kaspersky

Kaspersky Endpoint Security 14.2 for Windows

© 2026 AO Kaspersky Lab

Contents

Kaspersky Endpoint Security for Windows Help
- What's new
- Fixed issues
- Frequently asked questions

Kaspersky Endpoint Security for Windows
- Modes of the application: Standard, EDR Agent, Light Agent
- Distribution kit
- Hardware and software requirements
- Comparison of available application features depending on the type of operating system
- Comparison of application functions depending on the management tools
- Compatibility with other applications

Installing and removing the application
- Deployment through Kaspersky Security Center
  - Standard installation of the application
  - Creating an installation package
  - Updating databases in the installation package
  - Creating a remote installation task
- Installing the application locally using the Wizard
- Remotely installing the application using System Center Configuration Manager
- Description of setup.ini file installation settings
- Kaspersky Endpoint Security for Windows processes
- Change application components
- Upgrading a previous version of the application
  - Upgrading the application without a restart
  - SMU update of the application
- Removing the application

Application licensing
- About the End User License Agreement
- About the license
- About license certificate
- About subscription
- About license key
- About activation code
- About the key file
- Comparison of application functionality depending on license type for workstations
- Comparison of application functionality depending on license type for servers
- Activating the application
- Removing a license key
- Viewing license information
- Purchasing a license
- Renewing subscription

Getting started
About the Kaspersky Endpoint Security for Windows Management Plug-in
Special considerations when working with different versions of management plug-ins
Special considerations when using encrypted protocols for interacting with external services
Application interface
Application icon in the taskbar notification area
Simplified application interface
Configuring the display of the application interface
Preparing the application for use
Managing policies
Creating a policy
Exporting and importing a policy
Security level indicator
Task management
Configuring local application settings
Starting and stopping Kaspersky Endpoint Security
Pausing and resuming computer protection and control
Creating and using a configuration file
Restoring the default application settings
Kaspersky Endpoint Security performance and compatibility with other applications
Enabling or disabling energy-saving mode
Enabling or disabling conceding of resources to other applications
Best practices for optimizing Kaspersky Endpoint Security performance
Malware Scan
Scanning the computer
Scanning removable drives when they are connected to the computer
Background scan
Scan from context menu
Application Integrity Check
Editing the scan scope
Running a scheduled scan
Running a scan as a different user
Scan optimization
Updating databases and application software modules
Database and application module update scenarios
Updating from a server repository
Updating from a shared folder
Updating using Kaspersky Update Utility
Updating in mobile mode
Starting and stopping an update task
Starting an update task under the rights of a different user account
Selecting the update task run mode
Adding an update source
Updating application modules
Using a proxy server for updates
Last update rollback

Advanced disinfection technology
Disinfection of active threats on workstations
Disinfection of active threats on servers
Eliminating unprocessed threats
Computer protection
Real-Time Protection status
File Threat Protection
Enabling and disabling File Threat Protection
Automatic pausing of File Threat Protection
Changing the action taken on infected files by the File Threat Protection component
Forming the protection scope of the File Threat Protection component
Using scan methods
Using scan technologies in the operation of the File Threat Protection component
Optimizing file scanning
Scanning compound files
Changing the scan mode
Container Scan
Host Intrusion Prevention
Enabling and disabling Host Intrusion Prevention
Managing application trust groups
Changing the trust group of an application
Configuring trust group rights
Selecting a trust group for applications started before Kaspersky Endpoint Security
Selecting a trust group for unknown applications
Selecting a trust group for digitally signed applications
Managing application rights
Protecting operating system resources and personal data
Deleting information about unused applications
Monitoring Host Intrusion Prevention
Protecting access to audio and video
BadUSB Attack Prevention
Enabling and disabling BadUSB Attack Prevention
Using On-Screen Keyboard for authorization of USB devices
Barcode scanner authorization
AMSI Protection
Enabling and disabling AMSI Protection
Optimizing file scanning by AMSI Protection
Web Threat Protection
Enabling and disabling Web Threat Protection
Configuring malicious web address detection methods
Anti-Phishing
Creating the list of trusted web addresses
Exporting and importing the list of trusted web addresses
Mail Threat Protection
Enabling and disabling Mail Threat Protection
Changing the action to take on infected email messages
Forming the protection scope of the Mail Threat Protection component

Scanning compound files attached to email messages
Email messages attachment filtering
Exporting and importing extensions for attachment filtering
Scanning emails in Microsoft Office Outlook
Scanning emails in Thunderbird, MyOffice, R7-Office
Network Threat Protection
Enabling and disabling Network Threat Protection
Blocking an attacking computer
Configuring addresses of exclusions from blocking
Exporting and importing the list of exclusions from blocking
Configuring Network Threat Protection by type
Firewall
Enabling or disabling Firewall
Changing the network connection type
Managing network packet rules
Creating a network packet rule
Enabling or disabling a network packet rule
Changing the Firewall action for a network packet rule
Changing the priority of a network packet rule
Exporting and importing network packet rules
Defining network packet rules in XML
Managing application network rules
Creating an application network rule
Enabling and disabling an application network rule
Changing the Firewall action for an application network rule
Changing the priority of an application network rule
Network Monitor
Exploit Prevention
Enabling and disabling Exploit Prevention
System processes memory protection
Behavior Detection
Anti-Cryptor
Enabling and disabling protection of shared folders against external encryption
Configuring the blocking period of an untrusted computer
Editing the protection scope
Adding trusted computers for external data encryption
Exporting and importing a list of exclusions from protection of shared folders against external encryption
Remediation Engine
Kaspersky Security Network
Enabling and disabling the usage of Kaspersky Security Network
Limitations of Kaspersky Private Security Network
Enabling and disabling cloud mode for protection components
KSN Proxy settings
Checking the reputation of a file in Kaspersky Security Network
Encrypted connections scan
Enabling encrypted connections scan
Installing trusted root certificates

- Scanning encrypted connections with an untrusted certificate
- Adding Kaspersky certificate to the own certificate store
- Excluding encrypted connections from scanning
- Blocking access to domains with untrusted certificates
- Wipe Data
- Computer control
- Web Control
- Adding a web resource access rule
- Filter by web resource addresses
- Filter by web resource content
- Testing web resource access rules
- Exporting and importing Web Control rules
- Exporting and importing web resource addresses of the Web Control rule
- Monitoring user Internet activity
- Editing templates of Web Control messages
- Editing masks for web resource addresses
- Web Control for virtual machines
- Variables in Web Control message templates
- Device Control
- About access rules
- Getting information about installed devices
- Managing access to devices by type
- Managing access to devices by connection bus
- Differentiation of user access rights to devices
- Managing access to mobile devices
- Managing access to Bluetooth devices
- Control of printing
- Control of Wi-Fi connections
- Monitoring usage of removable drives
- Changing the caching duration
- Actions with trusted devices
- Adding a device to the trusted list
- Exporting and importing the list of trusted devices
- Obtaining access to a blocked device
- Online mode for granting access
- Offline mode for granting access
- Editing templates of Device Control messages
- Anti-Bridging
- Enabling Anti-Bridging
- Changing the status of a connection rule
- Change the priority of a connection rule
- Adaptive Anomaly Control
- Training Adaptive Anomaly Control
- Enabling and disabling an Adaptive Anomaly Control rule
- Modifying the action taken when an Adaptive Anomaly Control rule is triggered
- Creating an exclusion for an Adaptive Anomaly Control rule
- Exporting and importing exclusions for Adaptive Anomaly Control rules

- Applying updates for Adaptive Anomaly Control rules
- Editing Adaptive Anomaly Control message templates
- Monitoring Adaptive Anomaly Control operations

Application Control

- Application Control functionality limitations
- Getting information about installed applications
- How to enable the Blocked applications mode
- Application Control based on a baseline computer
- Managing Application Control rules
  - Adding a trigger condition for the Application Control rule
  - Adding executable files from the Executable files folder to the application category
  - Adding event-related executable files to the application category
  - Adding an Application Control rule
  - Changing the status of an Application Control rule via Kaspersky Security Center
  - Exporting and importing Application Control rules
  - Viewing events resulting from operation of the Application Control component
  - Viewing a report on blocked applications
- Testing Application Control rules
  - Enabling and disabling Application Control rule testing
  - Viewing a report on blocked applications in test mode
  - Viewing events resulting from test operation of the Application Control component
- Application activity monitor
- Rules for creating name masks for files or folders
- Editing Application Control message templates
- Variables in Application Control message templates
- Best practices for taking an inventory of executable files
- Best practices for implementing a list of allowed applications
  - Configuring allowlist mode for applications
  - Testing the allowlist mode
  - Support for allowlist mode

Network ports monitoring

- Enabling monitoring of all network ports
- Creating a list of monitored network ports
- Creating a list of applications for which all network ports are monitored
- Exporting and importing lists of monitored ports

Log Inspection

- Configuring predefined rules
- Adding custom rules

System Integrity Monitoring

- About System Integrity Monitoring rules
- Real-Time System Integrity Monitoring
- On-Demand System Integrity Check
- Exporting and importing System Integrity Monitoring rules
- Viewing System Integrity Monitoring reports
- System integrity status reset

Cloud Discovery

Trusted zone
Creating a scan exclusion
Creating an exclusion by type of detected objects
Editing the list of trusted applications
Creating a local trusted zone
Exporting and importing the trusted zone
Handling applications with a trusted digital signature
Appendix. Predefined scan exclusions and trusted applications
Microsoft SQL Server
Microsoft Exchange Server
Microsoft System Center Configuration Manager
Citrix
VMware
Data deduplication in Microsoft Windows Server
Managing Backup
Configuring the maximum storage period for files in Backup
Configuring the maximum size of Backup
Restoring files from Backup
Deleting backup copies of files from Backup
Notification service
Configuring event log settings
Configuring the display and delivery of notifications
Configuring the display of warnings about the application status in the notification area
Messaging between users and the administrator
Managing reports
Viewing reports
Configuring the maximum report storage term
Configuring the maximum size of the report file
Saving a report to file
Clearing reports
Kaspersky Endpoint Security Self-Defense
Enabling and disabling Self-Defense
Enabling and disabling AM-PPL support
Protection of application services against external management
Supporting remote administration applications
Password protection
Enabling Password protection
Granting permissions to individual users or groups
Using a temporary password to grant permissions
Revoking temporary password
Special aspects of Password protection permissions
Resetting the KLAdmin password
Administration Server connection protection
Data Encryption
Encryption functionality limitations
Changing the length of the encryption key (AES56 / AES256)

Kaspersky Disk Encryption
- Special features of SSD drive encryption
- Starting Kaspersky Disk Encryption
- Creating a list of hard drives excluded from encryption
- Exporting and importing a list of hard drives excluded from encryption
- Enabling Single Sign-On (SSO) technology
- Managing Authentication Agent accounts
- Using a token and smart card with Authentication Agent
- Hard drive decryption
- Restoring access to a drive protected by Kaspersky Disk Encryption technology
- Signing in with the Authentication Agent service account
- Updating the operating system
- Eliminating errors of encryption functionality update
- Tracing the Authentication Agent
- Editing Authentication Agent help texts
- Removing leftover objects and data after testing the operation of Authentication Agent

BitLocker Management
- Starting BitLocker Drive Encryption
- Decrypting a hard drive protected by BitLocker
- Restoring access to a drive protected by BitLocker
- Pausing BitLocker protection to update software

File Level Encryption on local computer drives
- Encrypting files on local computer drives
- Forming encrypted file access rules for applications
- Encrypting files that are created or modified by specific applications
- Generating a decryption rule
- Decrypting files on local computer drives
- Creating encrypted packages
- Restoring access to encrypted files
- Restoring access to encrypted data after operating system failure
- Editing templates of encrypted file access messages

Encryption of removable drives
- Starting encryption of removable drives
- Adding an encryption rule for removable drives
- Exporting and importing a list of encryption rules for removable drives
- Portable mode for accessing encrypted files on removable drives
- Decryption of removable drives

Viewing data encryption details
- Viewing the encryption status
- Viewing encryption statistics on Kaspersky Security Center dashboards
- Viewing file encryption errors on local computer drives
- Viewing the data encryption report

Working with encrypted devices when there is no access to them
- Recovering data by using the FDERT Restore Utility
- Creating an operating system rescue disk

Detection and Response solutions
MDR and EDR Optimum licensing
Compatibility with third-party EDR solutions
Kaspersky Endpoint Agent
Migrating the [KES+KEA] configuration to [KES+built-in agent] configuration
Policy and Task Migration for Kaspersky Endpoint Agent
Endpoint Detection and Response Agent (EDR Agent)
Installing EDR Agent
Integrating EDR Agent with MDR
Integrating EDR Agent with EDR (KATA)
Integrating EDR Agent with NDR (KATA)
Integrating EDR Agent with EDR Expert (on-premises)
Compatibility with third-party EPP applications
Managed Detection and Response
Integration of the built-in agent with MDR
KEA to KES Migration Guide for MDR
Endpoint Detection and Response
Integration of the built-in agent with EDR Optimum / EDR Expert
Scan for indicators of compromise (standard task)
Extended telemetry for IOC Scan
Move file to Quarantine
Get file
Delete file
Process start
Terminate process
Execution prevention
Computer network isolation
Cloud Sandbox
KEA to KES Migration Guide for EDR Optimum
Kaspersky Sandbox
Integration of the built-in agent with Kaspersky Sandbox
Scan for indicators of compromise (stand-alone task)
KEA to KES Migration Guide for Kaspersky Sandbox
Kaspersky Anti Targeted Attack Platform
Integration of the built-in agent with EDR / NDR (KATA)
Configuring EDR (KATA) telemetry
EDR (KATA) Telemetry exclusions
Example 1. Excluded processes
Example 2. Excluded network communications
Example 3. Excluded file operations
Example 4. Excluded registry modifications
KATA Sandbox
Integration of the built-in agent with KATA Sandbox
Configuring Threat Response actions
KEA to KES Migration Guide for EDR (KATA)

Endpoint Detection and Response Expert (on-premises)
Integration of the built-in agent with EDR Expert (on-premises)
Configuring EDR Expert (on-premises) telemetry settings
EDR Expert (on-premises) telemetry exclusions
Exporting and importing EDR Expert (on-premises) event filters
Special considerations when using policy profiles to configure integration with EDR Expert (on-premises) and EDR (KATA)
Endpoint Detection and Response Expert (cloud)
Integration of the built-in agent with EDR Expert (cloud)
Configuring EDR Expert (cloud) telemetry settings
EDR Expert (cloud) telemetry exclusions
How to export or import EDR Expert (cloud) event filters
Managing Quarantine
Configuring the maximum Quarantine size
Sending data about quarantined files to Kaspersky Security Center
Restoring files from Quarantine
Monitoring EDR actions
Kaspersky Unified Monitoring and Analysis Platform (KUMA)
Integration of Kaspersky Endpoint Security with KUMA
Preparation for the integration of KES with KUMA
Connecting KES to KUMA
Filtering events to be sent to KUMA
Exporting and importing KUMA event filters
KSWS to KES Migration Guide
Correspondence of KSWS and KES components
Correspondence of KSWS and KES settings
Migrating KSWS components
Migrating KSWS tasks and policies
Migrating KSWS trusted zone
Migrating KSWS Applications Launch Control rules
Installing KES instead of KSWS
Migrating the [KSWS+KEA] configuration to [KES+built-in agent] configuration
Making sure Kaspersky Security for Windows Server was successfully removed
Activating KES with a KSWS key
Special considerations for migrating high-load servers
Managing the application on a server in Server Core mode
Migrating from [KSWS+KEA] to [KES+built-in agent]
Light Agent mode to protect virtual machines
Special considerations for Light Agent mode
Preliminary configuration of the virtual machine
Compatibility with Citrix App Layering technology
Compatibility with Citrix Provisioning (Citrix Provisioning Services) technology
Compatibility with Omnissa App Volumes technology
Installing Light Agent
Connecting Light Agent to SVM
SVM discovery
Configuring the SVM selection algorithm for Light Agent

Distributing the connections of Light Agents to SVMs (tags)
Protecting the connection between a Light Agent and SVM
Activating Light Agent
KSVLA Light Agent to KES Light Agent Migration Guide
Installing KES Light Agent instead of KSVLA Light Agent
Correspondence of KSVLA Light Agent and KES Light Agent components
Migrating KSVLA Light Agent tasks and policies
Migrating [KSVLA Light Agent+KEA] configuration to [KES Light Agent+built-in agent] configuration
Managing the application from the command line
Setup. Installing the application
Setup /x. Removing the application
msiexec /i. Recovering the application
AVP commands
SCAN. Malware Scan
UPDATE. Updating databases and application software modules
ROLLBACK. Last update rollback
TRACES. Tracing
START. Starting a profile
STOP. Stopping a profile
STATUS. Profile status
STATISTICS. Profile operation statistics
RESTORE. Restoring files from Backup
EXPORT. Exporting application settings
IMPORT. Importing application settings
ADDKEY. Applying a key file
LICENSE. Licensing
RENEW. Purchasing a license
PBATESTRESET. Resetting the disk check results before encrypting the disk
EXIT. Exiting the application
EXITPOLICY. Disabling policy
STARTPOLICY. Enabling policy
DISABLE. Disabling protection
SPYWARE. Spyware detection
KSN. Switching between KSN / KPSN
SERVERBINDINGDISABLE. Disabling the server connection protection
KESCLI commands
Scan. Malware Scan
GetScanState. Scan completion status
GetLastScanTime. Determining the scan completion time
GetThreats. Obtaining data on detected threats
UpdateDefinitions. Updating databases and application software modules
GetDefinitionState. Determining the last update date and time of the databases
EnableRTP. Enabling protection
GetRealTimeProtectionState. File Threat Protection status
GetEncryptionState. Disk encryption status
Version. Identifying the application version

Detection and Response management commands
SANDBOX. Managing Sandbox
PREVENTION. Managing Execution prevention
ISOLATION. Managing Network isolation
RESTORE. Restoring files from Quarantine
IOCSCAN. Scan for indicators of compromise (IOC)
MDRLICENSE. MDR activation
EDRKATA. EDR (KATA) integration
EDRExpertOnPrem. EDR Expert (on-premises) integration
KUMA. KUMA Integration
YARA. Running YARA Scan
TELEMETRYFILTERS. Filtering events to be sent to KUMA
Light Agent management commands
KSVLAINFO. Determining the Light Agent mode
VIISINFO. Status of the Light Agent connection to the Integration Server
SVMINFO. Status of the Light Agent connection to the Protection Server
Error codes
Appendix. Application profiles
Managing the application through the REST API
Installing the application with the REST API
Working with the API
Sources of information about the application
Contacting Technical Support
Contents and storage of trace files
Application operation tracing
Application performance tracing
Dump writing
Protecting dump files and trace files
Obtaining OS data (Kaspersky Get System Info)
Limitations and warnings
Glossary
Active key
Administration group
Anti-virus databases
Archive
Authentication Agent
Certificate issuer
Cloud Discovery
Database of malicious web addresses
Database of phishing web addresses
Disinfection
False alarm
Infectable file
Infected file
Integration Server
IOC
IOC file

Kerberos authentication
License certificate
Light Agent
Mask
Network Agent
Normalized form of the address of a web resource
OLE object
OpenIOC
Portable File Manager
Protection scope
Scan scope
SVM
Task
Trusted Platform Module
Appendices
Appendix 1. Application settings
File Threat Protection
Web Threat Protection
Mail Threat Protection
Network Threat Protection
Firewall
BadUSB Attack Prevention
AMSI Protection
Exploit Prevention
Behavior Detection
Host Intrusion Prevention
Remediation Engine
Kaspersky Security Network
Log Inspection
Anti-Cryptor
Web Control
Device Control
Application Control
Adaptive Anomaly Control
System Integrity Monitoring
Endpoint Sensor
Sandbox
Managed Detection and Response
Endpoint Detection and Response
Endpoint Detection and Response Expert (on-premises)
Network Detection and Response (KATA)
KUMA Integration
Full Disk Encryption
File Level Encryption
Encryption of removable drives
Templates (data encryption)
Exclusions

Application settings
Reports and storage
Network settings
Interface
Manage Settings
Updating databases and application software modules
Appendix 2. Application trust groups
Appendix 3. File extensions for quick removable drives scan
Appendix 4. File Types for the Mail Threat Protection attachment filter
Appendix 5. Network settings for interaction with external services
Appendix 6. Application events
Critical
Functional failure
Warning
Informational message
Appendix 7. Supported file extensions for Execution prevention
Appendix 8. Supported script interpreters for Execution prevention
Appendix 9. IOC scan scope in the registry (RegistryItem)
Appendix 10. IOC file requirements
Appendix 11. API for EDR Threat Response
Appendix 12. User accounts in application component rules
Legal Information
Data provision
Data provision under the End User License Agreement
Data provision when using Kaspersky Security Network
Data provision when using Detection and Response solutions
Kaspersky Endpoint Detection and Response
Kaspersky Sandbox
Kaspersky Endpoint Detection and Response Expert (on-premises)
Kaspersky Network Detection and Response (KATA)
Integration with Kaspersky Unified Monitoring and Analysis Platform (KUMA)
Compliance with European Union legislation (GDPR)
Trademark notices
Information about third-party code

Kaspersky Endpoint Security for Windows Help

What's new in version 14.2

Added token-based authentication support for Password Protection

What's new in each version of Kaspersky Endpoint Security for Windows

Getting started

Deployment of Kaspersky Endpoint Security for Windows

Initial setup of Kaspersky Endpoint Security for Windows

Licensing of Kaspersky Endpoint Security for Windows

Data provision

Under the End User License Agreement

When using the KSN

GDPR

Eliminating threats

On workstations

On servers

Reacting to detection of an Indicator of Compromise (Network isolation → Quarantine → Execution prevention)

Best practices

Optimizing application performance

Implementing Default deny mode in Application Control

Migrating KEA to KES with built-in agent

Using KES as part of other solutions

Kaspersky EDR

Kaspersky Sandbox

Kaspersky MDR

What's new

Update 14.2

Kaspersky Endpoint Security 14.2 for Windows introduces the following features and improvements:

1. Changed the set of components installed by default. The default application configuration now includes BadUSB Attack Prevention, BitLocker management, and EDR Optimum built-in agent.

2. Added support for token-based authentication (Password protection). Now, to access the application, you can use either your user name and password, a temporary password issued by the administrator, or a token. Token-based authentication can be used, for example, for service user accounts that do not require a password.

3. Added a new password strength criterion for BitLocker – password history checking. The application prevents users from setting a password they have used previously.

4. Added support for changing the Kaspersky Endpoint Security interface language when updating the application using the *Install application remotely* task. Now you don't need to reinstall the application if you chose the wrong interface language.

5. Added new telemetry events for users of Kaspersky Endpoint Detection and Response solutions: GPO Change, SCCM Local Config Mismatch, SCCM Config Change, SCCM Deployment Task, Smb Connection Open. These new events enhance the threat detection capabilities of EDR solutions.

6. Added support for a new threat response action, *Place file*, for Kaspersky Endpoint Detection and Response Expert (on-premises) users. This task allows you to deliver configuration files, threat response scripts, utilities for mitigating the effects of attacks, etc., to computers. The *Place File* task is available in the OSMP console with the Kaspersky EDR Expert (on-premises) solution version 9.0 deployed.

7. Improved the behavior of threat response actions for Kaspersky Endpoint Detection and Response Optimum users. Now before performing the action (*Delete file*, *Move file to Quarantine*, or *Execution Prevention*), the application checks whether the object is critical to the system (System Critical Object, SCO) and warns about the potential impact on system stability. It is not recommended to apply these actions to System Critical Object (SCO) files.

8. Added support for Kaspersky Security for Virtualization Light Agent users to operate the application as part of a high-availability cluster of Integration Servers. A high-availability cluster of Integration Servers provides uninterrupted protection of the virtual environment thanks to the failover of SVMs and Light Agents to a backup Integration Server whenever the primary Integration Server fails.

9. When developing this version of Kaspersky Endpoint Security, we incorporated the changes included in the following private patches: PF15054, PF15056, PF15058, PF15062, PF15063, PF15064, PF16052, PF16053, PF16055, PF16056, PF16057, PF16060, PF16061, PF16062, PF17027, PF17029, PF17039, PF17041, PF17043, PF17048, PF17050, PF17051, PF17053, PF17054, PF17060, PF18010, PF18011, PF18014, PF18015, PF18020, PF18021, PF18022, PF18023, PF18024, PF18028, PF18031, PF18032, PF18043, PF18050, PF18051, PF18053, PF18057, PF19003, PF19016, PF19018, PF19017, PF19032, PF19034, PF19036, PF19037, PF19041, PF19043, PF19049, PF19051, PF19055, PF19056, PF19065, PF20011, PF20016, PF20017, PF20020, PF20021, PF20033, PF20036, PF20038, PF20039, PF20049, PF20052, PF20055, PF20060, PF20065, PF20078, PF20080, PF20081, PF21007, PF21010, PF21019, PF21021, PF21024, PF21026, PF21040, PF21058, PF21062, PF21063, PF22004, PF22008, PF22014, PF22027, PF22036, PF22049, PF22053, PF22056, PF22059, PF22065, PF23022, PF23026, PF23029, PF23031, PF23039, PF23049, PF23063, PF23095, PF24005, PF24011, PF24013, PF24014, PF24017, PF24019, PF24037, PF24043, PF24048, PF25013, PF25016, PF25019, PF25030.

Update 14.1

Kaspersky Endpoint Security 14.1 for Windows introduces the following features and improvements:

1. Support for the Windows Server 2025 operating system has been added.

2. The limit on the number of telemetry event filtering rules for Endpoint Detection and Response Expert (on-premises) and Kaspersky Endpoint Detection and Response Expert (cloud) has been increased. Kaspersky Endpoint Security now supports up to 10,000 inclusive and exclusive filtering rules in total.

3. You can now configure tasks to run only on specific days of the week, at a specified interval in weeks. The schedule is available in Kaspersky Security Center 16.1 or later.

4. For the *Malware Scan* task, you can now specify a time interval during which the task will be paused, for example, to minimize the impact on computer performance during periods of increased load.

5. Performance of the hard drive subsystem on the protected computer has been optimized by reducing the number of I/O operations.

6. When developing this version of Kaspersky Endpoint Security, we incorporated the changes included in the following private patches: PF14061, PF14062, PF14064, PF14065, PF14069, PF14070, PF14071, PF15054, PF15056, PF15058, PF15062, PF15063, PF15064, PF16052, PF16053, PF16055, PF16056, PF16057, PF16060, PF16061, PF16062, PF17027, PF17029, PF17039, PF17041, PF17043, PF17048, PF17050, PF17051, PF17053, PF17054, PF17060, PF18010, PF18011, PF18014, PF18015, PF18020, PF18021, PF18022, PF18023, PF18024, PF18028, PF18031, PF18032, PF18043, PF18050, PF18051, PF18053, PF18057, PF19003, PF19016, PF19018, PF19017, PF19032, PF19034, PF19036, PF19037, PF19041, PF19043, PF19049, PF19051, PF19055, PF19056, PF19065, PF20011, PF20016, PF20017, PF20020, PF20021, PF20033, PF20036, PF20038, PF20039, PF20049, PF20052, PF20055, PF20060, PF20065, PF20078, PF20080, PF20081, PF21007, PF21010, PF21019, PF21021, PF21024, PF21026, PF21040, PF21058, PF21062, PF21063, PF22004, PF22008, PF22014, PF22027, PF22036, PF22049, PF22053, PF22056, PF22059, PF23022, PF23026, PF23029, PF23031, PF23039, PF23049, PF23063, PF24005, PF24011, PF24013, PF24014, PF24017, PF24019, PF25013, PF25016, PF25019.

Update 14.0

Kaspersky Endpoint Security 14.0 for Windows introduces the following features and improvements:

1. Arm-based computers are now supported. You can install the application in either standard mode or EDR Agent mode. However, the application has several limitations (for example, among data encryption technologies, only BitLocker is supported).

2. Extended policy audit is supported in Kaspersky Security Center Web Console version 15.0 or later. Now you can view policy revisions and save them to a file. A *revision* is a set of modified parameters saved by the user. Revisions allow you to compare and revert changes to policy parameters.

3. New telemetry events are now available to users of Kaspersky Endpoint Detection and Response. These new events enhance the threat detection capabilities using Kaspersky EDR solutions.

4. When developing this version of Kaspersky Endpoint Security for Windows, we incorporated the changes included in the following private patches: PF13115, PF13118, PF13119, PF13120, PF13123, PF13124, PF14061, PF14062, PF14064, PF14065, PF14069, PF14070, PF15054, PF15056, PF15058, PF15062, PF15063, PF15064, PF16052, PF16053, PF16055, PF16056, PF16057, PF16060, PF16061, PF16062, PF17027, PF17029, PF17039, PF17041, PF17043, PF17048, PF17050, PF17051, PF17053, PF17054, PF17060, PF18010, PF18011, PF18014, PF18015, PF18020, PF18021, PF18022, PF18023, PF18024, PF18028, PF18031, PF18032, PF18043, PF18050, PF18051, PF18053, PF19003, PF19016, PF19018, PF19017, PF19032, PF19034, PF19036, PF19037, PF19041, PF19043, PF19049, PF19051, PF19055, PF19056, PF19065, PF20011, PF20016, PF20017, PF20020, PF20021, PF20033, PF20036, PF20038, PF20039, PF20049, PF20052, PF20055, PF20060, PF20065, PF20078, PF20080, PF21007, PF21010, PF21019, PF21021, PF21024, PF21026, PF21040, PF21058, PF22004, PF22008, PF22014, PF22027, PF22036, PF22049, PF22053, PF22056, PF23022, PF23026, PF23029, PF23031, PF23039, PF23049, PF24005, PF24011.

Update 12.12

Kaspersky Endpoint Security 12.12 for Windows introduces the following features and improvements:

1. The protection of shared folders from external encryption that used to be part of the Behavior Detection component is now a separate component, Anti-Cryptor.

2. Support for the Kerberos protocol has been added to authenticate the application via a proxy server for internet access.

3. Now you can specify a file hash for a trusted application and not just a full path.

4. More *IOC Scan* task features are available to users of Endpoint Detection and Response (EDR) solutions. Retrospective IOC Scan functionality is now available. *Retrospective IOC Scan* is a mode of the *IOC Scan* task in which Kaspersky Endpoint Security scans for indicators of compromise using data for a certain time period. This mode is intended for detecting indicators of compromise in the data of the computer's network activity. Kaspersky Endpoint Security analyzes data in operating system logs and browser logs on the computer.

5. Users of Kaspersky Endpoint Detection and Response (EDR) can remove the quarantine size limit. This may be necessary for YARA scanning because the application can save a large memory dump file. Now you can use all of your free disk space for the quarantine.

6. HTTPS compression is now supported for optimizing the export of events to Kaspersky Unified Monitoring and Analysis Platform (KUMA). This helps reduce outgoing traffic.

7. When developing this version of Kaspersky Endpoint Security for Windows, we incorporated the changes included in the following private patches: PF13115, PF13118, PF13119, PF13120, PF13123, PF13124, PF14061, PF14062, PF14064, PF14065, PF14069, PF14070, PF15054, PF15056, PF15058, PF15062, PF15063, PF15064, PF16052, PF16053, PF16055, PF16056, PF16057, PF16060, PF16061, PF16062, PF17027, PF17029, PF17039, PF17041, PF17043, PF17048, PF17050, PF17051, PF17053, PF17054, PF17060, PF18010, PF18011, PF18014, PF18015, PF18020, PF18021, PF18022, PF18023, PF18024, PF18028, PF18031, PF18032, PF18043, PF18050, PF18051, PF18053, PF19003, PF19016, PF19018, PF19017, PF19032, PF19034, PF19036, PF19037, PF19041, PF19043, PF19049, PF19051, PF19055, PF19056, PF19065, PF20011, PF20016, PF20017, PF20020, PF20021, PF20033, PF20036, PF20038, PF20039, PF20049, PF20052, PF20055, PF20060, PF20065, PF20078, PF20080, PF21007, PF21010, PF21019, PF21021, PF21024, PF21026, PF21040, PF21058, PF22004, PF22008, PF22014, PF22027, PF22036, PF22049, PF22053, PF22056, PF23022, PF23026, PF23029, PF23031, PF23039, PF23049, PF24005, PF24011.

Update 12.11

Kaspersky Endpoint Security 12.11 for Windows offers the following features and improvements:

1. The application checks the configuration of control components before saving the settings. The check was added for the Application Control, Device Control, System Integrity Monitoring components. The application now displays a warning if the current settings of the control component may increase the load on the computer or cause system failures. For example, in the case of Application Control, if you selected the mode that blocks all applications except allowed ones, and you did not add any allow rule, the application displays a warning because such a configuration may cause system failures.

2. Added support for automatic file submission to KATA Sandbox for review. *KATA Sandbox* is a component of Kaspersky Anti Targeted Attack Platform that runs files on virtual images of operating systems. Sandbox analyzes object behavior to detect malicious activity and activity characteristic of targeted attacks on the IT infrastructure of the organization. Sandbox analyzes and scans objects on special servers with deployed virtual images of Microsoft Windows operating systems (the Sandbox servers). For KATA Sandbox to operate in automatic mode, Kaspersky Anti Targeted Attack Platform 8.0 or later must be deployed.

3. Optimized EDR telemetry sending. Now you can specify the maximum packet length.

4. Improved connection diagnostics to Kaspersky Security Network. Expanded connection error details for Kaspersky Security Network to resolve potential issues.

5. Added support for configuring event lists to be sent to Kaspersky Unified Monitoring and Analysis Platform (KUMA). Now, in addition to the predefined event lists in KUMA, you can manually add events to telemetry or exclude events by their ID in the Windows Event Log.

6. Updated the policy interface in Web Console. The layout of policy sections has been changed for faster access to essential features.

7. Support for Windows 11 25H2.

8. When developing this version of Kaspersky Endpoint Security for Windows, we incorporated the changes included in the following private patches: PF13115, PF13118, PF13119, PF13120, PF13123, PF13124, PF14061, PF14062, PF14064, PF14065, PF14069, PF14070, PF15054, PF15056, PF15058, PF15062, PF15063, PF15064, PF16052, PF16053, PF16055, PF16056, PF16057, PF16060, PF16061, PF16062, PF17027, PF17029, PF17039, PF17041, PF17043, PF17048, PF17050, PF17051, PF17053, PF17054, PF18010, PF18011, PF18014, PF18015, PF18020, PF18021, PF18022, PF18023, PF18024, PF18028, PF18031, PF18032, PF18043, PF18050, PF18051, PF18053, PF19003, PF19016, PF19018, PF19017, PF19032, PF19034, PF19036, PF19037, PF19041, PF19043, PF19049, PF19051, PF19055, PF19056, PF20011, PF20016, PF20017, PF20020, PF20021, PF20033, PF20036, PF20038, PF20039, PF20049, PF20052, PF20055, PF20060, PF20065, PF21007, PF21010, PF21019, PF21021, PF21024, PF21026, PF22004, PF22008, PF22014.

Update 12.10

Kaspersky Endpoint Security 12.10 for Windows offers the following features and improvements:

1. For the BadUSB Attack Prevention component, the option has been added to authorize barcode scanners by reading a barcode from the screen. Now you do not need to enter a code using the on-screen keyboard to authorize barcode scanners.

2. The following features and improvements are available to users of Endpoint Detection and Response (EDR) solutions by Kaspersky:

   - Now you can manage the Network Isolation of the computer in the alert details. Additionally, in the alert details you can specify the computer Network Isolation time period and add exclusions.

   - Filling in alert details with new data. Now the alert details contain more information about the threat, including how the application behaves when responding to EDR threats.

   - The IOC files processing has been improved. Now you can view and edit the contents of IOC files in the interface of Kaspersky Security Center Web Console. After loading an IOC file, the application displays a report on the IOC terms application.

   - Improved response to detected IOCs. Now you can quarantine files detected by the *IOC Scan* task directly in IOC detection results in task properties. You can also isolate computers from the network in the task properties.

   - Now you can create IOC files directly in the properties of the *IOC Scan* task based on lists of file hashes, IP addresses, or DNS names generated in a TXT file.

   - Expanded scan scope for the *IOC Scan* task. Now you can define a scope for the IOC Scan of the registry (**Windows Registry – RegistryItem**). In earlier versions of the application, you could only use a predefined IOC Scan scope in the registry.

3. New Password protection permission added, *Export settings*. By default, only the KLAdmin user can create a configuration file with Kaspersky Endpoint Security settings in the application interface. To grant access to other users, you need to give them the corresponding permission.

4. When developing this version of Kaspersky Endpoint Security for Windows, we incorporated the changes included in the following private patches: PF12120, PF12121, PF12122, PF13115, PF13118, PF13119, PF13120, PF13123, PF14061, PF14062, PF14064, PF14065, PF15054, PF15056, PF15058, PF15062, PF16052, PF16053, PF16055, PF16056, PF16057, PF17027, PF17029, PF17039, PF17041, PF17043, PF17048, PF17050, PF18010, PF18011, PF18014, PF18015, PF18020, PF18021, PF18022, PF18023, PF18024, PF18028, PF18031, PF18032, PF18043, PF19003, PF19016, PF19018, PF19017, PF19032, PF19034, PF19036, PF19037, PF19041, PF19043, PF19049, PF20011, PF20016, PF20017, PF20020, PF20021, PF20033, PF20036, PF20038, PF20039, PF20049, PF21007.

Update 12.9

Kaspersky Endpoint Security 12.9 for Windows offers the following features and improvements:

1. The new functionality for *managing temporary passwords* has been added. Temporary password allows you to provide access to Kaspersky Endpoint Security with Password Protection enabled for a separate computer. Management of temporary passwords allows to save password history (up to 30 days), monitor temporary password status (*Active*, *Expired*, *Revoked*) and revoke temporary passwords.

2. The option to terminate connection to web resources prohibited by Web Control rules immediately after the policy is applied has been added. In previous versions of the application, Web Control restricted only new connections to prohibited web resources.

3. For Kaspersky Anti Targeted Attack Platform users, an option to run YARA check locally on the computer has been added. To do this, you need to download a file with YARA rules and execute the command in CMD.

4. Fixed the behavior of the application when BitLocker is enabled on computers on which drives are already protected by BitLocker using third-party tools. Kaspersky Endpoint Security initiates the recovery procedure to send the recovery key to Kaspersky Security Center. Thus, BitLocker management is transferred to the Kaspersky Security Center console.

5. A new section, **Response history**, is available to users of Detection and Response solutions by Kaspersky. This section contains information about threat response actions performed on the computer. Such actions include, for example, running the *Terminate process* task or isolating the computer from the network. Response history is only available to users of the following Kaspersky solutions: MDR, EDR, KATA.

6. For Kaspersky Unified Monitoring and Analysis Platform users, the support for EDR threat response actions is now available. When responding to threats, KUMA runs scripts that create corresponding EDR tasks. To perform EDR tasks, you need to create a response rule for the custom script in the KUMA console and select events.

7. When developing this version of Kaspersky Endpoint Security for Windows, we incorporated the changes included in the following private patches: PF10360, PF10362, PF10363, PF12120, PF12121, PF12122, PF13115, PF13118, PF13119, PF14061, PF14062, PF14064, PF14065, PF15054, PF15056, PF15058, PF16052, PF16053, PF16055, PF16056, PF17027, PF17029, PF17039, PF17041, PF17043, PF18010, PF18011, PF18014, PF18015, PF18020, PF18021, PF18022, PF18023, PF18024, PF18028, PF19003, PF19016, PF19018, PF19017, PF19032, PF19034, PF19036, PF19037, PF19041, PF20011, PF20016, PF20017, PF20020, PF20021.

Update 12.8

Kaspersky Endpoint Security 12.8 for Windows offers the following features and improvements:

1. The application now supports the Light Agent mode for protecting virtual environments. Now you can deploy the application as Light Agent as part of the Kaspersky Security for Virtualization Light Agent 6.2 solution.

2. Interception of file operations in Docker containers on servers is now supported. A *container* is an isolated environment in which an application can run without directly interacting with the operating system. Kaspersky Endpoint Security scans the files inside containers to which the user gains access. When a threat is detected, the applications blocks this malicious activity and attempts to disinfect the file inside the container. If the file cannot be disinfected, the application stops the container.

3. Now you can define a protection scope for the protection of shared folders against external encryption (Behavior Detection component). Now you can specify shared folders which the application must monitor for file activity. You can also exclude files from the protection scope. In previous versions of the application, the Behavior Detection component monitored all shared folders for file activity.

4. Now you can configure different sets of components for different types of operating systems in the installation package. That is, you can deploy the application to workstations and servers using the same installation package. Components that are not available for a certain operating system type are automatically excluded in installation package properties.

5. The option to select predefined scan exclusions and trusted applications has been added. Predefined scan exclusions and trusted applications allow quickly configuring the trusted zone for the application in a virtual environment (Citrix, VMware). Such exclusions comprise, for example, VHD and VHDX virtual machine files. Exclusions can be added when creating an application installation package, creating a policy, or when installing Kaspersky Endpoint Security.

6. The EDR telemetry now includes events for operations with USB-connected devices. You can also add these events to exclusions from EDR telemetry.

7. The option to block network connections over the obsolete TLS 1.0 protocol has been added. TLS 1.0 has a low security level, so it is recommended to disable this protocol and use newer TLS 1.2 or TLS 1.3 versions. By default, Kaspersky Endpoint Security blocks TLS 1.0 connections. After updating the application version, the operation of third-party services that use the TLS 1.0 protocol may fail. To avoid problems in the operation of third-party services, you can allow the use of the TLS 1.0 protocol in group policy before updating the application version.

8. When developing this version of Kaspersky Endpoint Security for Windows, we incorporated the changes included in the following private patches: PF10053, PF10054, PF10360, PF10362, PF10363, PF12120, PF12121, PF12122, PF13115, PF13118, PF13119, PF14061, PF14062, PF14064, PF14065, PF15054, PF15056, PF15058, PF16052, PF16053, PF16055, PF16056, PF17027, PF17029, PF17039, PF17041, PF17043, PF18010, PF18011, PF18014, PF18015, PF18020, PF18021, PF18022, PF18023, PF18024, PF18028, PF19003, PF19016, PF19018.

Update 12.7

Kaspersky Endpoint Security 12.7 for Windows offers the following features and improvements:

1. Now you can limit CPU resource usage for *Malware Scan* tasks. To do so, in application settings, specify the maximum CPU load percentage for all cores that can be utilized while scanning the computer.

2. Now you can manually send files for scanning in KATA Sandbox. *KATA Sandbox* is a component of Kaspersky Anti Targeted Attack Platform that runs files on virtual images of operating systems. Sandbox analyzes object behavior to detect malicious activity and activity characteristic of targeted attacks on the IT infrastructure of the organization. Sandbox analyzes and scans objects on special servers with deployed virtual images of Microsoft Windows operating systems (the Sandbox servers). To send a file for scanning to KATA Sandbox, select the relevant command in the context menu of the file.

3. Now you can set up integration with the solution that protects the corporate LAN, *Kaspersky Network Detection and Response*. Kaspersky Network Detection and Response (NDR) is part of Kaspersky Anti Targeted Attack Platform. You can configure the interaction with NDR in standard mode as well as in the EDR Agent mode.

4. Support for Microsoft Office Outlook mail client version 2021 has been added to the Mail Threat Protection extension. The extension allows scanning messages at the level of a mail client instead of the protocol level. In addition to messages, the extension lets you scan objects received through the MAPI interface from Microsoft Exchange repositories (for example, objects in the Calendar). This scanning takes place in the mail client.

5. When developing this version of Kaspersky Endpoint Security for Windows, we incorporated the changes included in the following private patches: PF10049, PF10355, PF12114, PF13109, PF14056, PF15038, PF15045, PF16037, PF16042, PF16047, PF17014, PF17018, PF17021, PF17024, PF18006, PF18007.

Update 12.6

Kaspersky Endpoint Security 12.6 for Windows offers the following features and improvements:

1. The functionality for integration with Kaspersky SIEM solution – *Kaspersky Unified Monitoring and Analysis Platform (KUMA)* – has been added. It is now possible to send events from Windows event logs to KUMA collector. This allows KUMA to receive Windows events (a limited set of EventIDs is supported) from all computers on which Kaspersky Endpoint Security is installed, without installing KUMA agents on these computers.

2. A new *System Integrity Monitoring* component was added to replace the File Integrity Monitor component. System Integrity Monitoring component includes all functionality of File Integrity Monitor and additionally allows to monitor registry changes and connection of external devices. The System Integrity Monitoring component monitors changes in the operating system that may indicate computer security breaches. When such changes are detected, Kaspersky Endpoint Security generates corresponding events and alerts the administrator. File Integrity Monitor is no longer part of the application. File Integrity Monitor settings automatically migrate to System Integrity Monitoring when you update the application. To ensure correct operation of System Integrity Monitoring, both Kaspersky Endpoint Security application and management plug-in should be updated to version 12.6.

3. The status of the installed built-in EDR Agent (KATA) has been added to the computer properties in the Kaspersky Security Center console. Now, if you have a built-in EDR Agent (KATA) installed, the **Endpoint Sensor status** column displays the current status of the component (e.g., *Running*, *Stopped*, *Not supported by license*, etc.).

4. The option to select predefined scan exclusions and trusted applications has been added. Predefined scan exclusions and trusted applications help to quickly configure the trusted zone when using the application on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. Such exclusions comprise, for example, MDF and LDF database files. Exclusions can be added when creating a new policy, modifying an existing policy, or when installing Kaspersky Endpoint Security.

5. The display of alert details for Kaspersky Endpoint Detection and Response Optimum has been moved from the Kaspersky Endpoint Security management plug-in to a separate Kaspersky Endpoint Detection and Response management plug-in. The EDR management plug-in is a single plug-in for working with agents on Windows, Mac and Linux operating systems. Now, when working with EDR Optimum, you will need Kaspersky Endpoint Security management plug-in to create threat response tasks and EDR management plug-in to view alert details.

6. Support for Windows 11 24H2.

7. When developing this version of Kaspersky Endpoint Security for Windows, we incorporated the changes included in the following private patches: pf10048, pf10353, pf12106, pf12107, pf12108, pf13090, pf13100, pf15031, pf15034, pf15036, pf16021, pf16023, pf16029, pf17002.

Update 12.5

Kaspersky Endpoint Security 12.5 for Windows offers the following features and improvements:

1. The option to configure telemetry exclusions has been added. *Telemetry* is a list of events that have occurred on the protected computer. Telemetry data is used by Kaspersky Anti Targeted Attack Platform (EDR) to monitor and protect the organization's IT infrastructure. Configuring telemetry exclusions helps improve computer performance and optimize data transmission to the Telemetry collection server.

2. The interface of the application's trusted zone has been improved. Kaspersky Endpoint Security now hides trusted zone objects from the user if the administrator has prohibited the user from adding their own (local) scan exclusions and trusted applications. This prevents unauthorized access to the trusted zone by an intruder, increasing the level of computer security.

3. The option to scan traffic for MyOffice Mail and R7-Office Organizer mail clients has been added. The Mail Threat Protection component now scans not only message attachments at download, but also sent and received messages.

4. A new category of web resources *Generative AI Tools* has been added. You can configure access to websites from the new category using Web Control.

5. Now you can select the location of a network packet rule in the Firewall list. The location of a network packet rule in the list determines its priority. In previous versions of the application, a new rule could only be added to the end of the list, after which you had to manually move the rule through the list to prioritize it. Now, when adding a rule, you can choose whether the rule should be placed at the beginning, at the end of the list, or next to the selected rule.

6. In the rules of Kaspersky Endpoint Security components, now you can select users not only from Active Directory, but also from the list of users in Kaspersky Security Center. You can also enter local user account data manually. This possibility has been added for the rules of the following components: Application Control, Device Control, Web Control, Adaptive Anomaly Control and Log Inspection.

7. The network attack detection report now includes a column with the MAC address of the attacking computer (the Network Threat Protection component). Now you can see the MAC address of the attacking computer in the report in addition to its IP address. This is helpful for incident investigation. Reports, containing the MAC address of the attacking computer, will also be available in the Kaspersky Security Center Linux console version 15.1 and later.

8. The level of computer protection requirements has been increased. The high protection level now requires enabling Protection of application services against external management. Check the security level indicator in the upper part of the policy window. If you have a medium or low security level, you can enable Protection of application services against external management in the security level indicator recommendation window.

9. Support for new events of object detection when the application is running in the Endpoint Detection and Response Agent (EDR Agent) configuration has been added. These events were already supported in the [KES+built-in agent] configuration.

10. When developing this version of Kaspersky Endpoint Security for Windows, we incorporated the changes included in the following private patches: pf9640, pf9830, pf9831, pf10047, pf10351, pf12102, pf12105, pf13084, pf13089, pf14040, pf14047, pf15026, pf15028, pf16013.

Update 12.4

Kaspersky Endpoint Security 12.4 for Windows offers the following features and improvements:

1. Added new functionality to protect the connection of the computer to Kaspersky Security Center. New *Administration Server connection protection* task allows setting a password for connecting to a trusted server. This means that it is not possible to reconnect the computer and run commands from another server without this password.

2. For the Password Protection component, the ability to select users manually and not only from Active Directory has been added. That is, you can manually specify a user name and password and assign access rights to Kaspersky Endpoint Security for this account. This way, you do not need to share your KLAdmin password with other users or create new Active Directory accounts to control access to the application.

3. Support for Windows 11 23H2.

Update 12.3

Kaspersky Endpoint Security 12.3 for Windows offers the following features and improvements:

1. Now you can install the application in the Endpoint Detection and Response Agent configuration. This configuration allows installing the application with a set of components required by Detection and Response solutions by Kaspersky: Kaspersky Managed Detection and Response, and Kaspersky Anti Targeted Attack Platform (EDR). You can install the application in this configuration alongside third-party solutions (for example, Dr.Web, Dallas Lock, ESET). This lets you use third-party infrastructure security tools alongside Detection and Response by Kaspersky.

2. Kaspersky Endpoint Security operation with Bluetooth devices has been improved. Now you can configure exclusions and restrict access to all Bluetooth devices except input devices (wireless keyboards, mice, etc).

3. The operation of Application Control component with the database of executable files has been optimized. Kaspersky Endpoint Security now automatically removes file information from the database if the file is deleted from the computer. This allows keeping the database up to date and saving Kaspersky Security Center resources.

4. The level of computer protection requirements has been increased. The high protection level now requires enabling Password protection. Check the security level indicator in the upper part of the policy window. If you have a medium or low protection level, you can enable Password protection in the security level indicator recommendation window.

5. HTTPS protocol support has been added to enable the application to work with Kaspersky Security Network. Enable HTTPS usage in the Administration Server properties in the KSN proxy server settings.

Update 12.2

Kaspersky Endpoint Security 12.2 for Windows offers the following features and improvements:

1. WPA3 protocol support has been added to control connections to Wi-Fi networks (Device Control). Now you can select WPA3 protocol in the trusted Wi-Fi network settings and deny connection to the network using a less secure protocol.

2. Now you can choose a protocol and ports for Network Threat Protection exclusions. Now in addition to specifying IP addresses of trusted devices, you can also select a port and protocol. This lets you exclude individual data streams and prevent network attacks from trusted IP addresses.

3. Different order of update sources for the local *Update of databases and application modules task* if a policy is applied to the computer. The Kaspersky Security Center server is now used by default as the first update source instead of Kaspersky servers. This helps save traffic when the user runs the local *Update of databases and application modules* task.

Update 12.1

Kaspersky Endpoint Security 12.1 for Windows offers the following features and improvements:

1. A built-in agent for the Kaspersky Anti Targeted Attack Platform solution has been added. You no longer need Kaspersky Endpoint Agent in order to use EDR (KATA). All functions of Kaspersky Endpoint Agent will be performed by Kaspersky Endpoint Security. To migrate Kaspersky Endpoint Agent policies, use the Migration Wizard. After updating the application, Kaspersky Endpoint Security switches to using the built-in agent and removes Kaspersky Endpoint Agent. Kaspersky Endpoint Agent has been added to the list of incompatible software. Kaspersky Endpoint Security has built-in agents for all Detection and Response solutions, therefore installing Kaspersky Endpoint Agent to integrate with those solutions is no longer necessary.

2. Azure WVD compatibility mode is now supported. This feature ensures correct display of Azure virtual machine state in the Kaspersky Anti Targeted Attack Platform console. Azure WVD compatibility mode allows assigning a permanent unique Sensor ID to these virtual machines.

3. Now you can configure user access to mobile devices in iTunes or similar applications. That is, you can, for example, allow the mobile device to be used only in iTunes and block using the mobile device as a removable drive. The application also supports these rules for the Android Debug Bridge (ADB) application.

4. Kaspersky Security Center version 11 is no longer supported. Upgrade Kaspersky Security Center to the latest version.

Fixed issues

The table below lists all issues discovered in previous versions of Kaspersky Endpoint Security and fixed in the current version.

List of issues fixed in version 14.2

Identifier	Description
10110351	The Device Control component allows access to an MTD device (SD card) when the **Block** action is selected for the **Removable drives** device type.
10068496	On a protected device, the MAC Spoofing Protection mode can be changed when the Network Threat Protection settings are locked in the parent policy.
10095087	When Encrypted connections scan is enabled, accessing any website through a next-generation firewall (NGFW) with a revoked certificate triggers a notification about being redirected to a domain with an untrusted certificate.
10140912	With the application installed, the computer does not detect the BHT1100B PDA device running Windows Mobile.
10141009	If the File Encryption component is installed, the Anthropic Claude application may not launch.
10610853	After upgrading to the new version, the policy cannot be opened because the Device Control settings in the new version include devices that are not supported in the previous version.
10720516	Attachments in files in office formats may not open with the application installed.
10421967	Signing in to a shared mailbox fails if this mailbox has been added as a separate account.

List of issues fixed in web plug-in 14.2.0.8289

Identifier	Description
9946286	When adding a website address to a Web Control rule, it is not possible to use a mask that does not include a period between the domain and the domain zone.
10054657 10507166	After migrating to the new version, certain components (such as Device Control and Application Control) cannot be managed via policy.
10084390	In the Device Control component settings, the **Hard drive** device type is duplicated, which causes user hard drives to be blocked.
10113718	In some cases, custom Firewall rules are not displayed.
10311613	In the Host Intrusion Prevention component settings, it is not possible to add a protected resource by mask using the `*` character.
10391923	In Application Control, when creating an application category based on a MD5 hash of a file, no warning is displayed indicating that such a category is invalid and will not function.
10571790	For the Application Control component, the title of the list of blocking rules in **Allow all except the rules list** mode has been corrected.
10592891 10689065	In the Trusted zone, the **Comment** field is not displayed for exclusions in the **Malware Scan exclusions** section.
10613015 10689049 10592534	In the Device Control component, the **Comment** field is not displayed for trusted devices.
10645068 10689057	The *Remove key* task does not run if a license key file in KEY format is selected.
10685370 10685422	In the Device Control component, adding a new device to the trusted list is not possible if there is already a device with that name in the list.
10721136	Group tasks cannot be saved if no completion date is specified in the schedule settings.
10753509	Modifying the list of users and groups for trusted devices in the Device Control component may change the record types, causing the settings to no longer apply to the device.
10773402	In some cases, changes to policy settings may not be saved due to corrupted profiles.
10822620	The Anti-Cryptor component settings are not displayed in the policy, and changes to notification settings are not saved.

10817035	In a child policy, adding a trusted device is allowed even if this setting is disabled in the parent policy (closed "padlock"). However, the added device is not saved.
10678009	In the Kaspersky Endpoint Security web plug-in, adding a new Firewall rule to a policy fails if a rule was previously created using an IP address range.

List of issues fixed in version 14.1

Identifier	Description
10140523	Enabling Native NVMe in Windows 11 may result in unstable application behavior.
9340076	On a device with the application installed and the File Encryption component enabled, Windows Explorer does not automatically refresh the contents of a network folder after it is modified from another device.
9722863	The Device Control report does not include USB token disconnection event.
10006481	After applying a rule that denies inbound traffic, active TCP connections to external services may be prematurely terminated due to incorrect timeout calculation.
10140912	The application does not detect the BHT1100B PDA device.
10157563	Folder Redirection may not work after a restart on VDI workstations.
10158494	Device Control logs multiple connection and disconnection events of a removable device without it being physically reconnected.

Frequently asked questions

GENERAL

On what computers can Kaspersky Endpoint Security operate?

What has changed since the last version?

With which other Kaspersky applications can Kaspersky Endpoint Security operate?

How can I conserve computer resources during operation of Kaspersky Endpoint Security?

DEPLOYMENT

How do I install Kaspersky Endpoint Security to all computers of an organization?

Which installation settings can be configured in the command line?

How do I remotely uninstall Kaspersky Endpoint Security?

UPDATE

What methods are available to update the databases?

What should I do if problems arise after an update?

How do I update databases outside of the corporate network?

Is it possible to use a proxy server for updates?

SECURITY

How does Kaspersky Endpoint Security scan email?

How do I exclude a trusted file from scans?

How do I protect a computer against viruses from flash drives?

How can I run a malware scan that is hidden from the user?

How do I temporarily pause the protection of Kaspersky Endpoint Security?

How do I restore a file that Kaspersky Endpoint Security erroneously deleted?

How do I protect Kaspersky Endpoint Security from being uninstalled by a user?

INTERNET

Does Kaspersky Endpoint Security scan encrypted connections (HTTPS)?

How do I allow users to connect only to trusted Wi-Fi networks?

How do I block social networks?

APPLICATIONS

How do I find out which applications are installed on a user's computer (inventory)?

How do I prevent computer games from running?

How do I verify that Application Control has been correctly configured?

How do I add an application to the trusted list?

DEVICES

How do I block the use of flash drives?

How do I add a device to the trusted list?

Is it possible to obtain access to a blocked device?

ENCRYPTION

Under which conditions is encryption impossible?

How do I use a password to restrict access to an archive?

Is it possible to use smart cards and tokens with encryption?

Is it possible to gain access to encrypted data if there is no connection with Kaspersky Security Center?

What should I do if the computer operating system fails but data remains encrypted?

SUPPORT

Where is the report file stored?

How do I create a trace file?

How do I enable dump writing?

Kaspersky Endpoint Security for Windows

Kaspersky Endpoint Security for Windows (hereinafter also referred to as Kaspersky Endpoint Security) provides comprehensive computer protection against various types of threats, network and phishing attacks.

The application is not intended to be used in technological processes that involve automated control systems. To protect devices in such systems, it is recommended to use Kaspersky Industrial CyberSecurity for Nodes application.

Threat detection technologies

Machine learning

Kaspersky Endpoint Security uses a model based on machine learning. The model is developed by Kaspersky experts. Subsequently, the model is continuously fed with threat data from KSN (model training).

Cloud analysis

Kaspersky Endpoint Security receives threat data from the Kaspersky Security Network. *Kaspersky Security Network (KSN)* is an infrastructure of cloud services providing access to the online Kaspersky Knowledge Base that contains information about the reputation of files, web resources, and software.

Expert analysis

Kaspersky Endpoint Security uses threat data added by Kaspersky virus analysts. Virus analysts evaluate objects if the reputation of an object cannot be determined automatically.

Behavior analysis

Kaspersky Endpoint Security analyzes the activity of an object in real time.

Automatic analysis

Kaspersky Endpoint Security receives data from the automatic object analysis system. The system processes all objects that are sent to Kaspersky. The system then determines the reputation of the object and adds the data to anti-virus databases. If the system cannot determine the reputation of the object, the system queries Kaspersky virus analysts.

Sandbox

Kaspersky Endpoint Security processes the object in a virtual machine. Kaspersky Sandbox analyzes the behavior of the object and decides on its reputation. This technology is available only if you are using the Kaspersky Sandbox solution.

Cloud Sandbox

Kaspersky Endpoint Security scans objects in an isolated environment provided by Kaspersky. Cloud Sandbox technology is permanently enabled and is available to all Kaspersky Security Network users regardless of the type of license they are using. If you have already deployed Endpoint Detection and Response solution, you can enable a separate counter for threats detected by Cloud Sandbox.

Selection tree

Each type of threat is handled by a dedicated component. Components can be enabled or disabled independently, and their settings can be configured.

Section	Component
Essential Threat Protection	**File Threat Protection** The File Threat Protection component lets you prevent infection of a computer file system. By default, the File Threat Protection component resides permanently in the computer's RAM and scans all files that are opened, saved, or run, in real time. This component scans files on all computer drives, including connected drives. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis. **Web Threat Protection** The Web Threat Protection component prevents downloads of malicious files from the internet, and also blocks the connection to malicious and phishing websites. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis. **Mail Threat Protection** The Mail Threat Protection component scans the attachments of incoming and outgoing email messages for viruses and other threats. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis. Mail Threat Protection can scan both incoming and outgoing messages. The application supports POP3, SMTP, IMAP, and NNTP in the following mail clients: • Microsoft Office Outlook • Mozilla Thunderbird • Windows Mail • MyOffice Mail • R7-Office Organizer To scan traffic in the Mozilla Thunderbird, MyOffice Mail, and R7-Office Organizer mail clients, you need to add a Kaspersky certificate to the certificate store and select the own certificate store. Mail Threat Protection does not support other protocols and mail clients. Mail Threat Protection may not always be able to gain *protocol-level* access to messages (for example, when using the Microsoft Exchange solution). For this reason, Mail Threat Protection includes an extension for Microsoft Office Outlook. The extension allows scanning messages at the *level of the mail client*. The Mail Threat Protection extension supports the 32-bit and 64-bit versions of Outlook 2010, 2013, 2016, 2019, 2021, 2024, and 365. On Arm-based computers, the Mail Threat Protection extension supports the 32-bit and 64-bit versions of Outlook 2016, Outlook 2021, Outlook 2024, and Outlook 365 for Arm64. **Network Threat Protection** The *Network Threat Protection* component (also called Intrusion Detection System, IDS) monitors inbound network traffic for activity characteristic of network attacks. When the application detects an attempted network attack on a user's computer, it blocks the network connection with the attacking computer. Descriptions of currently known types of network attacks and ways to counteract them are provided in the application databases. The list of network attacks that the Network Threat Protection component detects is updated during database and application module updates. **Firewall** The Firewall component blocks unauthorized connections to a computer while working on the internet or a local network. Firewall also controls the network activity of applications on the computer. This allows you to protect your corporate LAN from identity theft and other attacks. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and predefined *network rules*. **BadUSB Attack Prevention** The BadUSB Attack Prevention component prevents infected USB devices emulating a keyboard from connecting to the computer. **AMSI Protection** The AMSI Protection component is intended to support Antimalware Scan Interface from Microsoft. *Antimalware Scan Interface (AMSI)* allows third-party applications with AMSI support to send objects (for example, PowerShell scripts) to Kaspersky Endpoint Security for an additional scan, and then receive the results from scanning these objects.

Section	Component
Advanced Threat Protection	**Kaspersky Security Network** *Kaspersky Security Network (KSN)* is an infrastructure of cloud services providing access to the online Kaspersky Knowledge Base that contains information about the reputation of files, web resources, and software. The use of data from Kaspersky Security Network ensures faster responses by Kaspersky Endpoint Security to new threats, improves the performance of some protection components, and reduces the likelihood of false positives. If you are participating in Kaspersky Security Network, KSN services provide Kaspersky Endpoint Security with information about the reputation of scanned web addresses, as well as information about the category and reputation of scanned files . **Behavior Detection** The Behavior Detection component receives data on the actions of applications on your computer and provides this information to other protection components, to improve their performance. The Behavior Detection component utilizes Behavior Stream Signatures (BSS) for applications. If application activity matches a behavior stream signature, Kaspersky Endpoint Security performs the selected responsive action. The Kaspersky Endpoint Security functionality is based on behavior stream signatures and provides proactive defense for the computer. The Behavior Detection component additionally monitors network ports for application processes that may threaten the security of the computer. The application gets information about such processes with anti-virus databases. **Anti-Cryptor** The Anti-Cryptor component analyzes activity in shared folders. If this activity matches a behavior stream signature that is typical for external encryption, Kaspersky Endpoint Security performs the selected action. **Exploit Prevention** The Exploit Prevention component detects program code that takes advantage of vulnerabilities on a computer to exploit administrator privileges or to perform malicious activities. For example, exploits can utilize a buffer overflow attack. To do so, the exploit sends a large amount of data to a vulnerable application. When processing this data, the vulnerable application executes malicious code. As a result of this attack, the exploit can start an unauthorized installation of malware. When there is an attempt to run an executable file from a vulnerable application that was not performed by the user, Kaspersky Endpoint Security blocks this file from running or notifies the user. The Exploit Prevention component additionally monitors network ports for application processes that may threaten the security of the computer. The application gets information about such processes with anti-virus databases. **Host Intrusion Prevention** The Host Intrusion Prevention component prevents applications from performing actions that may be dangerous for the operating system, and ensures control over access to operating system resources and personal data. The component provides computer protection with the help of anti-virus databases and the Kaspersky Security Network cloud service. **Remediation Engine** The Remediation Engine component lets Kaspersky Endpoint Security roll back actions that have been performed by malware in the operating system.
Security Controls	**Application Control** Application Control manages the startup of applications on users' computers. This allows you to implement a corporate security policy when using applications. Application Control also reduces the risk of computer infection by restricting access to applications. **Device Control** Device Control manages user access to devices that are installed on or connected to a computer (for example, hard drives, cameras, or Wi-Fi modules). This lets you protect the computer from infection when such devices are connected, and prevent data loss or data leaks. **Web Control** Web Control manages user access to web resources. This helps reduce traffic and inappropriate use of work time. When a user tries to open a website that is restricted by Web Control, Kaspersky Endpoint Security blocks access or shows a warning. **Adaptive Anomaly Control** The Adaptive Anomaly Control component monitors and blocks actions that are not typical of the computers in a company's network. Adaptive Anomaly Control uses a set of rules to track non-typical behavior (for example, the *Start of Microsoft PowerShell from office application* rule). Rules are created by Kaspersky specialists based on typical scenarios of malicious activity. You can configure how Adaptive Anomaly Control handles each rule and, for example, allow the execution of PowerShell scripts that automate certain workflow tasks. Kaspersky Endpoint Security updates the set of rules along with the application databases. **Log Inspection** Log Inspection monitors the integrity of the protected environment based on the Windows event log analysis. When the application detects signs of atypical behavior in the system, it informs the administrator, as this behavior may indicate an attempted cyber attack. **System Integrity Monitoring** The System Integrity Monitoring component monitors changes in the operating system that may indicate computer security breaches. When such changes are detected, Kaspersky Endpoint Security generates corresponding events and alerts the administrator.

Section	Component
Tasks	**Malware Scan** Kaspersky Endpoint Security scans the computer for viruses and other threats. Malware Scan helps to rule out the possibility of spreading malware that was not detected by protection components, for example, due to a low security level. **Update of databases and application modules** Kaspersky Endpoint Security downloads updated databases and application modules. Updating keeps the computer protected against the latest viruses and other threats. The application is updated automatically by default, but if necessary, you can update the databases and application modules manually. **Last update rollback** Kaspersky Endpoint Security rolls back the last update of databases and modules. This lets you roll back the databases and application modules to their previous versions when necessary, for example, when the new database version contains an invalid signature that causes Kaspersky Endpoint Security to block a safe application. **Application Integrity Check** Kaspersky Endpoint Security checks the application modules in the application installation folder for corruption or modifications. If an application module has an incorrect digital signature, the module is considered corrupt.
Data Encryption	**File Level Encryption** The component allows creating file encryption rules. You can select predefined folders for encryption, select a folder manually, or select individual files by extension. **Full Disk Encryption** The component allows encrypting the hard disk using Kaspersky Disk Encryption or BitLocker Drive Encryption. **Encryption of removable drives** The component allows protecting data on removable drives. You can use Full Disk Encryption (FDE) or File Level Encryption (FLE).
Detection and Response	**Endpoint Detection and Response Optimum** Built-in agent for the Kaspersky Endpoint Detection and Response Optimum solution (hereinafter also "EDR Optimum"). *Kaspersky Endpoint Detection and Response* is a solution for protecting the corporate IT infrastructure from advanced cyber threats. The functionality of the solution combines automatic detection of threats with the ability to react to these threats to counteract advanced attacks including new exploits, ransomware, fileless attacks, as well as methods using legitimate system tools. For more information about the solution, refer to the Kaspersky Endpoint Detection and Response Optimum Help. **Endpoint Detection and Response Expert** Built-in agent for the Kaspersky Endpoint Detection and Response Expert solution (hereinafter also "EDR Expert"). EDR Expert offers more threat monitoring and response functionality than EDR Optimum. For more information about the solution, refer to the Kaspersky Endpoint Detection and Response Expert Help. **Endpoint Detection and Response Expert (on-premises)** and **Network Detection and Response (KATA)** Built-in agents for managing the Endpoint Detection and Response and Network Detection and Response components that are part of the Kaspersky Anti Targeted Attack Platform solution. *Kaspersky Anti Targeted Attack Platform* is a solution designed for timely detection of sophisticated threats such as targeted attacks, advanced persistent threats (APT), zero-day attacks, and others. Kaspersky Anti Targeted Attack Platform includes three functional units: • Kaspersky Anti Targeted Attack Platform (*KATA*) • Kaspersky Endpoint Detection and Response (*EDR (KATA)*) • Network Detection and Response (*NDR (KATA)*) You can purchase all functional units or individual functional units separately. For details about the solution, please refer to the Kaspersky Anti Targeted Attack Platform Help. **Sandbox** Built-in agent for Sandbox. The *Sandbox* component detects and automatically blocks advanced threats on computers. Sandbox analyzes object behavior to detect malicious activity and activity characteristic of targeted attacks on the IT infrastructure of the organization. Sandbox analyzes and scans objects on special servers with deployed virtual images of Microsoft Windows operating systems (the Sandbox servers). For details about the solution, please refer to the Kaspersky Sandbox Help and Kaspersky Anti Targeted Attack Platform Help. **Managed Detection and Response** Built-in agent to support the operation of the Kaspersky Managed Detection and Response solution. The *Kaspersky Managed Detection and Response (MDR)* solution automatically detects and analyzes security incidents in your infrastructure. To do so, MDR uses telemetry data received from endpoints and machine learning. MDR sends incident data to Kaspersky experts. The experts can then process the incident and, for example, add a new entry to Anti-Virus databases. Alternatively, the experts can issue recommendations on processing the incident and, for example, suggest isolating computer from the network. For detailed information about how the solution works, please refer to the Kaspersky Managed Detection and Response Help.

Modes of the application: Standard, EDR Agent, Light Agent

Kaspersky Endpoint Security for Windows is part of many Kaspersky solutions. Depending on the solution, you need to select a mode for the application.

Standard mode

This is the main and default mode of the application. You can install the application in this mode as part of Kaspersky EPP (Endpoint Protection Platform) solutions. For example, Kaspersky Endpoint Security in Standard mode is part of the Kaspersky Endpoint Security for Business. Kaspersky Endpoint Security provides comprehensive protection of workstations and servers from various threats, network attacks, and scams. In standard mode, built-in agents are also available for integration with Kaspersky Detection and Response solutions, including EDR, MDR, KUMA, and others.

EDR Agent

This mode allows deploying Kaspersky Detection and Response solutions together with third-party EPP solutions. Detection and Response solutions include Kaspersky Managed Detection and Response (MDR) and Kaspersky Anti Targeted Attack Platform (KATA). EDR Agent also supports the Kaspersky SIEM solution, Kaspersky Unified Monitoring and Analysis Platform (KUMA).

In this mode, standard protection components such as File Threat Protection or Web Threat Protection are not available. Standard protection of the computer is provided by the third-party EPP solution. EDR Agent continuously monitors processes running on these computers, open network connections, and files being modified, and interacts with Detection and Response solutions.

Light Agent

This mode is used to protect virtual environments. Kaspersky Endpoint Security in Light Agent mode is part of the Kaspersky Hybrid Cloud Security solution. Light Agent protects virtual machines with guest operating systems for workstations and servers. The same protection and control components are available in this mode as in Standard mode. The difference is that objects are scanned for viruses and other malware by a special solution component installed on a separate virtual machine, SVM (Secure Virtual Machine). Thus the Light Agent uses the resources of SVM to ensure the security of the infrastructure instead of the resources of the virtual machine.

Distribution kit

The distribution kit includes the following distribution packages:

- **AES256**

  This distribution package is intended for installation on computers with x86/x64 architecture. This distribution package contains cryptographic tools that implement the AES (Advanced Encryption Standard) encryption algorithm with an effective key length of 256 bits.

- **AES56**

  This distribution package is intended for installation on computers with x86/x64 architecture. This distribution package contains cryptographic tools that implement the AES encryption algorithm with an effective key length of 56 bits.

- **Arm64**

  This distribution package is intended for installation on Arm-based computers. This distribution package is not intended for installation on servers.

Before installation, make sure the distribution package matches the architecture of your processor. If the distribution package does not match the processor architecture, the installer will terminate the installation with an error.

The distribution package is a self-extracting archive in EXE format. To view the contents of the distribution package, you need to extract the archive to a separate folder. Each distribution package contains the following files:

`kes_win.msi`	Kaspersky Endpoint Security installation package.
`setup_kes.exe`	Files that are required for installing the application using any of the available methods.
`kes_win.kud`	File for creating installation packages for Kaspersky Endpoint Security.
`klcfginst.msi`	Installation package for the application management plug-in in the Kaspersky Security Center Administration Console.
`bases.cab`	Update package files that are used during installation.
`cleaner_v2.cab` `cleanerapi_v2.cab`	Files for removing incompatible software.
`incompatible.txt`	File containing the list of software that may cause compatibility issues with Kaspersky Endpoint Security. Kaspersky does not guarantee the compatibility of Kaspersky Endpoint Security with software from the list.
`ksn_<language ID>.txt`	File where you can read through the terms of participation in Kaspersky Security Network.
`license.txt`	File where you can read through the End User License Agreement and the Privacy Policy.
`installer.ini`	File that contains the internal settings of the distribution kit.
`kes.cab`	Files for the graphical interface of the application.

`aes256.cab` / `aes56.cab`	Files for the AES cryptographic algorithm (not included in the Arm64 distribution package).
`package.kcat`	File with signatures of the application distribution kit. The digital signature guarantees the authenticity and integrity of the application distribution kit.

It is not recommended to change the values of these settings. If you want to change installation options, use the setup.ini file.

Hardware and software requirements

This article lists the software versions on which the application has been tested and for which it is guaranteed to work correctly. The application may also work with other software versions, but those configurations have not undergone a full testing cycle and are not included in the list of guaranteed-supported versions.

To ensure proper operation of Kaspersky Endpoint Security, your computer must meet the following requirements:

To install the application, you need administrator rights on the computer.

Minimum general requirements

Minimum requirements	Workstation (x86/x64)	Server (x86/x64)	Arm
Storage	2 GB	2 GB	2 GB
CPU	1 GHz, SSE2 Instructions support	1.4 GHz, SSE2 Instructions support	1 GHz, Armv8.1 architecture
RAM	Workstation (x86): 1 GB Workstation (x64): 2 GB	2 GB Note: The server requires 8 GB of memory to install the application with the built-in agent for integration with Kaspersky Anti Targeted Attack Platform.	4 GB
Microsoft .NET Framework	4 or later	4 or later	4.8 or later

Workstations

Supported operating systems for workstations:

- Windows 7 Home / Professional / Ultimate / Enterprise Service Pack 1
- Windows 8 Professional / Enterprise
- Windows 8.1 Professional / Enterprise
- Windows 10 Home / Pro / Pro for Workstations / Education / Enterprise / Enterprise multi-session

- Windows 11 Home / Pro / Pro for Workstations / Education / Enterprise / Enterprise multi-session
- Windows 11 for Arm64 Home / Pro / Pro for Workstations / Education / Enterprise

Windows operating systems, starting from version 11 24H2, support the UDP Receive Segment Coalescing Offload (URO) technology. The technology is enabled by default if a compatible network card and drivers are installed on the computer. Disabling URO on a user's computer can significantly reduce the performance of the application.

To make sure Kaspersky Endpoint Security works correctly, the Windows Security Center (wscsvc) service must be running on the user's computer.

Kaspersky Endpoint Security cannot be installed on Microsoft Windows 7 without installed operating system updates: KB4490628 (March 12, 2019) and KB4474419 (September 23, 2019). For detailed information, refer to the Technical Support Knowledge Base.

For details about support for the Microsoft Windows 10 operating system, please refer to the Technical Support Knowledge Base.

For details about support for the Microsoft Windows 11 operating system, please refer to the Technical Support Knowledge Base.

Servers

Kaspersky Endpoint Security supports core components of the application on computers running the Windows operating system for servers. You can use Kaspersky Endpoint Security for Windows instead of Kaspersky Security for Windows Server on servers and clusters of your organization (Cluster Mode). The application also supports Server Core Mode (see known issues).

Supported operating systems for servers:

- Windows Small Business Server 2011 Essentials / Standard (64-bit)

  Microsoft Small Business Server 2011 Standard (64-bit) is supported only if Service Pack 1 for Microsoft Windows Server 2008 R2 is installed.

- Windows MultiPoint Server 2011 (64-bit)
- Windows Server 2008 R2 Foundation / Standard / Enterprise / Datacenter Service Pack 1
- Windows Web Server 2008 R2 Service Pack 1
- Windows Server 2012 Foundation / Essentials / Standard / Datacenter (including Server Core mode)

- Windows Server 2012 R2 Foundation / Essentials / Standard / Datacenter (including Server Core mode)
- Windows Server 2016 Essentials / Standard / Datacenter (including Server Core mode)
- Windows Server 2019 Essentials / Standard / Datacenter (including Server Core mode)
- Windows Server 2022 Standard / Datacenter / Datacenter: Azure Edition (including Server Core mode)
- Windows Server 2025 Standard / Datacenter

Kaspersky Endpoint Security cannot be installed on Microsoft Windows Server 2008 R2 without installed operating system updates: KB4490628 (March 12, 2019) and KB4474419 (September 23, 2019).

For details about support for the Microsoft Windows Server 2016 and Microsoft Windows Server 2019 operating systems, please refer to the Technical Support Knowledge Base.

For details about support for the Microsoft Windows Server 2022 operating system, please refer to the Technical Support Knowledge Base.

Unsupported operating systems for servers:

- Windows Server 2003 Standard / Enterprise / Datacenter Service Pack 2
- Windows Server 2003 R2 Foundation / Standard / Enterprise / Datacenter Service Pack 2
- Windows Server 2008 Standard / Enterprise / Datacenter Service Pack 2
- Windows Server 2008 Core Standard / Enterprise / Datacenter Service Pack 2
- Microsoft Small Business Server 2008 Standard / Premium Service Pack 2

Virtual platforms

Supported virtual platforms for application operation in standard mode:

- VMware Workstation Pro 15.5.2
- VMware ESXi 7.0 Patch Release ESXi 7.0b
- Windows Hyper-V Server 2019
- Citrix Virtual Apps and Desktops 7 2009
- Citrix Provisioning 2009
- Citrix Hypervisor 8.2 LTSR

The application supports virtual machines running Windows 11 Pro Arm64 created using Hyper-V.

Virtual machines for installing Light Agent

Installation of Kaspersky Endpoint Security in Light Agent mode on Arm-based virtual machines is not supported.

The BIOS on virtual machines must support the SMBIOS specification version 2.1 or later.

The following packages and utilities must be installed on virtual machines:

- When using Microsoft Hyper-V – Integration Services package.
- When using VMware vSphere – VMware Tools package.
- When using XenServer – XenTools package.
- When using HUAWEI FusionSphere – HUAWEI Tools package.
- When using KVM based hypervisors – QEMU Guest Agent.

See the Kaspersky Security for Virtualization Light Agent Help for virtual infrastructure requirements to run the application in the Light Agent mode.

For the application to work correctly, use a virtualized network interface with a bandwidth of at least 100 Mbit/s.

Terminal servers

Supported terminal server types:

- Microsoft Remote Desktop Services based on Windows Server 2008 R2 SP1
- Microsoft Remote Desktop Services based on Windows Server 2012
- Microsoft Remote Desktop Services based on Windows Server 2012 R2
- Microsoft Remote Desktop Services based on Windows Server 2016
- Microsoft Remote Desktop Services based on Windows Server 2019
- Microsoft Remote Desktop Services based on Windows Server 2022
- Microsoft Remote Desktop Services based on Windows Server 2025
- Citrix RDSH from Citrix Virtual Apps and Desktops 7 2507 LTSR

Kaspersky Security Center support

Kaspersky Endpoint Security supports operation with the following versions of Kaspersky Security Center:

- Kaspersky Security Center 14.2
- Kaspersky Security Center Linux 14.2
- Kaspersky Security Center Linux 15
- Kaspersky Security Center Windows 15.1
- Kaspersky Security Center Linux 15.1
- Kaspersky Security Center Linux 15.2
- Kaspersky Security Center Linux 15.3
- Kaspersky Security Center Linux 15.4
- Kaspersky Security Center Linux 16
- Kaspersky Security Center Linux 16.1
- Kaspersky Security Center Linux 16.2
- Kaspersky Security Center Linux 16.3
- Kaspersky Security Center Linux 17

Comparison of available application features depending on the type of operating system

The set of available Kaspersky Endpoint Security features depends on the type of operating system: workstation or server (see the table below).

Starting with Kaspersky Endpoint Security 12.8 for Windows, you can configure different sets of components for different operating system types in the installation package. That is, you can deploy the application to workstations and servers using the same installation package.

Installation of Kaspersky Endpoint Security in Light Agent mode on Arm-based virtual machines is not supported.

Comparison of Kaspersky Endpoint Security features

Feature	Workstation	Arm-based workstation	Server	Server Core mode
Advanced Threat Protection				
Kaspersky Security Network	✓	✓	✓	✓

Feature	Workstation	Arm-based workstation	Server	Server Core mode
Behavior Detection	✓	✓	✓	✓
Anti-Cryptor	✓	✓	✓	✓
Exploit Prevention	✓	✓	✓	✓
Host Intrusion Prevention	✓	✓	–	–
Remediation Engine	✓	✓	✓	✓
Essential Threat Protection				
File Threat Protection	✓	✓	✓	✓
Web Threat Protection	✓	✓	✓	–
Mail Threat Protection	✓	✓	✓	–
Firewall	✓	✓	✓	✓
Network Threat Protection	✓	✓	✓	✓
BadUSB Attack Prevention	✓	✓	✓	–
AMSI Protection	✓	✓	✓	✓
Security Controls				
Log Inspection	–	–	✓	–
Application Control	✓	✓	✓	✓
Device Control	✓	✓	✓	✓
Web Control	✓	✓	✓	–
Adaptive Anomaly Control	✓	✓	–	–
System Integrity Monitoring	–	–	✓	–
Cloud Discovery	✓	✓	–	–
Data Encryption				
Kaspersky Disk Encryption	✓	–	–	–
BitLocker Drive Encryption	✓	✓	✓	✓
File Level Encryption	✓	–	–	–
Encryption of removable drives	✓	–	–	–
Detection and Response				
Endpoint Detection and Response Optimum	✓	✓	✓	✓
Endpoint Detection and Response Expert (cloud)	✓	✓	✓	✓
Endpoint Detection and Response (KATA)	✓	✓	✓	✓
Network Detection and Response (KATA)	✓	✓	✓	✓
Sandbox	✓	✓	✓	✓
Managed Detection and Response (MDR)	✓	✓	✓	✓
KUMA Integration	✓	✓	✓	✓

Comparison of application functions depending on the management tools

The set of functions available in Kaspersky Endpoint Security depends on the management tools (see the table below).

You can manage the application using the following consoles of Kaspersky Security Center:

- Administration Console. Microsoft Management Console (MMC) snap-in installed on the administrator's workstation.
- Web Console. Component of Kaspersky Security Center that is installed on the Administration Server. You can work in the Web Console using a browser on any computer.

You can also manage the application by using the Kaspersky Security Center Cloud Console. The *Kaspersky Security Center Cloud Console* is the cloud version of Kaspersky Security Center. This means that the Administration Server and other components of Kaspersky Security Center are installed in the cloud infrastructure of Kaspersky. For details on managing the application using the Kaspersky Security Center Cloud Console, refer to the Kaspersky Security Center Cloud Console Help.

Kaspersky Endpoint Security is part of the Kaspersky Next Pro View solution. For more information on the available application features when it works as part of this solution, see Kaspersky Next Help.

Comparison of Kaspersky Endpoint Security features

Feature	Kaspersky Security Center		Kaspersky Security Center
	Administration Console	Web Console	Cloud Console
Advanced Threat Protection			
Kaspersky Security Network	✓	✓	✓
Kaspersky Private Security Network	✓	✓	–
Behavior Detection	✓	✓	✓
Anti-Cryptor			
Exploit Prevention	✓	✓	✓
Host Intrusion Prevention	✓	✓	✓
Remediation Engine	✓	✓	✓
Essential Threat Protection			
File Threat Protection	✓	✓	✓
Web Threat Protection	✓	✓	✓
Mail Threat Protection	✓	✓	✓
Firewall	✓	✓	✓
Network Threat Protection	✓	✓	✓
BadUSB Attack Prevention	✓	✓	✓
AMSI Protection	✓	✓	✓
Security Controls			
Log Inspection	✓	✓	✓
Application Control	✓	✓	✓
Device Control	✓	✓	✓
Web Control	✓	✓	✓
Adaptive Anomaly Control	✓	✓	✓
System Integrity Monitoring	✓	✓	✓
Cloud Discovery	–	–	✓
Data Encryption			
Kaspersky Disk Encryption	✓	✓	–

Feature	Kaspersky Security Center		Kaspersky Security Center
	Administration Console	Web Console	Cloud Console
BitLocker Drive Encryption	✓	✓	✓
File Level Encryption	✓	✓	–
Encryption of removable drives	✓	✓	–
Detection and Response			
Endpoint Detection and Response Optimum	–	✓	✓
Endpoint Detection and Response Expert (cloud)	–	–	✓
Endpoint Detection and Response (KATA)	✓	✓	–
Network Detection and Response (KATA)	✓	✓	–
Sandbox	–	✓	–
Managed Detection and Response (MDR)	✓	✓	✓
KUMA Integration	✓	✓	✓
Tasks			
Add key	✓	✓	✓
Change application components	✓	✓	✓
Inventory	✓	✓	✓
Update	✓	✓	✓
Update rollback	✓	✓	✓
Malware Scan	✓	✓	✓
Application Integrity Check	✓	✓	–
Wipe data	✓	✓	✓
Manage Authentication Agent accounts (Kaspersky Disk Encryption)	✓	✓	–
IOC Scan (EDR)	–	✓	✓
Move file to Quarantine (EDR)	–	✓	✓
Get file (EDR)	–	✓	✓
Delete file (EDR)	–	✓	✓
Start process (EDR)	–	✓	✓
Terminate process (EDR)	–	✓	✓

Compatibility with other applications

Kaspersky Endpoint Security is incompatible with some Kaspersky applications as well as some third-party applications. Therefore, before installing, updating the application version, and changing the application components, Kaspersky Endpoint Security scans the computer to see if any such applications are present.

Compatibility with third-party applications

Kaspersky Endpoint Security is incompatible with applications that are part of third-party endpoint protection systems (Endpoint Protection Platform, EPP). Kaspersky Endpoint Security can also experience compatibility issues with other applications. To determine compatibility, Kaspersky Endpoint Security consults a list of software prepared by Kaspersky. This list is contained in the incompatible.txt file. This file is included in the distribution kit.

Kaspersky does not guarantee the compatibility of Kaspersky Endpoint Security with software from the list. If an application from the list is discovered, the installer stops the deployment of Kaspersky Endpoint Security. The installer may automatically delete some applications from the list. If you are willing to disregard the risks and want to install Kaspersky Endpoint Security and a piece of software from the list on the same computer, you can skip the computer check (see instructions below).

DOWNLOAD THE INCOMPATIBLE.TXT FILE

Compatibility with Kaspersky applications

Kaspersky Endpoint Security is incompatible with the following Kaspersky applications:

- Kaspersky Standard | Plus | Premium.
- Kaspersky Small Office Security.
- Kaspersky Internet Security.
- Kaspersky Anti-Virus.
- Kaspersky Total Security.
- Kaspersky Safe Kids.
- Kaspersky Free.
- Kaspersky Anti-Ransomware Tool.
- Endpoint Sensor as part of the Kaspersky Anti Targeted Attack Platform and Kaspersky Endpoint Detection and Response solutions.
- Kaspersky Endpoint Agent as part of the Detection and Response solutions from Kaspersky.

  Kaspersky is switching all Detection and Response to working with the Kaspersky Endpoint Security built-in agent instead of Kaspersky Endpoint Agent. Starting with version 12.1, the application supports all Detection and Response solutions.

- Kaspersky Security for Virtualization Light Agent.
- Kaspersky Fraud Prevention for Endpoint.

- Kaspersky Security for Windows Server

> Starting with Kaspersky Endpoint Security 12.0, you can migrate from Kaspersky Security for Windows Server to Kaspersky Endpoint Security for Windows and use the same solution for protecting workstations and servers.

- Kaspersky Embedded Systems Security.

If Kaspersky applications from this list are installed on the computer, Kaspersky Endpoint Security removes these applications. Please wait for this process to finish before continuing installation of Kaspersky Endpoint Security.

Skipping the check for software that may cause compatibility issues

If Kaspersky Endpoint Security detects software from the incompatible.txt list, the installation of the application will be terminated. To continue the installation, you must remove that application. However, if the vendor of third-party software has indicated in their documentation that their software is compatible with Endpoint Protection Platform (EPP), you can install Kaspersky Endpoint Security to a computer containing an application from this vendor. For example, the Endpoint Detection and Response (EDR) solution provider may declare their compatibility with third-party EPP systems. If this is the case, you need to start the installation of Kaspersky Endpoint Security without running an installed software check. To do so, pass the following parameters to the installer:

- `SKIPPRODUCTCHECK=1` Disable the check for installed software. The list of software that may cause compatibility issues is available in the incompatible.txt file that is included in the distribution kit. If no value is set for this parameter and software from the list is detected, the installation of Kaspersky Endpoint Security will be terminated.

- `SKIPPRODUCTUNINSTALL=1` Disable automatic removal of detected software from the incompatible.txt list. If no value is set for this parameter, Kaspersky Endpoint Security attempts to remove the software that may cause compatibility issues.

- `CLEANERSIGNCHECK=0` Disable the digital signature verification of applications found by the check. If this parameter is not set, verification of digital signatures is disabled when deploying the application via Kaspersky Security Center. When the application is installed locally, digital signature verification is enabled by default.

You can pass parameters in the command line when locally installing the application.

If during the installation process you skipped the scan for software that may cause compatibility issues, Kaspersky Endpoint Security can perform this check again when the application components change. To skip the scan for installed software, you need to configure the *Change application components* task.

Example:
```
C:\KES\setup_kes.exe /pEULA=1 /pPRIVACYPOLICY=1 /pKSN=0 /pSKIPPRODUCTCHECK=1 /pSKIPPRODUCTUNINSTALL=1
/pCLEANERSIGNCHECK=0 /s
```

To remotely install Kaspersky Endpoint Security, you need to add the appropriate parameters to the installation package generation file named `kes_win.kud` in `[Setup]` (see below). The `kes_win.kud` file is included in the distribution kit.

kes_win.kud
```
[Setup]
UseWrapper=1
ExecutableRelPath=EXEC
Params=/s /pAKINSTALL=1 /pEULA=1 /pPRIVACYPOLICY=1 /pKSN=0 /pSKIPPRODUCTCHECK=1 /pSKIPPRODUCTUNINSTALL=1
/pCLEANERSIGNCHECK=0
```

```
Executable=setup_kes.exe
RebootDelegated = 1
RebootAllowed=1
ConfigFile=installer.ini
RelPathsToExclude=klcfginst.msi
```

Installing and removing the application

Kaspersky Endpoint Security can be installed on a computer in the following ways:

- locally, by using the Setup Wizard.
- locally from the command line.
- remotely using Kaspersky Security Center.
- remotely through the Microsoft Windows Group Policy Management Editor (for more details, visit the Microsoft Technical Support website).
- remotely, by using the System Center Configuration Manager.

You can configure the application installation settings in several ways. If you simultaneously use multiple methods for configuring the settings, Kaspersky Endpoint Security applies the settings with the highest priority. Kaspersky Endpoint Security uses the following order of priorities:

1. Settings received from the setup.ini file.
2. Settings received from the installer.ini file.
3. Settings received from the command line.
4. Settings received from the configuration file (install.cfg).

We recommend closing all running applications before starting the installation of Kaspersky Endpoint Security (including remote installation).

When installing Kaspersky Endpoint Security, the operating system may show its own messages. Network and Internet connections may also be interrupted when the application is being installed.

When installing, updating or uninstalling Kaspersky Endpoint Security, errors may occur. For more information about solving these errors, please refer to the Technical Support Knowledge Base.

Deployment through Kaspersky Security Center

Kaspersky Endpoint Security can be deployed on computers within a corporate network in several ways. You can choose the most suitable deployment scenario for your organization or combine several deployment scenarios at the same time. Before installing the application, you must make sure the Kaspersky Security Center Network Agent is installed on the computer. *Network Agent* facilitates interaction between the Administration Server and a client computer.

Kaspersky Security Center supports the following main deployment methods:

- Installing the application using the Protection Deployment Wizard.

  Standard installation method is convenient if you are satisfied with the default settings of Kaspersky Endpoint Security and your organization has a simple infrastructure that does not require special configurations.

- Installing the application using the remote installation task.

  Universal installation method, which allows to configure Kaspersky Endpoint Security settings and flexibly manage remote installation tasks. Installation of Kaspersky Endpoint Security consists of the following steps:

  1. Creating an installation package.

  2. Creating a remote installation task.

Kaspersky Security Center also supports other methods of installing Kaspersky Endpoint Security, such as deployment within an operating system image. For details about other deployment methods, refer to Kaspersky Security Center Help.

Standard installation of the application

Kaspersky Security Center provides a Protection Deployment Wizard for installing the application on corporate computers. The Protection Deployment Wizard includes the following main actions:

1. Selecting a Kaspersky Endpoint Security installation package.

   An *installation package* is a set of files created for remote installation of a Kaspersky application via Kaspersky Security Center. The installation package contains a range of settings needed to install the application and get it running immediately after installation. The installation package is created using files with the .kpd and .kud extensions included in the application distribution kit. Kaspersky Endpoint Security installation package is common for all supported Windows versions and processor architecture types.

2. Creating the *Install application remotely* task of the Kaspersky Security Center Administration Server.

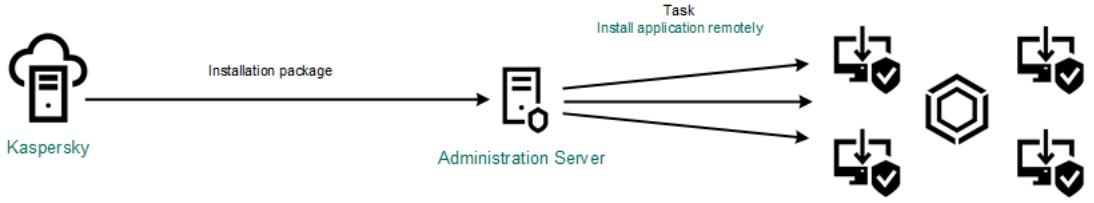

Kaspersky Endpoint Security deployment

How to run the Protection Deployment Wizard in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Advanced** → **Remote installation**.

3. Click the **Deploy installation package on managed devices (workstations)** link.

This will start the Protection Deployment Wizard. Follow the instructions of the Wizard.

TCP ports 139 and 445, and UDP ports 137 and 138 must be opened on a client computer.

Step 1. Selecting an installation package

Select Kaspersky Endpoint Security installation package from the list. If the list does not contain the installation package for Kaspersky Endpoint Security, you can create the package in the Wizard.

You can configure the installation package settings in Kaspersky Security Center. For example, you can select the application components that will be installed to a computer.

Network Agent will also be installed together with Kaspersky Endpoint Security. *Network Agent* facilitates interaction between the Administration Server and a client computer. If Network Agent is already installed on the computer, it is not installed again.

Step 2. Selecting the installation package source

Select the **Deploy Kaspersky Security Center package** source.

Step 3. Selecting devices for installation

Select the computers for installing Kaspersky Endpoint Security. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. Network Agent is not installed on unassigned devices. In this case, the task is assigned to specific devices. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 4. Defining remote installation task settings

Configure the following additional application settings:

- **Force installation package download**. Select the method of application installation:

  - **Using Network Agent**. The Network Agent is responsible for delivering the Kaspersky Endpoint Security installation package to the client computers. If the Network Agent is not installed, the task will end with an error. In this case, add the Network Agent installation package to the *Install application remotely* task and enable file delivery via operating system resources. Then the Network Agent will be installed using operating system resources. Then Kaspersky Endpoint Security is installed by the tools of Network Agent.

  - **Using operating system resources through distribution points**. The installation package is delivered to client computers using operating system resources via distribution points. You can select this option if there is at least one distribution point in the network. For more details about distribution points, refer to the Kaspersky Security Center Help.

  - **Using operating system resources through Administration Server**. Files will be delivered to client computers by using operating system resources through the Administration Server. You can select this option if Network Agent is not installed on the client computer, but the client computer is in the same network as the Administration Server.

- **Behavior for devices managed through other Administration Servers**. Select the Kaspersky Endpoint Security installation method. If the network has more than one Administration Server installed, these Administration Servers may see the same client computers. This may cause, for example, an application to be installed remotely on the same client computer several times through different Administration Servers, or other conflicts.

- **Do not re-install application if it is already installed**. Clear this check box if you want to install an earlier version of the application, for example.

- **Assign Network Agent installation in Active Directory group policies**. Manually installing Network Agent using Active Directory resources. To install Network Agent, the remote installation task must be run with domain administrator privileges.

Step 5. Selecting a license key

Add a key to the installation package for activating the application. This step is optional. If the Administration Server contains a license key with automatic distribution functionality, the key will be automatically added later. You can also activate the application later by using the *Add key* task.

Step 6. Selecting the operating system restart setting

Select the action to be performed if a computer restart is required. Restart is not required when installing Kaspersky Endpoint Security. Restart is required only if you have to remove incompatible applications prior to installation. Restart may also be required when updating the application version.

Step 7. Removing incompatible applications before installing the application

Carefully read the list of incompatible applications and allow removal of these applications. If incompatible applications are installed on the computer, installation of Kaspersky Endpoint Security ends with an error.

Step 8. Selecting an account for accessing devices

Select the account for installing Network Agent using the tools of the operating system. In this case, administrator rights are required for computer access. You can add multiple accounts. If an account does not have sufficient rights, the Installation Wizard uses the next account. If you install Kaspersky Endpoint Security using Network Agent tools, you do not have to select an account.

Step 9. Starting the installation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

How to start the Protection Deployment Wizard in the Web Console and Cloud Console

In the main window of the Web Console, select **Discovery & deployment** → **Deployment & assignment** → **Protection deployment wizard**.

This will start the Protection Deployment Wizard. Follow the instructions of the Wizard.

> TCP ports 139 and 445, and UDP ports 137 and 138 must be opened on a client computer.

Step 1. Selecting an installation package

Select Kaspersky Endpoint Security installation package from the list. If the list does not contain the installation package for Kaspersky Endpoint Security, you can create the package in the Wizard. To create the installation package, you do not need to search for the distribution package and save it to computer memory. In Kaspersky Security Center, you can view the list of distribution packages residing on Kaspersky servers, and the installation package is created automatically. Kaspersky updates the list after the release of new versions of applications.

You can configure the installation package settings in Kaspersky Security Center. For example, you can select the application components that will be installed to a computer.

Step 2. Selecting a license key

Add a key to the installation package for activating the application. This step is optional. If the Administration Server contains a license key with automatic distribution functionality, the key will be automatically added later. You can also activate the application later by using the *Add key* task.

Step 3. Selecting a Network Agent

Select the version of Network Agent that will be installed together with Kaspersky Endpoint Security. *Network Agent* facilitates interaction between the Administration Server and a client computer. If Network Agent is already installed on the computer, it is not installed again.

Step 4. Selecting devices for installation

Select the computers for installing Kaspersky Endpoint Security. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. Network Agent is not installed on unassigned devices. In this case, the task is assigned to specific devices. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 5. Configuring advanced settings

Configure the following additional application settings:

- **Force installation package download**. Select the method of application installation:
  - **Using Network Agent**. The Network Agent is responsible for delivering the Kaspersky Endpoint Security installation package to the client computers. If the Network Agent is not installed, the task will end with an error. In this case, add the Network Agent installation package to the *Install application remotely* task and enable file delivery via operating system resources. Then the Network Agent will be installed using operating system resources. Then Kaspersky Endpoint Security is installed by the tools of Network Agent.
  - **Using operating system resources through distribution points**. The installation package is delivered to client computers using operating system resources via distribution points. You can select this option if there is at least one distribution point in the network. For more details about distribution points, refer to the Kaspersky Security Center Help.
  - **Using operating system resources through Administration Server**. Files will be delivered to client computers by using operating system resources through the Administration Server. You can select this option if Network Agent is not installed on the client computer, but the client computer is in the same network as the Administration Server.
- **Do not re-install application if it is already installed**. Clear this check box if you want to install an earlier version of the application, for example.
- **Assign package installation in Active Directory group policies**. Kaspersky Endpoint Security is installed by means of Network Agent or manually by means of Active Directory. To install Network Agent, the remote installation task must be run with domain administrator privileges.

Step 6. Selecting the operating system restart setting

Select the action to be performed if a computer restart is required. Restart is not required when installing Kaspersky Endpoint Security. Restart is required only if you have to remove incompatible applications prior to installation. Restart may also be required when updating the application version.

Step 7. Removing incompatible applications before installing the application

Carefully read the list of incompatible applications and allow removal of these applications. If incompatible applications are installed on the computer, installation of Kaspersky Endpoint Security ends with an error.

Step 8. Assigning to an administration group

Select the administration group to which the computers will be moved after Network Agent is installed. Computers need to be moved to an administration group so that policies and group tasks can be applied. If a computer is already in any administration group, the computer will not be moved. If you do not select an administration group, computers will be added to the **Unassigned devices** group.

Step 9. Selecting an account for accessing devices

Select the account for installing Network Agent using the tools of the operating system. In this case, administrator rights are required for computer access. You can add multiple accounts. If an account does not have sufficient rights, the Installation Wizard uses the next account. If you install Kaspersky Endpoint Security using Network Agent tools, you do not have to select an account.

Step 10. Starting installation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

Creating an installation package

An *installation package* is a set of files created for remote installation of a Kaspersky application via Kaspersky Security Center. The installation package contains a range of settings needed to install the application and get it running immediately after installation. The installation package is created using files with the .kpd and .kud extensions included in the application distribution kit. Kaspersky Endpoint Security installation package is common for all supported Windows versions and processor architecture types.

How to create an installation package in the Administration Console (MMC)

1. In the Administration Console, go to the folder **Administration Server** → **Advanced** → **Remote installation** → **Installation packages**.

   This opens a list of installation packages that have been downloaded to Kaspersky Security Center.

2. Click **Create installation package**.

The New Package Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting the installation package type

Select the **Create an installation package for a Kaspersky application** option.

Step 2. Defining the installation package name

Enter the name of the installation package, for example, *Kaspersky Endpoint Security for Windows 14.2*.

Step 3. Selecting the distribution package for installation

Click the **Browse** button and select the `kes_win.kud` file that is included in the distribution kit.

If necessary, update the anti-virus databases in the installation package using the **Copy updates from repository to installation package** check box.

Step 4. End User License Agreement and Privacy Policy

Read and accept the terms of the End User License Agreement and Privacy Policy.

The installation package will be created and added to Kaspersky Security Center. Using the installation package, you can install Kaspersky Endpoint Security on corporate network computers or update the application version.

In installation package settings, you can select application components for different operating system types. That is, the installation package includes two sets of components: for workstations and for servers. Before deploying the installation package, the installer detects the type of the operating system and installs only those application components that you selected for that operating system type. In this way, you can use the same installation package for workstations and servers.

The installation package contains anti-virus databases from the Administration Server repository. You can update the databases in the installation package to reduce traffic consumption when updating the databases after installing Kaspersky Endpoint Security.

How to create an installation package in the Web Console

1. In the main window of the Web Console, select **Discovery & deployment** → **Deployment & assignment** → **Installation packages**.

   This opens a list of installation packages that have been downloaded to Kaspersky Security Center.

2. Click **Add**.

The New Package Wizard starts. Follow the instructions of the Wizard.

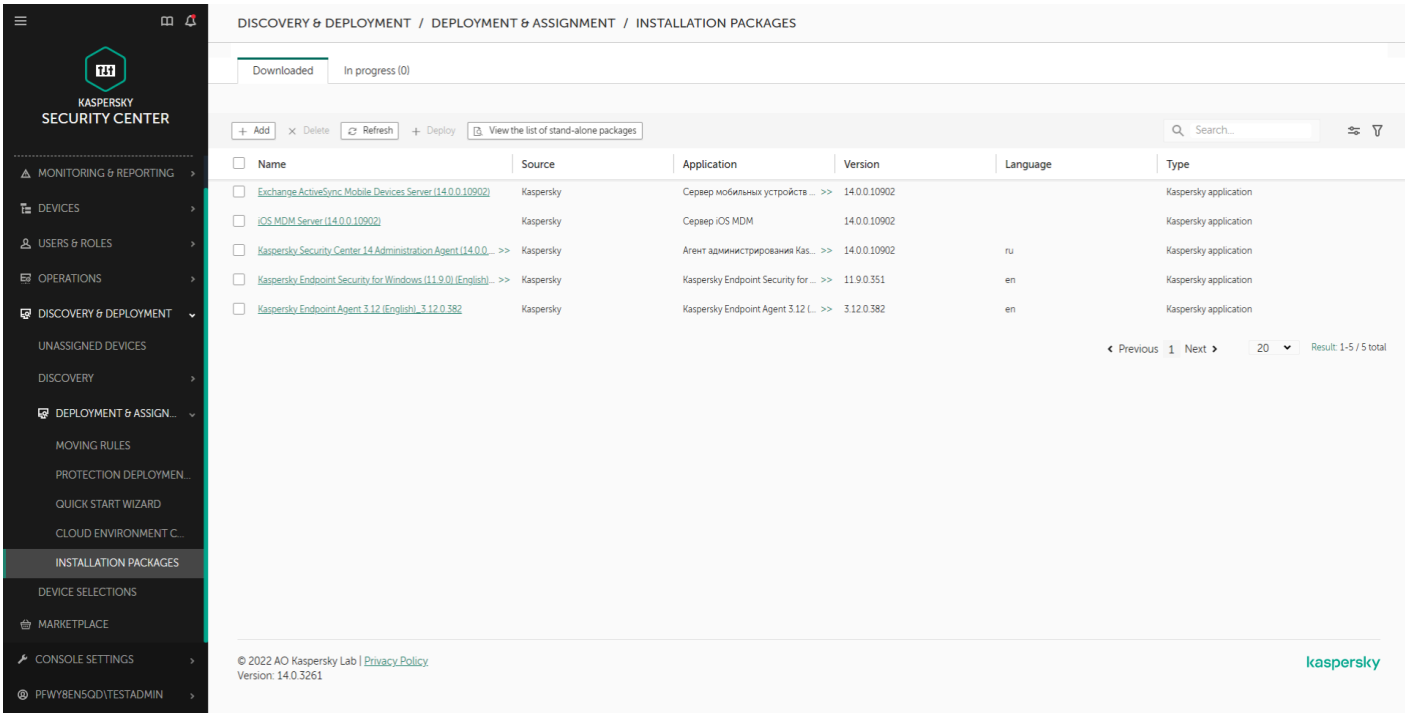

List of installation packages

Step 1. Selecting the installation package type

Select the **Create an installation package for a Kaspersky application** option.

The Wizard will create an installation package from the distribution package residing on Kaspersky servers. The list is updated automatically as new versions of applications are released. It is recommended to select this option for installation of Kaspersky Endpoint Security.

You can also create an installation package from a file.

Creating an installation package for Kaspersky Endpoint Security from a file is only available in Kaspersky Security Center Web Console.

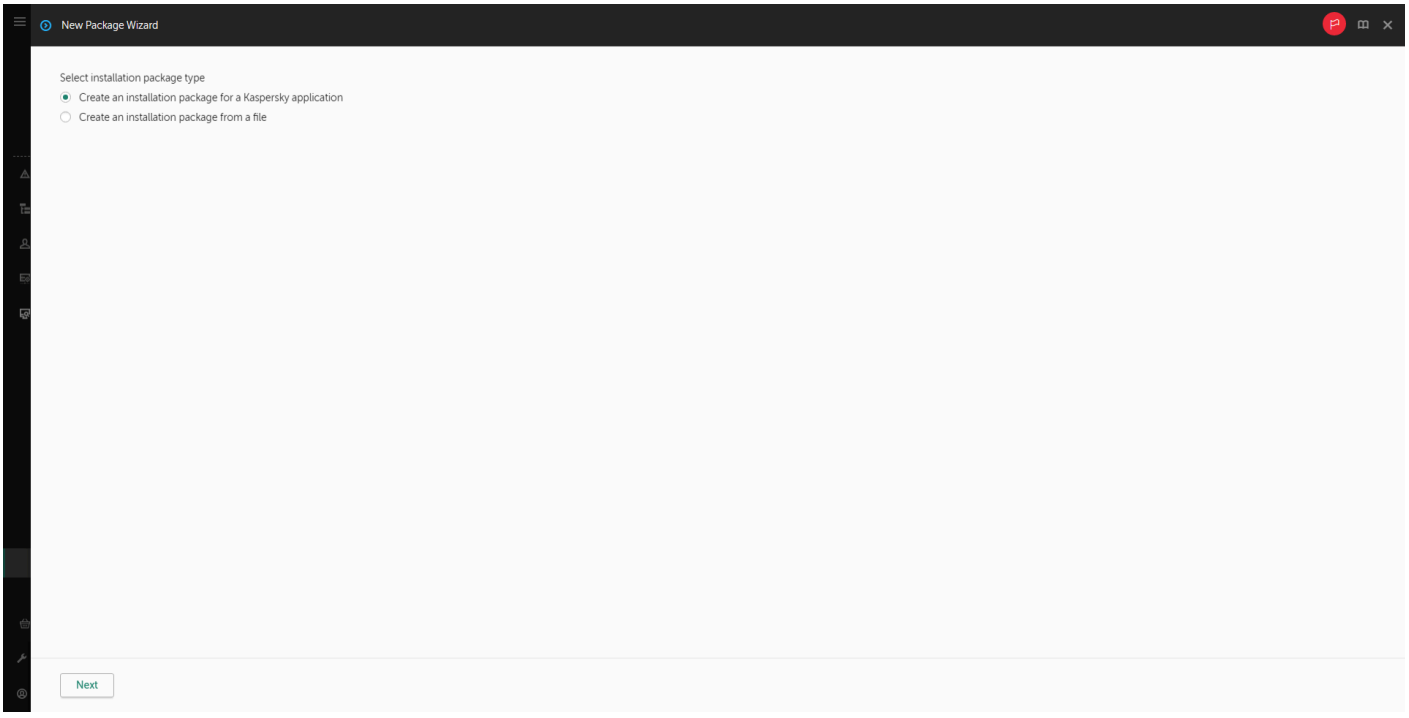

Types of installation packages

Step 2. Installation packages

Select the Kaspersky Endpoint Security for Windows installation package. The installation package creation process starts. During creation of the installation package, you must accept the terms of the End User License Agreement and Privacy Policy.

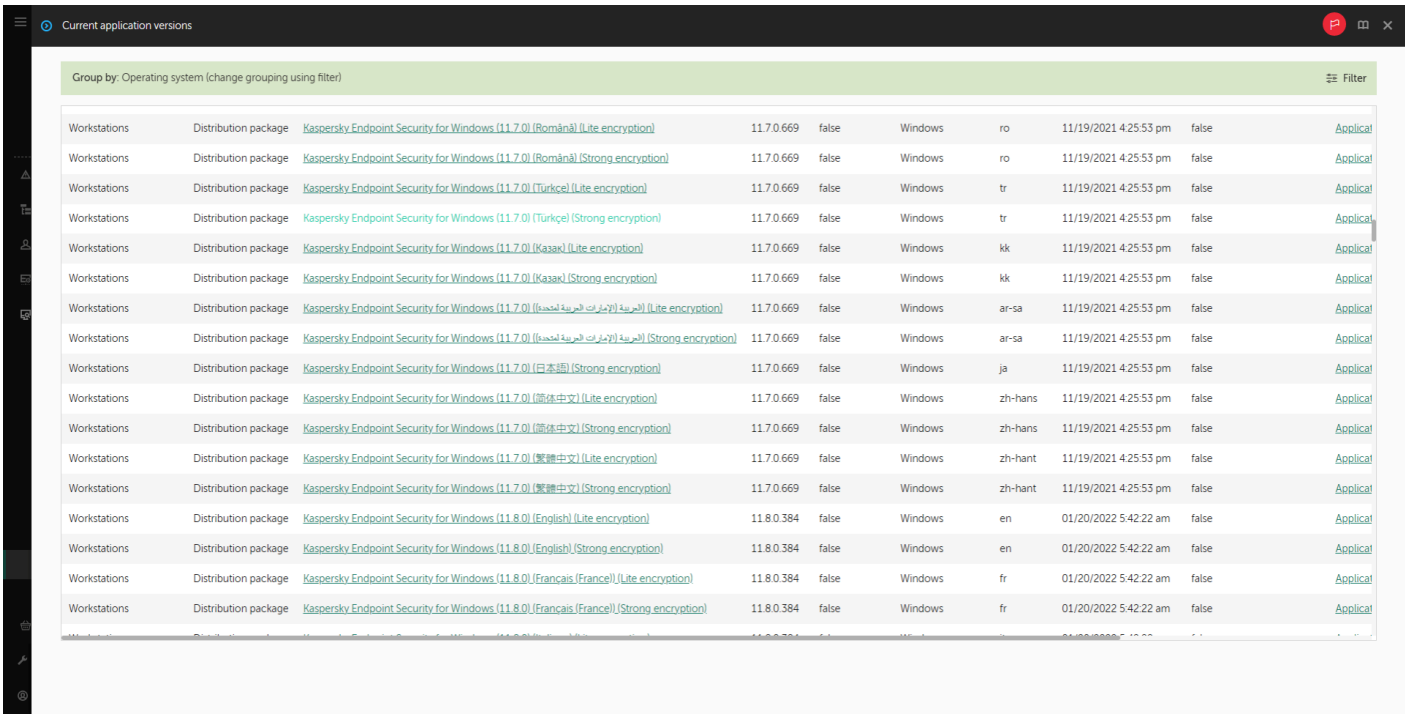

Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (Română) (Lite encryption)	11.7.0.669	false	Windows	ro	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (Română) (Strong encryption)	11.7.0.669	false	Windows	ro	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (Türkçe) (Lite encryption)	11.7.0.669	false	Windows	tr	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (Türkçe) (Strong encryption)	11.7.0.669	false	Windows	tr	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (Казак) (Lite encryption)	11.7.0.669	false	Windows	kk	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (Казак) (Strong encryption)	11.7.0.669	false	Windows	kk	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) ((العربية (الإمارات العربية المتحدة)) (Lite encryption)	11.7.0.669	false	Windows	ar-sa	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) ((العربية (الإمارات العربية المتحدة)) (Strong encryption)	11.7.0.669	false	Windows	ar-sa	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (日本語) (Strong encryption)	11.7.0.669	false	Windows	ja	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (简体中文) (Lite encryption)	11.7.0.669	false	Windows	zh-hans	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (简体中文) (Strong encryption)	11.7.0.669	false	Windows	zh-hans	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (繁體中文) (Lite encryption)	11.7.0.669	false	Windows	zh-hant	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.7.0) (繁體中文) (Strong encryption)	11.7.0.669	false	Windows	zh-hant	11/19/2021 4:25:53 pm	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.8.0) (English) (Lite encryption)	11.8.0.384	false	Windows	en	01/20/2022 5:42:22 am	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.8.0) (English) (Strong encryption)	11.8.0.384	false	Windows	en	01/20/2022 5:42:22 am	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.8.0) (Français (France)) (Lite encryption)	11.8.0.384	false	Windows	fr	01/20/2022 5:42:22 am	false	Applicat
Workstations	Distribution package	Kaspersky Endpoint Security for Windows (11.8.0) (Français (France)) (Strong encryption)	11.8.0.384	false	Windows	fr	01/20/2022 5:42:22 am	false	Applicat

List of installation packages on Kaspersky servers

The installation package will be created and added to Kaspersky Security Center. Using the installation package, you can install Kaspersky Endpoint Security on corporate network computers or update the application version.

In installation package settings, you can select application components for different operating system types. That is, the installation package includes two sets of components: for workstations and for servers. Before deploying the installation package, the installer detects the type of the operating system and installs only those application components that you selected for that operating system type. In this way, you can use the same installation package for workstations and servers.

The installation package contains anti-virus databases from the Administration Server repository. You can update the databases in the installation package to reduce traffic consumption when updating the databases after installing Kaspersky Endpoint Security.

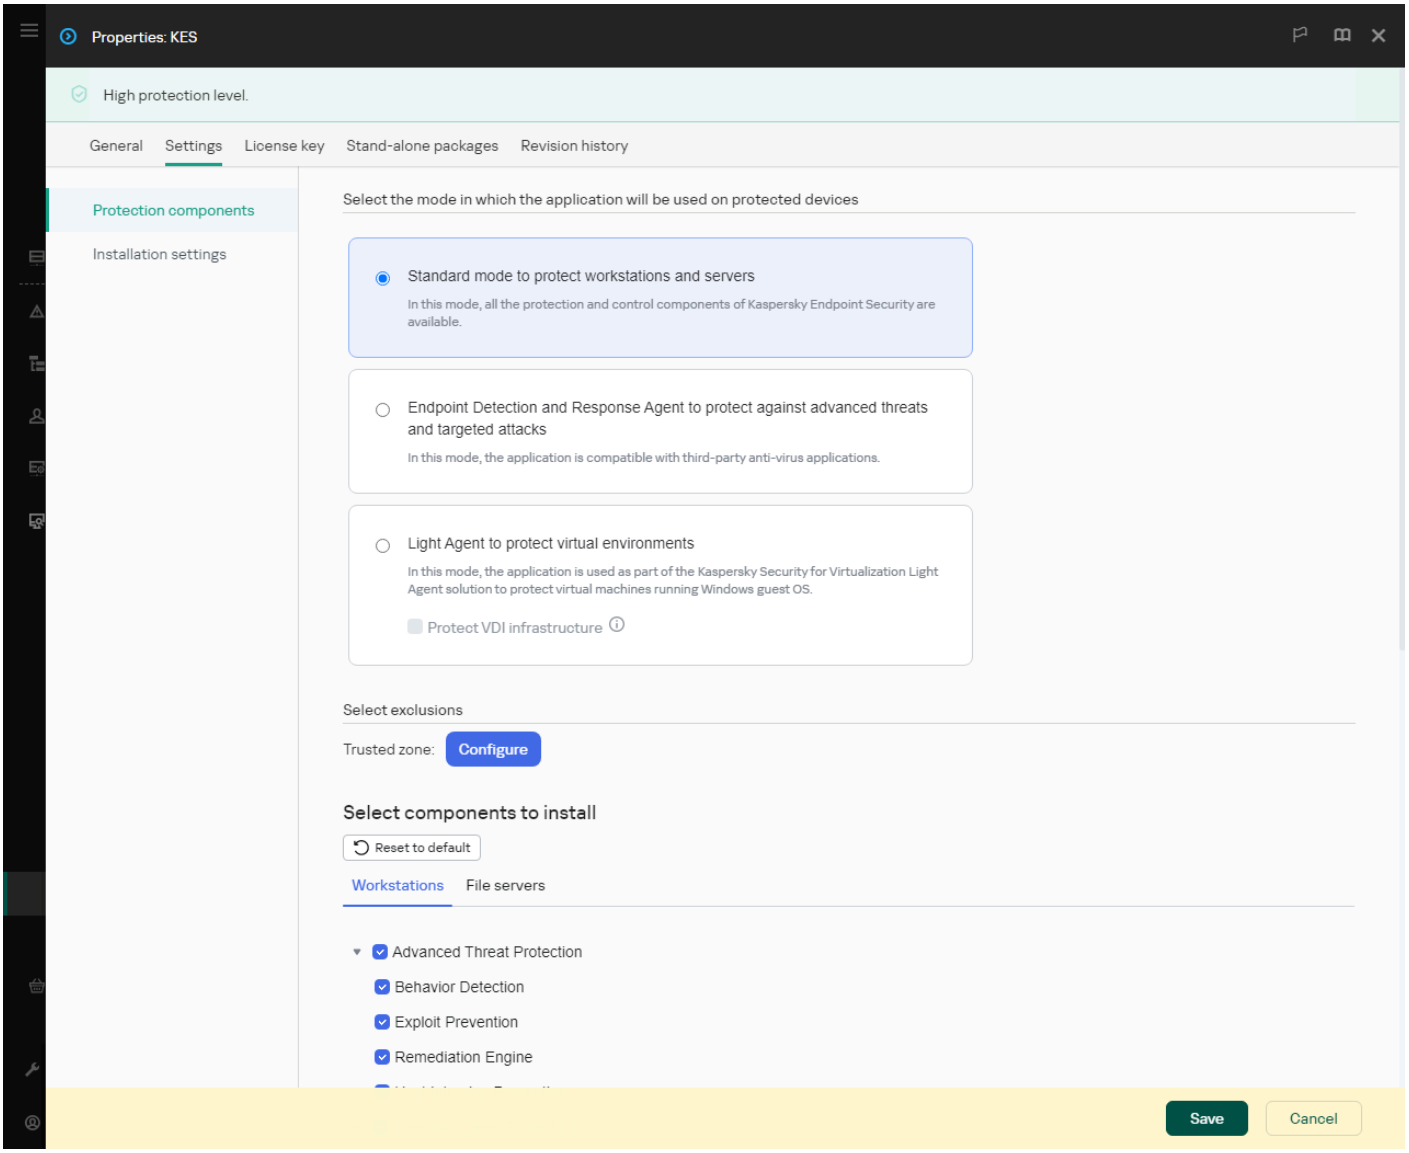

Components included in the installation package

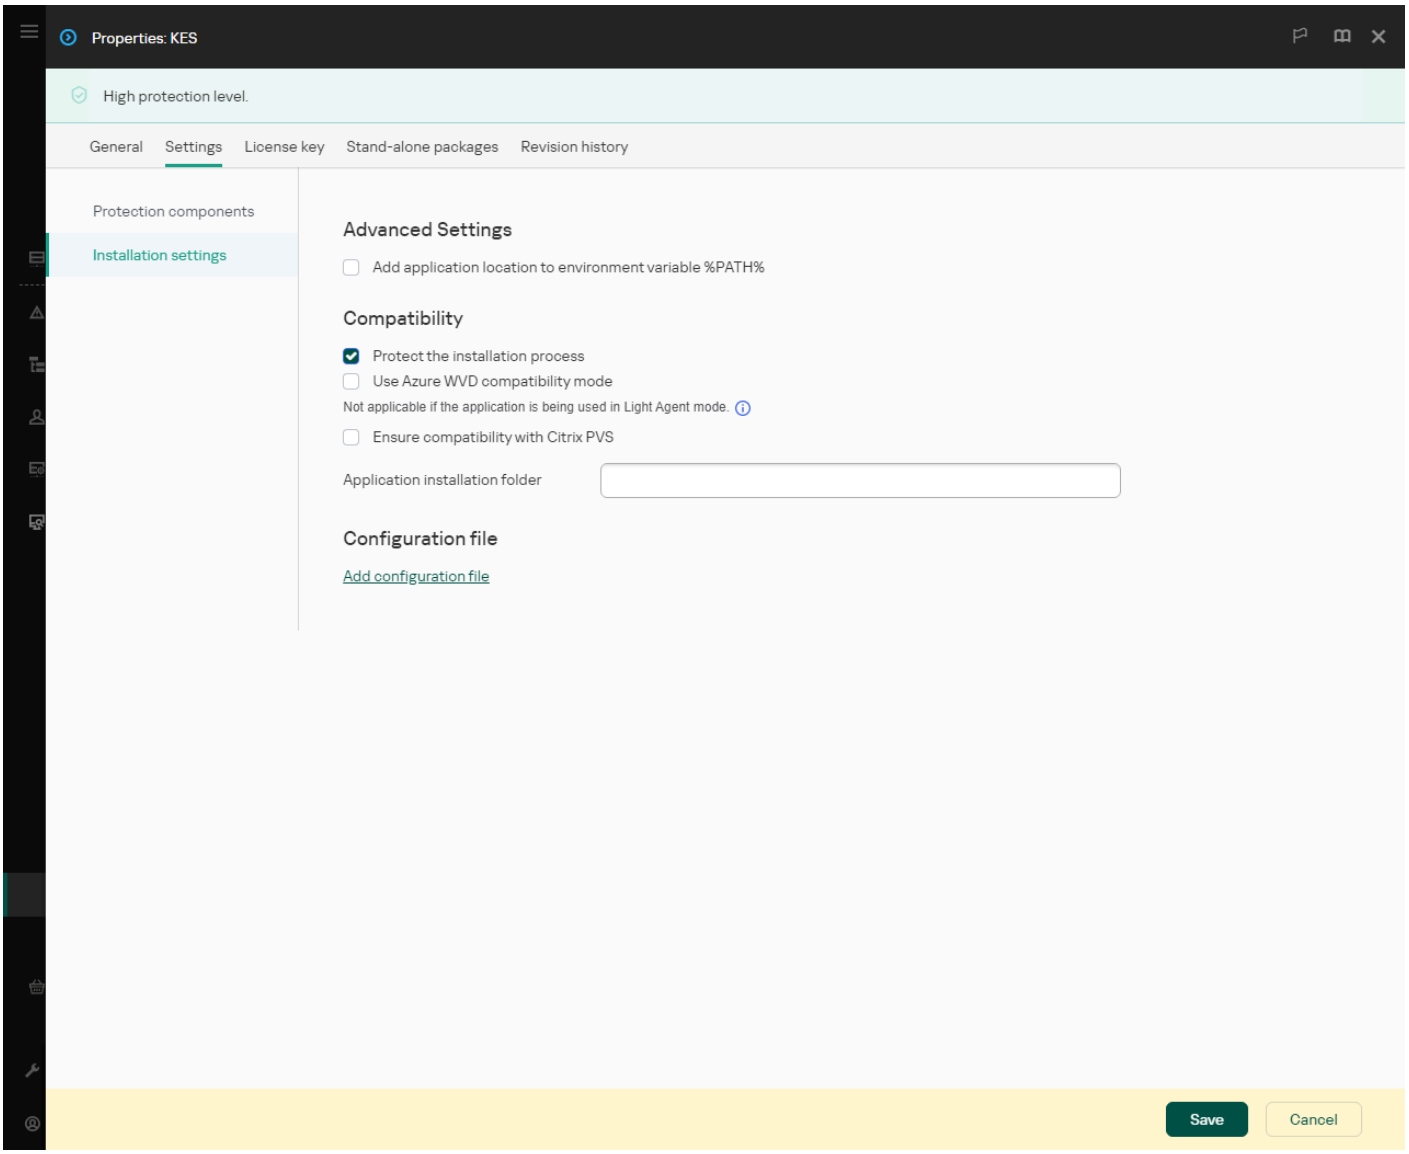

Installation settings of the installation package

Installation package settings

Section	Description
Protection components	**Standard mode**. The default configuration. This configuration lets you use all components of the application, including components that provide support for Detection and Response solutions. This configuration is used for comprehensive protection of the computer from a variety of threats, network attacks, and fraud. **Endpoint Detection and Response Agent**. In this configuration, you can only install the components that provide support for Detection and Response solutions: MDR, EDR (KATA), NDR (KATA), EDR Expert (on-premises), as well as KUMA. This configuration is needed if a third-party Endpoint Protection Platform (EPP) is deployed in your organization alongside a Kaspersky Detection and Response solution. This makes Kaspersky Endpoint Security in the Endpoint Detection and Response Agent configuration compatible with third-party EPP applications. **Light Agent to protect virtual environments**. This configuration is intended for the application that is used as part of the Kaspersky Security for Virtualization Light Agent solution. Light Agent must be installed on each virtual machine that needs to be protected using the solution. In this configuration, you cannot use Data Encryption components or Adaptive Anomaly Control. If you are installing Light Agent on a virtual machine template that will be used to create *nonpersistent virtual machines*, select the **Protect VDI infrastructure** check box (VDI stands for Virtual Desktop Infrastructure). The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. In this mode, Light Agent declines application updates that require restarting the virtual machine. When receiving application updates that require a restart, Light Agent generates an event about needing to update the template of the protected virtual machines.
Exclusions	Starting with Kaspersky Endpoint Security 12.6 for Windows, scan exclusions and trusted applications are added to the trusted zone. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers. Starting with Kaspersky Endpoint Security 12.8 for Windows, you can install the application in Light Agent mode for protecting virtual environments. Predefined scan exclusions and trusted applications can help you quickly configure Kaspersky Endpoint Security in Citrix and VMware virtual environments. You can also configure the trusted zone later in policy properties: scan exclusions and trusted applications.

Section	Description
Select components to install	In this section, you can select the application components that will be available. You can change the set of application components at a later time by using the *Change application components* task. You can create separate sets of components for workstations and servers. Before deploying the installation package, the installer detects the type of the operating system and installs only those application components that you selected for that operating system type. In this way, you can use the same installation package for workstations and servers. The set of available components depends on the configuration of the application: **Standard mode** Kaspersky Data Encryption, File Level Encryption, and all built-in agents except for EDR Optimum, are not installed by default. These components can be added in the installation package settings. **Endpoint Detection and Response Agent** In this configuration, only built-in agents for Kaspersky Detection and Response solutions are available. **Light Agent to protect virtual environments** In this configuration, you can use almost all of the application components that are available in the **Standard mode** configuration, except data encryption components and Adaptive Anomaly Control.
License key	In this section, you can activate the application. To activate the application, you must select a license key. Before you do that, you must add the key to the Administration Server. For more details about adding keys to the Kaspersky Security Center Administration Server, please refer to Kaspersky Security Center Help.
Incompatible applications	Carefully read the list of incompatible applications and allow removal of these applications. If incompatible applications are installed on the computer, installation of Kaspersky Endpoint Security ends with an error.
Installation settings	**Add the path to the file avp.com to the system variable %PATH%**. You can add the installation path to the %PATH% variable for convenient use of the command line interface. **Protect the installation process**. Installation protection includes protection against replacement of the distribution package with malicious applications, blocking access to the installation folder of Kaspersky Endpoint Security, and blocking access to the system registry section containing application keys. However, if the application cannot be installed (for example, when performing remote installation with the help of Windows Remote Desktop), you are advised to disable protection of the installation process. **Ensure compatibility with Citrix PVS**. You can enable support of Citrix Provisioning Services to install Kaspersky Endpoint Security to a virtual machine. **Use Azure WVD compatibility mode**. This feature ensures correct display of Azure virtual machine state in the Kaspersky Anti Targeted Attack Platform console. To monitor the performance of the computer, Kaspersky Endpoint Security sends telemetry to KATA servers. Telemetry includes an ID of the computer (Sensor ID). Azure WVD compatibility mode allows assigning a permanent unique Sensor ID to these virtual machines. If the compatibility mode is turned off, the Sensor ID can change after the computer is restarted because of how Azure virtual machines work. This can cause duplicates of virtual machines to appear on the console. **Application installation folder**. You can change the installation path of Kaspersky Endpoint Security on a client computer. By default, the application is installed in the `%ProgramFiles(x86)%\Kaspersky Lab\KES.14.2` folder. **Configuration file**. Installing the application with predefined settings. To do this, you need to upload a file that defines the settings of Kaspersky Endpoint Security. You can create a configuration file in the local interface of the application. The New package wizard does not support encrypted configuration files. When exporting the configuration file, skip the file encryption step.

Updating databases in the installation package

The installation package contains anti-virus databases from the Administration Server repository that are up to date when the installation package is created. After creating the installation package, you can update the anti-virus databases in the installation package. This lets you reduce traffic consumption when updating anti-virus databases after installing Kaspersky Endpoint Security.

To update the anti-virus databases in the Administration Server repository, use the *Download updates to the Administration Server repository* task of the Administration Server. For more information about updating the anti-virus databases in the Administration Server repository, please refer to the Kaspersky Security Center Help.

> You can update the databases in the installation package only in the Administration Console and Kaspersky Security Center Web Console. It is not possible to update the databases in the installation package in the Kaspersky Security Center Cloud Console.

How to update the anti-virus databases in the installation package through the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select the **Advanced** → **Remote installation** → **Installation packages** folder.

   This opens a list of installation packages that have been downloaded to Kaspersky Security Center.
3. Open the properties of the installation package.
4. In the **General** section, click **Update databases**.

As a result, the anti-virus databases in the installation package will be updated from the Administration Server repository. The `bases.cab` file that is included in the distribution kit will be replaced by the `bases` folder. The update package files will be inside the folder.

How to update anti-virus databases in an installation package through the Web Console

1. In the main window of the Web Console, select **Discovery & deployment** → **Deployment & assignment** → **Installation packages**.

   This opens a list of installation packages downloaded to Web Console.
2. Click on the name of the Kaspersky Endpoint Security installation package in which you want to update the anti-virus databases.

   The installation package properties window opens.
3. On the **General information** tab, click the **Update databases** link.

As a result, the anti-virus databases in the installation package will be updated from the Administration Server repository. The `bases.cab` file that is included in the distribution kit will be replaced by the `bases` folder. The update package files will be inside the folder.

Creating a remote installation task

The *Install application remotely* task is designed for remote installation of Kaspersky Endpoint Security. The *Install application remotely* task allows you to deploy the installation package of the application to all computers in the organization. Before deploying the installation package, you can update the anti-virus databases inside the package and select the available application components in the properties of the installation package.

How to create a remote installation task in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Tasks**.

   The list of tasks opens.
3. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Security Center Administration Server** → **Install application remotely**.

Step 2. Selecting an installation package

Select Kaspersky Endpoint Security installation package from the list. If the list does not contain the installation package for Kaspersky Endpoint Security, you can create the package in the Wizard.

You can configure the installation package settings in Kaspersky Security Center. For example, you can select the application components that will be installed to a computer.

Network Agent will also be installed together with Kaspersky Endpoint Security. *Network Agent* facilitates interaction between the Administration Server and a client computer. If Network Agent is already installed on the computer, it is not installed again.

Step 3. Additional

Select the Network Agent installation package. The selected version of Network Agent will be installed together with Kaspersky Endpoint Security.

Step 4. Settings

Configure the following additional application settings:

- **Force installation package download**. Select the method of application installation:
  - **Using Network Agent**. The Network Agent is responsible for delivering the Kaspersky Endpoint Security installation package to the client computers. If the Network Agent is not installed, the task will end with an error. In this case, add the Network Agent installation package to the *Install application remotely* task and enable file delivery via operating system resources. Then the Network Agent will be installed using operating system resources. Then Kaspersky Endpoint Security is installed by the tools of Network Agent.
  - **Using operating system resources through distribution points**. The installation package is delivered to client computers using operating system resources via distribution points. You can select this option if there is at least one distribution point in the network. For more details about distribution points, refer to the Kaspersky Security Center Help.
  - **Using operating system resources through Administration Server**. Files will be delivered to client computers by using operating system resources through the Administration Server. You can select this option if Network Agent is not installed on the client computer, but the client computer is in the same network as the Administration Server.

- **Behavior for devices managed through other Administration Servers**. Select the Kaspersky Endpoint Security installation method. If the network has more than one Administration Server installed, these Administration Servers may see the same client computers. This may cause, for example, an application to be installed remotely on the same client computer several times through different Administration Servers, or other conflicts.

- **Do not re-install application if it is already installed**. Clear this check box if you want to install an earlier version of the application, for example.

Step 5. Selecting the operating system restart setting

Select the action to be performed if a computer restart is required. Restart is not required when installing Kaspersky Endpoint Security. Restart is required only if you have to remove incompatible applications prior to installation. Restart may also be required when updating the application version.

Step 6. Selecting the devices to which the task will be assigned

Select the computers for installing Kaspersky Endpoint Security. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.

- Select computers detected by the Administration Server in the network: *unassigned devices*. Network Agent is not installed on unassigned devices. In this case, the task is assigned to specific devices. The specific devices can include devices in administration groups as well as unassigned devices.

- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 7. Selecting the account to run the task

Select the account for installing Network Agent using the tools of the operating system. In this case, administrator rights are required for computer access. You can add multiple accounts. If an account does not have sufficient rights, the Installation Wizard uses the next account. If you install Kaspersky Endpoint Security using Network Agent tools, you do not have to select an account.

Step 8. Configuring a task start schedule

Configure a schedule for starting a task, for example, manually or when the computer is idle.

Step 9. Defining the task name

Enter a name for the task, for example, *Install Kaspersky Endpoint Security for Windows 14.2*.

Step 10. Finishing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties. The application will be installed in silent mode. After installation, the icon will be added to the notification area of the user's computer. If the icon looks like this , make sure that you activated the application.

How to create a remote installation task in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Tasks**.

   The list of tasks opens.

2. Click **Add**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Configuring general task settings

Configure the general task settings:

1. In the **Application** drop-down list, select **Kaspersky Security Center**.
2. In the **Task type** drop-down list, select **Install application remotely**.
3. In the **Task name** field, enter a brief description, such as *Installation of Kaspersky Endpoint Security for Managers*.
4. In the **Devices to which the task will be assigned** block, select the task scope.

Step 2. Selecting computers for installation

At this step, select the computers on which Kaspersky Endpoint Security will be installed according to the selected task scope option.

Step 3. Configuring an installation package

At this step, configure the installation package:

1. Select the Kaspersky Endpoint Security for Windows (14.2) installation package.

2. Select the Network Agent installation package.

   The selected version of Network Agent will be installed together with Kaspersky Endpoint Security. *Network Agent* facilitates interaction between the Administration Server and a client computer. If Network Agent is already installed on the computer, it is not installed again.

3. In the **Force installation package download** block, select the application installation method:

   - **Using Network Agent**. The Network Agent is responsible for delivering the Kaspersky Endpoint Security installation package to the client computers. If the Network Agent is not installed, the task will end with an error. In this case, add the Network Agent installation package to the *Install application remotely* task and enable file delivery via operating system resources. Then the Network Agent will be installed using operating system resources. Then Kaspersky Endpoint Security is installed by the tools of Network Agent.

   - **Using operating system resources through distribution points**. The installation package is delivered to client computers using operating system resources via distribution points. You can select this option if there is at least one distribution point in the network. For more details about distribution points, refer to the Kaspersky Security Center Help.

   - **Using operating system resources through Administration Server**. Files will be delivered to client computers by using operating system resources through the Administration Server. You can select this option if Network Agent is not installed on the client computer, but the client computer is in the same network as the Administration Server.

4. In the **Maximum number of concurrent downloads** field, set a limit on the number of installation package download requests sent to the Administration Server. A limit on the number of requests will help prevent the network from being overload.

5. In the **Maximum number of installation attempts** field, set a limit on the number of attempts to install the application. If installation of Kaspersky Endpoint Security ends with an error, the task will automatically start the installation again.

6. If necessary, clear the **Do not re-install application if it is already installed** check box. It allows, for example, to install one of the previous versions of the application.

7. If necessary, clear the **Verify operating system type before downloading** check box. This lets you avoid downloading an application distribution package if the operating system of the computer does not meet the software requirements. If you are sure that the operating system of the computer meets the software requirements, you can skip this verification.

8. If necessary, select the **Assign package installation in Active Directory group policies** check box. Kaspersky Endpoint Security is installed by means of Network Agent or manually by means of Active Directory. To install Network Agent, the remote installation task must be run with domain administrator privileges.

9. If necessary, select the **Prompt users to close running applications** check box. Installation of Kaspersky Endpoint Security takes up computer resources. For the convenience of the user, the Application Installation Wizard prompts you to close running applications before starting the installation. This helps prevent disruptions in the operation of other applications and prevents possible malfunctions of the computer.

10. In the **Behavior for devices managed through other Administration Servers** block, select the Kaspersky Endpoint Security installation method. If the network has more than one Administration Server installed, these Administration Servers may see the same client computers. This may cause, for example, an application to be installed remotely on the same client computer several times through different Administration Servers, or other conflicts.

Step 4. Selecting the account to run the task

Select the account for installing Network Agent using the tools of the operating system. In this case, administrator rights are required for computer access. You can add multiple accounts. If an account does not have sufficient rights, the Installation Wizard uses the next account. If you install Kaspersky Endpoint Security using Network Agent tools, you do not have to select an account.

Step 5. Completing task creation

Finish the wizard by clicking the **Finish** button. A new task will be displayed in the list of tasks. To run a task, select the check box opposite the task and click the **Start** button. The application will be installed in silent mode. After installation, the icon will be added to the notification area of the user's computer. If the icon looks like this , make sure that you activated the application.

Installing the application locally using the Wizard

The interface of the application Setup Wizard consists of a sequence of windows corresponding to the application installation steps. Make sure the user account under which you are running the Setup Wizard is in the administrators group.

To install the application or upgrade the application from a previous version using the Setup Wizard:

1. Copy the distribution kit folder to the user's computer.

2. Run setup_kes.exe.

   The Setup Wizard starts.

Preparing for installation

Before installing Kaspersky Endpoint Security on a computer or upgrading it from a previous version, the following conditions are checked:

- Whether there is any software installed that may have compatibility issues with Kaspersky Endpoint Security (the list of software is available in the incompatible.txt file that is included in the distribution kit).
- Whether or not the hardware and software requirements are met.
- Whether Microsoft .NET Framework is present.
- Whether or not the user has the rights to install the software product.

If any one of the previous requirements is not met, a relevant notification is displayed on the screen. For example, a notification about incompatible software (see the figure below).

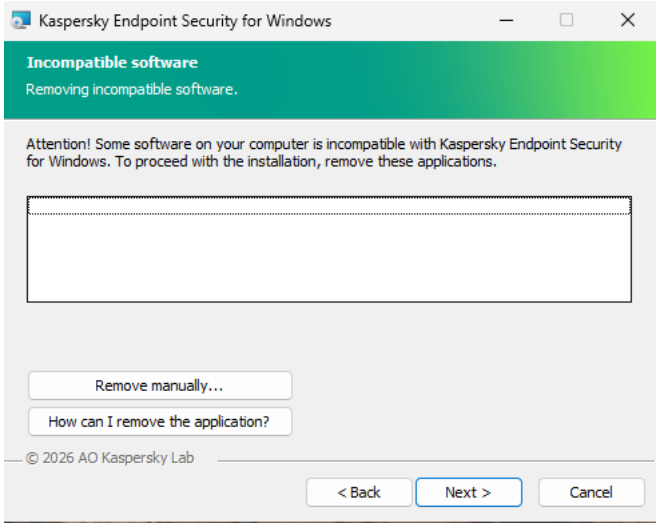

Removing incompatible software

If the computer meets the listed requirements, the Setup Wizard searches for Kaspersky applications that could lead to conflicts when running at the same time as the application being installed. If such applications are found, you are prompted to remove them manually.

If the detected applications include previous versions of Kaspersky Endpoint Security, all data that can be migrated (such as activation data and application settings) is retained and used during installation of Kaspersky Endpoint Security 14.2 for Windows, and the previous version of the application is automatically removed. This applies to the following application versions:

- Kaspersky Endpoint Security 12.3 for Windows (build 12.3.0.493)
- Kaspersky Endpoint Security 12.4 for Windows (build 12.4.0.467)
- Kaspersky Endpoint Security 12.5 for Windows (build 12.5.0.539)
- Kaspersky Endpoint Security 12.6 for Windows (build 12.6.0.438)
- Kaspersky Endpoint Security 12.7 for Windows (build 12.7.0.533)
- Kaspersky Endpoint Security 12.8 for Windows (build 12.8.0.505)

- Kaspersky Endpoint Security 12.9 for Windows (build 12.9.0.384)
- Kaspersky Endpoint Security 12.10 for Windows (build 12.10.0.466)
- Kaspersky Endpoint Security 12.11 for Windows (build 12.11.0.637)
- Kaspersky Endpoint Security 12.12 for Windows (build 12.12.0.522)
- Kaspersky Endpoint Security 14.0 for Windows (build 14.0.0.504)
- Kaspersky Endpoint Security 14.1 for Windows (build 14.1.0.423)

Configuration of Kaspersky Endpoint Security

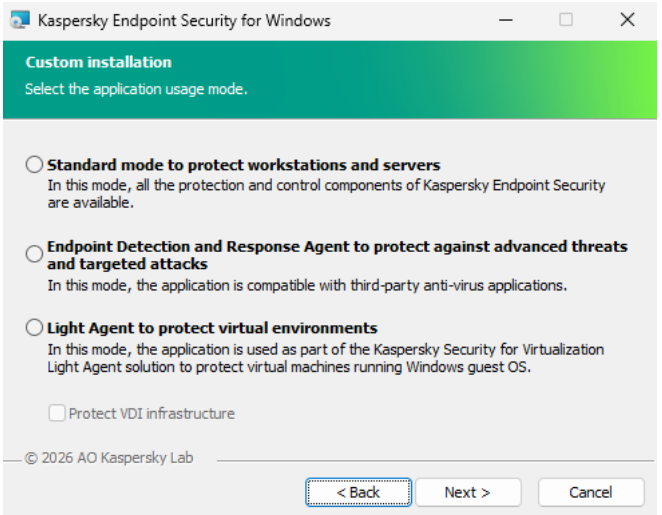

Choosing the configuration of the application

Standard mode. The default configuration. This configuration lets you use all components of the application, including components that provide support for Detection and Response solutions. This configuration is used for comprehensive protection of the computer from a variety of threats, network attacks, and fraud.

Endpoint Detection and Response Agent. In this configuration, you can only install the components that provide support for Detection and Response solutions: MDR, EDR (KATA), NDR (KATA), EDR Expert (on-premises), as well as KUMA. This configuration is needed if a third-party Endpoint Protection Platform (EPP) is deployed in your organization alongside a Kaspersky Detection and Response solution. This makes Kaspersky Endpoint Security in the Endpoint Detection and Response Agent configuration compatible with third-party EPP applications.

Light Agent to protect virtual environments. This configuration is intended for the application that is used as part of the Kaspersky Security for Virtualization Light Agent solution. Light Agent must be installed on each virtual machine that needs to be protected using the solution. In this configuration, you cannot use Data Encryption components or Adaptive Anomaly Control. If you are installing Light Agent on a virtual machine template that will be used to create *nonpersistent virtual machines*, select the **Protect VDI infrastructure** check box (VDI stands for Virtual Desktop Infrastructure). The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. In this mode, Light Agent declines application updates that require restarting the virtual machine. When receiving application updates that require a restart, Light Agent generates an event about needing to update the template of the protected virtual machines.

Kaspersky Endpoint Security components

During the installation process, you can select the components of Kaspersky Endpoint Security that you want to install (see the figure below). The File Threat Protection component is a mandatory component that must be installed. You cannot cancel its installation.

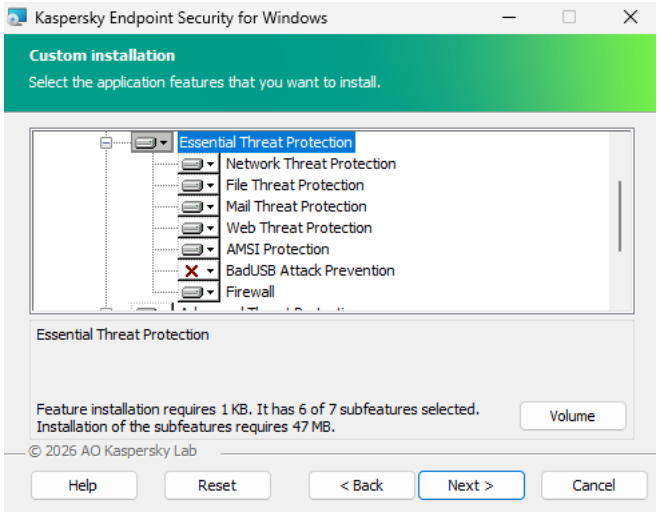

Selecting application components to install

By default, all application components are selected for installation except for the following components:

- Kaspersky Disk Encryption
- File Level Encryption
- Endpoint Detection and Response Expert (on-premises)
- Endpoint Detection and Response Expert (cloud)
- Sandbox
- Managed Detection and Response
- Network Detection and Response (KATA)
- Integration with KUMA

You can change the available application components after the application is installed. To do so, you need to run the Setup Wizard again and choose to change the available components.

If you need to install Detection and Response components, Kaspersky Endpoint Security supports the following configurations:

- Endpoint Detection and Response Optimum only
- Endpoint Detection and Response Expert (cloud) only
- Endpoint Detection and Response Expert (on-premises) only
- Network Detection and Response (KATA) only

- Sandbox only
- Endpoint Detection and Response Optimum and Sandbox
- Endpoint Detection and Response Expert (cloud) and Sandbox
- Endpoint Detection and Response Expert (on-premises) and Sandbox
- Network Detection and Response (KATA) and Endpoint Detection and Response Expert (on-premises)
- Network Detection and Response (KATA) and Managed Detection and Response

Kaspersky Endpoint Security verifies the selection of components before installing the application. If the selected configuration of Detection and Response components is not supported, Kaspersky Endpoint Security cannot be installed.

Selecting the folder for installing the application

You can change the installation path of Kaspersky Endpoint Security on a client computer. By default, the application is installed in the `%ProgramFiles(x86)%\Kaspersky Lab\KES.14.2` folder.

Configuring the trusted zone

Starting with Kaspersky Endpoint Security 12.6 for Windows, scan exclusions and trusted applications are added to the trusted zone. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers.

Starting with Kaspersky Endpoint Security 12.8 for Windows, you can install the application in Light Agent mode for protecting virtual environments. Predefined scan exclusions and trusted applications can help you quickly configure Kaspersky Endpoint Security in Citrix and VMware virtual environments.

You can also configure the trusted zone later in policy properties: scan exclusions and trusted applications.

Advanced settings

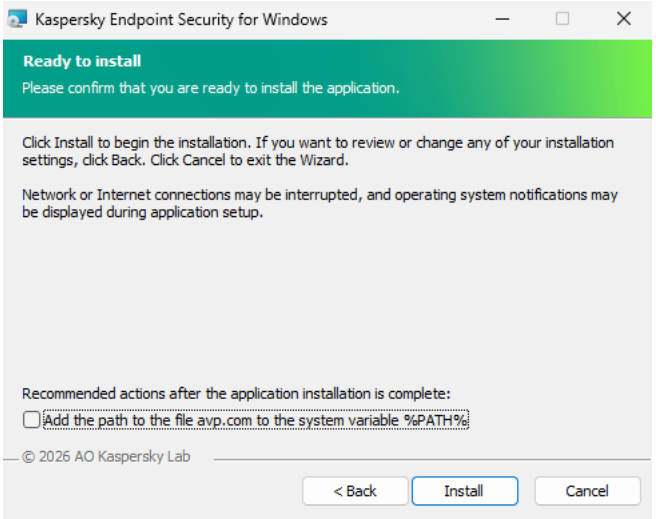

Advanced application installation settings

Protect the application installation process. Installation protection includes protection against replacement of the distribution package with malicious applications, blocking access to the installation folder of Kaspersky Endpoint Security, and blocking access to the system registry section containing application keys. However, if the application cannot be installed (for example, when performing remote installation with the help of Windows Remote Desktop), you are advised to disable protection of the installation process.

Ensure compatibility with Citrix PVS. You can enable support of Citrix Provisioning Services to install Kaspersky Endpoint Security to a virtual machine.

Add the path to the file avp.com to the system variable %PATH%. You can add the installation path to the %PATH% variable for convenient use of the command line interface.

Remotely installing the application using System Center Configuration Manager

These instructions apply to System Center Configuration Manager 2012 R2.

To remotely install an application using System Center Configuration Manager:

1. Open the Configuration Manager console.
2. In the right part of the console, in the **App management** block, select **Packages**.
3. In the upper part of the console in the control panel, click the **Create package** button.

   This starts the *New Package and Application Wizard*.

4. In the New Package and Application Wizard:

   a. In the **Package** section:

      - In the **Name** field, enter the name of the installation package.

      - In the **Source folder** field, specify the path to the folder containing the distribution package of Kaspersky Endpoint Security.

   b. In the **Application type** section, select the **Standard program** option.

   c. In the **Standard program** section:

      - In the **Name** field, enter the unique name for the installation package (for example, the application name including the version).

      - In the **Command line** field, specify the Kaspersky Endpoint Security installation options from the command line.

      - Click the **Browse** button to specify the path to the executable file of the application.

      - Make sure that the **Run mode** list has the **Run with administrative rights** item selected.

   d. In the **Requirements** section:

      - Select the **Run another program first** check box if you want a different application to be started before installing Kaspersky Endpoint Security.

        Select the application from the **Application** drop-down list or specify the path to the executable file of this application by clicking the **Browse** button.

      - Select the **This program can run only on specified platforms** option in the **Platform requirements** block if you want the application to be installed only in the specified operating systems.

        In the list below, select the check boxes opposite the operating systems in which Kaspersky Endpoint Security will be installed.

      This step is optional.

   e. In the **Summary** section, check all entered values of the settings and click **Next**.

   The created installation package will appear in the **Packages** section in the list of available installation packages.

5. In the context menu of the installation package, select **Deploy**.

   This starts the *Deployment Wizard*.

6. In the Deployment Wizard:

   a. In the **General** section:

      - In the **Software** field, enter the unique name of the installation package or select the installation package from the list by clicking the **Browse** button.

      - In the **Collection** field, enter the name of the collection of computers on which the application will be installed, or select the collection by clicking the **Browse** button.

b. In the **Contains** section, add distribution points (for more detailed information, please refer to the help documentation for System Center Configuration Manager).

c. If required, specify the values of other settings in the Deployment Wizard. These settings are optional for remote installation of Kaspersky Endpoint Security.

d. In the **Summary** section, check all entered values of the settings and click **Next**.

After the Deployment Wizard finishes, a task will be created for remote installation of Kaspersky Endpoint Security.

Description of setup.ini file installation settings

The setup.ini file is used when installing the application from the command line or when using the Group Policy Editor of Microsoft Windows. To apply settings from the setup.ini file, place this file into the folder containing the Kaspersky Endpoint Security distribution package.

Use the setup.ini file only when installing the application in silent mode.

You cannot add a path to the install.cfg configuration file in the setup.ini file. The application also skips the install.cfg configuration file if it is placed in the same folder as the Kaspersky Endpoint Security distribution kit. To apply settings from install.cfg configuration file, you need to specify the path to the file in the following application installation command: `CONFIGPATH=<path to the configuration file>`.

DOWNLOAD THE SETUP.INI FILE

The setup.ini file consists of the following sections:

- `[Setup]` – general settings of application installation.
- `[Components]` – selection of application components to be installed in Standard mode. If none of the components are specified, all components that are available for the operating system are installed. File Threat Protection is a mandatory component and is installed on the computer regardless of which settings are indicated in this section.
- `[Tasks]` – selection of tasks to be included in the list of Kaspersky Endpoint Security tasks. If no task is specified, all tasks are included in the task list of Kaspersky Endpoint Security.

The alternatives to the value `1` are the values `yes`, `on`, `enable`, `enabled`, and `true`. The alternatives to the value `0` are the values `no`, `off`, `disable`, `disabled`, and `false`.

Settings of the setup.ini file

Section	Parameter	Description
`[Setup]`	`InstallDir`	Path to the application installation folder.
	`ActivationCode`	Kaspersky Endpoint Security activation code.

Section	Parameter	Description
	`Eula`	Acceptance of the terms of the End User License Agreement. The text of the License Agreement is included in the distribution kit of Kaspersky Endpoint Security. Accepting the terms of the End User License Agreement is necessary for installing the application or upgrading the application version.
	`PrivacyPolicy`	Acceptance of the Privacy Policy. The text of the Privacy Policy is included in the Kaspersky Endpoint Security distribution kit. To install the application or upgrade the application version, you must accept the Privacy Policy.
	`KSN`	Agreement or refusal to participate in Kaspersky Security Network (KSN). If no value is set for this parameter, Kaspersky Endpoint Security will prompt to confirm your consent or refusal to participate in KSN when Kaspersky Endpoint Security is first started. Available values: • `1` – agreement to participate in KSN. • `0` – refusal to participate in KSN (default value). The Kaspersky Endpoint Security distribution package is optimized for use with Kaspersky Security Network. If you opted not to participate in Kaspersky Security Network, you should update Kaspersky Endpoint Security immediately after the installation is complete.
	`CLEANERSIGNCHECK`	Verifying digital signatures of the detected software files from the incompatible.txt list. To remove the software, Kaspersky Endpoint Security runs the software installer file. If the installer file does not have a digital signature, Kaspersky Endpoint Security considers the file untrusted and halts the software removal to avoid running potentially malicious code. If the application cannot verify the digital signature of the detected software file, Kaspersky Endpoint Security installation is stopped with an error. The default value is different depending on the software installation method: • `0` means that digital signature verification is disabled (default value if deployed through Kaspersky Security Center). • `1` means that digital signature verification is enabled (default value if the application is being installed locally).
	`Login`	Set the user name for accessing the features and settings of Kaspersky Endpoint Security (the Password protection component). The user name is set together with the `Password` and `PasswordArea` parameters. The user name KLAdmin is used by default.
	`Password`	Specify a password for accessing Kaspersky Endpoint Security features and settings (the password is specified together with the `Login` and `PasswordArea` parameters). If you specified a password but did not specify a user name with the `Login` parameter, the KLAdmin user name is used by default.
	`PasswordArea`	Specify the scope of the password for accessing Kaspersky Endpoint Security. When a user attempts to perform an action that is included in this scope, Kaspersky Endpoint Security prompts for the user's account credentials (`Login` and `Password` parameters). Use the `;` character to specify multiple values. Available values: • `SET` – modifying application settings. • `EXIT` – exiting the application. • `DISPROTECT` – disabling protection components and stopping scan tasks. • `DISPOLICY` – disabling the Kaspersky Security Center policy. • `UNINST` – removing the application from the computer. • `DISCTRL` – disabling control components. • `REMOVELIC` – removing the key. • `REPORTS` – viewing reports. • `EXPORT` – exporting application settings. For example, `PasswordArea=SET;PasswordArea=UNINST;PasswordArea=EXIT`.

Section	Parameter	Description
	`SelfProtection`	Enabling or disabling the application installation protection mechanism. Available values: • `1` – the application installation protection mechanism is enabled (default value). • `0` – the application installation protection mechanism is disabled. Installation protection includes protection against replacement of the distribution package with malicious applications, blocking access to the installation folder of Kaspersky Endpoint Security, and blocking access to the system registry section containing application keys. However, if the application cannot be installed (for example, when performing remote installation with the help of Windows Remote Desktop), you are advised to disable protection of the installation process.
	`PROTECTOSSERVICES`	Protection of operating system services functionality. Operating system services protection prevents third-party applications from interfering with the operation of operating system services. Such services include, for example, the application autostart service. • `1` means that the protection of operating system services is enabled (default value). • `0` means that the protection of operating system services is disabled.
	`EnableAzureSupport`	Enabling or disabling Azure WVD compatibility mode. Available values: • `1` – Azure WVD compatibility mode is enabled. • `0` – Azure WVD compatibility mode is disabled (default value). This feature ensures correct display of Azure virtual machine state in the Kaspersky Anti Targeted Attack Platform console. To monitor the performance of the computer, Kaspersky Endpoint Security sends telemetry to KATA servers. Telemetry includes an ID of the computer (Sensor ID). Azure WVD compatibility mode allows assigning a permanent unique Sensor ID to these virtual machines. If the compatibility mode is turned off, the Sensor ID can change after the computer is restarted because of how Azure virtual machines work. This can cause duplicates of virtual machines to appear on the console.
	`Reboot`	Automatic restart of the computer, if required after installation or upgrade of the application. If no value is set for this parameter, automatic computer restart is blocked. Restart is not required when installing Kaspersky Endpoint Security. Restart is required only if you have to remove incompatible applications prior to installation. Restart may also be required when updating the application version.
	`AddEnvironment`	In the %PATH% system variable, add the path to executable files located in the Kaspersky Endpoint Security setup folder. Available values: • `1` – the %PATH% system variable is supplemented with the path to executable files that are located in the Kaspersky Endpoint Security setup folder. • `0` – the %PATH% system variable is not supplemented with the path to executable files that are located in the Kaspersky Endpoint Security setup folder.
	`AMPPL`	Enables or disables protection of the Kaspersky Endpoint Security processes using AM-PPL technology (Antimalware Protected Process Light). For more details about AM-PPL technology, please visit the Microsoft website. AM-PPL technology is available for Windows 10 version 1703 (RS2) or later, and Windows Server 2019 operating systems. Available values: • `1` – protection of the Kaspersky Endpoint Security processes using AM-PPL technology is enabled. • `0` – protection of the Kaspersky Endpoint Security processes using AM-PPL technology is disabled.
	`UPGRADEMODE`	Application upgrade mode: • `Seamless` means upgrading the application with a computer restart (default value). • `Force` means upgrading the application without a restart. You can upgrade the application without a restart starting with version 11.10.0. To upgrade an earlier version of the application, you must restart the computer. You can also install patches without a restart starting with version 11.11.0. Restart is not required when installing Kaspersky Endpoint Security. So, the upgrade mode of the application will be specified in the application settings. You can change this parameter in the application settings or in the policy. When upgrading already installed application, the priority of the parameter specified in the setup.ini file is higher than that of the parameter specified in the application settings or in the command line. For example, if `Force` upgrade mode is specified in the setup.ini file and `Seamless` mode is specified in the application settings, the upgrade will be installed without a restart (`Force`). If you are using the setup.ini file, where the `UPGRADEMODE` parameter is not specified, the installer will use a default value (`Seamless`) and will install the upgrade with a computer restart.
	`SetupReg`	Enable writing of registry keys from the setup.reg file to the registry. `SetupReg: setup.reg` parameter value.

Section	Parameter	Description
	`EnableTraces`	Enabling or disabling application tracing. After Kaspersky Endpoint Security starts, it saves trace files in the folder `%ProgramData%\Kaspersky Lab\KES.14.2\Traces`. Available values: • `1` – tracing is enabled. • `0` – tracing is disabled (default value).
	`TracesLevel`	Level of detail of traces. Available values: • `100` (critical). Only messages about fatal errors. • `200` (high). Messages about all errors, including fatal errors. • `300` (diagnostic). Messages about all errors, as well as warnings. • `400` (important). All error messages, warnings, and additional information. • `500` (normal). Messages about all errors and warnings, as well as detailed information about the operation of the application in normal mode (default). • `600` (low). All messages.
	`RESTAPI`	Managing the application through the REST API. To manage the application through the REST API, you must specify the user name (`RESTAPI_User` parameter). Available values: • `1` – management via REST API is allowed. • `0` – management via REST API is blocked (default value). To manage the application through the REST API, management using administrative systems must be allowed. To do so, set the `AdminKitConnector=1` parameter. If you manage the application through the REST API, it is impossible to manage the application using the administration systems of Kaspersky.
	`RESTAPI_User`	User name of the Windows domain account used for managing the application through the REST API. Management of the application through the REST API is available only to this user. Enter the user name in the format `<DOMAIN>\<UserName>` (for example, `RESTAPI_User=COMPANY\Administrator`). You can select only one user to work with the REST API. Adding a user name is a prerequisite for managing the application through the REST API.
	`RESTAPI_Port`	Port used for managing the application through the REST API. Port 6782 is used by default. Make sure that the port is free.
	`RESTAPI_Certificate`	Certificate for identifying requests (for example, `RESTAPI_Certificate=C:\cert.pem`). Secure interaction of Kaspersky Endpoint Security with the REST client requires configuring request identification. To do so, you must install a certificate and subsequently sign the payload of each request.
	`StandaloneMode`	Installing the application in Endpoint Detection and Response Agent (EDR Agent) mode. *Endpoint Detection and Response Agent* is an application that is installed on individual workstations and servers in the IT infrastructure of the organization to support the Kaspersky Managed Detection and Response and Kaspersky Anti Targeted Attack Platform solutions. EDR Agent is compatible with third-party EPP applications. This lets you use third-party infrastructure security tools alongside Detection and Response by Kaspersky. To install EDR Agent, in the `[Components]` section, select `StandaloneKATA`, `StandaloneNDR` or `StandaloneMDR` components. EDR Agent does not support other application components. Available values: • `1` to install the application in EDR Agent mode. • `0` to install the application in Standard mode (default).
	`KSVLAMode`	Installing the application in Light Agent mode. This configuration is intended for the application that is used as part of the Kaspersky Security for Virtualization Light Agent solution. Light Agent must be installed on each virtual machine that needs to be protected using the solution. Available values: • `1` to install the application in Light Agent mode. • `0` to install the application in Standard mode (default).
	`InstallOnVDI`	Enabling the VDI protection mode when installing the application in Light Agent mode (`KSVLAMode=1`). The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. In this mode, Light Agent declines application updates that require restarting the virtual machine. When receiving application updates that require a restart, Light Agent generates an event about needing to update the template of the protected virtual machines. Available values: • `1` to enable VDI protection mode. • `0` to disable VDI protection mode (default).

Section	Parameter	Description
	`KESExclusions`	Adding predefined scan exclusions and trusted applications when installing the application on the server. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. For example, predefined scan exclusions for SQL servers include MDF and LDF database files. This means you do not need to manually set up a trusted zone for the application on servers. Available values: • `1` enables predefined scan exclusions and trusted applications. • `0` disables predefined scan exclusions and trusted applications (default).
	`LAExclusions`	Adding predefined scan exclusions and trusted applications when installing the application on a virtual machine (Light Agent mode). Predefined scan exclusions and trusted applications can help you quickly configure Kaspersky Endpoint Security in Citrix and VMware virtual environments. Available values: • `1` enables predefined scan exclusions and trusted applications. • `0` disables predefined scan exclusions and trusted applications (default).
	`EnableUniqueSensorID`	Creating a unique computer identifier (Sensor ID) during the installation or update of the application. Sensor ID is used in the Kaspersky Anti Targeted Attack Platform solution to identify computers that send telemetry to the server. When creating Sensor ID, the application uses an algorithm that takes into account the computer's configuration, such as the motherboard serial number. In some cases, for example, when using the application in a virtual environment, Sensor ID may be duplicated. As a result, the Kaspersky Anti Targeted Attack Platform cannot identify the computer from which the telemetry is sent. To create a unique Sensor ID, you need to set the parameter `EnableUniqueSensorID=1`. As a result, the application will use a different algorithm to create the Sensor ID, which takes into account other data about the computer. This ensures a unique Sensor ID. By default, the parameter is not set. The application inherits the Sensor ID in the following cases: • updating the application version; • migrating the [KES+KEA] configuration to [KES+built-in agent] configuration. As part of application repair, the installer attempts to inherit the Sensor ID. If the Sensor ID cannot be restored, the application creates a new Sensor ID.
	`CitrixCompatibility`	Enabling support for Citrix Provisioning Services to install Kaspersky Endpoint Security to a virtual machine.
`[Components]`	`ALL`	Installation of all components. If the parameter value `1` is specified, all components will be installed regardless of the installation settings of individual components. Because of the way Detection and Response solutions are supported, the Endpoint Detection and Response Optimum and Sandbox components are installed on the computer. The Endpoint Detection and Response Expert (cloud) component is not compatible with this configuration.
	`MailThreatProtection`	Mail Threat Protection.
	`WebThreatProtection`	Web Threat Protection.
	`AMSI`	AMSI Protection.
	`HostIntrusionPrevention`	Host Intrusion Prevention.
	`BehaviorDetection`	Behavior Detection.
	`ExploitPrevention`	Exploit Prevention.
	`RemediationEngine`	Remediation Engine.
	`Firewall`	Firewall.
	`NetworkThreatProtection`	Network Threat Protection.
	`WebControl`	Web Control.
	`DeviceControl`	Device Control.
	`ApplicationControl`	Application Control.
	`AdaptiveAnomaliesControl`	Adaptive Anomaly Control.

Section	Parameter	Description
	`CloudDiscovery`	Cloud Discovery.
	`LogInspector`	Log Inspection
	`AntiCryptor`	Anti-Cryptor
	`FileThreatProtection`	File Threat Protection.
	`SystemIntegrityMonitor`	System Integrity Monitoring.
	`FileEncryption`	File Level Encryption libraries.
	`DiskEncryption`	Full Disk Encryption libraries.
	`MSBitLocker`	BitLocker Encryption management libraries.
	`BadUSBAttackPrevention`	BadUSB Attack Prevention.
	`EDR`	Endpoint Detection and Response Optimum The component is not compatible with the Endpoint Detection and Response Expert (cloud) (`EDRCloud`) and Endpoint Detection and Response Expert (on-premises) (`AntiAPT`) components.
	`EDRCloud`	Endpoint Detection and Response Expert (cloud) The component is not compatible with the Endpoint Detection and Response Optimum (`EDR`) and Endpoint Detection and Response Expert (on-premises) (`AntiAPT`) components.
	`AntiAPT`	Endpoint Detection and Response Expert (on-premises) The component is not compatible with the Endpoint Detection and Response Expert (cloud) (`EDRCloud`) and Endpoint Detection and Response Optimum (`EDR`) components.
	`SB`	Kaspersky Sandbox or KATA Sandbox. *Kaspersky Sandbox* is a standalone Detection and Response solution by Kaspersky. *KATA Sandbox* is a component of the Kaspersky Anti Targeted Attack Platform solution.
	`MDR`	Managed Detection and Response
	`NDR`	Network Detection and Response (KATA) The component is not compatible with the Endpoint Detection and Response Expert (cloud) (`EDRCloud`) and Endpoint Detection and Response Optimum (`EDR`) components.
	`AdminKitConnector`	Application management using administration systems. Administration systems include, for example, Kaspersky Security Center. In addition to Kaspersky administration systems, you can use third-party solutions. Kaspersky Endpoint Security provides an API for this purpose. Available values: • `1` – application management with the help of administration systems is allowed (default value). • `0` – application management is allowed only through the local interface.
	`KUMAIntegration`	Integration with KUMA.
	`StandaloneKATA`	Installing the application in Endpoint Detection and Response Agent (EDR Agent) mode for integration with Kaspersky Anti Targeted Attack Platform (EDR).
	`StandaloneMDR`	Installing the application in the Endpoint Detection and Response Agent (EDR Agent) mode for integration with Kaspersky Managed Detection and Response.

Section	Parameter	Description
	`StandaloneNDR`	Installing the application in Endpoint Detection and Response Agent (EDR Agent) mode for integration with Kaspersky Anti Targeted Attack Platform (NDR).
	`StandaloneSiemTelemetry`	Installing the application in the Endpoint Detection and Response Agent (EDR Agent) mode for integration with KUMA.
`[Tasks]`	`ScanMyComputer`	Full Scan task. Available values: • `1` – the task is included in the list of Kaspersky Endpoint Security tasks. • `0` – the task is not included in the list of Kaspersky Endpoint Security tasks.
	`ScanCritical`	Critical Areas Scan task. Available values: • `1` – the task is included in the list of Kaspersky Endpoint Security tasks. • `0` – the task is not included in the list of Kaspersky Endpoint Security tasks.
	`Updater`	Update task. Available values: • `1` – the task is included in the list of Kaspersky Endpoint Security tasks. • `0` – the task is not included in the list of Kaspersky Endpoint Security tasks.

Kaspersky Endpoint Security for Windows processes

Kaspersky Endpoint Security for Windows starts processes described in the table below.

Kaspersky Endpoint Security for Windows processes

File name	Purpose
avp.exe	Kaspersky Endpoint Security for Windows work process.
avpsus.exe	This process allows installing and rolling back critical and approved application module updates.

Change application components

During installation of the application, you can select the components that will be available. You can change the available application components in the following ways:

- Locally, by using the Setup Wizard.

  Application components are changed by using the normal method for a Windows operating system, which is through the Control Panel. Run the Application Setup Wizard and select the option to change the application components that are available. Follow the instructions on the screen.

  > This method is not available if the application was installed via Kaspersky Security Center. You can change the selection of application components in the Control Panel only after installing the application locally.

- Remotely using Kaspersky Security Center.

  The *Change application components* task allows you to change the components of Kaspersky Endpoint Security after the application is installed.

Please take into account the following special considerations when changing the application components:

- On computers running Windows Server, you cannot install all components of Kaspersky Endpoint Security (for example, the Adaptive Anomaly Control component is not available).
- If the hard drives on your computer are protected by Full Disk Encryption (FDE), you cannot remove the Full Disk Encryption component. To remove the Full Disk Encryption component, decrypt all the hard drives of the computer.
- If the computer has encrypted files (FLE) or the user uses encrypted removable drives (FDE or FLE), it will be impossible to access the files and removable drives after the Data Encryption components are removed. You can access the files and removable drives by reinstalling the Data Encryption components.
- If the application is installed in Light Agent mode in a VDI infrastructure, changing the set components is not supported.

How to add or remove application components in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Select components to install**.

Step 2. Task settings for changing application components

Select the configuration of the application:

- **Standard mode to protect hosts**. The default configuration. This configuration lets you use all components of the application, including components that provide support for Detection and Response solutions. This configuration is used for comprehensive protection of the computer from a variety of threats, network attacks, and fraud.

- **Endpoint Detection and Response Agent to protect against advanced threats and targeted attacks**. In this configuration, you can only install the components that provide support for Detection and Response solutions: MDR, EDR (KATA), NDR (KATA), EDR Expert (on-premises), as well as KUMA. This configuration is needed if a third-party Endpoint Protection Platform (EPP) is deployed in your organization alongside a Kaspersky Detection and Response solution. This makes Kaspersky Endpoint Security in the Endpoint Detection and Response Agent configuration compatible with third-party EPP applications.

  When changing the application configuration for the EDR Agent to work with MDR, ensure that the components responsible for receiving telemetry are enabled.

- **Light Agent to protect virtual environments**. This configuration is intended for the application that is used as part of the Kaspersky Security for Virtualization Light Agent solution. Light Agent must be installed on each virtual machine that needs to be protected using the solution. In this configuration, you cannot use Data Encryption components or Adaptive Anomaly Control. If you are installing Light Agent on a virtual machine template that will be used to create *nonpersistent virtual machines*, select the **Protect VDI infrastructure** check box (VDI stands for Virtual Desktop Infrastructure). The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. In this mode, Light Agent declines application updates that require restarting the virtual machine. When receiving application updates that require a restart, Light Agent generates an event about needing to update the template of the protected virtual machines.

Select the application components that will be available on the user's computer.

Step 3. Advanced settings

Configure the advanced settings for the task (see the table below).

Step 4. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 5. Configuring a task start schedule

Configure a schedule for starting a task, for example, manually or when the computer is idle.

Step 6. Defining the task name

Enter a name for the task, for example, *Add the Application Control component*.

Step 7. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

How to add or remove application components in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Configuring general task settings

Configure the general task settings:

1. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2.0**.
2. In the **Task type** drop-down list, select **Change application components**.
3. In the **Task name** field, enter a brief description, for example, *Add the Application Control component*.
4. In the **Devices to which the task will be assigned** block, select the task scope.

Step 2. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. For example, select a separate administration group or build a selection.

Step 3. Completing task creation

Select the **Open task details when creation is complete** check box and finish the wizard.

In the task properties, select the **Application settings** tab. Next, select the configuration of the application:

- **Standard mode to protect workstations and servers**. The default configuration. This configuration lets you use all components of the application, including components that provide support for Detection and Response solutions. This configuration is used for comprehensive protection of the computer from a variety of threats, network attacks, and fraud.

- **Endpoint Detection and Response Agent to protect against advanced threats and targeted attacks**. In this configuration, you can only install the components that provide support for Detection and Response solutions: MDR, EDR (KATA), NDR (KATA), EDR Expert (on-premises), as well as KUMA. This configuration is needed if a third-party Endpoint Protection Platform (EPP) is deployed in your organization alongside a Kaspersky Detection and Response solution. This makes Kaspersky Endpoint Security in the Endpoint Detection and Response Agent configuration compatible with third-party EPP applications.

  When changing the application configuration for the EDR Agent to work with MDR, ensure that the components responsible for receiving telemetry are enabled.

- **Light Agent to protect virtual environments**. This configuration is intended for the application that is used as part of the Kaspersky Security for Virtualization Light Agent solution. Light Agent must be installed on each virtual machine that needs to be protected using the solution. In this configuration, you cannot use Data Encryption components or Adaptive Anomaly Control. If you are installing Light Agent on a virtual machine template that will be used to create *nonpersistent virtual machines*, select the **Protect VDI infrastructure** check box (VDI stands for Virtual Desktop Infrastructure). The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. In this mode, Light Agent declines application updates that require restarting the virtual machine. When receiving application updates that require a restart, Light Agent generates an event about needing to update the template of the protected virtual machines.

Select the application components that will be available on the user's computer. Configure the advanced settings for the task (see the table below).

As a result, the set of Kaspersky Endpoint Security components on users' computers will be changed in silent mode. The settings of available components will be displayed in the local interface of the application. The components that were not included in the application are disabled, and the settings of these components are not available.

When installing, updating or uninstalling Kaspersky Endpoint Security, errors may occur. For more information about solving these errors, please refer to the Technical Support Knowledge Base.

Advanced Settings of the task

Parameter	Description
Task settings	**Check for incompatible third-party applications**. By default, Kaspersky Endpoint Security checks installed applications for compatibility. The list of software that may cause compatibility issues is available in the incompatible.txt file. The file is included in the distribution kit. If the scan of installed software is enabled, when an application from the list is detected, Kaspersky Endpoint Security stops the task. You can disable the scan of installed software if the vendor documentation of the third-party software claims compatibility with Endpoint Protection Platform (EPP). **Remove incompatible third-party applications**. Automatic removal of applications listed in the incompatible.txt file before changing the set of components. If this functionality is enabled, Kaspersky Endpoint Security attempts to remove the applications that may cause compatibility issues in order to continue the task. **Use Azure WVD compatibility mode**. This feature ensures correct display of Azure virtual machine state in the Kaspersky Anti Targeted Attack Platform console. To monitor the performance of the computer, Kaspersky Endpoint Security sends telemetry to KATA servers. Telemetry includes an ID of the computer (Sensor ID). Azure WVD compatibility mode allows assigning a permanent unique Sensor ID to these virtual machines. If the compatibility mode is turned off, the Sensor ID can change after the computer is restarted because of how Azure virtual machines work. This can cause duplicates of virtual machines to appear on the console.

Parameter	Description
Exclusions	Starting with Kaspersky Endpoint Security 12.6 for Windows, scan exclusions and trusted applications are added to the trusted zone. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers. Starting with Kaspersky Endpoint Security 12.8 for Windows, you can install the application in Light Agent mode for protecting virtual environments. Predefined scan exclusions and trusted applications can help you quickly configure Kaspersky Endpoint Security in Citrix and VMware virtual environments. You can also configure the trusted zone later in policy properties: scan exclusions and trusted applications.
Separate mode / Combined mode	You can create separate sets of components for workstations and servers – **Separate mode**. Before deploying the installation package, the installer detects the type of the operating system and installs only those application components that you selected for that operating system type. In this way, you can use the same installation package for workstations and servers. **Combined mode** offers a common list of components for workstation and servers. The availability of individual components depends on the operating system type. In this mode, we recommend creating a separate installation package for workstations and separate installation package for servers. You can configure the common list of components in the installation package only in Standard mode.
Use password for modifying the set of application components	Administrators typically enable Password protection to restrict access to Kaspersky Endpoint Security. That is, to modify the selection of application components, you must enter credentials of a user that has the **Remove / modify / restore the application** permission. For example, you can use the KLAdmin account.
Use the password to uninstall Kaspersky Endpoint Agent and Kaspersky Security for Windows Server	Administrators typically enable Password protection in settings of these tasks to restrict access to Kaspersky Endpoint Agent (KEA) and Kaspersky Security for Windows Server (KSWS). That is, if you are migrating from the [KES+KEA] configuration to [KES+built-in agent], or if you are migrating from KSWS to KES, you must enter a password to remove these applications.

Upgrading a previous version of the application

When you update a previous version of the application to a newer version, consider the following:

- We recommend quitting all active applications before starting the update.
- Before updating, Kaspersky Endpoint Security blocks the Full Disk Encryption functionality. If Full Disk Encryption could not be locked, the upgrade installation will not start. After updating the application, the Full Disk Encryption functionality will be restored.
- To change the language of the application, in the *Install application remotely* task, select the installation package with your preferred localization and update the application. Changing the application language first became available in Kaspersky Endpoint Security for Windows 14.2.

Kaspersky Endpoint Security supports updates for the following versions of the application:

- Kaspersky Endpoint Security 12.3 for Windows (build 12.3.0.493)
- Kaspersky Endpoint Security 12.4 for Windows (build 12.4.0.467)
- Kaspersky Endpoint Security 12.5 for Windows (build 12.5.0.539)
- Kaspersky Endpoint Security 12.6 for Windows (build 12.6.0.438)
- Kaspersky Endpoint Security 12.7 for Windows (build 12.7.0.533)
- Kaspersky Endpoint Security 12.8 for Windows (build 12.8.0.505)
- Kaspersky Endpoint Security 12.9 for Windows (build 12.9.0.384)

- Kaspersky Endpoint Security 12.10 for Windows (build 12.10.0.466)
- Kaspersky Endpoint Security 12.11 for Windows (build 12.11.0.637)
- Kaspersky Endpoint Security 12.12 for Windows (build 12.12.0.522)
- Kaspersky Endpoint Security 14.0 for Windows (build 14.0.0.504)
- Kaspersky Endpoint Security 14.1 for Windows (build 14.1.0.423)

When installing, updating or uninstalling Kaspersky Endpoint Security, errors may occur. For more information about solving these errors, please refer to the Technical Support Knowledge Base.

Application upgrade methods

Kaspersky Endpoint Security can be updated on the computer in the following ways:

- Using the Kaspersky update service (Seamless Update – SMU).
- locally, by using the Setup Wizard.
- locally from the command line.
- remotely using Kaspersky Security Center.
- remotely through the Microsoft Windows Group Policy Management Editor (for more details, visit the Microsoft Technical Support website).
- remotely, by using the System Center Configuration Manager.

If the application that is deployed in the corporate network features a set of components other than the default set, updating the application through the Administration Console (MMC) is different from updating the application through the Web Console. When you update Kaspersky Endpoint Security, consider the following:

- Kaspersky Security Center Web Console.

  If you created an installation package for the new version of the application with the default set of components, then the set of components on a user's computer will not be changed. To use Kaspersky Endpoint Security with the default set of components, you need to open the installation package properties, change the set of components, then revert to the original set of components and save the changes.

- Kaspersky Security Center Administration Console.

  The set of application components after the update will match the set of components in the installation package. That is, if the new version of the application has the default set of components, then, for example, built-in MDR agent will be removed from the computer, since this component is excluded from the default set. To continue using the application with the same set of components as before the update, select the required components in the installation package settings.

Upgrading the application without a restart

Upgrading the application without a restart provides uninterrupted server operation when the application version is updated.

Upgrading the application without a restart has the following limitations:

- You can upgrade the application without a restart starting with version 11.10.0. To upgrade an earlier version of the application, you must restart the computer.
- You can install patches without a restart starting with version 11.11.0. To install patches for earlier versions of the application, a computer restart may be required.
- Upgrading the application without a restart is not available on computers with enabled data encryption (Kaspersky encryption (FDE), BitLocker, File Level Encryption (FLE)). To upgrade the application on computers with enabled data encryption, the computer must be restarted.
- The application cannot be upgraded on a virtual machine without a restart. To upgrade the application on a virtual machine, you must restart the virtual machine.

After upgrading the application, installing a patch, changing the set of application components, or restoring, Kaspersky Endpoint Security restarts to begin using the new version. Restarting Kaspersky Endpoint Security may take up to one minute. During this time, the level of computer protection is reduced. After restarting the application, the computer's protection level will be restored.

How to select the application upgrade mode in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Application settings**.
5. In the **Advanced settings** block, select or clear the **Install application updates without restart** check box to configure the application upgrade mode.
6. To apply the policy to computers, close the padlock icons and save your changes.

How to select the application upgrade mode in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **User Interaction**.

5. In the **Application update settings** block, select or clear the **Install application updates without restart** check box to configure the application upgrade mode.

6. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to select the application upgrade mode in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Application settings**.

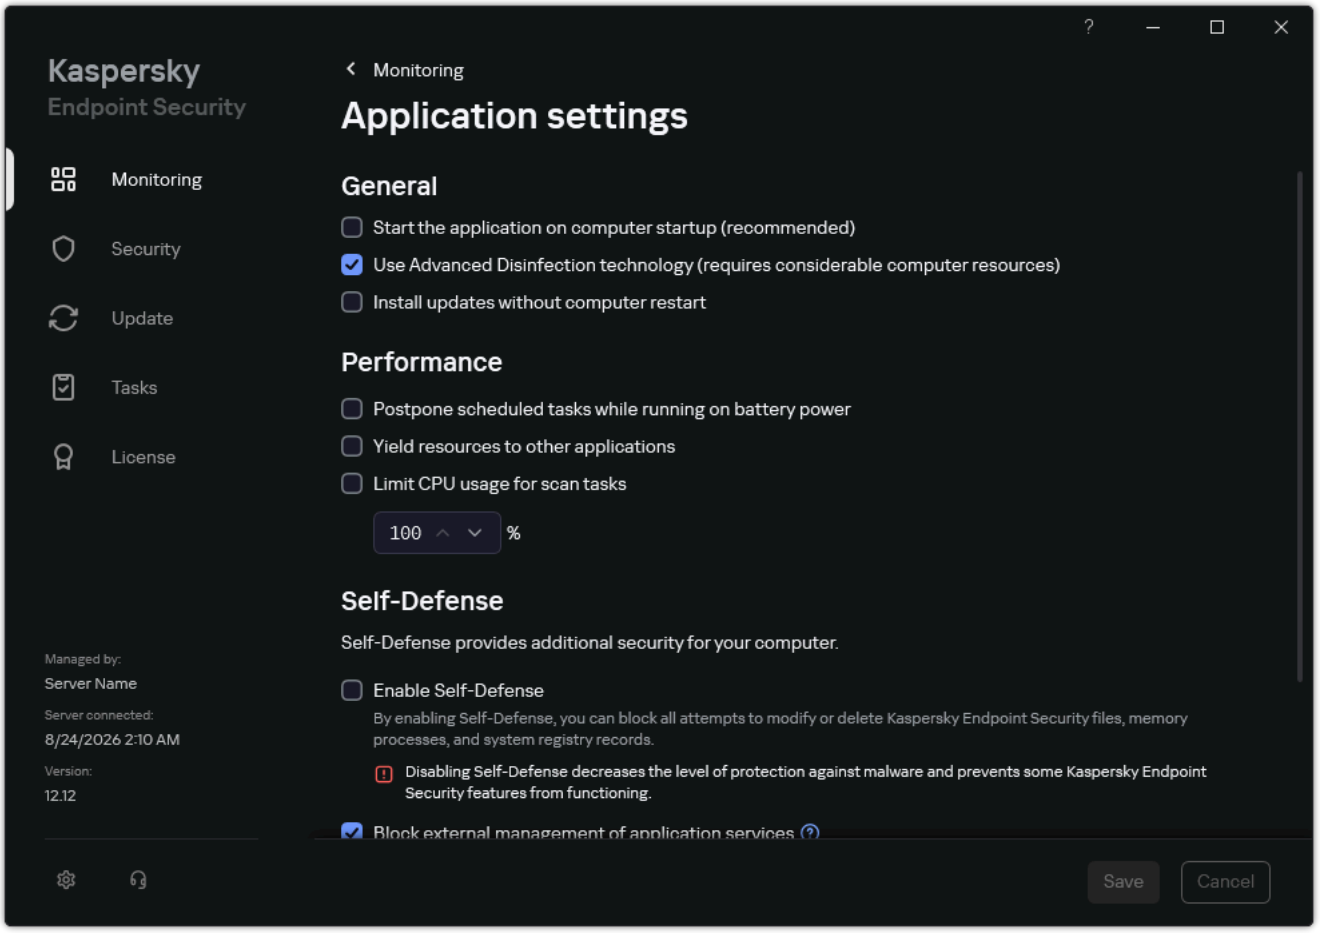

Kaspersky Endpoint Security for Windows settings

3. In the **General** block, select or clear the **Install updates without computer restart** check box to configure the application upgrade mode.

4. Save your changes.

You can also select the application upgrade mode when installing the application from the command line (using the `UPGRADEMODE` option).

After the procedure of upgrading the application without a restart finishes, the new version of Kaspersky Endpoint Security will have been installed on the computer. The previous version of the application is deleted automatically.

> You cannot initiate an application upgrade before the previous upgrade finishes completely.

You can check the Kaspersky Endpoint Security upgrade status using the Kaspersky application version report in the Kaspersky Security Center console.

SMU update of the application

To update the application using the Kaspersky update service (Seamless Update; SMU), you do not need to run the installer, in contrast to other update methods. Kaspersky Endpoint Security gets the new version of the application alongside anti-virus databases from the same source.

> An SMU update allows updating the application on all computers of your organization to the latest version. Before applying an SMU update, we recommend testing the new version of the application on a few computers. To do so, you must update the application on these computers manually (for example, locally using the Setup Wizard). You cannot select individual computers when performing an SMU update.

The update schedule for the application is determined by Kaspersky staff. To make sure the new version of the application is running smoothly, Kaspersky makes updates available on a step by step basis. This means you may get your SMU update up to two months later than a new version is released.

You can manage the SMU update of the application using the *Update of databases and application modules* task. To have the new version of the application included in the same package as the anti-virus databases, you must allow updating *application modules* in *Update of databases and application modules* task settings. Also in *Update of databases and application modules* task settings, you can allow updating the application without a restart.

Steps of an SMU update of the application

1. **After a new version of the application is released, Kaspersky distributes the update.**

2. **The user approves the update of the application.**

   If the computer is connected to the Kaspersky Security Center, the update is available in the Kaspersky Security Center, in the **Update of Kaspersky databases and application modules** section. For more details on approving updates, refer to the Kaspersky Security Center Help.

   If the computer is not connected to the Kaspersky Security Center, the update is available in the notification section of the interface of the application: . To approve the update, select a version of the application and accept the terms and conditions of the agreements (see the figure below).

3. **Kaspersky Endpoint Security runs the *Update of databases and application modules* task in accordance with the configured schedule.**

As a result, Kaspersky Endpoint Security updates the application in "silent" mode.

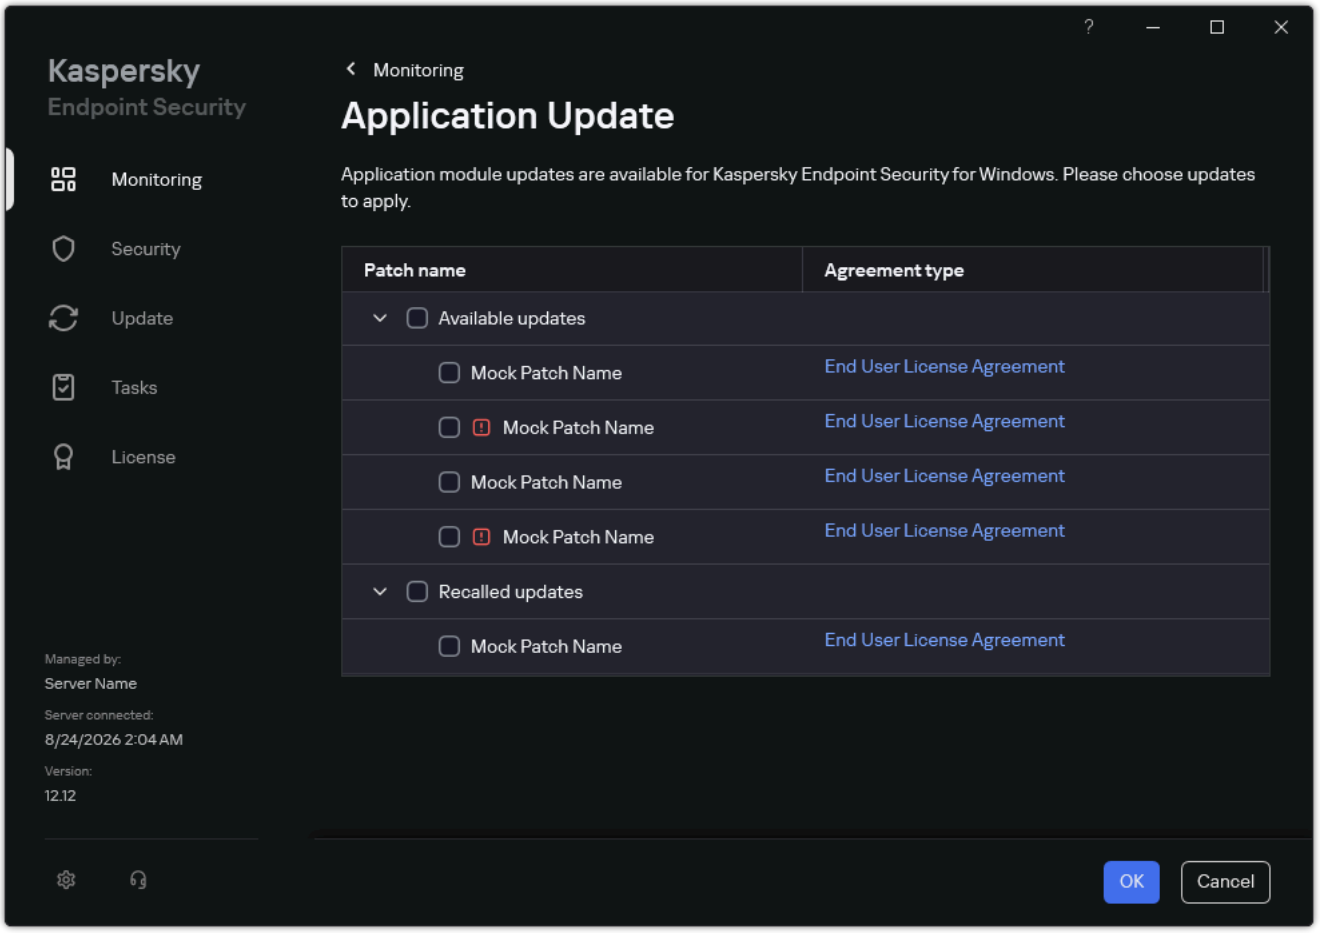

Available application updates

Removing the application

Removing Kaspersky Endpoint Security leaves the computer and user data unprotected against threats.

When installing, updating or uninstalling Kaspersky Endpoint Security, errors may occur. For more information about solving these errors, please refer to the Technical Support Knowledge Base.

Removing the application remotely using Kaspersky Security Center

You can remotely uninstall the application by using the *Uninstall application remotely* task. When performing the task, Kaspersky Endpoint Security downloads the application uninstall utility to the user's computer. After completing uninstallation of the application, the utility will be automatically removed.

How to remove the application through the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Tasks**.
   The list of tasks opens.
3. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Security Center Administration Server** → **Advanced** → **Uninstall application remotely**.

Step 2. Selecting the application to be removed

Select **Uninstall application supported by Kaspersky Security Center**.

Step 3. Task settings for application uninstallation

Select **Kaspersky Endpoint Security for Windows (14.2)**.

Step 4. Uninstall utility settings

Configure the following additional application settings:

- **Force download of the uninstallation utility**. Select the utility delivery method:
  - **Using Network Agent**. If Network Agent has not been installed on the computer, first Network Agent will be installed using the tools of the operating system. Kaspersky Endpoint Security is then uninstalled by the tools of Network Agent.
  - **Using operating system resources through Administration Server**. The utility will be delivered to client computers by using operating system resources through the Administration Server. You can select this option if Network Agent is not installed on the client computer, but the client computer is in the same network as the Administration Server.
  - **Using operating system resources through distribution points**. The utility is delivered to client computers using operating system resources via distribution points. You can select this option if there is at least one distribution point in the network. For more details about distribution points, refer to the Kaspersky Security Center Help.
- **Verify operating system type before downloading**. If necessary, clear this check box. This lets you avoid downloading the uninstall utility if the operating system of the computer does not meet the software requirements. If you are sure that the operating system of the computer meets the software requirements, you can skip this verification.

If the application uninstallation operation is password protected, do the following:

1. Select the **Use uninstallation password** check box.
2. Click the **Edit** button.
3. Enter the KLAdmin account password.

Step 5. Selecting the operating system restart setting

After uninstalling the application, a restart is required. Select the action that will be performed to restart the computer.

Step 6. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 7. Selecting the account to run the task

Select the account for installing Network Agent using the tools of the operating system. In this case, administrator rights are required for computer access. You can add multiple accounts. If an account does not have sufficient rights, the Installation Wizard uses the next account. If you uninstall Kaspersky Endpoint Security using Network Agent tools, you do not have to select an account.

Step 8. Configuring a task start schedule

Configure a schedule for starting a task, for example, manually or when the computer is idle.

Step 9. Defining the task name

Enter a name for the task, such as *Remove Kaspersky Endpoint Security 14.2*.

Step 10. Finishing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

The application will be uninstalled in silent mode.

How to remove the application through the Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Configuring general task settings

Configure the general task settings:

1. In the **Application** drop-down list, select **Kaspersky Security Center**.
2. In the **Task type** drop-down list, select **Uninstall application remotely**.
3. In the **Task name** field, enter a brief description, for example, *Uninstall Kaspersky Endpoint Security from Technical Support computers*.
4. In the **Devices to which the task will be assigned** block, select the task scope.

Step 2. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. For example, select a separate administration group or build a selection.

Step 3. Configuring application uninstallation settings

At this step, configure the application uninstallation settings:

1. Select the **Uninstall managed application** type.
2. Select **Kaspersky Endpoint Security for Windows**.
3. **Force download of the uninstallation utility**. Select the utility delivery method:
   - **Using Network Agent**. If Network Agent has not been installed on the computer, first Network Agent will be installed using the tools of the operating system. Kaspersky Endpoint Security is then uninstalled by the tools of Network Agent.
   - **Using operating system resources through Administration Server**. The utility will be delivered to client computers by using operating system resources through the Administration Server. You can select this option if Network Agent is not installed on the client computer, but the client computer is in the same network as the Administration Server.
   - **Using operating system resources through distribution points**. The utility is delivered to client computers using operating system resources via distribution points. You can select this option if there is at least one distribution point in the network. For more details about distribution points, refer to the Kaspersky Security Center Help.
4. In the **Maximum number of concurrent downloads** field, set a limit on the number of requests sent to the Administration Server to download the application uninstall utility. A limit on the number of requests will help prevent the network from being overload.

5. In the **Maximum number of uninstallation attempts** field, set a limit on the number of attempts to uninstall the application. If uninstallation of Kaspersky Endpoint Security ends with an error, the task will automatically start the uninstallation again.

6. If necessary, clear the **Verify operating system type before downloading** check box. This lets you avoid downloading the uninstall utility if the operating system of the computer does not meet the software requirements. If you are sure that the operating system of the computer meets the software requirements, you can skip this verification.

Step 4. Selecting the account to run the task

Select the account for installing Network Agent using the tools of the operating system. In this case, administrator rights are required for computer access. You can add multiple accounts. If an account does not have sufficient rights, the Installation Wizard uses the next account. If you uninstall Kaspersky Endpoint Security using Network Agent tools, you do not have to select an account.

Step 5. Completing task creation

Finish the wizard by clicking the **Finish** button. A new task will be displayed in the list of tasks.

To run a task, select the check box opposite the task and click the **Start** button. The application will be uninstalled in silent mode. After uninstallation is complete, Kaspersky Endpoint Security shows a prompt to restart the computer.

> If the application uninstallation operation is password protected, enter the KLAdmin account password in the properties of the *Uninstall application remotely* task. Without the password, the task will not be performed.

To use the KLAdmin account password in the Uninstall application remotely task:

1. In the main window of the Web Console, select **Asset management** → **Tasks**.

   The list of tasks opens.

2. Click the **Uninstall application remotely** task of Kaspersky Security Center.

   The task properties window opens.

3. Select the **Application settings** tab.

4. Select the **Use uninstallation password** check box.

5. Enter the KLAdmin account password.

6. Save your changes.

Restart the computer to complete the uninstallation. To do so, Network Agent displays a pop-up window.

Removing the application remotely using Active Directory

You can remotely uninstall the application using a Microsoft Windows group policy. To uninstall the application, you need to open the Group Policy Management Console (gpmc.msc) and use the Group Policy Editor to create an application removal task (for more details, please visit the Microsoft Technical Support website).

If the application uninstallation operation is password protected, you need to do the following:

1. Create a BAT file with the following contents:

   ```
   msiexec.exe /x<GUID> KLLOGIN=<user name> KLPASSWD=<password> /qn
   ```

   `<GUID>` is the unique ID of the application. You can find out the GUID of the application in the Technical Support Knowledge Base or by using the following command:

   ```
   wmic product where "Name like '%Kaspersky Endpoint Security%'" get Name, IdentifyingNumber
   ```

   Example

   ```
   msiexec.exe /x{6BB76C8F-365E-4345-83ED-6D7AD612AF76} KLLOGIN=KLAdmin KLPASSWD=samplePassword /qn
   ```

2. Create a new Microsoft Windows policy for the computers in the Group Policy Management Console (gpmc.msc).

3. Use the new policy to run the created BAT file on the computers.

Removing the application locally

You can remove the application locally using the Setup Wizard. Kaspersky Endpoint Security is removed using the normal method for a Windows operating system, which is through the Control Panel. The Setup Wizard starts. Follow the instructions on the screen.

Selecting the application removal operation

You can specify which of the data that is used by the application you want to save for future use, during the next installation of the application (such as when upgrading to a newer version of the application). If you do not specify any data, the application will be completely removed (see the figure below).

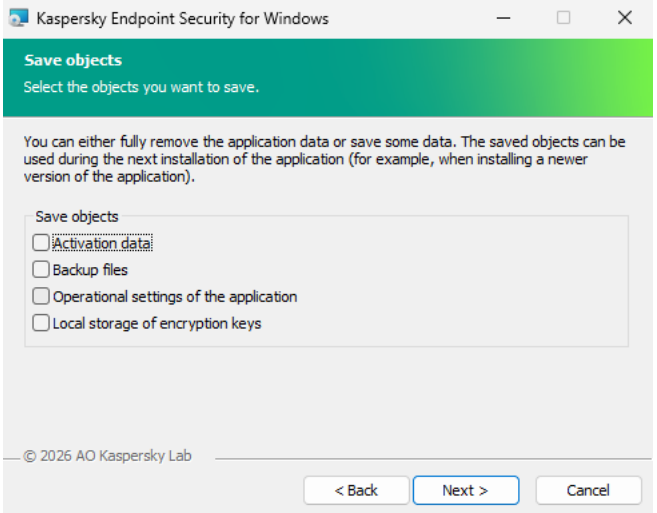

Saving data after removal

You can save the following data:

- **Activation data**, which lets you avoid having to activate the application again. Kaspersky Endpoint Security automatically adds a license key if the license term has not expired prior to installation.
- **Backup files** – files that are scanned by the application and placed in Backup.

  Backup files that are saved after removal of the application can be accessed only from the same version of the application that was used to save those files.

  If you plan to use Backup objects after removal of the application, you must restore those objects before removing the application. However, Kaspersky experts do not recommend restoring objects from Backup because this may harm the computer.

- **Operational settings of the application** – values of application settings that are selected during application configuration.
- **Local storage of encryption keys** – data that provides access to files and drives that were encrypted before removal of the application. To ensure access to encrypted files and drives, make sure that you selected data encryption functionality when reinstalling Kaspersky Endpoint Security. No further action is required for access to previously encrypted files and drives.

Kaspersky Endpoint Security saves data in the `C:\ProgramData\Kaspersky Lab\KES.14.2\QB` folder.

You can also delete the application locally using the command line.

Application licensing

This section provides information about general concepts related to Kaspersky Endpoint Security licensing.

About the End User License Agreement

The *End User License Agreement* is a binding agreement between you and AO Kaspersky Lab stipulating the terms on which you may use the application.

We recommend carefully reading the terms of the License Agreement before using the application.

You can view the terms of the License Agreement in the following ways:

- When installing Kaspersky Endpoint Security in interactive mode.
- By reading the license.txt file. This document is included in the application distribution kit and is also located in the application installation folder `%ProgramFiles(x86)%\Kaspersky Lab\KES\Doc\<locale>\KES`.

By confirming that you agree with the End User License Agreement when installing the application, you signify your acceptance of the terms of the End User License Agreement. If you do not accept the terms of the End User License Agreement, you must abort the installation.

About the license

A *license* is a time-limited right to use the application, granted under the End User License Agreement.

The license entitles you to use the application in accordance with the terms of the End User License Agreement, and to receive technical support. The list of available features and application usage term depend on the type of license under which the application was activated.

The following license types are provided:

- *Trial* – a free license intended for trying out the application.

  A trial license usually has a short term. When the trial license expires, all Kaspersky Endpoint Security features become disabled. To continue using the application, you must purchase a commercial license.

  You can activate the application under a trial license only once. The application cannot be activated under a trial license after it has been activated with a commercial license.

- *Commercial* – a paid license that is provided when you purchase Kaspersky Endpoint Security.

  Application functionality available under the commercial license depends on the choice of product. The selected product is indicated in the License Certificate. Information on available products may be found on the Kaspersky website.

  When the commercial license expires, key features of the application become disabled. To continue using the application, you must renew your commercial license. If you are not planning to renew your license, you must remove the application from your computer.

About license certificate

A *license certificate* is a document transferred to the user together with a key file or activation code.

The license certificate contains the following license information:

- License ID or order number.
- Details of the user to whom the license is granted.
- Details of the application that can be activated using the license.
- Limitation on the number of licensed units (for example, the number of devices on which the application can be used under the license).
- License term start date.
- License expiration date or license term.
- License type.

About subscription

A *subscription for Kaspersky Endpoint Security* is a purchase order for the application with specific parameters (such as the subscription expiry date and number of devices protected). You can order a subscription for Kaspersky Endpoint Security from your service provider (such as your ISP). A subscription can be renewed manually or automatically, or you may cancel your subscription. You can manage your subscription on the website of the service provider.

Subscription can be limited (for one year, for example) or unlimited (without an expiry date). To keep Kaspersky Endpoint Security working after the limited subscription term expires, you need to renew your subscription. Unlimited subscription is renewed automatically if the vendor's services have been prepaid on time.

When a limited subscription expires, you may be provided a subscription renewal grace period during which the application continues to function. The availability and duration of such a grace period is decided by the service provider.

To use Kaspersky Endpoint Security under a subscription, you need to apply the activation code received from the service provider. After the activation code is applied, the active key is added. The active key determines the license for using the application under the subscription. You cannot activate the application under the subscription using a key file. The service provider can only provide an activation code. It is not possible to add a reserve key under a subscription.

> Activation codes purchased under subscription may not be used to activate previous versions of Kaspersky Endpoint Security.

About license key

A *license key* is a sequence of bits that you can use to activate and then use the application in accordance with the terms of the End User License Agreement.

> A license certificate is not provided for a key that is added under a subscription.

You can add a license key to the application by either applying a key file or entering an activation code.

The key can be blocked by Kaspersky if the terms of the End User License Agreement are violated. If the key has been blocked, you need to add a different key to continue using the application.

There are two types of keys: active and reserve.

An *active key* is a key that is currently used by the application. A trial or commercial license key can be added as the active key. The application cannot have more than one active key.

A *reserve key* is a key that entitles the user to use the application, but is not currently in use. At the expiry of the active key, a reserve key automatically becomes active. A reserve key can be added only if the active key is available.

> A key for a trial license can be added only as an active key. It cannot be added as the reserve key. A trial license key cannot replace the active key to a commercial license.

If a key is added to the list of prohibited keys, the application functionality defined by the license used to activate the application remains available for eight days. The application notifies the user that the key has been added to the list of prohibited keys. After eight days, application functionality becomes limited to the functionality level that is available after license expiry. You can use protection and control components and run a scan using the application databases that were installed before the license expired. The application also continues to encrypt files that had been modified and encrypted before license expiration, but does not encrypt new files. Use of Kaspersky Security Network is not available.

About activation code

An *activation code* is a unique sequence of 20 alphanumeric characters. You enter an activation code to add a license key that activates Kaspersky Endpoint Security. You receive an activation code at the email address you specified after purchasing Kaspersky Endpoint Security.

To activate the application with an activation code, Internet access is required to connect to Kaspersky activation servers.

When the application is activated using an activation code, the active key is added. A reserve key can be added only by using an activation code and cannot be added using a key file.

If an activation code is lost after activating the application, you can restore the activation code. You may need an activation code, for example, to register a Kaspersky CompanyAccount. If the activation code was lost after the application activation, contact Kaspersky partner from whom you purchased the license.

About the key file

A *key file* is a file with the .key extension that you receive from Kaspersky. The purpose of a key file is to add a license key that activates the application.

You receive a key file at the email address that you provided when you purchased Kaspersky Endpoint Security or ordered the trial version of Kaspersky Endpoint Security.

You do not need to connect to Kaspersky activation servers in order to activate the application with a key file.

You can recover a key file if it has been accidentally deleted. You may need a key file to register a Kaspersky CompanyAccount, for example.

To recover a key file, do one of the following:

- Contact the license seller.
- Obtain a key file on the Kaspersky website based on your existing activation code.
- Get a key file from another Administration Server.

When the application is activated using a key file, an active key is added. A reserve key can be added only by using a key file and cannot be added using an activation code.

Comparison of application functionality depending on license type for workstations

The set of Kaspersky Endpoint Security functionality available on workstations depends on the license type (see table below).

See also the comparison of application functionality for servers

Comparison of the application functionality depending on Kaspersky Next license type, see in Kaspersky Next Help.

Comparison of Kaspersky Endpoint Security features

Feature	Kaspersky Endpoint Security for Business Select	Kaspersky Endpoint Security for Business Advanced	Kaspersky Total Security	Kaspersky Endpoint Detection and Response Optimum	Kaspersky Optimum Security	Kaspersky Endpoint Detection and Response Expert	Kaspersky Hybrid Cloud Security Standard	Kaspersky Hybrid Cloud Security Enterprise
Advanced Threat Protection								
Kaspersky Security Network	✓	✓	✓	✓	✓	✓	✓	✓
Behavior Detection	✓	✓	✓	✓	✓	✓	✓	✓

Feature	Kaspersky Endpoint Security for Business Select	Kaspersky Endpoint Security for Business Advanced	Kaspersky Total Security	Kaspersky Endpoint Detection and Response Optimum	Kaspersky Optimum Security	Kaspersky Endpoint Detection and Response Expert	Kaspersky Hybrid Cloud Security Standard	Kaspersky Hybrid Cloud Security Enterprise
Anti-Cryptor	✓	✓	✓	✓	✓	✓	✓	✓
Exploit Prevention	✓	✓	✓	✓	✓	✓	✓	✓
Host Intrusion Prevention	✓	✓	✓	✓	✓	✓	✓	✓
Remediation Engine	✓	✓	✓	✓	✓	✓	✓	✓
Essential Threat Protection								
File Threat Protection	✓	✓	✓	✓	✓	✓	✓	✓
Web Threat Protection	✓	✓	✓	✓	✓	✓	✓	✓
Mail Threat Protection	✓	✓	✓	✓	✓	✓	✓	✓
Firewall	✓	✓	✓	✓	✓	✓	✓	✓
Network Threat Protection	✓	✓	✓	✓	✓	✓	✓	✓
BadUSB Attack Prevention	✓	✓	✓	✓	✓	✓	✓	✓
AMSI Protection	✓	✓	✓	✓	✓	✓	✓	✓
Security Controls								
Log Inspection	–	–	–	–	–	–	–	–
Application Control	✓	✓	✓	✓	✓	✓	✓	✓
Device Control	✓	✓	✓	✓	✓	✓	✓	✓
Web Control	✓	✓	✓	✓	✓	✓	✓	✓
Adaptive Anomaly Control	–	✓	✓	✓	✓	✓	–	✓
System Integrity Monitoring	–	–	–	–	–	–	–	–
Data Encryption								
Kaspersky Disk Encryption	–	✓	✓	✓	✓	✓	–	✓
BitLocker Drive Encryption	–	✓	✓	✓	✓	✓	–	✓
File Level Encryption	–	✓	✓	✓	✓	✓	–	✓
Encryption of removable drives	–	✓	✓	✓	✓	✓	–	✓
Detection and Response								
Endpoint Detection and Response Optimum	–	–	–	✓	✓	–	–	–
Endpoint Detection and Response Expert	–	–	–	–	–	✓	–	–

Feature	Kaspersky Endpoint Security for Business Select	Kaspersky Endpoint Security for Business Advanced	Kaspersky Total Security	Kaspersky Endpoint Detection and Response Optimum	Kaspersky Optimum Security	Kaspersky Endpoint Detection and Response Expert	Kaspersky Hybrid Cloud Security Standard	Kaspersky Hybrid Cloud Security Enterprise
Kaspersky Sandbox *(Kaspersky Sandbox license must be purchased separately)*	✓	✓	✓	✓	✓	✓	✓	✓
Integration with KUMA *(license for KUMA Integration must be purchased separately)*	✓	✓	✓	✓	✓	✓	✓	✓
Light Agent mode *(to activate the application, you must add a license key to the SVM to which the Light Agent is connected)*	–	–	–	–	–	–	✓	✓

Comparison of application functionality depending on license type for servers

The set of Kaspersky Endpoint Security functionality available on servers depends on the license type (see table below).

See also the comparison of application functionality for workstations

Comparison of the application functionality depending on Kaspersky Next license type, see in Kaspersky Next Help.

Comparison of Kaspersky Endpoint Security features

Feature	Kaspersky Endpoint Security for Business Select	Kaspersky Endpoint Security for Business Advanced	Kaspersky Total Security	Kaspersky Endpoint Detection and Response Optimum	Kaspersky Optimum Security	Kaspersky Endpoint Detection and Response Expert	Kaspersky Hybrid Cloud Security Standard	Kaspersky Hybrid Cloud Security Enterprise
Advanced Threat Protection								
Kaspersky Security Network	✓	✓	✓	✓	✓	✓	✓	✓
Behavior Detection	✓	✓	✓	✓	✓	✓	✓	✓
Anti-Cryptor	✓	✓	✓	✓	✓	✓	✓	✓
Exploit Prevention	✓	✓	✓	✓	✓	✓	✓	✓

Feature	Kaspersky Endpoint Security for Business Select	Kaspersky Endpoint Security for Business Advanced	Kaspersky Total Security	Kaspersky Endpoint Detection and Response Optimum	Kaspersky Optimum Security	Kaspersky Endpoint Detection and Response Expert	Kaspersky Hybrid Cloud Security Standard	Kaspersky Hybrid Cloud Security Enterprise
Host Intrusion Prevention	–	–	–	–	–	–	–	–
Remediation Engine	✓	✓	✓	✓	✓	✓	✓	✓
Essential Threat Protection								
File Threat Protection	✓	✓	✓	✓	✓	✓	✓	✓
Web Threat Protection	–	✓	✓	✓	✓	✓	✓	✓
Mail Threat Protection	–	✓	✓	✓	✓	✓	✓	✓
Firewall	✓	✓	✓	✓	✓	✓	✓	✓
Network Threat Protection	✓	✓	✓	✓	✓	✓	✓	✓
BadUSB Attack Prevention	✓	✓	✓	✓	✓	✓	✓	✓
AMSI Protection	✓	✓	✓	✓	✓	✓	✓	✓
Security Controls								
Log Inspection	–	–	–	–	–	–	–	✓
Application Control	–	✓	✓	✓	✓	✓	–	✓
Device Control	–	✓	✓	✓	✓	✓	✓	✓
Web Control	–	✓	✓	✓	✓	✓	✓	✓
Adaptive Anomaly Control	–	–	–	–	–	–	–	–
System Integrity Monitoring	–	–	–	–	–	–	–	✓
Data Encryption								
Kaspersky Disk Encryption	–	–	–	–	–	–	–	–
BitLocker Drive Encryption	–	✓	✓	✓	✓	✓	–	✓
File Level Encryption	–	–	–	–	–	–	–	–
Encryption of removable drives	–	–	–	–	–	–	–	–
Detection and Response								
Endpoint Detection and Response Optimum	–	–	–	✓	✓	–	–	–
Endpoint Detection and Response Expert	–	–	–	–	–	✓	–	–

Feature	Kaspersky Endpoint Security for Business Select	Kaspersky Endpoint Security for Business Advanced	Kaspersky Total Security	Kaspersky Endpoint Detection and Response Optimum	Kaspersky Optimum Security	Kaspersky Endpoint Detection and Response Expert	Kaspersky Hybrid Cloud Security Standard	Kaspersky Hybrid Cloud Security Enterprise
Kaspersky Sandbox *(Kaspersky Sandbox license must be purchased separately)*	✓	✓	✓	✓	✓	✓	✓	✓
Integration with KUMA *(license for KUMA Integration must be purchased separately)*	✓	✓	✓	✓	✓	✓	✓	✓
Light Agent mode *(to activate the application, you must add a license key to the SVM to which the Light Agent is connected)*	–	–	–	–	–	–	✓	✓

Activating the application

Activation is the process of activating a license that allows you to use a fully functional version of the application until the license expires. The application activation involves adding a license key.

You can activate the application in one of the following ways:

- Locally from the application interface, by using the Activation Wizard. You can add both the active key and the reserve key in this way.
- Remotely using the Kaspersky Security Center software suit.
  - Using the *Add key* task.

    This method lets you add a key to a specific computer or to computers that are part of an administration group. You can add both the active key and the reserve key in this way.
  - By distributing a key stored on the Kaspersky Security Center Administration Server to the computers.

    This method lets you automatically add a key to computers that are already connected to Kaspersky Security Center, and to new computers. To use this method, you need to first add the key to the Kaspersky Security Center Administration Server. For more details about adding keys to the Kaspersky Security Center Administration Server, please refer to Kaspersky Security Center Help.

    The activation code purchased under subscription is distributed in the first place.

- By adding the key to the Kaspersky Endpoint Security installation package.

  This method lets you add the key in Installation package properties during Kaspersky Endpoint Security deployment. The application is automatically activated after the installation.

- Using the command line.

It may take some time for the application to be activated with an activation code (during either remote or non-interactive installation) due to load distribution across activation servers of Kaspersky. If you need to activate the application right away, you may interrupt the ongoing activation process and start activation using the Activation Wizard.

If Kaspersky Endpoint Security is being used in Light Agent mode for protecting virtual environments, you do not need to activate the application separately.

Activating the application

How to activate the application in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Add key**.

Step 2. Adding a key

Enter an activation code or select a key file.

For more details about adding keys to the Kaspersky Security Center repository, please refer to the Kaspersky Security Center Help.

Step 3. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 4. Configuring a task start schedule

Configure a schedule for starting a task, for example, manually or when the computer is idle.

Step 5. Defining the task name

Enter a name for the task, such as *Activate Kaspersky Endpoint Security for Windows*.

Step 6. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties. As a result, Kaspersky Endpoint Security will be activated on users' computers in silent mode.

How to activate the application in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Configuring general task settings

Configure the general task settings:

1. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.
2. In the **Task type** drop-down list, select **Add key**.
3. In the **Task name** field, enter a brief description, such as *Activation of Kaspersky Endpoint Security for Windows*.
4. In the **Devices to which the task will be assigned** block, select the task scope. Go to the next step.

Step 2. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 3. Selecting a license

Select the license that you want to use to activate the application. Go to the next step.

You can add keys to the Web Console (**Operations** → **Licensing**).

Step 4. Completing task creation

Finish the wizard by clicking the **Finish** button. A new task will be displayed in the list of tasks. To run a task, select the check box opposite the task and click the **Start** button. As a result, Kaspersky Endpoint Security will be activated on users' computers in silent mode.

How to activate the application in the application interface

1. In the main application window, go to the **License** section.
2. Click **Activate the application using a new license**.

The Application Activation Wizard starts. Follow the instructions of the Activation Wizard.

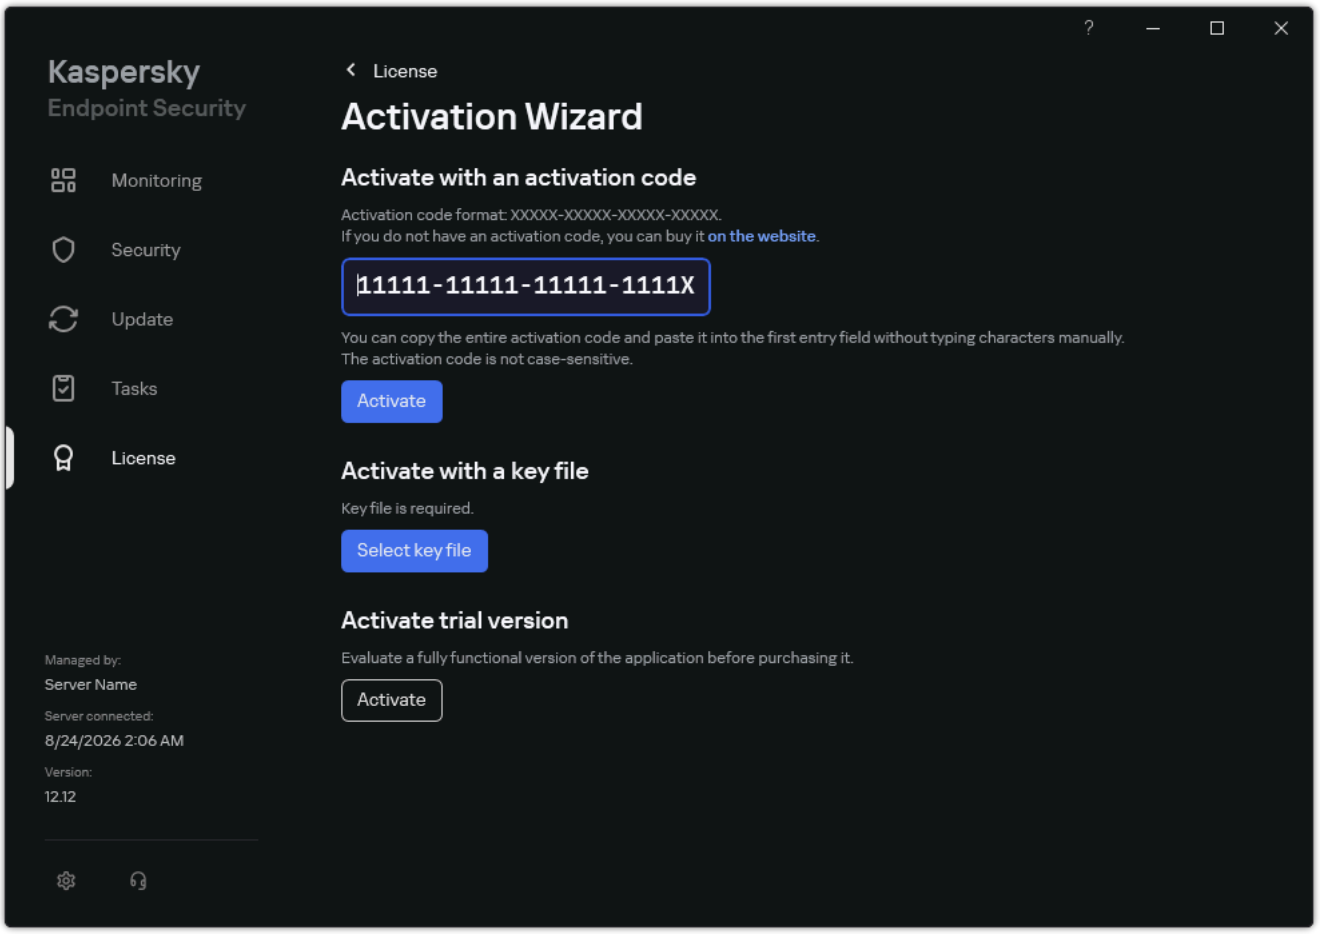

Activating the application

In the properties of the *Add key* task, you can add a reserve key to the computer. A *reserve key* becomes active when the active key expires. The availability of a reserve key lets you avoid application functionality limitations when a license expires.

How to automatically add a license key to computers through the Administration Console (MMC)

1. In the Administration Console, go to the folder **Kaspersky Licenses**.

   A list of license keys opens.

2. Open the license key properties.

3. In the **General** section, select the **Automatically distribute license key to managed devices** check box.

4. Save your changes.

   As a result, the key will be automatically distributed to the appropriate computers. During automatic distribution of a key as an active or a reserve key, the licensing limit on the number of computers (set in the key properties) is taken into account. If the licensing limit is reached, distribution of this key to computers ceases automatically. You can view the number of computers to which the key has been added and other data in the key properties in the **Devices** section.

How to automatically add a license key to computers through the Web Console and Cloud Console

1. In the main window of the Web Console, select **Operations** → **Licensing** → **Licenses**.

   A list of license keys opens.

2. Open the license key properties.

3. On the **General** tab, enable the **Automatically distribute license key to managed devices** toggle switch.

4. Save your changes.

   As a result, the key will be automatically distributed to the appropriate computers. During automatic distribution of a key as an active or a reserve key, the licensing limit on the number of computers (set in the key properties) is taken into account. If the licensing limit is reached, distribution of this key to computers ceases automatically. You can view the number of computers to which the key has been added and other data in the key properties on the **Devices** tab.

If you are activating the application with an *activation code*, you need internet access to connect to Kaspersky activation servers. If you are activating the application with a *key file*, internet access is not necessary. If the computers are in an isolated network segment without internet access, to activate the application with a code, you must allow using the Kaspersky Security Center Administration Server as a proxy server. That is, the application can gain access to the activation servers through the Administration Server that has internet access.

How to allow using the Administration Server as a proxy server for activating the application in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **General settings** → **Application settings**.

4. Select the **Use Kaspersky Security Center as proxy server for activation** check box.

5. Save your changes.

How to allow using the Administration Server as a proxy server for activating the application in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **KSC Integration**.

5. Select the **Use Kaspersky Security Center as proxy server for activation** check box.

6. Save your changes.

If you cannot activate the application with an *activation code*, you can try getting a *key file* using the Kaspersky solution and trying to activate the application again using a different method.

License usage monitoring

You can monitor the use of licenses in the following ways:

- View the *Report on usage of license keys* for the organization's infrastructure (**Monitoring** → **Reports**).
- View the statuses of computers on the **Managed devices** → **Devices** tab. If the application is not activated, the computer will have the ⚠ *Application is not activated* status.
- View license information in the computer properties.
- View key properties (**Operations** → **Licensing**).

Specifics of activating the application as a part of Kaspersky Security Center Cloud Console

A trial version is provided for Kaspersky Security Center Cloud Console. The *trial version* is a special version of Kaspersky Security Center Cloud Console designed to familiarize a user with the features of the application. In this version, you can perform actions in a workspace for a period of 30 days. All managed applications are automatically run under a trial license for Kaspersky Security Center Cloud Console, including Kaspersky Endpoint Security. However, you cannot activate Kaspersky Endpoint Security using its own trial license when the trial license for Kaspersky Security Center Cloud Console expires. For detailed information about Kaspersky Security Center licensing, please refer to the Kaspersky Security Center Cloud Console Help.

> The trial version of Kaspersky Security Center Cloud Console does not allow you to subsequently switch to a commercial version. Any trial workspace will be automatically deleted with all its contents after the 30-day period expires.

Removing a license key

To remove a license key, you need to run a special task on your computers. You can remove a license key, for example, to rearrange the licensing units. Also, when the license expires, Kaspersky Endpoint Security notifies you. If you have added a license key with a short term to try out the application (for example, EDR Optimum Add-on), you can remove this license key to get rid of notifications and fix the status of your computer.

The *Remove key* task allows removing any license keys from the computer. You can remove active license keys as well as reserve license keys. In addition to the Kaspersky Endpoint Security activation license key, you can remove individual license keys of Kaspersky Detection and Response solutions (for example, EDR Optimum Add-on).

How to remove a license key in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

   The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Remove key**.

Step 2. Selecting a license

Select the license key that you want to delete. You can select a license key from the Kaspersky Security Center key store or select a key file.

Step 3. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 4. Configuring a task start schedule

Configure a schedule for starting a task, for example, manually or when the computer is idle.

Step 5. Defining the task name

Enter a name for the task, for example, *Remove key for beta*.

Step 6. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

How to remove a license key in Web Console

1. In the main window of the Web Console, select **Tasks**.
   The list of tasks opens.
2. Click **Add**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Configuring general task settings

Configure the general task settings:

1. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.
2. In the **Task type** drop-down list, select **Remove key**.
3. In the **Task name** field, enter a brief description, for example, *Remove key for beta*.
4. In the **Devices to which the task will be assigned** block, select the task scope. Go to the next step.

Step 2. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 3. Selecting a license

Select the license key that you want to delete. You can select a license key from the Kaspersky Security Center key store or select a key file. Go to the next step.

Step 4. Completing task creation

Finish the wizard by clicking the **Finish** button. A new task will be displayed in the list of tasks. To run a task, select the check box opposite the task and click the **Start** button.

How to remove a license key in the application interface

1. In the main application window, go to the **License** section.
2. Select the key that you want to delete and click **Delete**.

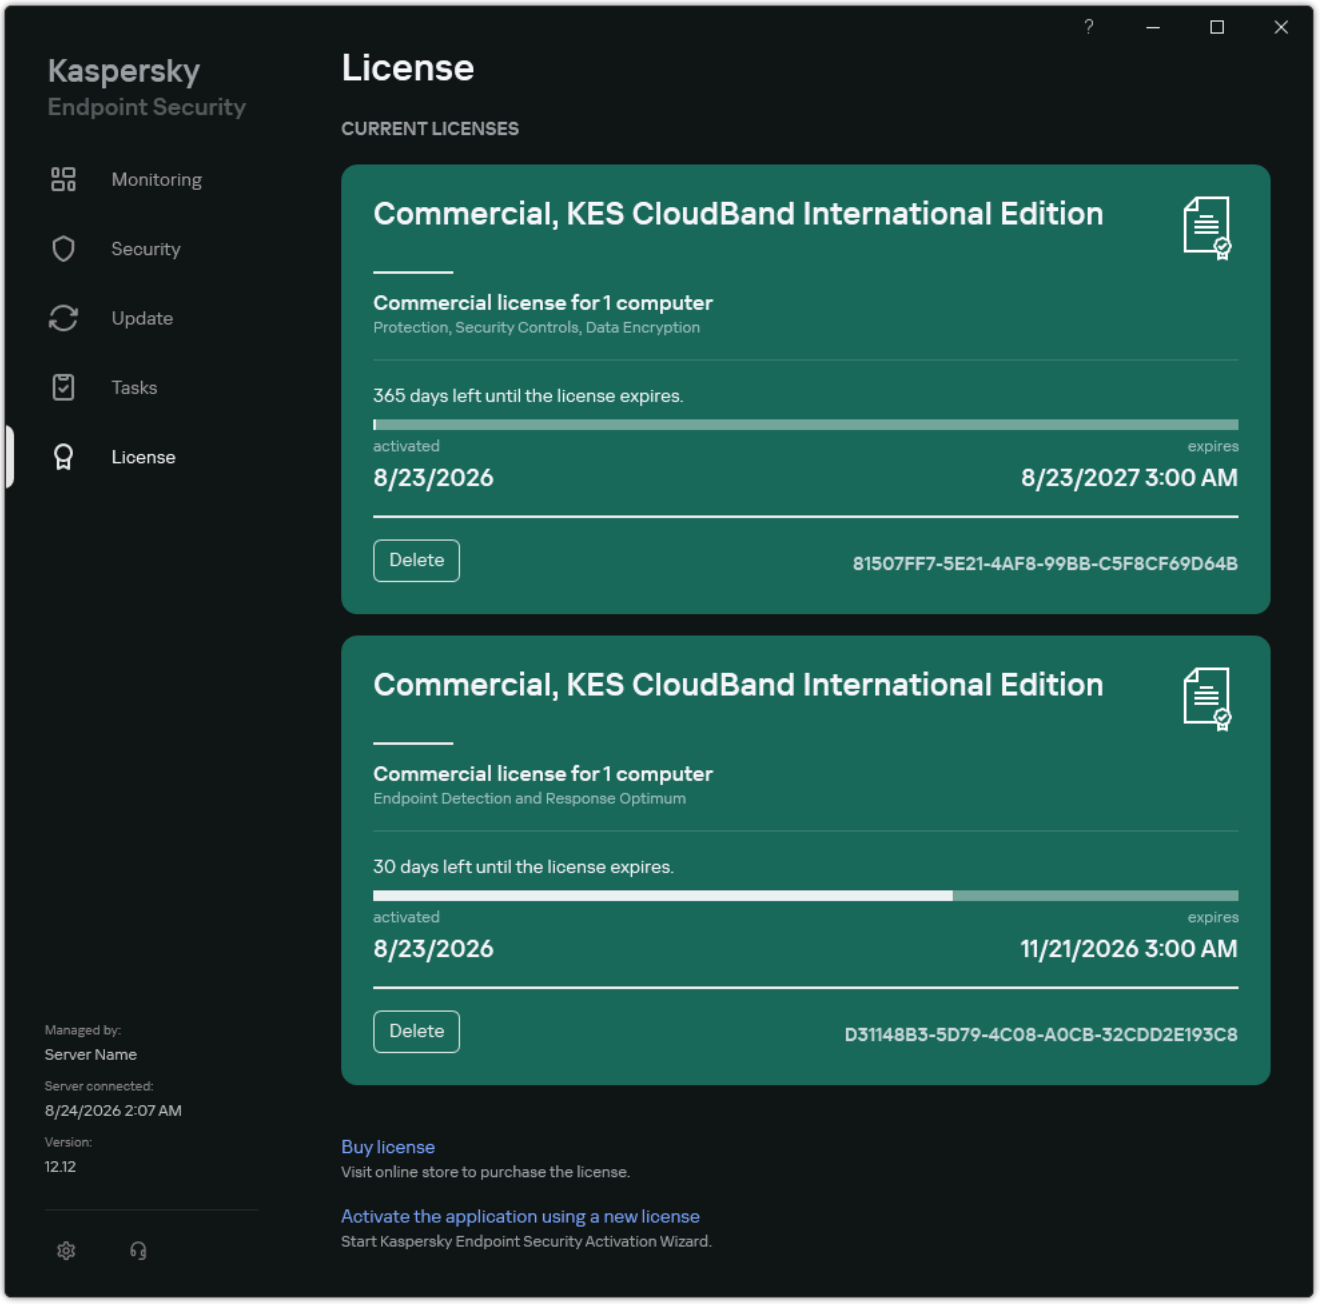

Licensing window

You can also remove a license key on the command line.

Viewing license information

To view information about a license:

In the main application window, go to the **License** section (see the figure below).

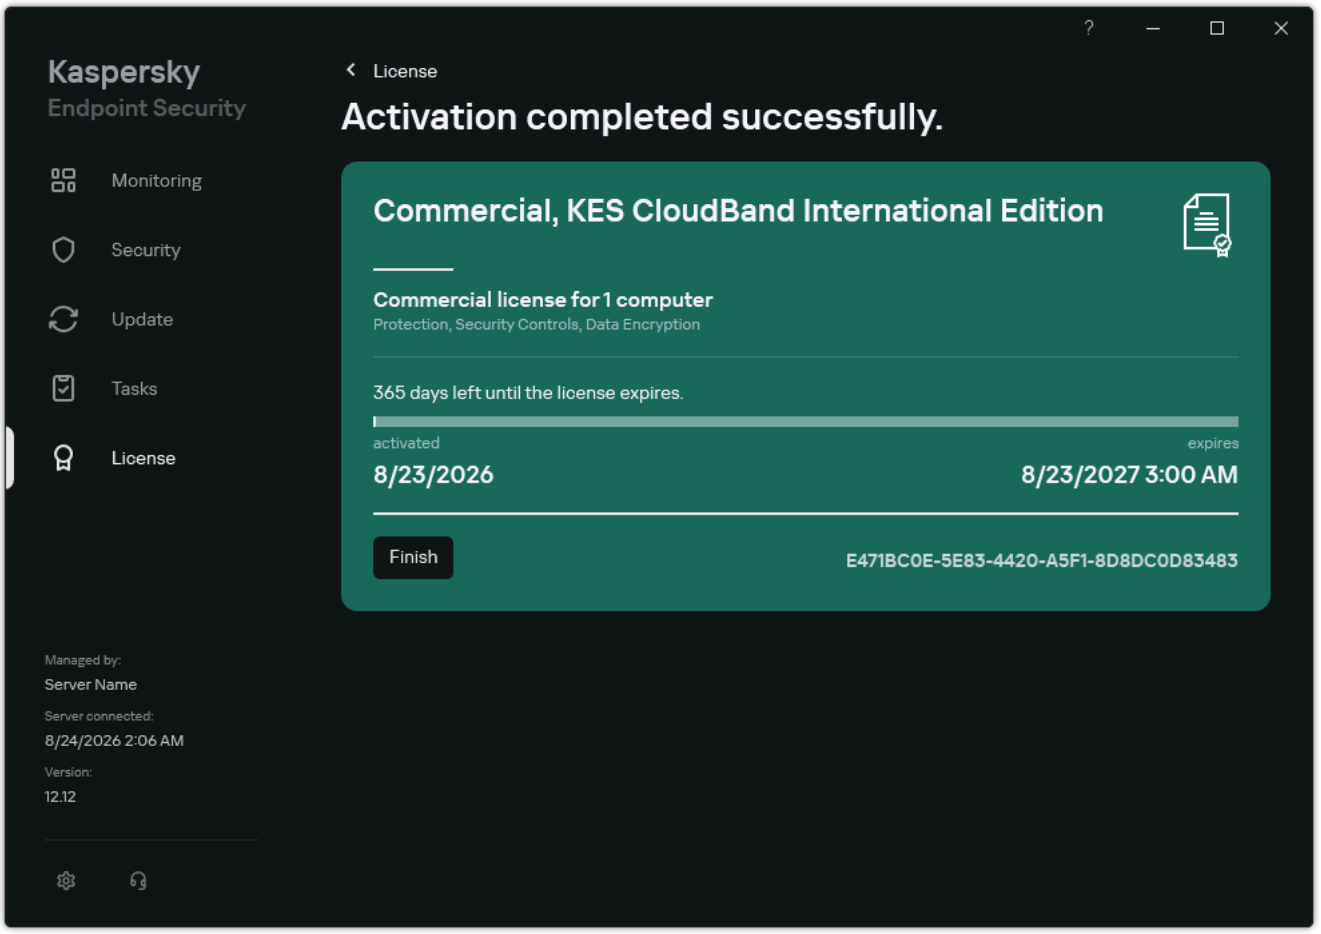

Licensing window

The section displays the following details:

- *Key status*. Several keys can be stored on a computer. There are two types of keys: active and reserve. The application cannot have more than one active key. A reserve key can become active only after the active key expires or after the active key is deleted by clicking **Delete**.
- *Application name*. Full name of the purchased Kaspersky application.
- *License type*. The following types of licenses are available: trial and commercial.
- *Functionality*. Application features that are available under your license. Features may include Protection, Security Controls, Data Encryption, and others. The list of available features is also provided in the License Certificate.

- *Additional information about the license*. Start date and end date of the license term (only for the active key), remaining duration of the license term.

  License expiration time is displayed according to the time zone configured in the operating system.

- *Key*. A key is a unique alphanumeric sequence that is generated from an activation code or a key file.

In the Licensing window, you can also do one of the following:

- **Buy license** / **Renew license**. Opens the Kaspersky online store website, where you can purchase or renew a license. To do so, please enter your company information and pay for the order.

- **Activate the application using a new license**. Starts the Application Activation Wizard. In this Wizard you can add a key using an activation code or a key file. The Application Activation Wizard allows you to add an active key and only one reserve key.

Purchasing a license

You may purchase a license after installing the application. On purchasing a license, you receive an activation code or a key file for activating the application.

To purchase a license:

1. In the main application window, go to the **License** section.

2. Do one of the following:

   - If no keys have been added or a key for trial license has been added, click the **Buy license** button.

   - If the key for a commercial license is added, click the **Renew license** button.

   A window will open with the website of the Kaspersky online store, where you can purchase a license.

Renewing subscription

When you use the application under subscription, Kaspersky Endpoint Security automatically contacts the activation server at specific intervals until your subscription expires.

If you use the application under unlimited subscription, Kaspersky Endpoint Security automatically checks the activation server for renewed keys in background mode. If a key is available on the activation server, the application adds it by replacing the previous key. In this way, unlimited subscription for Kaspersky Endpoint Security is renewed without user involvement.

If you are using the application under a limited subscription, on the expiration date of the subscription (or on the expiration date of the subscription renewal grace period), Kaspersky Endpoint Security notifies you about this and stops attempting to renew the subscription automatically. In this case, Kaspersky Endpoint Security behaves in the same way as it does when a commercial license for the application expires: the application operates without updates and the Kaspersky Security Network is unavailable.

You can renew subscription on the website of the service provider.

To visit the website of the service provider from the application interface:

1. In the main application window, go to the **License** section.

2. Click **Contact your subscription provider**.

   You can update subscription status manually. This may be required if the subscription has been renewed after the grace period and the application has not updated the subscription status automatically.

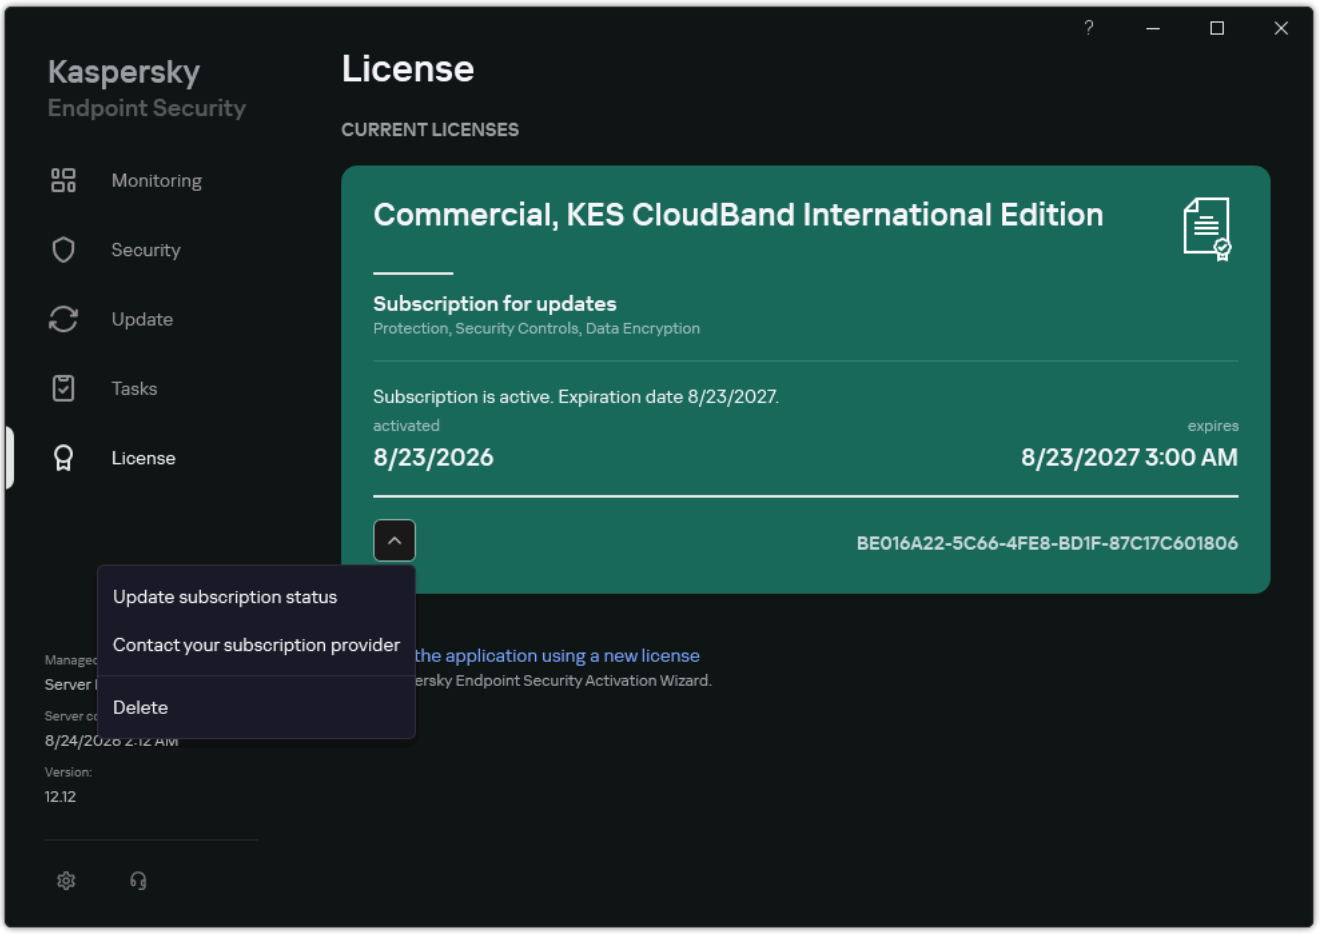

Renewing subscription

Getting started

After installing Kaspersky Endpoint Security, you can manage the application using the following interfaces:

- Local application interface.
- Kaspersky Security Center Administration Console.
- Kaspersky Security Center Web Console.
- Kaspersky Security Center Cloud Console.

Kaspersky Security Center Administration Console

Kaspersky Security Center lets you remotely install and uninstall, start and stop Kaspersky Endpoint Security, configure application settings, change the set of available application components, add keys, and start and stop update and scan tasks.

The application can be managed via Kaspersky Security Center using the Kaspersky Endpoint Security Management Plug-in.

For more details on managing the application through Kaspersky Security Center, refer to the Kaspersky Security Center Help.

Kaspersky Security Center Web Console and Kaspersky Security Center Cloud Console

Kaspersky Security Center Web Console (hereinafter also referred to as *Web Console*). This is a web interface for managing a protection system based on Kaspersky applications. You can work in Kaspersky Security Center Web Console using a browser on any device. For detailed information about Kaspersky Security Center Web Console, please refer to the Kaspersky Security Center Help.

Kaspersky Security Center Cloud Console (hereinafter also referred to as the "*Cloud Console*") is a cloud-based solution for protecting and managing an organization's network. For detailed information about Kaspersky Security Center Cloud Console, please refer to the Kaspersky Security Center Cloud Console Help.

Web Console and Cloud Console let you do the following:

- Monitor the status of your organization's security system.
- Install Kaspersky applications on devices within your network.
- Manage installed applications.
- View reports on the security system status.

Management of Kaspersky Endpoint Security through the Web Console, Cloud Console, and Kaspersky Security Center Administration Console all provide different management capabilities. The available components and tasks also vary for the different Consoles.

About the Kaspersky Endpoint Security for Windows Management Plug-in

The Kaspersky Endpoint Security for Windows Management Plug-in enables interaction between Kaspersky Endpoint Security and Kaspersky Security Center. The Management Plug-in lets you manage Kaspersky Endpoint Security by using policies, tasks, and local application settings. Interaction with Kaspersky Security Center Web Console is provided by the web plug-in.

The version of the Management Plug-in may differ from the version of Kaspersky Endpoint Security application installed on the client computer. If the installed version of the Management Plug-in has less functionality than the installed version of Kaspersky Endpoint Security, the settings of the missing functions are not regulated by the Management Plug-in. These settings can be modified by the user in the local interface of Kaspersky Endpoint Security.

The web plug-in is not installed by default in Kaspersky Security Center Web Console. The web plug-in must be installed on a computer that has Kaspersky Security Center Web Console installed. The functionality of the web plug-in is available to all administrators that have access to Web Console in a browser. You can view the list of installed web plug-ins in the Web Console interface (**Console settings** → **Web plug-ins**).

If you are using Kaspersky Endpoint Security as part of the Kaspersky Endpoint Detection and Response Optimum solution, you must install the Kaspersky Endpoint Detection and Response management plug-in. You need the management plug-in to display alert details. *Alert Details* is a tool for viewing the entirety of collected information about a detected threat. Alert details include, for example, the history of files appearing on the computer. Thus, to create threat response tasks, you need the Kaspersky Endpoint Security management plug-in, and to view alert details, you need the EDR management plug-in.

Installing the web plug-in

You can install the web plug-in as follows:

- Install web plug-in using Quick Start Wizard of Kaspersky Security Center Web Console.

  Web Console automatically prompts you to run the Quick Start Wizard when connecting Web Console to the Administration Server for the first time. You can also run the Quick Start Wizard in the Web Console interface (**Discovery & deployment** → **Deployment & assignment** → **Quick start wizard**). The Quick Start Wizard can also check if the installed web plug-ins are up to date and download the necessary updates. For more details on the Quick Start Wizard for Kaspersky Security Center Web Console, please refer to the Kaspersky Security Center Help.

- Install web plug-in from the list of available distribution packages in Web Console.

  To install the web plug-in, select the distribution package of the Kaspersky Endpoint Security web plug-in in the Web Console interface (**Console settings** → **Web plug-ins**). The list of available distribution packages is updated automatically after new versions of Kaspersky applications are released.

- Download the distribution package to the Web Console from an external source.

  To install the web plug-in, add the ZIP-archive of the distribution package for the Kaspersky Endpoint Security web plug-in in the Web Console interface (**Console settings** → **Web plug-ins**). The distribution package of the web plug-in can be downloaded on the Kaspersky website, for example.

Starting with Kaspersky Endpoint Security 12.11 for Windows, the installation procedure for the web plug-in has changed. The distribution package now includes two web plug-ins: *Kaspersky Endpoint Security for Windows 14.2.0* and the *Unified Protection and Management Plug-in*. This is due to the transition to a single unified web plug-in for managing Kaspersky applications. The unified web plug-in allows creating a single policy to manage multiple Kaspersky applications (for example, Kaspersky Endpoint Security for Windows, macOS, and Linux). The transition to the unified web plug-in may take several releases. After the transition is complete, the distribution package will include only the *Unified Protection and Management Plug-in*.

Updating the Management Plug-in

To update the Kaspersky Endpoint Security for Windows Management Plug-in, download the latest version of the plug-in (included in distribution kit) and run the plug-in installation wizard.

If a new version of the web plug-in becomes available, Web Console will display the notification *Updates are available for utilized plug-ins*. You can proceed to update the web plug-in version from this Web Console notification. You can also manually check for new web plug-in updates in the Web Console interface (**Console settings** → **Web plug-ins**). The previous version of the web plug-in will be automatically removed during the update.

> When the web plug-in is updated, already existing items (for example, policies or tasks) are saved. The new settings of items implementing new functions of Kaspersky Endpoint Security will appear in existing items and will have the default values.

You can update the web plug-in as follows:

- Update the web plug-in in the list of web plug-ins in online mode.

  To update the web plug-in, you must select the distribution package of the Kaspersky Endpoint Security web plug-in in the Web Console interface (**Console settings** → **Web plug-ins**). Web Console checks for available updates on Kaspersky servers and downloads the relevant updates.

- Update the web plug-in from a file.

  To update the web plug-in, you must select the ZIP-archive of the distribution package for the Kaspersky Endpoint Security web plug-in in the Web Console interface (**Console settings** → **Web plug-ins**). The distribution package of the web plug-in can be downloaded on the Kaspersky website, for example. You can update the Kaspersky Endpoint Security web plug-in only to a more recent version. The web plug-in cannot be updated to an older version.

If any item is opened (such as a policy or task), the web plug-in checks its compatibility information. If the version of the web plug-in is equal to or later than the version specified in the compatibility information, you can change the settings of this item. Otherwise, you cannot use the web plug-in to change the settings of the selected item. It is recommended to update the web plug-in.

Special considerations when working with different versions of management plug-ins

You can manage Kaspersky Endpoint Security via Kaspersky Security Center only if you have a Management Plug-in whose version is equal to or later than the version specified in the information regarding the compatibility of Kaspersky Endpoint Security with the Management Plug-in. You can view the minimum required version of the Management Plug-in in the installer.ini file included in the distribution kit.

If any item is opened (such as a policy or task), the Management Plug-in checks its compatibility information. If the version of the Management Plug-in is equal to or later than the version specified in the compatibility information, you can change the settings of this item. Otherwise, you cannot use the Management Plug-in to change the settings of the selected item. It is recommended to upgrade the Management Plug-in.

If the Kaspersky Endpoint Security Management Plug-in is installed in the Administration Console, please consider the following when installing a new version of the Management Plug-in:

- The previous version of the Kaspersky Endpoint Security Management Plug-in will be removed.
- The new version of the Kaspersky Endpoint Security Management Plug-in supports management of the previous version of Kaspersky Endpoint Security for Windows on users' computers.
- You can use the new version of the Management Plug-in to change the settings in policies, tasks, and other items created by the previous version of the Management Plug-in.
- For new settings, the new version of the Management Plug-in assigns the default values when a policy, policy profile, or task are saved for the first time.

  After the Management Plug-in is upgraded, it is recommended to check and save the values of the new settings in policies and policy profiles. If you do not do this, the new groups of Kaspersky Endpoint Security settings on the user's computer will take the default values and can be edited (the attribute). It is recommended to check the settings starting with policies and policy profiles at the top level of the hierarchy. It is also recommended to use the user account that has access rights to all functional areas of Kaspersky Security Center.

  To learn about the new capabilities of the application, please refer to the Release Notes or the application help.

- If a new parameter has been added to a group of settings in the new version of the Management Plug-in, the previously defined status of the / attribute for this group of settings is not changed.

Special considerations when using encrypted protocols for interacting with external services

Kaspersky Endpoint Security and Kaspersky Security Center uses an encrypted communication channel with TLS (Transport Layer Security) to work with external services of Kaspersky. Kaspersky Endpoint Security uses external services for the following functions:

- updating databases and application software modules;
- activating the application with an activation code (activation 2.0);
- using Kaspersky Security Network.

Use of TLS secures the application by providing the following features:

- Encryption. The contents of messages are confidential and are not disclosed to third-party users.
- Integrity. The message recipient is certain that the message contents have not been modified since the message was forwarded by the sender.
- Authentication. The recipient is certain that communication is established only with a trusted Kaspersky server.

Kaspersky Endpoint Security uses public key certificates for server authentication. A Public Key Infrastructure (PKI) is required for working with certificates. A Certificate Authority is part of a PKI. Kaspersky uses its own Certificate Authority because Kaspersky services are highly technical and not public. In this case, when root certificates of Thawte, VeriSign, GlobalTrust and others are revoked, the Kaspersky PKI remains operational without disruptions.

Environments that have MITM (software and hardware tools that support parsing of the HTTPS protocol) are considered to be unsafe by Kaspersky Endpoint Security. Errors may be encountered when working with Kaspersky services. For example, there may be errors regarding the use of Self-Signed Certificate. These errors may occur because an HTTPS Inspection tool from your environment does not recognize the Kaspersky PKI. To rectify these problems, you must configure exclusions for interacting with external services.

Application interface

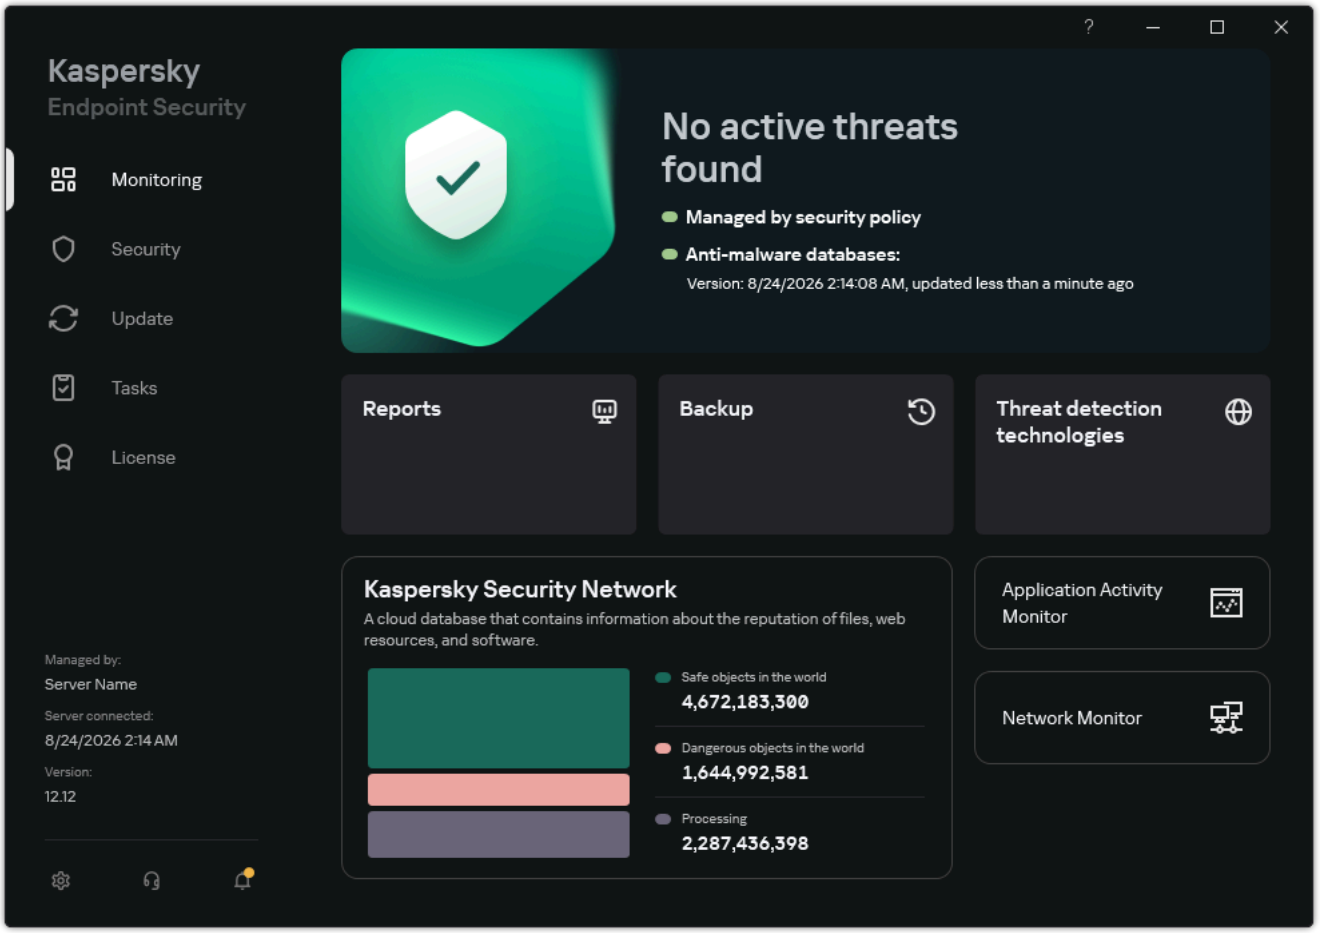

Main application window

Monitoring	• **Reports**. View events that occurred during operation of the application, individual components and tasks. • **Backup**. View a list of saved copies of infected files that the application has deleted. • **Threat detection technologies**. View information about threat detection technologies and the number of threats detected by these technologies. • **Kaspersky Security Network**. Status of the connection between Kaspersky Endpoint Security and Kaspersky Security Network, and global KSN statistics. *Kaspersky Security Network (KSN)* is an infrastructure of cloud services providing access to the online Kaspersky Knowledge Base that contains information about the reputation of files, web resources, and software. The use of data from Kaspersky Security Network ensures faster responses by Kaspersky Endpoint Security to new threats, improves the performance of some protection components, and reduces the likelihood of false positives. If you are participating in Kaspersky Security Network, KSN services provide Kaspersky Endpoint Security with information about the reputation of scanned web addresses, as well as information about the category and reputation of scanned files. • **Application Activity Monitor**. View information about the operation of installed applications. Application Activity Monitor keeps track of the file, registry, and operating system events associated with an application. • **Network Monitor**. View information about network activity of the computer in real time. • **Encryption Monitor**. Monitors the disk encryption or decryption process in real time. Encryption Monitor is available if the Kaspersky Disk Encryption component or BitLocker Drive Encryption component is installed.
Security	Operating status of installed components. You can also proceed to configuring components or viewing reports.
Update	Manage Kaspersky Endpoint Security update tasks. You can update anti-virus databases and application modules and roll back the last update. An administrator can hide the section from the user or restrict task management.
Tasks	Manage Kaspersky Endpoint Security scan tasks. You can run a malware scan and application integrity check. An administrator can hide tasks from a user or restrict management of tasks.
License	Application licensing. You can purchase a license, activate the application or renew a subscription. You can also view information about the current license.
⚙	Configure application settings. An administrator can prohibit changes to settings in Kaspersky Security Center.

	Information about the application: current version of Kaspersky Endpoint Security, database release date, key, and other information. You can also proceed to Kaspersky information resources that provide useful information, recommendations, and answers to frequently asked questions on how to purchase, install, and use the application.
	Messages containing information about available updates and requests for access to encrypted files and devices.

Application icon in the taskbar notification area

Immediately after installation of Kaspersky Endpoint Security, the application icon appears in the Microsoft Windows taskbar notification area.

> If the application icon in the taskbar notification area is hidden, the administrator has disabled the display of the application interface in the policy.

The icon serves the following purposes:

- It indicates application activity.
- It acts as a shortcut to the context menu and main window of the application.

The following application icon statuses are provided for displaying application operating information:

- The icon signifies that critically important protection components of the application are enabled. Kaspersky Endpoint Security will display a warning if the user is required to perform an action, for example, restart the computer after updating the application.
- The icon signifies that critically important protection components of the application are disabled or have malfunctioned. Protection components may malfunction, for example, if the license has expired or as a result of an application error. Kaspersky Endpoint Security will display a warning with a description of the problem in computer protection.

The context menu of the application icon contains the following items:

- **Kaspersky Endpoint Security for Windows**. Opens the main application window. In this window, you can adjust the operation of application components and tasks, and view the statistics of processed files and detected threats.
- **Pause protection** / **Resume protection**. Pause the operation of all protection and control components that are not marked by a lock ( ) in the policy. Prior to performing this operation, it is recommended to disable the Kaspersky Security Center policy.

  Prior to pausing the operation of protection and control components, the application requests the password for accessing Kaspersky Endpoint Security (account password or temporary password). You can then select the pause period: for a specific amount of time, until a restart, or upon user request.

  This context menu item is available if Password Protection is enabled. To resume the operation of protection and control components, click **Resume protection** in the context menu of the application.

  > Pausing the operation of protection and control components does not affect the performance of update and malware scan tasks. The application also continues using Kaspersky Security Network.

- **Disable policy** / **Enable policy**. Disabling Kaspersky Security Center policy on the computer. All Kaspersky Endpoint Security settings are available for configuration, including settings that have a closed lock in the policy (). If the policy is disabled, the application requests the password for accessing Kaspersky Endpoint Security (account password or temporary password). This context menu item is available if Password Protection is enabled. To enable the policy, select **Enable policy** in the context menu of the application.

- **Settings**. Opens the application settings window.

- **Support**. This opens a window containing the information necessary for contacting Kaspersky Technical Support.

- **About**. This item opens an information window with application details.

- **Exit**. This item quits Kaspersky Endpoint Security. Clicking this context menu item causes the application to be unloaded from the computer RAM.

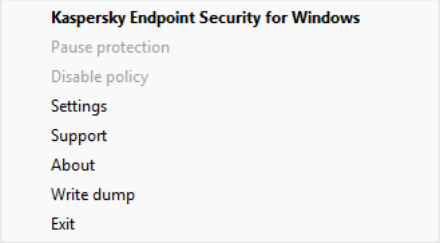

Application icon context menu

Simplified application interface

If a Kaspersky Security Center policy configured to display the simplified application interface is applied to a client computer on which Kaspersky Endpoint Security is installed, the main application window is not available on this client computer. Right-click to open the context menu of the Kaspersky Endpoint Security icon (see the figure below) containing the following items:

- **Disable policy** / **Enable policy**. Disabling Kaspersky Security Center policy on the computer. All Kaspersky Endpoint Security settings are available for configuration, including settings that have a closed lock in the policy (). If the policy is disabled, the application requests the password for accessing Kaspersky Endpoint Security (account password or temporary password). This context menu item is available if Password Protection is enabled. To enable the policy, select **Enable policy** in the context menu of the application.

- **Tasks**. Drop-down list containing the following items:

  - **Application Integrity Check**.

  - **Rollback of databases to their previous version**.

  - **Full Scan**.

  - **Custom Scan**.

  - **Critical Areas Scan**.

  - **Update**.

- **Support**. This opens a window containing the information necessary for contacting Kaspersky Technical Support.

- **Exit**. This item quits Kaspersky Endpoint Security. Clicking this context menu item causes the application to be unloaded from the computer RAM.



Context menu of the application icon when displaying the simplified interface

Configuring the display of the application interface

You can configure the application interface display mode for a user. The user can interact with the application in the following ways:

- **Simplified**. On a client computer, the main application window is inaccessible, and only the icon in the Windows notification area is available. In the context menu of the icon, the user can perform a limited number of operations with Kaspersky Endpoint Security. Kaspersky Endpoint Security also displays only notifications that require user action above the application icon.

- **Full**. On a client computer, the main window of Kaspersky Endpoint Security and the icon in the Windows notification area are available. In the context menu of the icon, the user can perform operations with Kaspersky Endpoint Security. Kaspersky Endpoint Security also displays notifications above the application icon.

- **Do not display user interface**. On a client computer, no signs of Kaspersky Endpoint Security operation are displayed. The icon in the Windows notification area and notifications are not available.

How to configure the application interface display mode in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **General settings** → **Interface**.

4. In the **Interaction with user** block, configure how the application interface will be displayed:

   - **Display user interface**. On a client computer, the main window of Kaspersky Endpoint Security and the icon in the Windows notification area are available. In the context menu of the icon, the user can perform operations with Kaspersky Endpoint Security. Kaspersky Endpoint Security also displays notifications above the application icon. If necessary, you can enable the **Hide Application Activity Monitor section** functionality to hide data about application activity on the computer, thereby restricting user access to the Application Activity Monitor tool.

   - **Display simplified interface**. On a client computer, the main application window is inaccessible, and only the icon in the Windows notification area is available. In the context menu of the icon, the user can perform a limited number of operations with Kaspersky Endpoint Security. Kaspersky Endpoint Security also displays only notifications that require user action above the application icon.

   - **Do not display user interface**. On a client computer, no signs of Kaspersky Endpoint Security operation are displayed. The icon in the Windows notification area and notifications are not available.

5. Save your changes.

How to configure the application interface display mode in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **User Interaction**.
5. In the **Visibility for users** block, configure how the application interface will be displayed:
   - **Display user interface**. If this functionality is disabled, no signs of Kaspersky Endpoint Security operation are displayed on a client computer. The icon in the Windows notification area and notifications are not available.
   - **Simplified**. On a client computer, the main application window is inaccessible, and only the icon in the Windows notification area is available. In the context menu of the icon, the user can perform a limited number of operations with Kaspersky Endpoint Security. Kaspersky Endpoint Security also displays only notifications that require user action above the application icon.
   - **Full**. On a client computer, the main window of Kaspersky Endpoint Security and the icon in the Windows notification area are available. In the context menu of the icon, the user can perform operations with Kaspersky Endpoint Security. Kaspersky Endpoint Security also displays notifications above the application icon.
   - **Hide Application Activity Monitor section**. If you want to hide application activity information on a user's computer, you can restrict user access to the Application Activity Monitor tool.
6. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

Preparing the application for use

After deploying the application on client computers, to work with Kaspersky Endpoint Security from Kaspersky Security Center Web Console you need to perform the following actions:

- Create and configure a policy.

  You can use policies to apply identical Kaspersky Endpoint Security settings to all client computers within an administration group. The Quick Start Wizard of Kaspersky Security Center automatically creates a policy for Kaspersky Endpoint Security.
- Create the *Update of databases and application modules* and *Malware Scan* tasks.

  The *Update of databases and application modules* task is required for keeping computer security up to date. When the task is performed, Kaspersky Endpoint Security updates the anti-virus databases and application modules. The *Update of databases and application modules* task is created automatically by the Administration Server quick start wizard. To create the *Update of databases and application modules* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

  The *Malware Scan* task is required for the timely detection of viruses and other malware. You need to manually create the *Malware Scan* task.

How to create a Malware Scan task in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Malware Scan**.

Step 2. Scan scope

Create the list of objects that Kaspersky Endpoint Security will scan while performing a scan task.

Step 3. Kaspersky Endpoint Security action

Choose the action on threat detection:

- **Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file.

- **Disinfect, inform if disinfection fails**. If this option is selected, Kaspersky Endpoint Security automatically attempts to disinfect all infected files that are detected. If disinfection fails, Kaspersky Endpoint Security adds the information about the infected files that are detected to the list of active threats.

- **Inform**. If this option is selected, Kaspersky Endpoint Security adds the information about infected files to the list of active threats on detection of these files.

- **Run Advanced Disinfection immediately**. If the check box is selected, Kaspersky Endpoint Security uses the Advanced Disinfection technology to treat active threats during the scan.

  Advanced disinfection technology is aimed at purging the operating system of malicious applications that have already started their processes in RAM and that prevent Kaspersky Endpoint Security from removing them by using other methods. The threat is neutralized as a result. While Advanced Disinfection is in progress, you are advised to refrain from starting new processes or editing the operating system registry. The advanced disinfection technology uses considerable operating system resources, which may slow down other applications. After the advanced disinfection is complete, Kaspersky Endpoint Security will restart the computer without asking the user for confirmation.

- **Run only when the computer is idle**. Postponed start of the task when computer resources are busy. Kaspersky Endpoint Security starts the scan task if the computer is locked or if the screen saver is on. If you have interrupted the execution of the task, for example by unlocking the computer, Kaspersky Endpoint Security automatically runs the task, continuing from the point where it was interrupted. This schedule option lets you conserve computer resources when the computer is being used.

Step 4. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 5. Selecting the account to run the task

Select an account to run the *Malware Scan* task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account. If the scan scope includes network drives or other objects with restricted access, select a user account with the sufficient access rights.

Step 6. Configuring a task start schedule

Configure a schedule for starting a task, for example, manually or after anti-virus databases are downloaded to the repository.

Step 7. Defining the task name

Enter a name for the task, for example, *Daily full scan*.

Step 8. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties. As a result, the Malware Scan task will be executed on the user computers in accordance to the specified schedule.

How to create a Malware Scan task in the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Malware Scan**.

   c. In the **Task name** field, enter a brief description, for example, *Weekly scan*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Select an account to run the task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.

6. Finish the wizard.

   A new task will be displayed in the list of tasks.

7. To configure the task schedule, go to the task properties.

   It is recommended to schedule the task to run at least once a week.

8. Select the check box next to the task.

9. Click **Start**.

   You can monitor the status of the task, and the number of devices on which the task was completed successfully or completed with an error.

As a result, the Malware Scan task will be executed on the user computers in accordance to the specified schedule.

- Optimize Kaspersky Endpoint Security performance.

Managing policies

A *policy* is a collection of application settings that are defined for an administration group. You can configure multiple policies with different values for one application. An application can run under different settings for different administration groups. Each administration group can have its own policy for an application.

Each policy setting has the ("padlock") attribute. The status of this attribute determines whether the setting will be passed to the managed devices in the administration group:

- If the "padlock" is open ( ), the value of this setting will not be passed to the managed devices. The setting will be available for modification in the local interface of the application. Such settings are referred to as *unlocked*.

- If the "padlock" is closed ( ), the value of this setting will be passed and applied to the managed devices. Such settings are referred to as *locked*. Blocked settings are not available for modification in the local interface of the application.

Policy settings are sent to client computers by Network Agent during *synchronization*. By default, the Administration Server performs synchronization immediately after policy settings are changed. UDP port 15000 on the client computer is used for synchronization. The Administration Server performs synchronization every 15 minutes by default. If synchronization fails after policy settings were changed, the next synchronization attempt will be performed according to the configured schedule.

Settings inheritance

Policies, like administration groups, are arranged in a hierarchy. *Child policy* is a policy for nested hierarchy levels, that is a policy for nested administration groups and secondary Administration Servers.

By default, a child policy inherits settings from the parent policy. If the setting in the parent policy has the (closed "padlock") attribute, then in child policies and local application settings, the value of that setting will be overridden in accordance with the parent policy, and the setting will be locked. If necessary, you can disable the inheritance of settings from the parent policy. Out-of-office policies do not affect other policies through the hierarchy of administration groups.

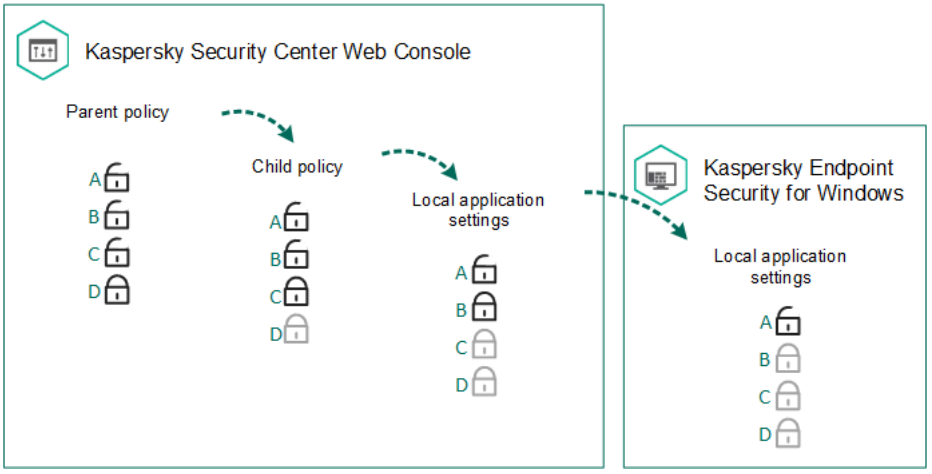

Settings inheritance

The rights to access policy settings (read, write, execute) are specified for each user who has access to the Kaspersky Security Center Administration Server and separately for each functional scope of Kaspersky Endpoint Security. To configure access rights to policy settings, go to the **Security** section of the properties window of Kaspersky Security Center Administration Server (by default, this section is hidden in the console interface).

Policy revisions

Kaspersky Security Center tracks policy modifications and creates revisions. A *revision* is a set of modified parameters saved by the user. Revisions allow you to compare and revert changes to policy parameters. In addition to the set of modified parameters, the revision includes information about the user who made the changes, as well as the time, IP address, user comment, and other relevant data.

To view the revision log, open policy properties and go to the **Revision history** section. For more details about working with revisions, refer to the Kaspersky Security Center Help.

Creating a policy

When creating a policy, the wizard suggests settings that are relevant for the selected mode. For example, for Light Agent mode, you must add a Protection Server (SVM). When using the application to protect an SQL server, you must add predefined scan exclusions to make sure the operation of the server is not interfered with. The wizard suggests relevant policy settings after selecting a mode. You can then edit these settings in policy properties.

How to create a policy in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the **Managed devices** folder in the Administration Console tree, select the folder with the name of the administration group to which the relevant client computers belong.
3. In the workspace, select the **Policies** tab.
4. Click **New policy**.

   The Policy Wizard starts.
5. Follow the instructions of the Policy Wizard.

Step 1. Selecting the application to create group policy

Select the **Kaspersky Endpoint Security for Windows (14.2)** application.

Step 2. Naming the group policy

Enter a name for the group policy, for example, *Policy for the office*.

You can also create new policies based on the existing policies using the Policy Wizard. To do so, when specifying the group policy name, select the **Use policy settings for an earlier version of the application** check box. The wizard also allows creating a Kaspersky Endpoint Security (KES) policy based on a policy of a different solution, for example, Kaspersky Security for Windows Server (KSWS) or Kaspersky Security for Virtualization Light Agent for Windows

Step 3. Participating in Kaspersky Security Network

Please read and accept the terms of the Kaspersky Security Network (KSN) Statement.

Step 4. Selecting the application usage mode on computers

Depending on the intended use of Kaspersky Endpoint Security, you can configure a policy for the following application modes:

- Standard mode to protect hosts

In this mode, you can select how you want to configure the policy:

- **Create a policy with default settings**. Default settings are considered optimal. This settings are recommended by Kaspersky experts. Default settings provide recommended protection level and optimal resource use.

- **Change policy settings in the Wizard**. This method allows managing policy settings step-by-step using a wizard. You can also manage policy settings using a configuration file of the application (see the next step).

- Endpoint Detection and Response Agent to protect against advanced threats and targeted attacks.

  Endpoint Detection and Response Agent is an application that is installed on individual workstations and servers in the IT infrastructure of the organization to support the Detection and Response solutions by Kaspersky. At the next step, you need to select a solution for EDR Agent integration.

- Light Agent to protect virtual environments.

  To use the application in Light Agent mode, you need to configure a connection with an SVM virtual machine. These settings are required for the application to work in Light Agent mode.

Kaspersky Endpoint Security provides a common policy for all application modes and OS types. This means that the policy covers the whole set of settings. However, the application may ignore some of the policy settings because Kaspersky Endpoint Security is deployed in a mode in which some functionality is not available. For example, when using the application in Endpoint Detection and Response Agent mode, only settings that are relevant to the integration with Kaspersky Detection and Response solutions and to integration with KUMA are available.

We recommend using different policies for different modes and operating system types.

Step 5. Importing settings

This step is available if you select manual policy configuration at step 4.

You can create a policy based on Kaspersky Endpoint Security settings from a CFG configuration file. The New policy wizard does not support encrypted configuration files. When exporting the configuration file, skip the file encryption step.

When importing an application CFG configuration file, not all policy settings are available to the wizard. For example, policy profiles are missing from application settings. If you want to transfer all settings and profiles to the policy, you can import another policy from a KLP file.

When importing a configuration file, Kaspersky Endpoint Security does not transfer crypto-container passwords. If you use two-way authentication when connecting to servers, you need to specify crypto-container passwords from scratch.

Step 6 - 10. Configuring policy settings

This step is available if you select manual policy configuration at step 4.

Follow the steps to manage policy settings.

Step 11. Configuring the trusted zone

Configure the trusted zone. You can add predefined scan exclusions and trusted applications. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers. Predefined scan exclusions and trusted applications can also help you quickly configure Kaspersky Endpoint Security in Light Agent mode in Citrix and VMware virtual environments.

Step 12. Selecting the policy status

- **Active**. After the next synchronization, the policy will be used as the active policy on the computer.

  The settings of an active policy are saved on client computers during synchronization. You cannot simultaneously apply multiple policies to one computer, therefore only one policy may be active in each group.

- **Inactive**. Backup policy. If necessary, an inactive policy can be switched to active status.

  You can create an unlimited number of inactive policies. An inactive policy does not affect application settings on computers in the network. Inactive policies are intended as preparations for emergency situations, such as a virus attack. If there is an attack via flash drives, you can activate a policy that blocks access to flash drives. In this case, the active policy automatically becomes inactive.

- **Out-of-office**. The policy is activated when a computer leaves the organization network perimeter.

Finish the wizard.

How to create a policy in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click **Add**.

   The Policy Wizard starts.

3. Select Kaspersky Endpoint Security and click **Next**.

4. Please read and accept the terms of the Kaspersky Security Network (KSN) Statement and click **Next**.

5. Select the mode of the application:

   - Standard mode to protect workstations and servers

   - Endpoint Detection and Response Agent to protect against advanced threats and targeted attacks.

     If you select this mode, you can create a policy to integrate the computer with Kaspersky Detection and Response solutions. The wizard prompts you to configure the integration for Kaspersky Managed Detection and Response and then Kaspersky Anti Targeted Attack Platform (EDR).

   - Light Agent to protect virtual environments.

     If you select this mode, at the next step, you must configure the connection to the Protection Server (SVM). These settings are required for the application to work in Light Agent mode.

   Kaspersky Endpoint Security provides a common policy for all application modes and OS types. This means that the policy covers the whole set of settings. However, the application may ignore some of the policy settings because Kaspersky Endpoint Security is deployed in a mode in which some functionality is not available. For example, when using the application in Endpoint Detection and Response Agent mode, only settings that are relevant to the integration with Kaspersky Detection and Response solutions and to integration with KUMA are available.

   We recommend using different policies for different modes and operating system types.

6. Configure the trusted zone. You can add predefined scan exclusions and trusted applications. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers. Predefined scan exclusions and trusted applications can also help you quickly configure Kaspersky Endpoint Security in Light Agent mode in Citrix and VMware virtual environments.

7. On the **General** tab, you can perform the following actions:

   - Change the policy name.

   - Select the policy status:

     - **Active**. After the next synchronization, the policy will be used as the active policy on the computer.

       The settings of an active policy are saved on client computers during synchronization. You cannot simultaneously apply multiple policies to one computer, therefore only one policy may be active in each group.

     - **Inactive**. Backup policy. If necessary, an inactive policy can be switched to active status.

       You can create an unlimited number of inactive policies. An inactive policy does not affect application settings on computers in the network. Inactive policies are intended as preparations for emergency situations, such as a virus attack. If there is an attack via flash drives, you can activate a policy that blocks access to flash drives. In this case, the active policy automatically becomes inactive.

     - **Out-of-office**. The policy is activated when a computer leaves the organization network perimeter.

- Configure the inheritance of settings:

  - **Inherit settings from parent policy**. If this toggle button is switched on, the policy setting values are inherited from the top-level policy. Policy settings cannot be edited if 🔒 is set for the parent policy.

  - **Force inheritance of settings in child policies**. If the toggle button is on, the values of the policy settings are propagated to the child policies. In the properties of the child policy, the **Inherit settings from parent policy** toggle button will be automatically switched on and cannot be switched off. Child policy settings are inherited from the parent policy, except for the settings marked with 🔓. Child policy settings cannot be edited if 🔒 is set for the parent policy.

8. On the **Application settings** tab, you can configure the Kaspersky Endpoint Security policy settings.

9. Finish the wizard.

As a result, Kaspersky Endpoint Security settings will be configured on client computers during the next synchronization. You can view information about the policy that is being applied to the computer in the Kaspersky Endpoint Security interface by clicking the button on the main screen (for example, the policy name). To do so, in the settings of the Network Agent policy, you need to enable the receipt of extended policy data. For more details about a Network Agent policy, please refer to the Kaspersky Security Center Help.

Exporting and importing a policy

Kaspersky Endpoint Security allows exporting a policy with its settings and profiles to a KLP file. You can then use the policy export / import functionality to back up policies, migrate policies to another server or, for example, to migrate policies from Kaspersky Security Center Windows to Kaspersky Security Center Linux. For details on managing policies, please refer to the Kaspersky Security Center Help.

How to export and import a policy in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the **Managed devices** folder in the Administration Console tree, open the folder with the name of the administration group to which the relevant client computers belong.

3. In the workspace, select the **Policies** tab.

4. To export a policy:

   a. Click the policy you want to export.

   b. Click the **Export policy to file** link in the right part of the window.

   c. In the window that opens, specify the name of the KLP file to which you want to export the policy, and select the folder to save the file.

   d. Save the file.

5. To import a policy:

   a. Click **Import policy from file**.

   b. In the window that opens, select the KLP policy file that you want to import.

   c. Open the file.

   This adds a new policy with the *Inactive policy* status.

How to export and import the policy in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. To export a policy:

   a. Select the check box next to the policy that you want to export.

   b. Click the **Export** button.

   c. In the window that opens, specify the name of the KLP file to which you want to export the policy, and select the folder to save the file.

   d. Save the file.

3. To import a policy:

   a. Click **Import**.

   b. Select the KLP policy file that you want to import.

   c. After the policy is successfully processed, select the administration group to which you want to apply the policy.

   d. Click the **Complete** button to finish importing the policy.

   This adds a new policy with the *Inactive* status.

Security level indicator

The security level indicator is displayed at the top of the policy properties window. The indicator can take one of the following values:

- **High protection level**. The indicator takes this value and turns green if all components from the following categories are enabled:

  - **Critical**. This category includes the following components:

    - File Threat Protection.

    - Behavior Detection.

    - Exploit Prevention.

- Remediation Engine.
- Protection of application services against external management.

- **Important**. This category includes the following components:
  - Kaspersky Security Network.
  - Web Threat Protection.
  - Mail Threat Protection.
  - Host Intrusion Prevention.
  - Password protection.

- **Medium protection level**. The indicator takes this value and turns yellow if one of the important components is disabled.
- **Low protection level**. The indicator takes this value and turns red in one of the following cases:
  - One or multiple critical components are disabled.
  - Two ore more important components are disabled.

If the indicator has the **Medium protection level** or **Low protection level** value, a link that opens the **Recommended protection components** window appears to the right of the indicator. In this window, you can enable any of the recommended protection components.

After upgrading the application, the protection level indicator may indicate a lower protection level than before the upgrade. This happens because the newer version of the application introduces new components or features that are important for the security of the computer. After upgrading the application, you need to manage the new settings to make sure the protection level remains high.

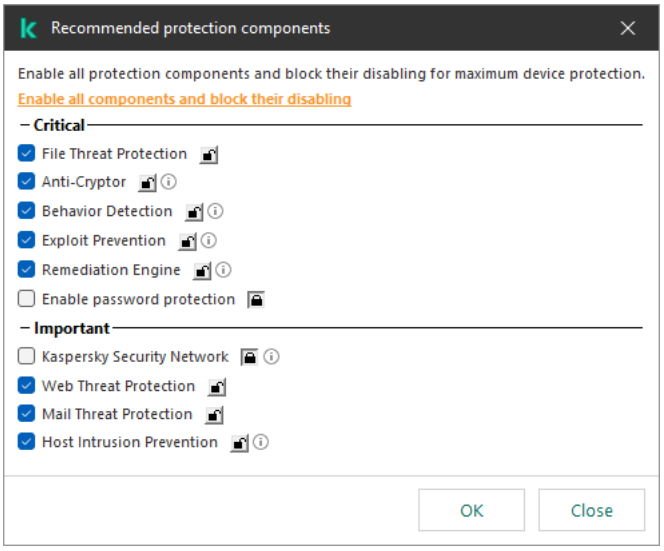

Security level indicator of the policy

Task management

You can create the following types of tasks to administer Kaspersky Endpoint Security through Kaspersky Security Center:

- Local tasks that are configured for an individual client computer.
- Group tasks that are configured for client computers within administration groups.
- Tasks for a selection of computers.

You can create any number of group tasks, tasks for a selection of computers, or local tasks. For more details about working with administration groups and selections of computers, please refer to Kaspersky Security Center Help.

Kaspersky Endpoint Security supports the following tasks:

- **Malware Scan**. Kaspersky Endpoint Security scans the computer areas specified in the task settings for viruses and other threats. The *Malware Scan* task is required for the operation of Kaspersky Endpoint Security and is created during the Quick Start Wizard. It is recommended to schedule the task to run at least once a week.
- **Add key**. Kaspersky Endpoint Security adds a key for activating applications, including an additional key. Before running the task, make sure that the number of computers, on which the task is to be executed, does not exceed the number of computers allowed by the license.
- **Change application components**. Kaspersky Endpoint Security installs or removes components on client computers according to the list of components specified in the task settings. The File Threat Protection component cannot be removed. The optimal set of Kaspersky Endpoint Security components helps to conserve computer resources.
- **Inventory**. Kaspersky Endpoint Security receives information about all application executable files that are stored on computers. The *Inventory* task is performed by the Application Control component. If the Application Control component is not installed, the task will end with an error.
- **Update of databases and application modules**. Kaspersky Endpoint Security updates databases and application modules. The *Update of databases and application modules* task is required for the operation of Kaspersky Endpoint Security and is created during the Quick Start Wizard. It is recommended to configure a schedule that runs the task at least once per day.
- **Wipe data**. Kaspersky Endpoint Security deletes files and folders from users' computers immediately or if there is no connection with Kaspersky Security Center for a long time.
- **Update rollback**. Kaspersky Endpoint Security rolls back the last update of databases and application modules. This may be necessary if, for example, new databases contain incorrect data that could cause Kaspersky Endpoint Security to block a safe application.
- **Application Integrity Check**. Kaspersky Endpoint Security analyzes application files, checks files for corruption or modifications, and verifies the digital signatures of application files.
- **Manage Authentication Agent accounts**. Kaspersky Endpoint Security configures the Authentication Agent account settings. An Authentication Agent is needed for working with encrypted drives. Before the operating system is loaded, the user needs to complete authentication with the Agent.

If the application is working as part of the Endpoint Detection and Response solution by Kaspersky, you can run additional tasks as detection response actions (responses). For example, you can remotely terminate processes using the *Terminate process* task.

Tasks are run on a computer only if Kaspersky Endpoint Security is running.

Creating a task

How to create a task in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. Select the **Tasks** folder in the Administration Console tree.
3. Click **New task**.
   The Task Wizard starts.
4. Follow the instructions of the Task Wizard.

How to create a task in the Web Console

1. In the main window of the Web Console, select **Tasks**.
   The list of tasks opens.
2. Click **Add**.
   The Task Wizard starts.
3. Configure the task settings:
   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.
   b. In the **Task type** drop-down list, select the task that you want to run on user computers.
   c. In the **Task name** field, enter a brief description.
   d. In the **Devices to which the task will be assigned** block, select the task scope.
4. Select devices according to the selected task scope option. Go to the next step.
5. Select an account to run the task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.
6. Finish the wizard.

A new task will be displayed in the list of tasks. The task will have the default settings. To configure the task settings, you need to go to the task properties. To run a task, you need to select the check box opposite the task and click the **Start** button. After the task has started, you can pause the task and resume it later.

In the list of tasks, you can monitor the task results, which include the task status and the statistics for task performance on computers. You can also create a selection of events to monitor the completion of tasks (**Monitoring** → **Event selections**). For more details on event selection, refer to the Kaspersky Security Center Help. Task execution results are also saved locally in Windows event log and in Kaspersky Endpoint Security reports.

Managing task access

The rights to access Kaspersky Endpoint Security tasks (read, write, execute) are defined for each user who has access to Kaspersky Security Center Administration Server, through the settings of access to functional areas of Kaspersky Endpoint Security. To configure access to the functional areas of Kaspersky Endpoint Security, go to the **Security** section of the properties window of Kaspersky Security Center Administration Server. For more details on task management through Kaspersky Security Center, please refer to the Kaspersky Security Center Help.

You can configure users' rights to access tasks by using a policy (*task management mode*). For example, you can hide group tasks in the Kaspersky Endpoint Security interface.

How to configure the task management mode in the Kaspersky Endpoint Security interface through the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Local Tasks** → **Task management**.
4. Configure the task management mode (see the table below).
5. Save your changes.

How to configure the task management mode in the Kaspersky Endpoint Security interface through the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **User Interaction**.
5. Under **Permitted actions**, configure the task management mode (see the table below).
6. To apply the policy to computers, close the padlock icons and save your changes.

Parameter	Description
Access to local tasks	If the check box is selected, local tasks are displayed in the Kaspersky Endpoint Security local interface. When there are no additional policy restrictions, the user can configure and run tasks. However, configuring task run schedule remains unavailable for the user. The user can run tasks only manually. If this check box is cleared, local tasks are hidden in the application interface. In this mode, local tasks do not run according to schedule. Tasks cannot be started or configured in the local interface of Kaspersky Endpoint Security, or when working with the command line. A user can still start a scan of a file or folder by selecting the **Scan for viruses** option in the context menu of the file or folder. The scan task is started with the default values of settings for the custom scan task.
View group tasks	If the check box is selected, group tasks are displayed in the Kaspersky Endpoint Security local interface. The user can view the list of all tasks in the application interface. If the check box is cleared, Kaspersky Endpoint Security displays an empty task list.
Manage group tasks	If the check box is selected, users can start and stop group tasks specified in the Kaspersky Security Center console. Users can start and stop tasks in the application interface or in the simplified application interface. If the check box is cleared, Kaspersky Endpoint Security starts scheduled tasks automatically, or the administrator starts tasks manually in the Kaspersky Security Center console.

Configuring local application settings

In Kaspersky Security Center, you can configure Kaspersky Endpoint Security settings on a particular computer. They are the *local application settings*. Some settings may be inaccessible for editing. These settings are locked by the 🔒 attribute in the policy properties.

How to configure the local application settings in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the **Managed devices** folder in the Administration Console tree, open the folder with the name of the administration group to which the relevant client computers belong.
3. In the workspace, select the **Devices** tab.
4. Double-click to open the computer properties window.
5. In the computer properties window, select the **Applications** section.
6. In the list of Kaspersky applications installed on the computer, select **Kaspersky Endpoint Security for Windows (14.2)** and double-click to open the application properties.
7. In the **General settings** section, configure Kaspersky Endpoint Security as well as Reports and Storage.

   The rest of the sections in the application properties window are standard for Kaspersky Security Center. A description of these sections is provided in the Kaspersky Security Center Help.

   > If an application is subject to a policy that prohibits changes to specific settings, you will not be able to edit them while configuring application settings in the **General settings** section.

8. Save your changes.

How to configure the local application settings in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Select the computer for which you want to configure local application settings.
   This opens the computer properties.
3. Select the **Applications** tab.
4. Click **Kaspersky Endpoint Security for Windows 14.2**.
   This opens the local application settings.
5. Select the **Application settings** tab.
6. Configure the local application settings.
7. Save your changes.

Local application settings are the same as policy settings, except for encryption settings.

Starting and stopping Kaspersky Endpoint Security

After installing Kaspersky Endpoint Security to a user's computer, the application is started automatically. By default, Kaspersky Endpoint Security is started after operating system startup. It is not possible to configure automatic startup of the application in the operating system settings.

Downloading Kaspersky Endpoint Security anti-virus databases after the operating system starts can take up to two minutes depending on the capabilities of the computer. During this time, the level of computer protection is reduced. The downloading of anti-virus databases when Kaspersky Endpoint Security is started on an already started operating system does not cause a reduction in the level of computer protection.

How to configure the startup of Kaspersky Endpoint Security in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Application settings**.
4. Use the **Start the application on computer startup (recommended)** check box to configure the application startup.
5. Save your changes.

How to configure the startup of Kaspersky Endpoint Security in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **User Interaction**.

5. Use the **Start Kaspersky Endpoint Security on computer startup (recommended)** check box to configure the application startup.

6. Save your changes.

How to configure the startup of Kaspersky Endpoint Security in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Application settings**.

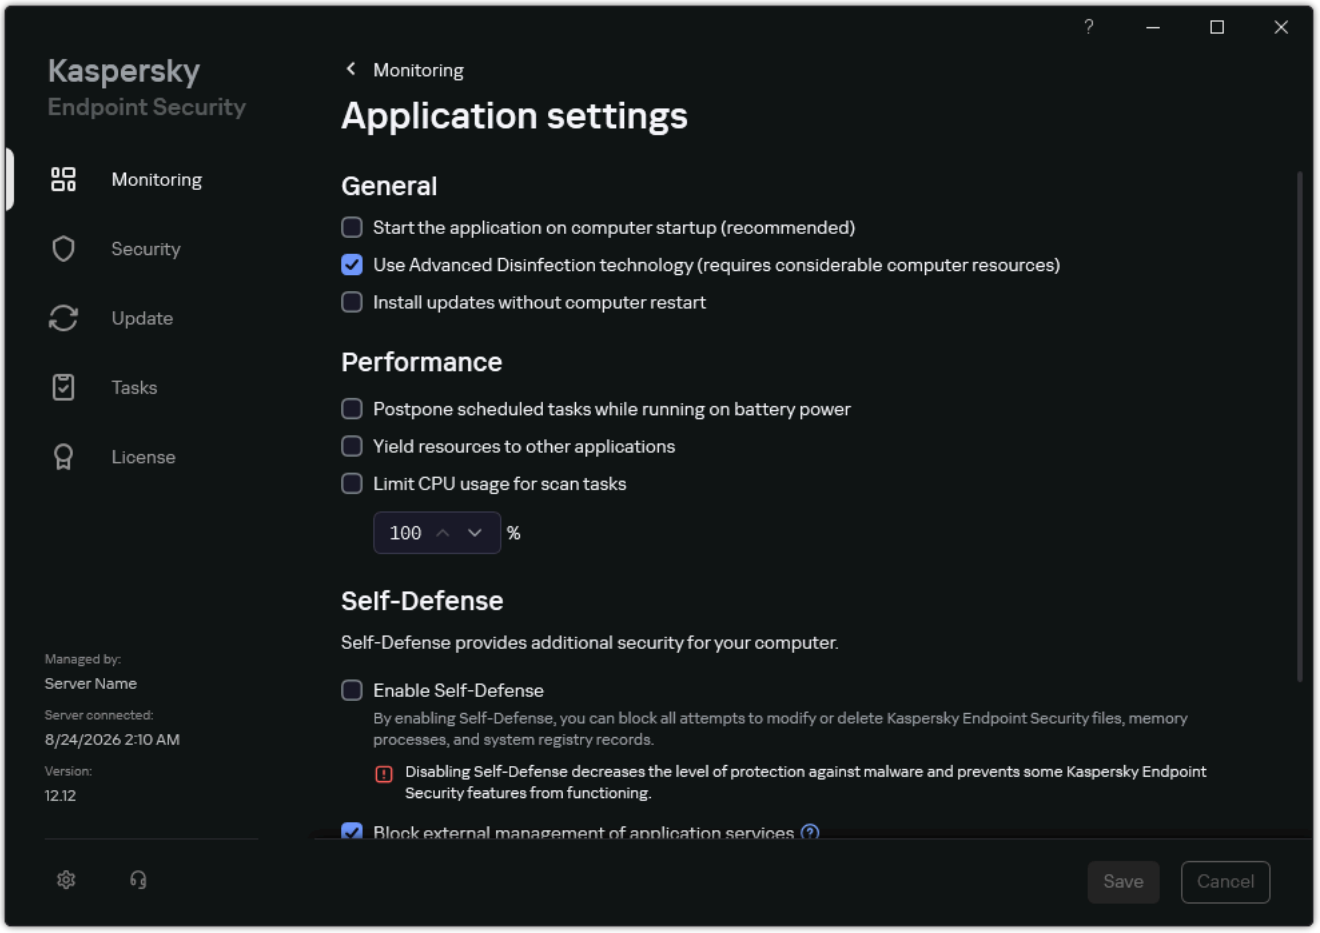

Kaspersky Endpoint Security for Windows settings

3. Use the **Start the application on computer startup (recommended)** check box to configure the application startup.

4. Save your changes.

Kaspersky experts recommend against manually stopping Kaspersky Endpoint Security because doing so exposes the computer and your personal data to threats. If necessary, you can pause computer protection for as long as you need to, without stopping the application.

You can monitor the application status by using the **Protection status** widget.

How to start or stop Kaspersky Endpoint Security in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the **Managed devices** folder in the Administration Console tree, open the folder with the name of the administration group to which the relevant client computers belong.
3. In the workspace, select the **Devices** tab.
4. Double-click to open the computer properties window.
5. In the computer properties window, select the **Applications** section.
6. In the list of Kaspersky applications installed on the computer, select **Kaspersky Endpoint Security for Windows (14.2)** and double-click to open the application properties.
7. Do one of the following:
   - To start the application, click the button to the right of the list of Kaspersky applications.
   - To stop the application, click the button to the right of the list of Kaspersky applications.

How to start or stop Kaspersky Endpoint Security in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Click the name of the computer on which you want to start or stop Kaspersky Endpoint Security.

   The computer properties window opens.
3. Select the **Applications** tab.
4. Select the check box opposite **Kaspersky Endpoint Security for Windows**.
5. Click the **Start** or **Stop** button.

How to start or stop Kaspersky Endpoint Security from the command line

1. Run the command line interpreter (cmd.exe) as an administrator.
2. Go to the folder where executable file klpsm.exe is located.
3. To start the application from the command line, enter `klpsm.exe start_avp_service`.
4. To stop the application from the command line, enter `klpsm.exe stop_avp_service`.

To stop the application from the command line, enable external management of system services.

Starting and stopping the application from the command line

Pausing and resuming computer protection and control

Pausing computer protection and control means disabling all protection and control components of Kaspersky Endpoint Security for some time.

The application status is displayed using the application icon in the taskbar notification area.

- The icon signifies that computer protection and control are paused.
- The icon signifies that computer protection and control are enabled.

Pausing or resuming computer protection and control does not affect scan or update tasks.

If any network connections are already established when you pause or resume computer protection and control, a notification about the termination of these network connections is displayed.

To pause computer protection and control:

1. Right-click to bring up the context menu of the application icon that is in the taskbar notification area.
2. In the context menu, select **Pause protection** (see the figure below).

   This context menu item is available if Password Protection is enabled.

3. Select one of the following options:

   - **Pause for <time period>** – computer protection and control will resume after the amount of time that is specified in the drop-down list below.

   - **Pause until application restart** – computer protection and control will resume after you restart the application or restart the operating system. Automatic startup of the application must be enabled to use this option.

   - **Pause** – computer protection and control will resume when you decide to re-enable them.

4. Click **Pause protection**.

   Kaspersky Endpoint Security will pause the operation of all protection and control components that are not marked by a lock (🔒) in the policy. Prior to performing this operation, it is recommended to disable the Kaspersky Security Center policy.

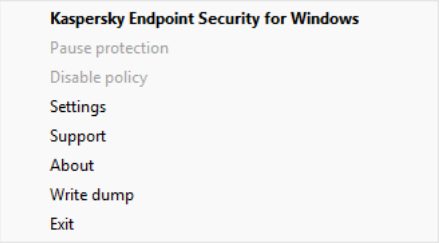

Application icon context menu

To resume computer protection and control:

1. Right-click to bring up the context menu of the application icon that is in the taskbar notification area.

2. In the context menu, select **Resume protection**.

You can resume computer protection and control at any time, regardless of the computer protection and control pause option that you selected previously.

Creating and using a configuration file

A configuration file with Kaspersky Endpoint Security settings lets you accomplish the following tasks:

- Perform local installation of Kaspersky Endpoint Security via the command line with predefined settings.

- Perform remote installation of Kaspersky Endpoint Security via Kaspersky Security Center with predefined settings.

- Transfer application settings to a policy.

- Migrate Kaspersky Endpoint Security settings from one computer to another (see the instructions below).

Exporting a configuration file

Starting with Kaspersky Endpoint Security version 14.2, the exported configuration file can be encrypted. As the configuration file may contain credentials, we recommend encrypting the configuration file. You cannot edit an encrypted file. Any attempts to modify a configuration file will make it corrupt.

Configuration file encryption has the following special features:

- Kaspersky Endpoint Security allows importing encrypted files only in the user interface of the application or on the command line. You cannot use such a file in a Kaspersky Security Center console to configure a policy or remotely install the application. If you intend to add the file to a policy or an installation package, skip the file encryption step.
- Recovering the password of an encrypted file is not possible.
- Kaspersky Endpoint Security versions earlier than 14.1 do not support the import of encrypted configuration files. If you intend to import the file to an earlier version of the application, skip the file encryption step.

To create a configuration file:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Manage settings**.
3. Click **Export**.
4. To save the configuration file, Password protection must be enabled. The user must have the **Export settings** permission.
5. In the window that opens, specify the path to where you want to save the configuration file, and enter its name.

   To use the configuration file for local or remote installation of Kaspersky Endpoint Security, you must name it install.cfg.

6. If necessary, enable the **Encrypt the exported file** toggle switch and enter the encryption password for the configuration file.

   Save the password in a secure store. It is not possible to recover this password.

7. Save the file.

As a result, the application creates a configuration file.

Importing a configuration file

When importing a configuration file, Kaspersky Endpoint Security does not transfer crypto-container passwords. If you use two-way authentication when connecting to servers, you need to specify crypto-container passwords from scratch.

To import Kaspersky Endpoint Security settings from a configuration file:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Manage settings**.
3. Click **Import**.
4. In the window that opens, enter the path to the configuration file.

5. If the configuration file is encrypted, enter the password that you specified when exporting.

> If you have forgotten the encryption password of configuration file, you cannot recover the password. In this case, you need to repeat the steps for exporting the configuration file.

6. Open the file.

All values of Kaspersky Endpoint Security settings will be set according to the selected configuration file.

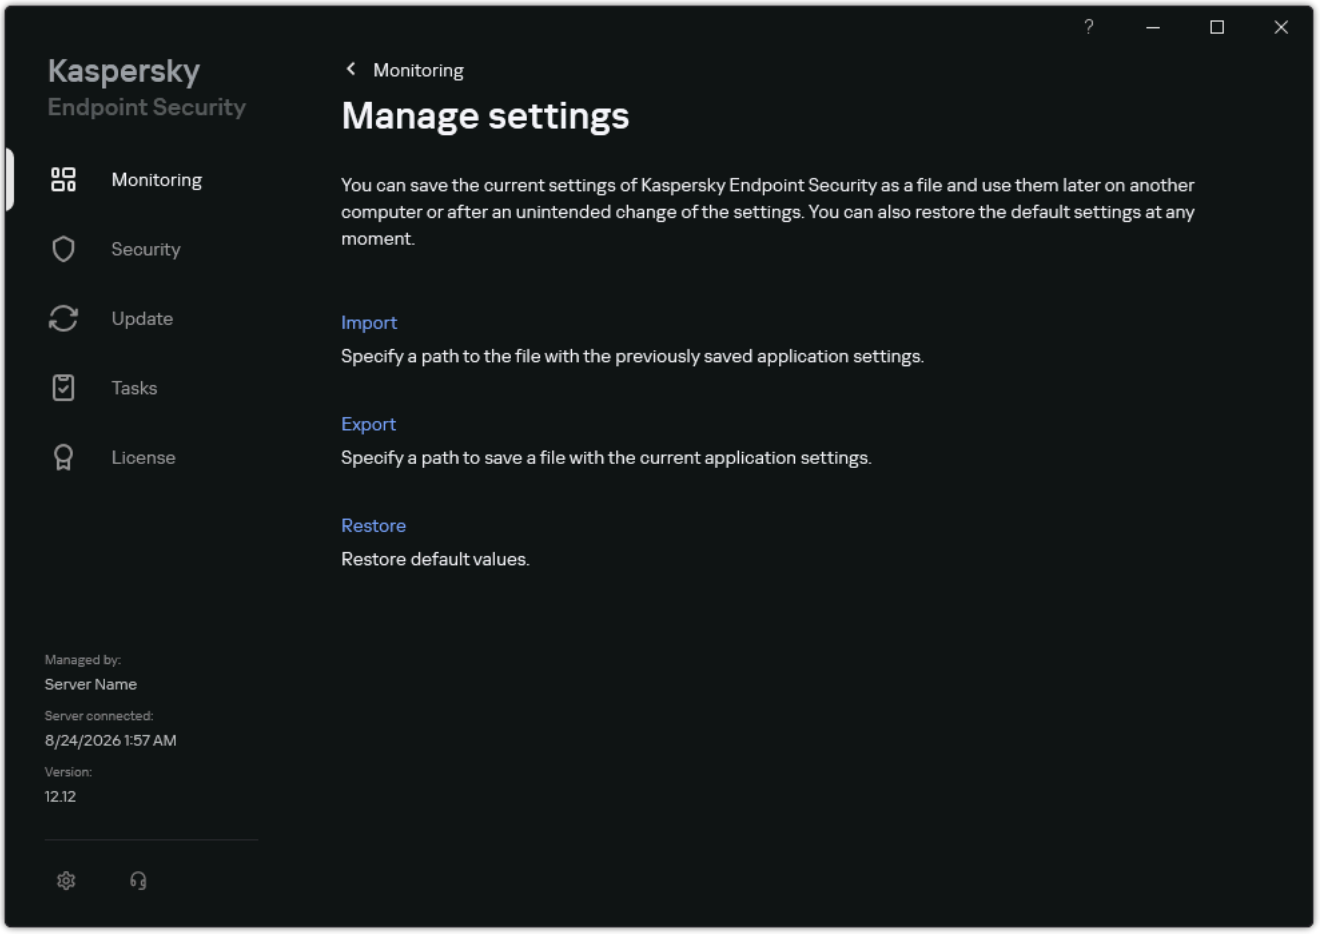

Managing the application settings

Restoring the default application settings

You can restore the application settings recommended by Kaspersky at any time. When the settings are restored, the **Recommended** security level is set for all protection components.

To restore the default application settings:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Manage settings**.

3. Click **Restore**.

4. Save your changes.

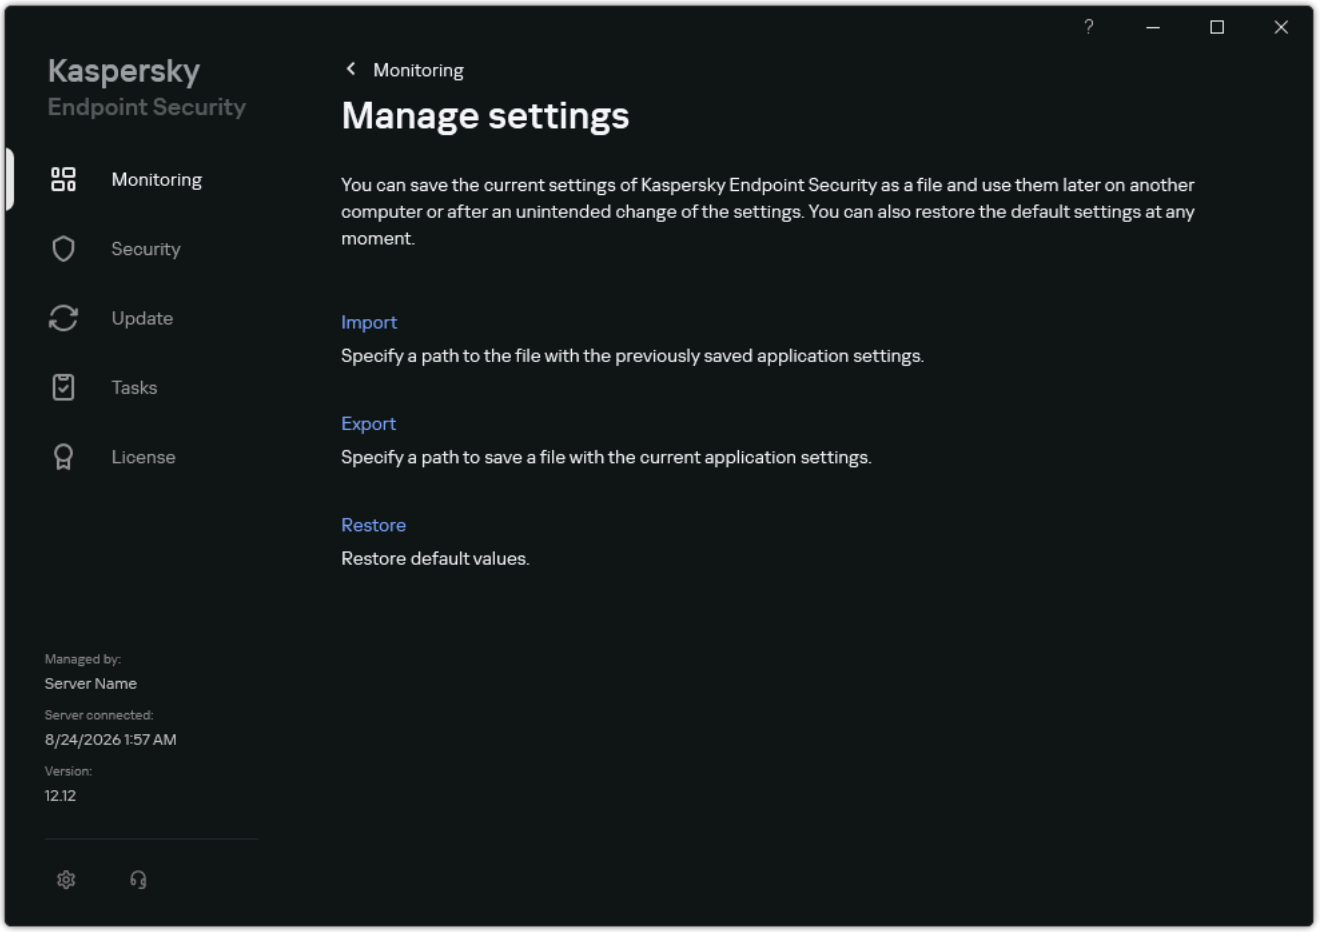

Managing the application settings

Kaspersky Endpoint Security performance and compatibility with other applications

The performance of Kaspersky Endpoint Security refers to the number of types of objects that can harm the computer that are detectable, as well as energy consumption and use of computer resources.

Selecting types of detectable objects

Kaspersky Endpoint Security lets you fine-tune the protection of your computer and select the types of objects that the application detects during operation. Kaspersky Endpoint Security always scans the operating system for viruses, worms, and Trojans. You cannot disable scanning of these types of objects. Such malware can cause significant harm to the computer. For greater security on your computer, you can expand the range of detectable object types by enabling monitoring of legal software that can be used by criminals to damage your computer or personal data.

Using energy-saving mode

Energy consumption by applications is a key consideration for portable computers. Kaspersky Endpoint Security scheduled tasks usually use up considerable resources. When the computer is running on battery power, you can use energy-saving mode to consume power more sparingly.

In energy-saving mode, the following scheduled tasks are postponed automatically:

- Full Scan task;
- Critical Areas Scan task;
- Custom Scan task;
- Integrity Check task.

Whether or not energy saving mode is enabled, Kaspersky Endpoint Security pauses encryption tasks when a portable computer switches to battery power. The application resumes encryption tasks when the portable computer switches from battery power to mains power.

Conceding computer resources to other applications

Consumption of computer resources when scanning a computer may increase the load on the CPU and hard drive subsystems. To resolve the problem of simultaneous operation during increased load on the CPU and hard drive subsystems, Kaspersky Endpoint Security can concede resources to other applications.

Using advanced disinfection technology

Today's malicious applications can penetrate the lowest levels of an operating system, which makes them virtually impossible to eliminate. After detecting malicious activity in the operating system, Kaspersky Endpoint Security performs an extensive disinfection procedure that uses special advanced disinfection technology. *Advanced disinfection technology* is aimed at purging the operating system of malicious applications that have already started their processes in RAM and that prevent Kaspersky Endpoint Security from removing them by using other methods. The threat is neutralized as a result. While Advanced Disinfection is in progress, you are advised to refrain from starting new processes or editing the operating system registry. The advanced disinfection technology uses considerable operating system resources, which may slow down other applications.

After the Advanced Disinfection process has been completed on a computer running Microsoft Windows for workstations, Kaspersky Endpoint Security requests the user's permission to reboot the computer. After system reboot, Kaspersky Endpoint Security deletes malware files and starts a "lite" full scan of the computer.

A reboot prompt is impossible on a computer running Microsoft Windows for servers due to the specifics of Kaspersky Endpoint Security. An unplanned reboot of a file server can lead to problems involving temporary unavailability of file server data or loss of unsaved data. It is recommended to reboot a file server strictly according to schedule. This is why Advanced Disinfection technology is disabled by default for file servers.

If active infection is detected on a file server, an event is relayed to Kaspersky Security Center with information that Advanced Disinfection is required. To disinfect an active infection of a server, enable Advanced Disinfection technology for servers and start a *Malware Scan* group task at a time convenient for server users.

Enabling or disabling energy-saving mode

Power-saving mode is a functionality that reduces the load on the resources of the laptop and extends the battery life without significantly compromising the security level. In power-saving mode, the application limits the launch of scheduled tasks. In this way, power-saving mode ensures a balance between the security level and the battery life of the laptop.

When power-saving mode is enabled and a computer is running on battery power, the following tasks are not run, even if scheduled:

- *Full Scan*.
- *Critical Areas Scan*.
- *Custom Scan*.
- *Application Integrity Check*.
- *IOC Scan*.
- *Update of databases and application modules* (patches only)

> The application skips scheduled database updates only when the laptop is running on battery power and the battery level is below 30% (default value). You can change the minimum battery charge level at which the application starts skipping scheduled anti-virus database updates by editing the registry (see instructions below). In all other cases, Kaspersky Endpoint Security updates databases according to schedule, regardless of whether the laptop is plugged in or running on battery power, or whether the application is in power-saving mode.

How to enable or disable power-saving mode in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Application settings**.
5. In the **Performance** block, use the **Postpone scheduled tasks while running on battery power** check box to enable or disable power saving mode.
6. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable power-saving mode in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Performance**.
5. In the **Postpone or skip scheduled tasks while running on battery power** block, use the **Postpone or skip scheduled tasks while running on battery power (depends on OS)** check box to enable or disable power saving mode.
6. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable power-saving mode in the application interface

1. In the main application window, click the button.
2. In the application settings window, select **General settings** → **Application settings**.

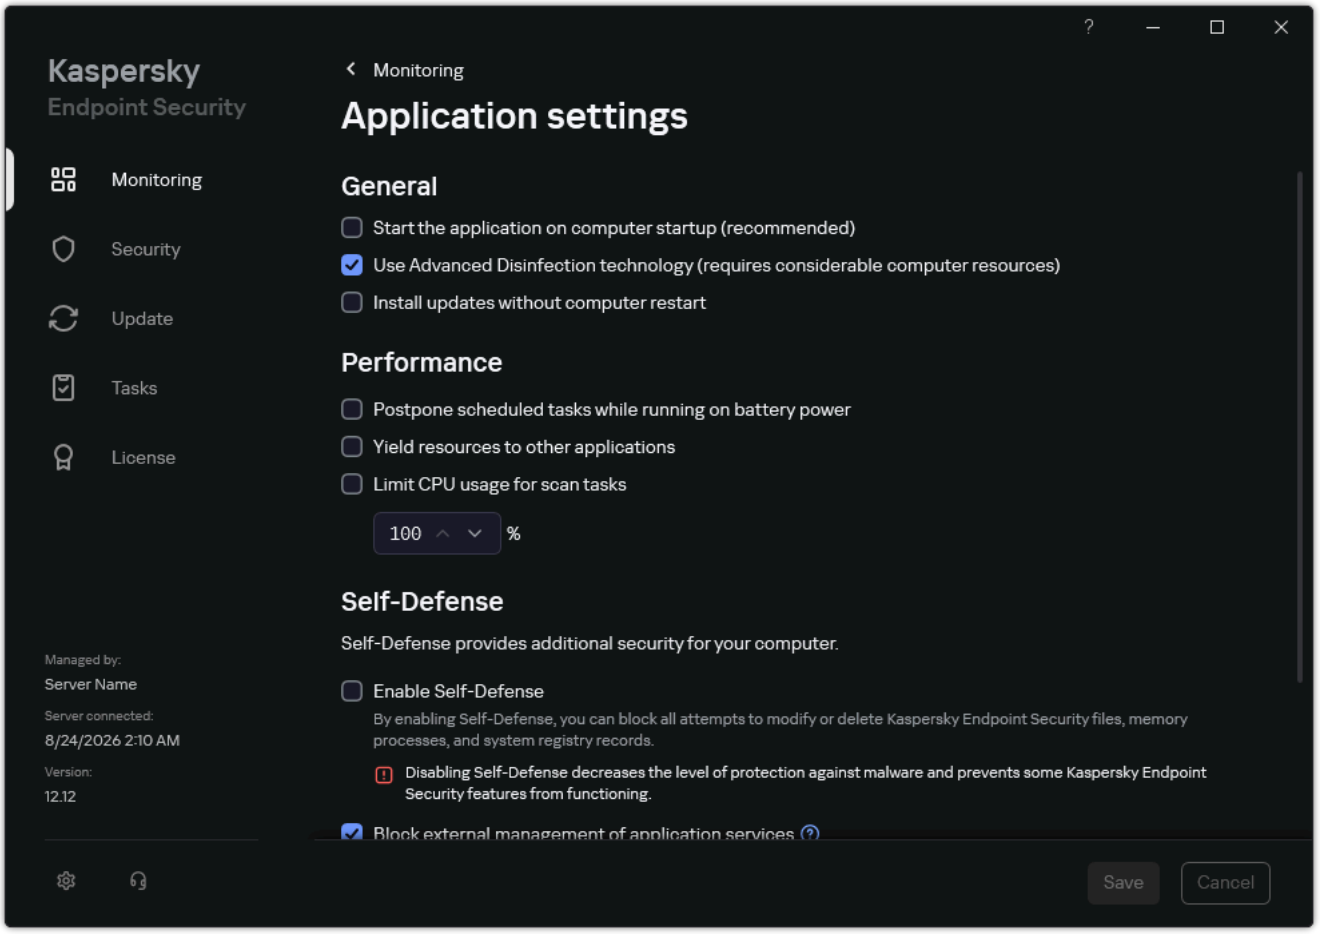

Kaspersky Endpoint Security for Windows settings

3. In the **Performance** block, use the **Postpone scheduled tasks while running on battery power** check box to enable or disable power saving mode.
4. Save your changes.

How to change the minimum charge level at which the application starts skipping scheduled anti-virus database updates

1. Open the registry editor on the computer.
2. In the registry editor, go to the following section:
   - For 64-bit operating systems:
     `[HKEY_LOCAL_MACHINE\SOFTWARE\WOW6432Node\KasperskyLab\protected\KES.14.2\environment`
   - For 32-bit operating systems:
     `[HKEY_LOCAL_MACHINE\SOFTWARE\KasperskyLab\protected\KES.14.2\environment]`
3. Open `UpdaterAccumulatorThreshold` for editing.
4. Specify the minimum charge level at which the application starts skipping scheduled anti-virus database updates.

Enabling or disabling conceding of resources to other applications

Consumption of computer resources by Kaspersky Endpoint Security when scanning a computer may increase the load on the CPU and hard drive subsystems. This may slow down other applications. To optimize the performance, Kaspersky Endpoint Security provides a *mode for transferring resources to other applications*. In this mode, the operating system can decrease the priority of Kaspersky Endpoint Security scan task threads when the CPU load is high. This allows redistributing operating system resources to other applications. Thus, scan tasks will receive less CPU time. As a result, Kaspersky Endpoint Security will take longer to scan the computer. By default, the application is configured to yield resources to other applications.

How to enable or disable conceding resources to other applications in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Application settings**.
4. In the **Performance** block, use the **Yield resources to other applications** check box to enable or disable conceding of resources to other applications.
5. Save your changes.

How to enable or disable conceding resources to other applications in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Performance**.

5. In the **Yield resources to other applications** block, use the **Yield resources to other applications** toggle switch to enable or disable conceding of resources to other applications.

6. Save your changes.

How to enable or disable conceding resources to other applications in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Application settings**.

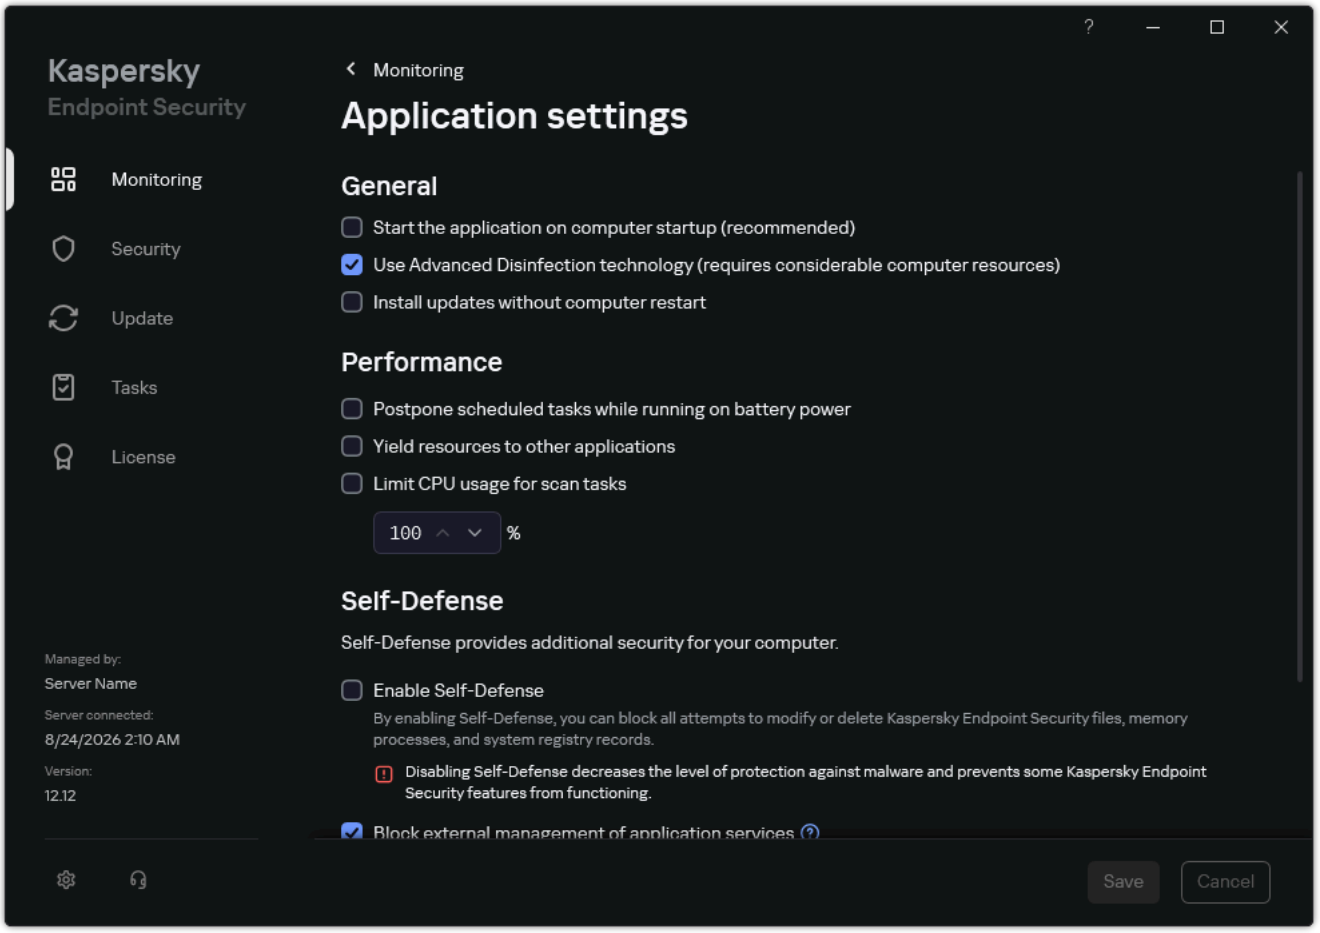

Kaspersky Endpoint Security for Windows settings

3. In the **Performance** block, use the **Yield resources to other applications** check box to enable or disable conceding of resources to other applications.

4. Save your changes.

Best practices for optimizing Kaspersky Endpoint Security performance

When deploying Kaspersky Endpoint Security for Windows, you can use the following recommendations to configure computer protection and optimize performance. For more information on dealing with computer performance issues, please refer to the Technical Support Knowledge Base.

General

Configure general settings of the application in accordance with the following recommendations:

1. Upgrade Kaspersky Endpoint Security to the latest version.

   Newer versions of the application have errors fixed, stability improved, and performance optimized.

2. Enable protection components with default settings.

   Default settings are considered optimal. This settings are recommended by Kaspersky experts. Default settings provide recommended protection level and optimal resource use. If necessary, you can restore the default application settings.

3. Enable application performance optimization features.

   The application has performance optimization features: energy conservation mode and conceding of resources to other applications. Make sure these options are enabled.

Malware Scan on workstations

Enabling Background scan is recommended for Malware Scan of workstations. *Background Scan* is a scan mode of Kaspersky Endpoint Security that does not display notifications for the user. Background Scan requires fewer computer resources than other types of scans (such as a full scan). In this mode, Kaspersky Endpoint Security scans startup objects, the boot sector, system memory, and the system partition. Background scan settings are considered optimal. This settings are recommended by Kaspersky experts. Thus for performing a Malware Scan of the computer, you can use just the background scan mode without using other scan tasks.

If background scanning does not suit your needs, configure the *Malware Scan* task in accordance with the following recommendations:

1. Set a limit on CPU resource consumption while scanning the computer.

   You can limit CPU usage when running the *Malware Scan* task. To do so, in application settings, specify the maximum CPU load percentage for all cores that can be utilized while scanning the computer. This may increase the time it takes to scan your computer.

2. Configure the optimal computer scan schedule.

   You can configure the task to run when the computer is operating under minimum load. For example, you can configure the task to run at night or on weekends.

   If users turn off the computer outside of business hours, you can enable the Wake-on-LAN function. The Wake-on-LAN feature allows remotely powering on the computer by sending a special signal over the local network. To use this feature, you must enable Wake-on-LAN in BIOS settings. You can also have the computer automatically turned off after the scan finishes.

   If you could not configure an optimal scan schedule, set tasks to run only when the computer is idle. Kaspersky Endpoint Security starts the scan task if the computer is locked or if the screen saver is on. If you have interrupted the execution of the task, for example by unlocking the computer, Kaspersky Endpoint Security automatically runs the task, continuing from the point where it was interrupted.

3. Define a scan scope.

Select the following objects for scanning (minimum set of scan scopes):

- Kernel memory
- Running processes and Startup Objects
- Boot sectors
- %systemroot% (not including subfolders)
- %systemroot%\System (not including subfolders)
- %systemroot%\System32 (not including subfolders)
- %systemroot%\System32\drivers (not including subfolders)
- %systemroot%\SysWOW64 (not including subfolders)
- %systemroot%\SysWOW64\drivers (not including subfolders)

4. Turn on iSwift and iChecker technologies.

   - iSwift technology.

     This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.

   - iChecker technology.

     This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).

   > You can only turn on iSwift and iChecker technologies in the Administration Console (MMC) and Kaspersky Endpoint Security interface. You cannot turn on these technologies in Kaspersky Security Center Web Console.

5. Disable the scanning of password-protected archives.

   If the scanning of password-protected archives is enabled, a password prompt is displayed before the archive is scanned. Because the task is recommended to be scheduled during out-of-office hours, the user cannot enter the password. You can scan password-protected archives manually.

6. Disable simultaneous launch of several scan tasks.

   Kaspersky Endpoint Security will enqueue new scan tasks if the current scan continues. This helps optimize the load on the computer.

Malware Scan on the servers

Configure the *Malware Scan* task in accordance with the following recommendations:

1. Set a limit on CPU resource consumption while scanning the computer.

   You can limit CPU usage when running the *Malware Scan* task. To do so, in application settings, specify the maximum CPU load percentage for all cores that can be utilized while scanning the computer. This may increase the time it takes to scan your computer.

2. Configure the optimal computer scan schedule.

   You can configure the task to run when the computer is operating under minimum load. For example, you can configure the task to run at night or on weekends.

3. Turn on iSwift and iChecker technologies.

   - iSwift technology.

     This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.

   - iChecker technology.

     This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).

   > You can only turn on iSwift and iChecker technologies in the Administration Console (MMC) and Kaspersky Endpoint Security interface. You cannot turn on these technologies in Kaspersky Security Center Web Console.

4. Disable the scanning of password-protected archives.

   If the scanning of password-protected archives is enabled, a password prompt is displayed before the archive is scanned. Because the task is recommended to be scheduled during out-of-office hours, the user cannot enter the password. You can scan password-protected archives manually.

5. Disable simultaneous launch of several scan tasks.

   Kaspersky Endpoint Security will enqueue new scan tasks if the current scan continues. This helps optimize the load on the computer.

Kaspersky Security Network

To protect your computer more effectively, Kaspersky Endpoint Security uses data that is received from users around the globe. Kaspersky Security Network is designed for obtaining this data.

Kaspersky Security Network (KSN) is an infrastructure of cloud services providing access to the online Kaspersky Knowledge Base that contains information about the reputation of files, web resources, and software. The use of data from Kaspersky Security Network ensures faster responses by Kaspersky Endpoint Security to new threats, improves the performance of some protection components, and reduces the likelihood of false positives. If you are participating in Kaspersky Security Network, KSN services provide Kaspersky Endpoint Security with information about the reputation of scanned web addresses, as well as information about the category and reputation of scanned files.

Edit Kaspersky Security Network settings in accordance with the following recommendations:

1. Disable extended KSN mode.

   Extended KSN mode is a mode in which Kaspersky Endpoint Security sends additional data to Kaspersky.

2. Configure Kaspersky Private Security Network.

   Kaspersky Private Security Network (KPSN) is a solution that enables users of computers hosting Kaspersky Endpoint Security or other Kaspersky applications to obtain access to Kaspersky reputation databases, and to other statistical data without sending data to Kaspersky from their own computers.

3. Enable Cloud mode.

   Cloud mode refers to the application operating mode in which Kaspersky Endpoint Security uses a light version of anti-virus databases. Kaspersky Security Network supports the operation of the application when light anti-virus databases are being used. The light version of anti-virus databases lets you use approximately half of the computer RAM that would otherwise be used with the usual databases. If you do not participate in Kaspersky Security Network or if cloud mode is disabled, Kaspersky Endpoint Security downloads the full version of anti-virus databases from Kaspersky servers.

Malware Scan

Malware scan is vital to computer security. Regularly run malware scans to rule out the possibility of spreading malware that is undetected by protection components due to a low security level setting or for other reasons.

Kaspersky Endpoint Security does not scan files whose contents are located in OneDrive cloud storage, and creates log entries stating that these files have not been scanned.

Full Scan

A thorough scan of the entire computer. Kaspersky Endpoint Security scans the following objects:

- Kernel memory
- Objects that are loaded at startup of the operating system
- Boot sectors
- Operating system backup
- All hard and removable drives

Kaspersky experts recommend that you do not change the scan scope of the *Full Scan* task.

To conserve computer resources, it is recommended to use a background scan task instead of a full scan task. This will not affect the security level of the computer.

Critical Areas Scan

By default, Kaspersky Endpoint Security scans the kernel memory, running processes, and disk boot sectors.

Kaspersky experts recommend that you do not change the scan scope of the *Critical Areas Scan* task.

Custom Scan

Kaspersky Endpoint Security scans the objects that are selected by the user. You can scan any object from the following list:

- System memory
- Objects that are loaded at startup of the operating system
- Operating system backup
- Hard, removable, and network drives
- Any selected file

Background Scan

Background Scan is a scan mode of Kaspersky Endpoint Security that does not display notifications for the user. Background Scan requires fewer computer resources than other types of scans (such as a full scan). In this mode, Kaspersky Endpoint Security scans startup objects, the boot sector, system memory, and the system partition.

Application Integrity Check

Kaspersky Endpoint Security checks the application modules for corruption or modifications.

Scanning the computer

A scan is vital to computer security. Regularly run malware scans to rule out the possibility of spreading malware that is undetected by protection components due to a low security level setting or for other reasons. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis.

Kaspersky Endpoint Security has the following standard tasks predefined: *Full Scan*, *Critical Areas Scan*, *Custom Scan*. If your organization has the Kaspersky Security Center administration system deployed, you can create a *Malware Scan* task and configure the scan.

How to run a scan task in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Tasks**.
3. Select the scan task and double-click to open the task properties.

   If necessary, create the *Malware Scan* task.

4. In the task properties window, select the **Settings** section.

5. Configure the scan task (see the table below).

   If necessary, configure the scan task schedule.

6. Save your changes.

7. Run the scan task.

Kaspersky Endpoint Security will start scanning the computer. If the user has interrupted the execution of the task (for example by powering off the computer), Kaspersky Endpoint Security automatically runs the task, continuing from the point where the scan was interrupted.

How to run a scan task in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Tasks**.

   The list of tasks opens.

2. Click the scan task.

   The task properties window opens.

3. Select the **Application settings** tab.

4. Configure the scan task (see the table below).

   If necessary, configure the scan task schedule.

5. Save your changes.

6. Run the scan task.

Kaspersky Endpoint Security will start scanning the computer. If the user has interrupted the execution of the task (for example by powering off the computer), Kaspersky Endpoint Security automatically runs the task, continuing from the point where the scan was interrupted.

How to run a scan task in the application interface

1. In the main application window, go to the **Tasks** section.

2. In the task list, select the scan task and click ⚙.

   If the scan task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

   In the application interface, you can configure only local scan tasks: *Full Scan*, *Critical Areas Scan*, *Custom Scan*. It is not possible to configure group tasks added via the Kaspersky Security Center Console in the application interface. The ⚙ button is not displayed for group tasks.

3. Configure the scan task (see the table below).

   If necessary, configure the scan task schedule.

4. Save your changes.

5. Run the scan task.

   Kaspersky Endpoint Security will start scanning the computer. The application will show the scan progress, the number of scanned files, and the scan time remaining. You can stop the task at any time by clicking the **Stop** button.

To optimize Kaspersky Endpoint Security performance while scanning the computer, you can manage the advanced settings of the *Full Scan* task and limit the usage of CPU resources.

In Kaspersky Security Center, you can also use the *Background Scan* task instead of the *Full Scan* task to optimize the performance of the application. This will not affect the security level of the computer. The background scan cannot be configured.

As a result, Kaspersky Endpoint Security scans the computer and if a threat is detected, executes the action configured in application settings. Typically the application attempts to disinfect infected files. As a result, the infected files can receive the following statuses:

- **Postponed**. The infected file could not be disinfected. The application deletes the infected file after computer restart.
- **Logged**. The infected file could not be disinfected. The application adds information about detected infected files to the list of active threats.
- **Write not supported** or **Write error**. The infected file could not be disinfected. The application has no write access.
- **Already processed**. The application detected an infected file earlier. The application disinfects or deletes the infected file after computer restart.

Scan settings

Parameter	Description
Security level	Kaspersky Endpoint Security can use different groups of settings for running a scan. These groups of settings that are stored in the application are called *security levels*: • **High**. Kaspersky Endpoint Security scans all types of files. When scanning compound files, the application scans archives, distribution packages, files in office formats, but does not scan password-protected archives. When this security level is set, the application uses heuristic analysis with the **Deep scan** level of detail. • **Recommended**. Kaspersky Endpoint Security scans all types of files. When scanning compound files, the application scans archives, distribution packages, files in office formats, but does not scan password-protected archives. When this security level is set, the application uses heuristic analysis with the **Medium scan** level of detail. • **Low**. Kaspersky Endpoint Security scans only the specified file formats. When scanning compound files, the application scans archives, distribution packages, files in office formats, but does not scan password-protected archives. When this security level is set, the application uses heuristic analysis with the **Light scan** level of detail. You can select one of the preset security levels or manually configure security level settings. If you change the security level settings, you can always revert back to the recommended security level settings.

Parameter	Description
Action on threat detection	**Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file. **Disinfect, inform if disinfection fails**. If this option is selected, Kaspersky Endpoint Security automatically attempts to disinfect all infected files that are detected. If disinfection fails, Kaspersky Endpoint Security adds the information about the infected files that are detected to the list of active threats. **Inform**. If this option is selected, Kaspersky Endpoint Security adds the information about infected files to the list of active threats on detection of these files. Before attempting to disinfect or delete an infected file, the application creates a backup copy of the file in case you need to restore the file or if it can be disinfected in the future. On detection of infected files that are part of the Windows Store application, Kaspersky Endpoint Security attempts to delete the file.
Run Advanced Disinfection immediately *(available only in the Kaspersky Security Center Console)*	Advanced Disinfection during a virus scan task on a computer is performed only if the Advanced Disinfection feature is enabled in the properties of the policy applied to this computer. If the check box is selected, Kaspersky Endpoint Security disinfects the active infection immediately after it is detected during the execution of the virus scan task. After the active infection is disinfected, Kaspersky Endpoint Security reboots the computer without prompting the user. If the check box is cleared, Kaspersky Endpoint Security does not disinfect the active infection immediately after it is detected during the execution of the virus scan task. Kaspersky Endpoint Security generates active infection events in local application reports and on the Kaspersky Security Center side. The active infection can be disinfected when the virus scan task is run again with the Advanced Disinfection feature turned on. In this way, the system administrator can choose the appropriate time to do Advanced Disinfection and subsequently reboot the computers automatically.
Scan scope	List of objects that Kaspersky Endpoint Security scans while performing a scan task. Objects within the scan scope can include the kernel memory, running processes, boot sectors, system backup storage, hard drive, removable drive or network drive, folder or file. In Kaspersky Endpoint Security for Windows 12.12 email is excluded from the application scan scope. The scan of incoming and outgoing email messages is performed by the Mail Threat Protection component. If you are using an earlier version of the management plug-in, the application excludes email from the scan scope, even if the policy includes it.
Scan schedule	**Manually**. Run mode in which you can start scan manually at a time when it is convenient for you. **By schedule**. In this scan task run mode, the application starts the scan task in accordance with the schedule that you create. If this scan task run mode is selected, you can also start the scan task manually.
Postpone running after application startup for N minutes	Postponed start of the scan task after application startup. At operating system startup, many processes are running, therefore it is advantageous to postpone running the scan task instead of running it immediately after Kaspersky Endpoint Security startup.
Run skipped tasks	If the check box is selected, Kaspersky Endpoint Security starts the skipped task as soon as it becomes possible. The task may be skipped, for example, if the computer was off at the scheduled task start time. When the application gets an opportunity to execute missed tasks, it runs the tasks randomly within a certain time interval to distribute the load on the computer. If the check box is cleared, Kaspersky Endpoint Security does not run skipped tasks. Instead, it carries out the next task in accordance with the current schedule.
Run only when the computer is idle	Postponed start of the task when computer resources are busy. Kaspersky Endpoint Security starts the scan task if the computer is locked or if the screen saver is on. If you have interrupted the execution of the task, for example by unlocking the computer, Kaspersky Endpoint Security automatically runs the task, continuing from the point where it was interrupted. This schedule option lets you conserve computer resources when the computer is being used.

Parameter	Description
Run scan as	By default the scan task is run in the name of the user with whose rights you are registered in the operating system. The protection scope may include network drives or other objects that require special rights to access. You can specify a user that has the required rights in the application settings and run the scan task under this user's account.
File types	Kaspersky Endpoint Security considers files without an extension as executable ones. The application always scans executable files regardless of the file types that you select for scanning. **All files**. If this setting is enabled, Kaspersky Endpoint Security checks all files without exception (all formats and extensions). **Files scanned by format**. If this setting is enabled, the application scans infectable files only. Before scanning a file for malicious code, the internal header of the file is analyzed to determine the format of the file (for example, .txt, .doc, or .exe). The scan also looks for files with particular file extensions. **Files scanned by extension**. If this setting is enabled, the application scans infectable files only. The file format is then determined based on the file's extension. By default, Kaspersky Endpoint Security scans files by their format. Scanning files by extension is less safe because a malicious file can have an extension that is not on the list of potentially infectable (for example, `.123`).
Scan only new and modified files	Scans only new files and those files that have been modified since the last time they were scanned. This helps reduce the duration of a scan. This mode applies both to simple and to compound files.
Skip file that is scanned for longer than N seconds	Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule.
Do not run multiple scan tasks at the same time	Delay scheduled scan tasks if a previously started scheduled scan is still running. Kaspersky Endpoint Security will enqueue scheduled scan tasks if the current scan continues. This helps optimize the load on the computer. For example, you have scheduled scan tasks to run at 6:00 PM and 8:00 PM. Kaspersky Endpoint Security will postpone the 8:00 PM scan task if the scan task scheduled for 6:00 PM is still running. The application will run a scan after the task that started at 6:00 PM is complete. However, Kaspersky Endpoint Security immediately starts a scan task even if one of the following scan tasks is running: • Scan of removable drives on connection. • Scan from Context Menu. • Critical Areas Scan that was started upon detection of an Indicator of Compromise (IoC). If this check box is cleared, Kaspersky Endpoint Security lets you run multiple scan tasks at the same time. Running multiple scan tasks requires more computer resources.
Scan archives	Scanning ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR, ICE, and other archives. The application scans archives not only by extension, but also by format. When checking archives, the application performs a recursive unpacking. This allows the detection of threats inside multi-level archives (an archive within an archive).
Scan distribution packages	Scanning distribution packages of third-party applications.
Scan files in Microsoft Office formats	Scans Microsoft Office files (DOC, DOCX, XLS, PPT and other Microsoft extensions). Office format files include OLE objects as well. The application scans office format files that are smaller than 1 MB, regardless of whether the check box is selected or not.

Parameter	Description
Scan email format files	Scanning email format files and the email database. The application scans PST and OST files used by MS Outlook and Windows Mail mail clients as well as EML files. Kaspersky Endpoint Security does not support the 64-bit version of Microsoft Outlook mail client. This means that Kaspersky Endpoint Security does not scan Microsoft Outlook files (PST and OST files) if a 64-bit version of Microsoft Outlook is installed on the computer, even if mail is included in the scan scope. If the check box is selected, Kaspersky Endpoint Security splits the mail-format file into its components (header, body, attachments) and scans them for threats. If this check box is cleared, Kaspersky Endpoint Security scans the mail-format file as a single file. When a malicious object is discovered in PST or OST files, Kaspersky Endpoint Security renders it harmless in accordance with the selected action (for example, disinfection or deletion of the file). If malicious objects are detected in files of other email clients (for example, Mozilla Thunderbird), Kaspersky Endpoint Security does not disinfect or delete such files to avoid unwanted deletion of your email messages. Kaspersky Endpoint Security only adds information about detected objects to the list of active threats. You need to take steps to delete emails with malicious files in attachments in the user interface of your mail client. If deletion of messages with malicious objects is not available at the moment for whatever reason, you can process such threats in the Kaspersky Endpoint Security user interface by adding the detected objects to the list of exclusions from scanning.
Scan password-protected archives	If the check box is selected, the application scans password-protected archives. Before files in an archive can be scanned, you are prompted to enter the password. If the check box is cleared, the application skips scanning of password-protected archives.
Do not unpack large compound files	If this check box is selected, the application does not scan compound files if their size exceeds the specified value. If this check box is cleared, the application scans compound files of all sizes. The application scans large files that are extracted from archives regardless of whether the check box is selected or not.
Machine learning and signature analysis	The machine learning and signature analysis method uses the Kaspersky Endpoint Security databases that contain descriptions of known threats and ways to neutralize them. Protection that uses this method provides the minimum acceptable security level. Based on the recommendations of Kaspersky experts, machine learning and signature analysis is always enabled.
Heuristic analysis	The technology was developed for detecting threats that cannot be detected by using the current version of Kaspersky application databases. It detects files that may be infected with an unknown virus or a new variety of a known virus. When scanning files for malicious code, the heuristic analyzer executes instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.
iSwift Technology *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.
iChecker Technology *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).

Scanning removable drives when they are connected to the computer

Kaspersky Endpoint Security scans all files that you run or copy, even if the file is located on a removable drive (the File Threat Protection component). To prevent the spread of viruses and other malware, you can configure automatic scans of removable drives when they are connected to the computer. Kaspersky Endpoint Security automatically attempts to disinfect all infected files that are detected. If disinfection fails, Kaspersky Endpoint Security deletes the files. The component keeps a computer secure by running scans that implement machine learning, heuristic analysis (high level), and signature analysis. Kaspersky Endpoint Security also uses iSwift and iChecker scan optimization technologies. The technologies are always on and cannot be disabled.

How to configure running the Removable drives scan in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Local Tasks** → **Removable Drives Scan**.
4. In the **Action on a removable drive connection** drop-down list, select **Detailed Scan** or **Quick Scan**.
5. Configure advanced options for Removable drives scan (see table below).
6. Save your changes.

How to configure running the Removable drives scan in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **Removable Drives Scan**.
5. Use the **Removable Drives Scan ENABLED** toggle to enable or disable the component.
6. In the **Scan type** block, select **Detailed Scan** or **Quick Scan**.
7. Configure advanced options for Removable drives scan (see table below).
8. Save your changes.

How to configure running the Removable drives scan in the application interface

1. In the main application window, go to the **Tasks** section.
2. In the task list, select the scan task and click ⚙.
3. Use the **Removable Drives Scan** toggle to enable or disable scans of removable drives upon connection to the computer.

4. Configure advanced options for Removable drives scan (see table below).

5. Save your changes.

As a result, Kaspersky Endpoint Security runs a Removable drives scan for removable drives that are not larger than the specified maximum size. If the *Removable Drives Scan* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

Removable drives scan task settings

Parameter	Description
Scan type	**Detailed Scan**. If this option is selected, Kaspersky Endpoint Security scans all files when a removable drive is connected, including files nested in compound objects, archives, distribution packages, and files in Office formats. Kaspersky Endpoint Security does not scan files in mail formats or password-protected archives. **Quick Scan**. If this option is selected, after a removable drive is connected Kaspersky Endpoint Security scans only the files of specific formats that are most vulnerable to infection, and does not unpack compound objects.
Maximum drive size (MB)	If this check box is selected, Kaspersky Endpoint Security performs the selected action on removable drives with a size not more than the specified maximum drive size. If the size of the removable drive exceeds the configured value, Kaspersky Endpoint Security skips the scan. If the check box is cleared, Kaspersky Endpoint Security performs the selected action on removable drives of any size.
Hide scan progress bar	If the check box is selected, Kaspersky Endpoint Security displays the progress of removable drives scan in a separate window and in the **Tasks** section. If the check box is cleared, Kaspersky Endpoint Security performs removable drives scan in the background.
Prevent users from stopping the scan	If this check box is selected, then for the removable drives scan task in the local interface of Kaspersky Endpoint Security, the **Stop** button in the **Tasks** section and the **Stop** button in the removable drives scan window are not available.

Background scan

Background Scan is a scan mode of Kaspersky Endpoint Security that does not display notifications for the user. Background Scan requires fewer computer resources than other types of scans (such as a full scan). In this mode, Kaspersky Endpoint Security scans startup objects, the boot sector, system memory, and the system partition.

To conserve computer resources, it is recommended to use a background scan task instead of a full scan task. This will not affect the security level of the computer. These tasks have the same scan scope. To optimize the load on the computer, the application does not run a Full Scan task and a Background Scan task at the same time. If you have already ran a Full Scan task, Kaspersky Endpoint Security will not start a Background Scan task for seven days after the Full Scan task is completed.

A background scan is started in the following cases:

- After an anti-virus database update.
- 30 minutes after Kaspersky Endpoint Security is started.
- Every six hours.
- When the computer is idling for five minutes or more (the computer is locked or the screensaver is on).

Background scan when the computer is idling is interrupted when any of the following conditions are true:

- The computer went into active mode.

  If the background scan has not been run for more than ten days, the scan is not interrupted.

- The computer (laptop) has switched to battery mode.

When performing a background scan, Kaspersky Endpoint Security does not scan files whose contents are located in OneDrive cloud storage.

How to enable background scanning in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Local Tasks** → **Background Scan**.
4. Use the **Enable Background Scan** check box to enable or disable background scanning.
5. Save your changes.

How to enable background scanning in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **File Threat Protection**.
5. Under **Background Scan**, use the **Background Scan ENABLED** toggle switch to enable or disable background scanning.
6. Save your changes.

How to enable background scanning in the application interface

1. In the main application window, go to the **Tasks** section.
2. In the task list, select the scan task and click ⚙.
3. Use the **Background Scan** toggle to enable or disable background scans.
4. Save your changes.

If the *Background scan* is not displayed, it means the administrator has prohibited using local tasks in the policy.

Scan from context menu

Kaspersky Endpoint Security lets you run a scan of individual files for viruses and other malware from the context menu (see the figure below).

When performing a scan from the context menu, Kaspersky Endpoint Security does not scan files whose contents are located in OneDrive cloud storage.

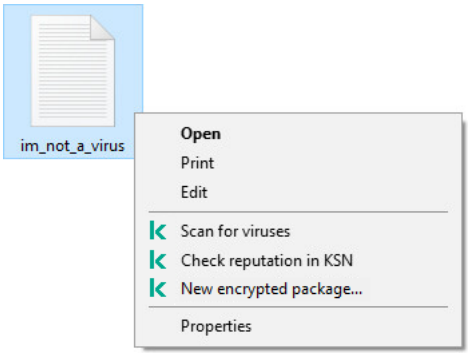

Scan from context menu

How to configure Scan from Context Menu in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Local Tasks** → **Scan from Context Menu**.
4. Configure Scan from Context Menu (see the table below).
5. Save your changes.

How to configure Scan from Context Menu in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **File Threat Protection**.
5. Under **Scan from Context Menu**, configure Scan from Context Menu (see the table below).
6. Save your changes.

How to configure Scan from Context Menu in the application interface

1. In the main application window, go to the **Tasks** section.
2. In the task list, select the scan task and click ⚙.
3. Configure Scan from Context Menu (see the table below).
4. Save your changes.

If the *Scan from Context Menu* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

Scan from Context Menu task settings

Parameter	Description
Security level	Kaspersky Endpoint Security can use different groups of settings for running a scan. These groups of settings that are stored in the application are called *security levels*: • **High**. Kaspersky Endpoint Security scans all types of files. When scanning compound files, the application scans archives, distribution packages, files in office formats, but does not scan password-protected archives. When this security level is set, the application uses heuristic analysis with the **Deep scan** level of detail. • **Recommended**. Kaspersky Endpoint Security scans all types of files. When scanning compound files, the application scans archives, distribution packages, files in office formats, but does not scan password-protected archives. When this security level is set, the application uses heuristic analysis with the **Medium scan** level of detail. • **Low**. Kaspersky Endpoint Security scans only the specified file formats. When scanning compound files, the application scans archives, distribution packages, files in office formats, but does not scan password-protected archives. When this security level is set, the application uses heuristic analysis with the **Light scan** level of detail.
Action on threat detection	**Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file. **Disinfect, inform if disinfection fails**. If this option is selected, Kaspersky Endpoint Security automatically attempts to disinfect all infected files that are detected. If disinfection fails, Kaspersky Endpoint Security adds the information about the infected files that are detected to the list of active threats. **Inform**. If this option is selected, Kaspersky Endpoint Security adds the information about infected files to the list of active threats on detection of these files.
File types	Kaspersky Endpoint Security considers files without an extension as executable ones. The application always scans executable files regardless of the file types that you select for scanning. **All files**. If this setting is enabled, Kaspersky Endpoint Security checks all files without exception (all formats and extensions). **Files scanned by format**. If this setting is enabled, the application scans infectable files only. Before scanning a file for malicious code, the internal header of the file is analyzed to determine the format of the file (for example, .txt, .doc, or .exe). The scan also looks for files with particular file extensions. **Files scanned by extension**. If this setting is enabled, the application scans infectable files only. The file format is then determined based on the file's extension. By default, Kaspersky Endpoint Security scans files by their format. Scanning files by extension is less safe because a malicious file can have an extension that is not on the list of potentially infectable (for example, `.123`).
Scan only new and modified files	Scans only new files and those files that have been modified since the last time they were scanned. This helps reduce the duration of a scan. This mode applies both to simple and to compound files.
Skip file that is scanned for longer than N seconds	Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule.
Scan archives	Scanning ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR, ICE, and other archives. The application scans archives not only by extension, but also by format. When checking archives, the application performs a recursive unpacking. This allows the detection of threats inside multi-level archives (an archive within an archive).
Scan distribution packages	The check box enables or disables scanning of distribution packages.
Scan files in Microsoft Office formats	Scans Microsoft Office files (DOC, DOCX, XLS, PPT and other Microsoft extensions). Office format files include OLE objects as well. The application scans office format files that are smaller than 1 MB, regardless of whether the check box is selected or not.

Parameter	Description
Scan email format files	Scanning email format files and the email database. The application scans PST and OST files used by MS Outlook and Windows Mail mail clients as well as EML files. Kaspersky Endpoint Security does not support the 64-bit version of Microsoft Outlook mail client. This means that Kaspersky Endpoint Security does not scan Microsoft Outlook files (PST and OST files) if a 64-bit version of Microsoft Outlook is installed on the computer, even if mail is included in the scan scope. If the check box is selected, Kaspersky Endpoint Security splits the mail-format file into its components (header, body, attachments) and scans them for threats. If this check box is cleared, Kaspersky Endpoint Security scans the mail-format file as a single file. When a malicious object is discovered in PST or OST files, Kaspersky Endpoint Security renders it harmless in accordance with the selected action (for example, disinfection or deletion of the file). If malicious objects are detected in files of other email clients (for example, Mozilla Thunderbird), Kaspersky Endpoint Security does not disinfect or delete such files to avoid unwanted deletion of your email messages. Kaspersky Endpoint Security only adds information about detected objects to the list of active threats. You need to take steps to delete emails with malicious files in attachments in the user interface of your mail client. If deletion of messages with malicious objects is not available at the moment for whatever reason, you can process such threats in the Kaspersky Endpoint Security user interface by adding the detected objects to the list of exclusions from scanning.
Scan password-protected archives	If the check box is selected, the application scans password-protected archives. Before files in an archive can be scanned, you are prompted to enter the password. If the check box is cleared, the application skips scanning of password-protected archives.
Do not unpack large compound files	If this check box is selected, the application does not scan compound files if their size exceeds the specified value. If this check box is cleared, the application scans compound files of all sizes. The application scans large files that are extracted from archives regardless of whether the check box is selected or not.
Machine learning and signature analysis	The machine learning and signature analysis method uses the Kaspersky Endpoint Security databases that contain descriptions of known threats and ways to neutralize them. Protection that uses this method provides the minimum acceptable security level. Based on the recommendations of Kaspersky experts, machine learning and signature analysis is always enabled.
Heuristic analysis	The technology was developed for detecting threats that cannot be detected by using the current version of Kaspersky application databases. It detects files that may be infected with an unknown virus or a new variety of a known virus. When scanning files for malicious code, the heuristic analyzer executes instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.
iSwift Technology	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.
iChecker Technology	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).

Application Integrity Check

Kaspersky Endpoint Security checks the application modules for corruption or modifications. For example, if an application library has an incorrect digital signature, the library is considered corrupt. The *Application Integrity Check* task is intended for checking application files. Run the *Application Integrity Check* task if Kaspersky Endpoint Security detected a malicious object but did not neutralize it.

> You can create the *Application Integrity Check* task both in the Kaspersky Security Center Web Console and in the Administration Console. It is not possible to create a task in the Kaspersky Security Center Cloud Console.

Application integrity breaches may occur in the following cases:

- A malicious object modified files of Kaspersky Endpoint Security. In this case, perform the procedure for restoring Kaspersky Endpoint Security using the tools of the operating system. After restoration, run a full scan of the computer and repeat the integrity check.
- The digital signature expired. In this case, update Kaspersky Endpoint Security.

How to run an application integrity check through the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Application Integrity Check**.

Step 2. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 3. Configuring a task start schedule

Configure a schedule for starting a task, for example, manually or when a virus outbreak is detected.

Step 4. Defining the task name

Enter a name for the task, for example, *Integrity check after the computer was infected*.

Step 5. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties. As a result, Kaspersky Endpoint Security will check the integrity of the application. You can also configure an application integrity check schedule in the task properties (see the table below).

How to run an application integrity check through the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Application Integrity Check**.

   c. In the **Task name** field, enter a brief description, for example, *Check the integrity of the application after a computer infection*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Select an account to run the task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.

6. Finish the wizard.

   A new task will be displayed in the list of tasks.

7. Select the check box next to the task.

As a result, Kaspersky Endpoint Security will check the integrity of the application. You can also configure an application integrity check schedule in the task properties (see the table below).

How to run an integrity check in the application interface

1. In the main application window, go to the **Tasks** section.
2. This opens the task list; select the *Application Integrity Check* task and click **Run**.

As a result, Kaspersky Endpoint Security will check the integrity of the application. You can also configure an application integrity check schedule in the task properties (see the table below). If the *Application Integrity Check* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

Integrity check task settings

Parameter	Description
Scan schedule	**Manually**. Run mode in which you can start scan manually at a time when it is convenient for you. **By schedule**. In this scan task run mode, the application starts the scan task in accordance with the schedule that you create. If this scan task run mode is selected, you can also start the scan task manually.
Run skipped tasks	If the check box is selected, Kaspersky Endpoint Security starts the skipped task as soon as it becomes possible. The task may be skipped, for example, if the computer was off at the scheduled task start time. When the application gets an opportunity to execute missed tasks, it runs the tasks randomly within a certain time interval to distribute the load on the computer. If the check box is cleared, Kaspersky Endpoint Security does not run skipped tasks. Instead, it carries out the next task in accordance with the current schedule.
Run only when the computer is idle	Postponed start of the task when computer resources are busy. Kaspersky Endpoint Security starts the scan task if the computer is locked or if the screen saver is on. If you have interrupted the execution of the task, for example by unlocking the computer, Kaspersky Endpoint Security automatically runs the task, continuing from the point where it was interrupted. This schedule option lets you conserve computer resources when the computer is being used.

Editing the scan scope

The *Scan scope* is a list of paths to folders and paths that Kaspersky Endpoint Security scans when executing the task. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

> To edit the scan scope, we recommend using the *Custom Scan* task. Kaspersky experts recommend that you do not change the scan scope of the *Full Scan* and *Critical Areas Scan* tasks.

Kaspersky Endpoint Security has the following predefined objects as part of the scan scope:

- **System memory**.
- **Running processes and Startup Objects**.

  Memory occupied by processes and application executable files that are run at system startup.
- **Disk boot sectors**.

  Hard disk and removable disk boot sectors.
- **System Backup**.

  Contents of the System Volume Information folder.
- **All external devices**.
- **All hard drives**.
- **All network drives**.

In Kaspersky Endpoint Security for Windows 12.12 email is excluded from the application scan scope. The scan of incoming and outgoing email messages is performed by the Mail Threat Protection component. If you are using an earlier version of the management plug-in, the application excludes email from the scan scope, even if the policy includes it.

We recommend creating a separate scan task for scanning network drives or shared folders. In the settings of the *Malware Scan* task, specify a user that has write access to this drive; this is necessary to mitigate detected threats. If the server where the network drive is located has its own security tools, do not run the scan task for that drive. In this way, you can avoid checking object twice and improve the performance of the server.

To exclude folders or files from the scan scope, add the folder or file to the trusted zone.

How to edit a scan scope in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Tasks**.
3. Select the scan task and double-click to open the task properties.

   If necessary, create the *Malware Scan* task.
4. In the task properties window, select the **Settings** section.
5. In the **Scan scope** section, click **Settings**.
6. In the window that opens, select the objects that you want to add to the scan scope or exclude from it.
7. If you want to add a new object to the scan scope:

   a. Click **Add**.

   b. In the **Object** field, enter the path to the folder or file.

   Use masks:

   - The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.
   - Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.
   - The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

   You can use masks anywhere in a file or folder path. For example, if you want the scan scope to include the Downloads folder for all user accounts on the computer, enter the `C:\Users\*\Downloads\` mask.

The **This PC** object in the list of file resources of the computer includes the following objects: **All hard drives**, **All network drives** and **All removable drives**.

You can exclude an object from scans without deleting it from the list of objects in the scan scope. To do so, clear the check box next to the object.

8. To apply the policy to computers, close the padlock icons and save your changes.

How to edit a scan scope in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Tasks**.

   The list of tasks opens.

2. Click the scan task.

   The task properties window opens. If necessary, create the *Malware Scan* task.

3. Select the **Application settings** tab.

4. In the **Scan scope** section, select the objects that you want to add to the scan scope or exclude from it.

5. If you want to add a new object to the scan scope:

   a. Click **Add**.

   b. Enter the path to the folder or file.

      Use masks:

      - The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

      - Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

      - The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

      You can use masks anywhere in a file or folder path. For example, if you want the scan scope to include the Downloads folder for all user accounts on the computer, enter the `C:\Users\*\Downloads\` mask.

   You can exclude an object from scans without deleting it from the list of objects in the scan scope. To do so, set the toggle switch next to it to the off position.

6. Save your changes.

How to edit a scan scope in the application interface

1. In the main application window, go to the **Tasks** section.
2. This opens the task list; select the *Custom Scan* task and click **Select**.

   You can also edit the scan scope for other tasks. Kaspersky experts recommend that you do not change the scan scope of the *Full Scan* and *Critical Areas Scan* tasks.
3. In the window that opens, select the objects that you want to add to the scan scope.
4. Save your changes.

If the scan task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

Running a scheduled scan

Scanning for malware using the *Malware Scan* task can be time-consuming and may increase Kaspersky Endpoint Security's use of computer resources. Therefore, it is recommended to select an optimal time to run the task so that the impact on other applications' performance is minimized.

For example, if employees in your organization work on a fixed schedule, you can configure a computer scan to run at night or on weekends. If it is impossible to run the task for any reason (for example, the computer is off at that time), you can configure the skipped task to be run automatically as soon as this becomes possible. This function should be used with caution, as it may slow down applications on the user's computer when the computer is turned on in the morning.

If you cannot determine an optimal scan schedule that fits your needs, you can configure the scan to run when one of the following special conditions is met:

- After a database update.

  Kaspersky Endpoint Security runs the computer scan with the updated signature databases.
- After application startup.

  Kaspersky Endpoint Security runs a computer scan after a specified amount of time following application startup. At operating system startup, many processes are running, therefore it is advantageous to postpone running the scan task instead of running it immediately after Kaspersky Endpoint Security startup.
- Wake-on-LAN feature.

  Kaspersky Endpoint Security runs a computer scan on schedule even if the computer is powered off. To do so, the application uses the Wake-on-LAN feature of the operating system. The Wake-on-LAN feature allows remotely powering on the computer by sending a special signal over the local network. To use this feature, you must enable Wake-on-LAN in BIOS settings.

  You can configure running the scan using Wake-on-LAN only for the *Malware Scan* task in Kaspersky Security Center. You cannot enable Wake-on-LAN for scanning the computer in the application interface.
- When the computer is idling.

  Kaspersky Endpoint Security runs a computer scan on schedule when the screensaver is active or the screen is locked. If the user unlocks the computer, Kaspersky Endpoint Security pauses the scan. In this case, the Full Scan may take several days to complete.

- When the task was skipped.

  Kaspersky Endpoint Security runs the skipped task as soon as it becomes possible. The task may be skipped, for example, if the computer was off at the scheduled task start time. When the application gets an opportunity to execute missed tasks, it runs the tasks randomly within a certain time interval to distribute the load on the computer.

How to configure the scan schedule in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the scan task.

   The task properties window opens.

3. In the task properties window, select the **Schedule** tab.

4. Configure the scan task schedule.

5. Depending on the selected frequency, configure advanced settings that specify the task run schedule (see the table below).

6. Save your changes.

How to configure the scan schedule in the application interface

> You can configure the scan schedule only if a policy is not applied to the computer. For computers under policy, you can configure the *Malware Scan* task schedule in Kaspersky Security Center.

1. In the main application window, go to the **Tasks** section.

2. In the task list, select the scan task and click ⚙.

   You can configure a schedule for running a Full Scan, a Critical Areas Scan, or an Integrity Check. You can only run a Custom Scan manually.

3. Click **Scan schedule**.

4. In the window that opens, configure the scan task run schedule.

5. Depending on the selected frequency, configure advanced settings that specify the task run schedule (see the table below).

6. Save your changes.

Scan schedule settings

Parameter	Description
Scan schedule	**Manually**. Run mode in which you can start scan manually at a time when it is convenient for you. **By schedule**. In this scan task run mode, the application starts the scan task in accordance with the schedule that you create. If this scan task run mode is selected, you can also start the scan task manually.
Postpone running after application startup for N minutes	Postponed start of the scan task after application startup. At operating system startup, many processes are running, therefore it is advantageous to postpone running the scan task instead of running it immediately after Kaspersky Endpoint Security startup.

Parameter	Description
Run skipped tasks	If the check box is selected, Kaspersky Endpoint Security starts the skipped task as soon as it becomes possible. The task may be skipped, for example, if the computer was off at the scheduled task start time. When the application gets an opportunity to execute missed tasks, it runs the tasks randomly within a certain time interval to distribute the load on the computer. If the check box is cleared, Kaspersky Endpoint Security does not run skipped tasks. Instead, it carries out the next task in accordance with the current schedule.
Run only when the computer is idle	Postponed start of the task when computer resources are busy. Kaspersky Endpoint Security starts the scan task if the computer is locked or if the screen saver is on. If you have interrupted the execution of the task, for example by unlocking the computer, Kaspersky Endpoint Security automatically runs the task, continuing from the point where it was interrupted. This schedule option lets you conserve computer resources when the computer is being used.
Use automatically randomized delay for task starts *(available only in the Kaspersky Security Center Console)*	If the check box is selected, the task is not run strictly on schedule, but randomly within a certain interval, that is, the start times of the task are spread out. Randomized start times help avoid a great number of computers simultaneously accessing the Administration Server when the task is run on schedule. The range of randomized start times is automatically calculated when the task is created, depending on the number of computers that have the task assigned. Subsequently, the task is always run at its calculated start time. However, whenever task settings are modified or the task is run manually, the calculated start time changes. If the check box is cleared, the task is run exactly at scheduled time.
Use randomized delay for task starts within an interval of (min)	If this check box is selected, the task is run on computers at a random time within a certain time frame. Randomized start times help avoid a great number of computers simultaneously accessing the Administration Server when the task is run on schedule. If the check box is cleared, the task is run exactly at scheduled time.
Stop the task if it runs longer than (min) *(available only in the Kaspersky Security Center Console)*	Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule. To reduce the task execution time, you can, for example, configure the scan scope or optimize the scan.
Turn on devices by using the Wake-on-LAN function before starting the task (min) *(available only in the Kaspersky Security Center Console)*	If the check box is selected, the operating system of the computer is given a specified lead time to complete startup before the task is run. The default lead time is 5 minutes. Select the check box if you want to run the task on all computers including powered off computers.
Shut down the devices after completing the task *(available only in the Kaspersky Security Center Console)*	If this check box is selected, the computer will shut down after the task is completed. For example, you can enable this functionality to scan the computer on Fridays after working hours. When the task finishes, the application turns off the computer for the weekend.
Pause task	You can specify a time interval during which the execution of a previously scheduled task will be paused. Once the specified time period is over, the task will resume. This may be necessary, for example, to minimize the impact of Kaspersky Endpoint Security on the performance of your computer during periods of peak usage.
Disable schedule from	If the check box is selected, Kaspersky Endpoint Security will stop running the scheduled task starting on the specified date. The task will be set to **Manually** mode.

Running a scan as a different user

By default the scan task is run in the name of the user with whose rights you are registered in the operating system. The protection scope may include network drives or other objects that require special rights to access. You can specify a user that has the required rights in the application settings and run the scan task under this user's account.

You can run the following scans as a different user:

- Critical Areas Scan.
- Full Scan.

- Custom Scan.
- Scan from Context Menu.

You cannot configure user rights to run a Removable drives scan, a Background scan, or an Integrity check.

How to run a scan as a different user in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the **Managed devices** folder in the Administration Console tree, open the folder with the name of the administration group to which the relevant client computers belong.
3. In the workspace, select the **Tasks** tab.
4. Select the scan task and double-click to open the task properties.
5. In the task properties window, select the **Account** section.
6. Enter the account credentials of the user whose rights you want to use to run a scan task.
7. Save your changes.

How to run a scan as a different user in Web Console or Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Tasks**.

   The list of tasks opens.
2. Click the scan task.

   The task properties window opens.
3. Select the **Settings** tab.
4. In the **Account** block, click the **Settings** button.
5. Enter the account credentials of the user whose rights you want to use to run a scan task.
6. Save your changes.

How to run a scan as a different user in the application interface

1. In the main application window, go to the **Tasks** section.
2. In the task list, select the scan task and click ⚙.
3. In the task properties, select **Advanced settings** → **Run scan as**.
4. In the window that opens, enter the account credentials of the user whose rights you want to use to run a scan task.
5. Save your changes.

If the scan task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

Scan optimization

Limiting CPU usage while scanning the computer

You can limit CPU usage when running the *Malware Scan* task. This may increase the time it takes to scan your computer.

How to limit CPU usage when scanning the computer in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Application settings**.
4. Under **Performance**, select the **Limit CPU usage for scan tasks** check box and enter the average value of CPU resource consumption in percent.
5. Save your changes.

How to limit CPU usage when scanning the computer in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Performance**.
5. Under **Limit CPU usage for scan tasks**, set the toggle switch to **Limit CPU usage for scan tasks** and enter the average value of CPU resource consumption in percent.
6. Save your changes.

How to limit CPU usage when scanning the computer in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Application settings**.

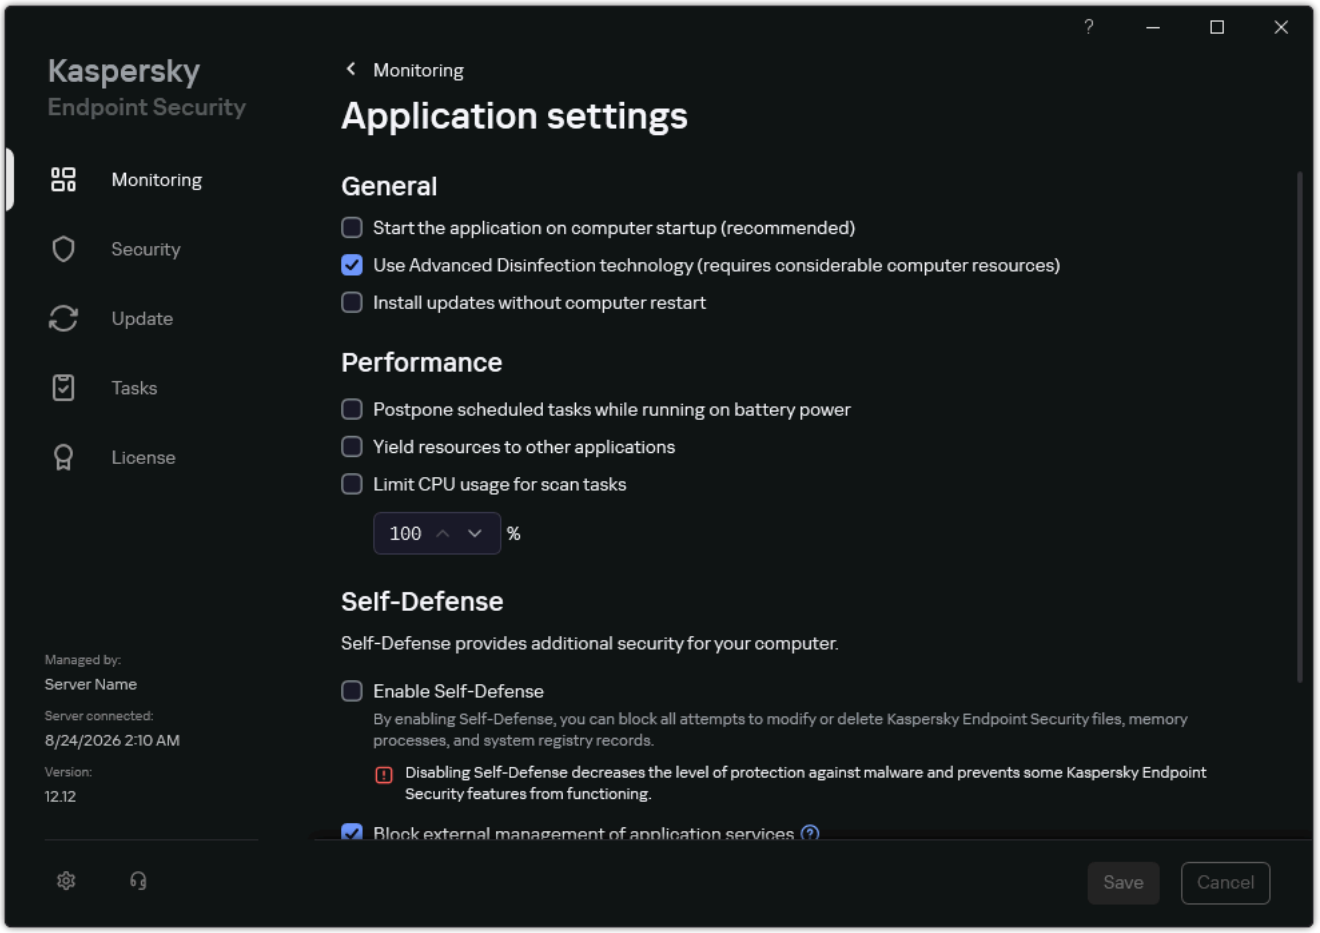

Kaspersky Endpoint Security for Windows settings

3. Under **Performance**, select the **Limit CPU usage for scan tasks** check box and enter the average value of CPU resource consumption in percent.

4. Save your changes.

Configuring advanced task settings for Malware Scan.

You can optimize file scanning: reduce scan time and increase the operating speed of Kaspersky Endpoint Security. This can be achieved by scanning only new files and those files that have been modified since the previous scan. This mode applies both to simple and to compound files. You can also set a limit for scanning a single file. When the specified time interval expires, Kaspersky Endpoint Security excludes the file from the current scan (except archives and objects that include several files).

A common technique of concealing viruses and other malware is to implant them in compound files, such as archives or databases. To detect viruses and other malware that are hidden in this way, the compound file must be unpacked, which may slow down scanning. You can limit the types of compound files to be scanned and thereby speed up scanning.

You can also enable the iChecker and iSwift technologies. The iChecker and iSwift technologies optimize the speed of scanning files, by excluding files that have not been modified since the most recent scan.

How to optimize scanning in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Tasks**.
3. Select the scan task and double-click to open the task properties.

   If necessary, create the *Malware Scan* task.
4. In the task properties window, select the **Settings** section.
5. In the **Security level** block, click the **Settings** button.

   This opens the scan task settings window.
6. In the **Optimization** block, configure the scan settings:

   - **Scan only new and modified files**. Scans only new files and those files that have been modified since the last time they were scanned. This helps reduce the duration of a scan. This mode applies both to simple and to compound files.

     You can also configure scanning new files by type. For example, you can scan all distribution packages and scan only new archives and office format files.
   - **Skip files that are scanned for longer than N sec**. Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule.
   - **Do not run multiple scan tasks at the same time**. Delay scheduled scan tasks if a previously started scheduled scan is still running. Kaspersky Endpoint Security will enqueue scheduled scan tasks if the current scan continues. This helps optimize the load on the computer. For example, you have scheduled scan tasks to run at 6:00 PM and 8:00 PM. Kaspersky Endpoint Security will postpone the 8:00 PM scan task if the scan task scheduled for 6:00 PM is still running. The application will run a scan after the task that started at 6:00 PM is complete.
7. Click **Additional**.

   This opens the compound files scanning settings window.
8. In the **Size limit** block, select the **Do not unpack large compound files** check box. Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule.

   > Kaspersky Endpoint Security scans large files that are extracted from archives, regardless of whether the **Do not unpack large compound files** check box is selected.
9. Click **OK**.
10. Go to the **Additional** tab.

11. In the **Scan technologies** block, select the check boxes next to the names of technologies that you want to use during a scan:

    - **iSwift Technology**. This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.

    - **iChecker Technology**. This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).

12. Save your changes.

How to optimize scanning in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Tasks**.

   The list of tasks opens.

2. Click the scan task.

   The task properties window opens. If necessary, create the *Malware Scan* task.

3. Select the **Application settings** tab.

4. In the **Action on threat detection** block, select the **Scan only new and modified files** check box. Scans only new files and those files that have been modified since the last time they were scanned. This helps reduce the duration of a scan. This mode applies both to simple and to compound files.

   You can also configure scanning new files by type. For example, you can scan all distribution packages and scan only new archives and office format files.

5. In the **Scan optimization** block, select the **Do not unpack large compound files** check box. Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule.

   > Kaspersky Endpoint Security scans large files that are extracted from archives, regardless of whether the **Do not unpack large compound files** check box is selected.

6. Select the **Do not run multiple scan tasks at the same time** check box. Delay scheduled scan tasks if a previously started scheduled scan is still running. Kaspersky Endpoint Security will enqueue scheduled scan tasks if the current scan continues. This helps optimize the load on the computer. For example, you have scheduled scan tasks to run at 6:00 PM and 8:00 PM. Kaspersky Endpoint Security will postpone the 8:00 PM scan task if the scan task scheduled for 6:00 PM is still running. The application will run a scan after the task that started at 6:00 PM is complete.

7. In the **Advanced settings** block, select the **Skip file that is scanned for longer than (sec)** check box. Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule.

8. Save your changes.

How to optimize scanning in the application interface

1. In the main application window, go to the **Tasks** section.

2. In the task list, select the scan task and click ⚙.

3. Click **Advanced settings**.

4. In the **Optimization** block, configure the scan settings:

   - **Scan only new and modified files**. Scans only new files and those files that have been modified since the last time they were scanned. This helps reduce the duration of a scan. This mode applies both to simple and to compound files.

     You can also configure scanning new files by type. For example, you can scan all distribution packages and scan only new archives and office format files.

   - **Skip file that is scanned for longer than N seconds**. Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule.

   - **Do not run multiple scan tasks at the same time**. Delay scheduled scan tasks if a previously started scheduled scan is still running. Kaspersky Endpoint Security will enqueue scheduled scan tasks if the current scan continues. This helps optimize the load on the computer. For example, you have scheduled scan tasks to run at 6:00 PM and 8:00 PM. Kaspersky Endpoint Security will postpone the 8:00 PM scan task if the scan task scheduled for 6:00 PM is still running. The application will run a scan after the task that started at 6:00 PM is complete.

5. In the **Size limit** block, select the **Do not unpack large compound files** check box. Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule.

   Kaspersky Endpoint Security scans large files that are extracted from archives, regardless of whether the **Do not unpack large compound files** check box is selected.

6. In the **Scan technologies** block, select the check boxes next to the names of technologies that you want to use during a scan:

   - **iSwift Technology**. This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.

   - **iChecker Technology**. This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).

7. Save your changes.

If the scan task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

Updating databases and application software modules

Updating the databases and application modules of Kaspersky Endpoint Security ensures up-to-date protection on your computer. New viruses and other types of malware appear worldwide on a daily basis. Kaspersky Endpoint Security databases contain information about threats and ways of neutralizing them. To detect threats quickly, you are urged to regularly update the databases and application modules.

Updates functionality (including providing anti-virus signature updates and codebase updates) may not be available in the application in the U.S.

Regular updates require a license in effect. If there is no current license, you will be able to perform an update only once.

Your computer must be connected to the Internet to successfully download the update package from Kaspersky update servers. By default, the Internet connection settings are determined automatically. If you are using a proxy server, you need to configure the proxy server settings.

Updates are downloaded over the HTTPS protocol. They may also be downloaded over the HTTP protocol when it is impossible to download updates over the HTTPS protocol.

While performing an update, the following objects are downloaded and installed on your computer:

- Kaspersky Endpoint Security databases. Computer protection is provided using databases that contain signatures of viruses and other threats and information on ways to neutralize them. Protection components use this information when searching for and neutralizing infected files on your computer. The databases are constantly updated with records of new threats and methods for counteracting them. Therefore, we recommend that you update the databases regularly.

  In addition to the Kaspersky Endpoint Security databases, the network drivers that enable the application's components to intercept network traffic are updated.

- Application modules. In addition to the databases of Kaspersky Endpoint Security, you can also update the application modules. Updating the application modules fixes vulnerabilities in Kaspersky Endpoint Security, adds new functions, or enhances existing functions.

While updating, the application modules and databases on your computer are compared against the up-to-date version at the update source. If your current databases and application modules differ from their respective up-to-date versions, the missing portion of the updates is installed on your computer.

If the databases are obsolete, the update package may be large, which may cause additional internet traffic (up to several dozen MB).

Information about the current state of the Kaspersky Endpoint Security databases is displayed in the main application window or the tooltip that you see when you hover the cursor over the icon of the application in the notification area.

Information on update results and on all events that occur during the performance of the update task is logged in the Kaspersky Endpoint Security report.

If the application is working in Light Agent mode, special considerations are involved in updating application databases and modules.

Database and application module update scenarios

Updating the databases and application modules of Kaspersky Endpoint Security ensures up-to-date protection on your computer. New viruses and other types of malware appear worldwide on a daily basis. Kaspersky Endpoint Security databases contain information about threats and ways of neutralizing them. To detect threats quickly, you are urged to regularly update the databases and application modules.

The following objects are updated on users' computers:

- Anti-virus databases. Anti-virus databases include databases of malware signatures, description of network attacks, databases of malicious and phishing web addresses, databases of banners, spam databases, and other data.

- Application modules. Module updates are intended for eliminating vulnerabilities in the application and to improve computer protection methods. Module updates may change the behavior of application components and add new capabilities.

Kaspersky Endpoint Security supports the following scenarios for updating databases and application modules:

- Update from Kaspersky servers.

  Kaspersky update servers are located in various countries throughout the world. This ensures high reliability of updates. If an update cannot be performed from one server, Kaspersky Endpoint Security switches over to the next server.

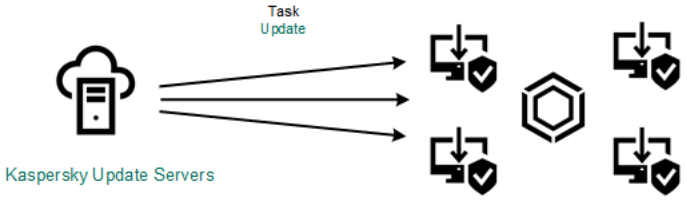

Update from Kaspersky servers

- Centralized update.

  Centralized update reduces external Internet traffic, and provides for convenient monitoring of the update.

  Centralized update consists of the following steps:

  1. Download the update package to a repository within the organization's network.

     The update package is downloaded to the repository by the Administration Server task named *Download updates to the Administration Server repository*.

  2. Download the update package to a shared folder (optional).

You can download the update package to a shared folder by using the following methods:

- Using Kaspersky Endpoint Security *Update of databases and application modules* task. The task is intended for one of the computers in the local company network.
- Using the Kaspersky Update Utility. For detailed information about using Kaspersky Update Utility, refer to the Kaspersky Knowledge Base.

3. Distribute the update package to client computers.

   The update package is distributed to client computers by the Kaspersky Endpoint Security *Update of databases and application modules* task. You can create an unlimited number of update tasks for each administration group.

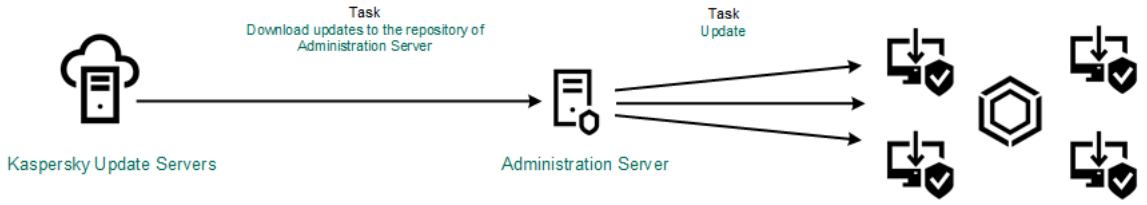

Updating from a server repository

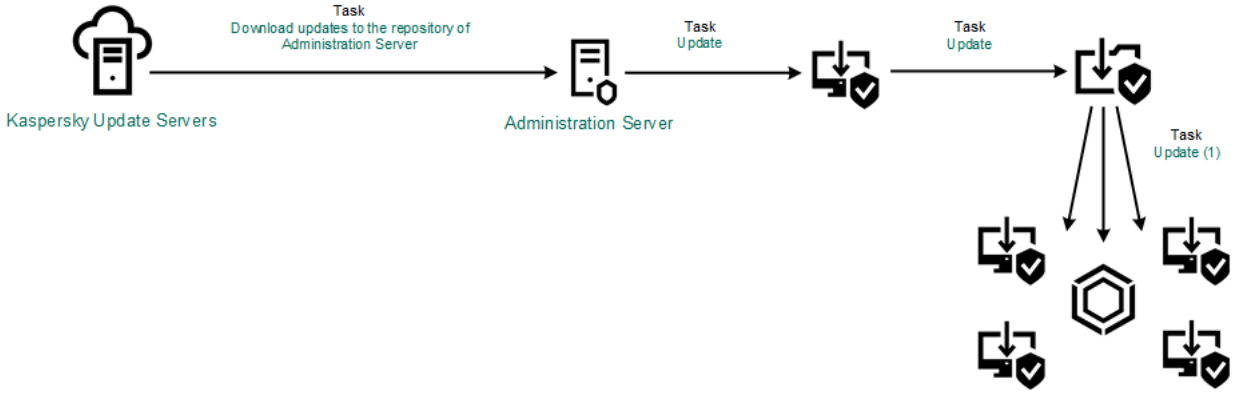

Updating from a shared folder

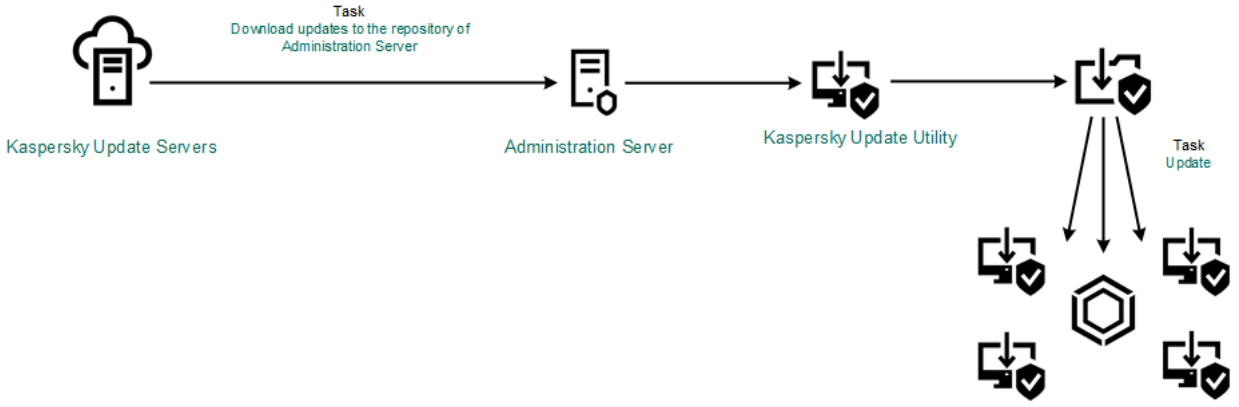

Updating using Kaspersky Update Utility

For Kaspersky Security Center, the default list of update sources contains the Kaspersky Security Center Administration Server and Kaspersky update servers. For the Kaspersky Security Center Cloud Console, the default list of update sources contains distribution points and Kaspersky update servers. For more details about distribution points, refer to the Kaspersky Security Center Cloud Console Help. You can add other update sources to the list. You can specify HTTP/FTP servers and shared folders as update sources. If an update cannot be performed from an update source, Kaspersky Endpoint Security switches over to the next one.

Updates are downloaded from Kaspersky update servers or from other FTP- or HTTP servers over standard network protocols. If connection to a proxy server is required for accessing the update source, specify the proxy server settings in Kaspersky Endpoint Security policy settings.

Updating from a server repository

To conserve Internet traffic, you can configure updates of databases and application modules on computers of the organization's LAN from a server repository. For this purpose, Kaspersky Security Center must download an update package to the repository (FTP- or HTTP server, network or local folder) from Kaspersky update servers. Other computers on the organization's LAN will be able to receive the update package from the server repository.

Configuring database and application module updates from a server repository consists of the following steps:

1. Configure download of an update package to the Administration Server repository (the *Download updates to the Administration Server repository* task).

   The *Download updates to the Administration Server repository* task is created automatically by the Administration Server quick start wizard, and this task may only have one single instance. By default, Kaspersky Security Center copies the update package to folder `\\<server name>\KLSHARE\Updates`. For more information about downloading updates to the Administration Server repository, please refer to the Kaspersky Security Center Help.

2. Configure database and application module updates from the specified server repository to the remaining computers on the organization's LAN (*Update of databases and application modules* task).

   How to configure Kaspersky Endpoint Security update from the specified server storage in the Administration Console (MMC)

   1. Open the Kaspersky Security Center Administration Console.

      In the console tree, select **Tasks**.

   2. Click the **Update of databases and application modules** task of Kaspersky Endpoint Security.

      The task properties window opens.

      The *Update of databases and application modules* task is created automatically by the Administration Server quick start wizard. To create the *Update of databases and application modules* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

3. In the task properties window, select the **Settings** section.

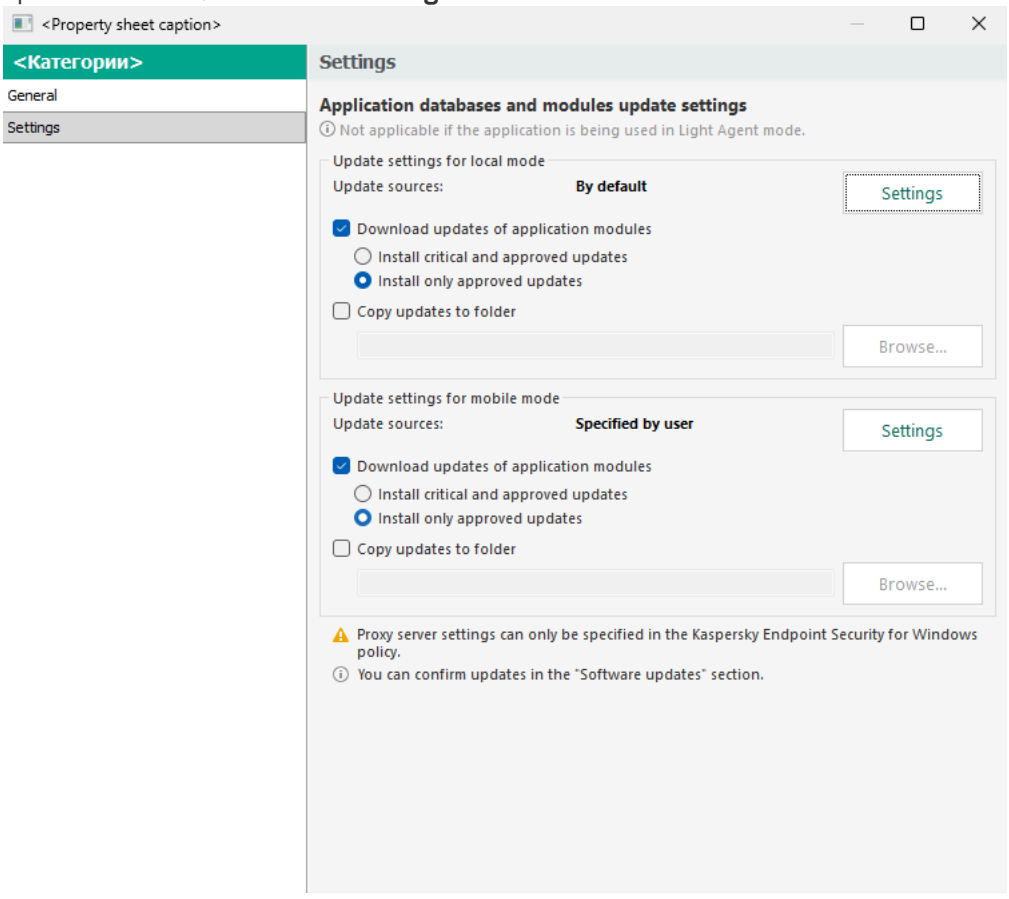

Update of databases and application modules task settings

4. In the **Update settings for local mode** block, click the **Settings** button.

5. In the list of update sources, make sure that the update from the **Kaspersky Security Center** source is enabled. Additionally, the **Kaspersky Security Center** source must have the highest priority.

6. If necessary, add the update sources:

   a. In the list of update sources, click the **Add** button.

   b. In the **Update sources** field, specify the address of the FTP- or HTTP server, network folder or local folder where Kaspersky Security Center will copy the update package received from Kaspersky servers.

   > The address of the update source must match the address you specified in the **Folder for storing updates** field when you configured download of updates to the server storage (the *Download updates to the Administration Server repository* task).

   c. Click **OK**.

You can exclude the update source without removing it from the list of update sources. To do so, clear the check box next to the object.

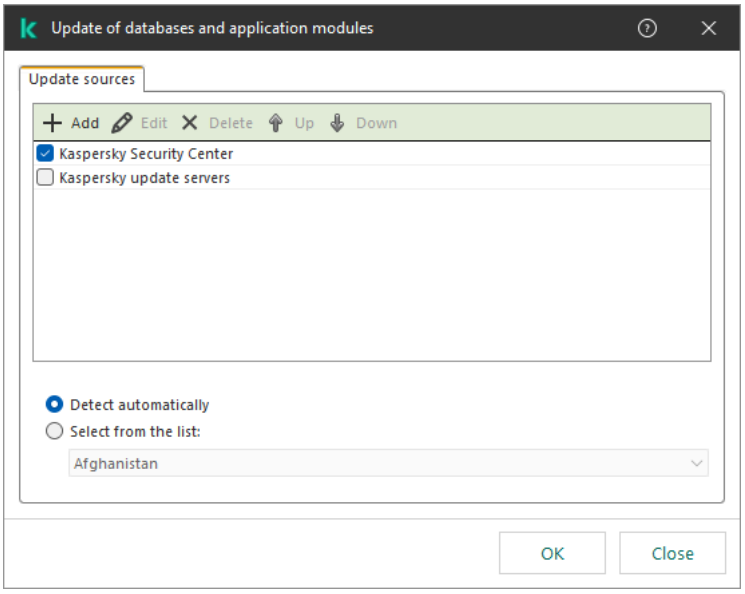

Sources of update

7. Configure the priorities of update sources by using the **Up** and **Down** buttons.

   If an update cannot be performed from the first update source, Kaspersky Endpoint Security automatically switches over to the next source.

8. In the task properties window, select the **Schedule** section and configure the task run mode.

9. By default, Kaspersky Endpoint Security runs the task in manual mode.

10. Save your changes.

How to configure Kaspersky Endpoint Security update from the specified server storage in the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **Update** task of Kaspersky Endpoint Security.

   The task properties window opens.

   The *Update* task is created automatically by the Administration Server quick start wizard. To create the *Update* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

3. Select the **Application settings** → **Local mode** tab.

4. In the list of update sources, make sure that the update from the **Kaspersky Security Center** source is enabled. Additionally, the **Kaspersky Security Center** source must have the highest priority.

5. If necessary, add the update sources:

   a. In the list of update sources, click the **Add** button.

   b. In the **Update sources** field, specify the address of the FTP- or HTTP server, network folder or local folder where Kaspersky Security Center will copy the update package received from Kaspersky servers.

   > The address of the update source must match the address you specified in the **Folder for storing updates** field when you configured download of updates to the server storage (the *Download updates to the Administration Server repository* task).

   c. Click **Save**.

   You can exclude the update source without removing it from the list of update sources. To do so, set the toggle switch next to it to the off position.

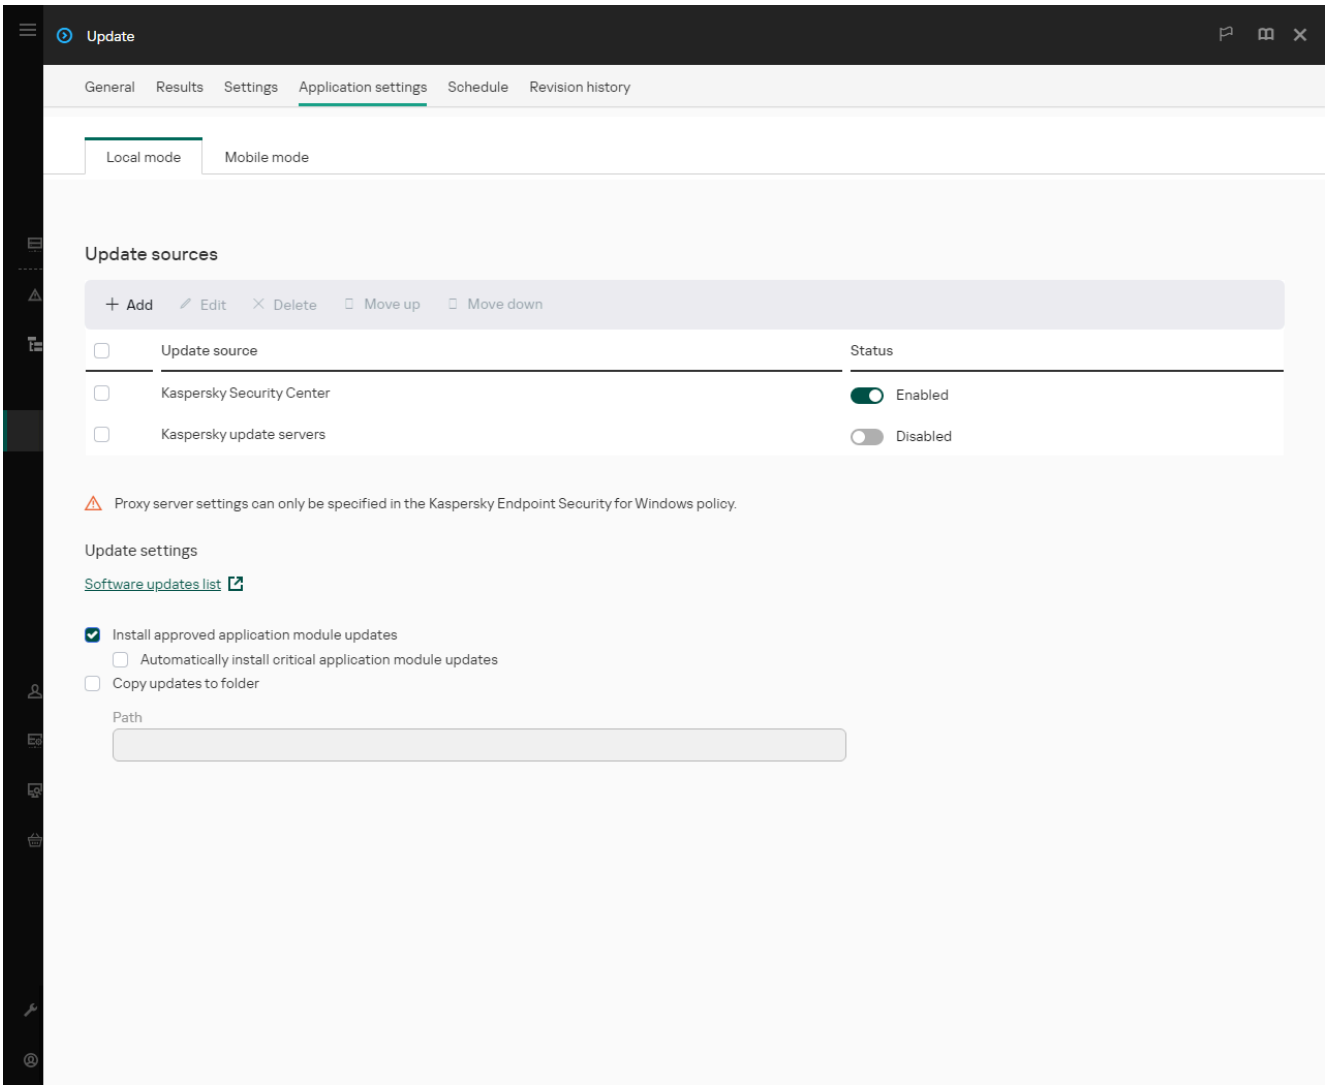

Sources of update

6. Configure the priorities of update sources by using the **Move up** and **Move down** buttons.

   If an update cannot be performed from the first update source, Kaspersky Endpoint Security automatically switches over to the next source.

7. In the task properties window, select the **Schedule** section and configure the task run mode.

8. By default, Kaspersky Endpoint Security runs the task in manual mode.

9. Save your changes.

How to configure Kaspersky Endpoint Security update from the specified server storage in the application interface

> You cannot configure the *Update of databases and application modules* group task in the application interface. Only a local update task, *Update of databases and application modules*, is available to the user. If the *Update of databases and application modules* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

1. In the main application window, go to the **Update** section.

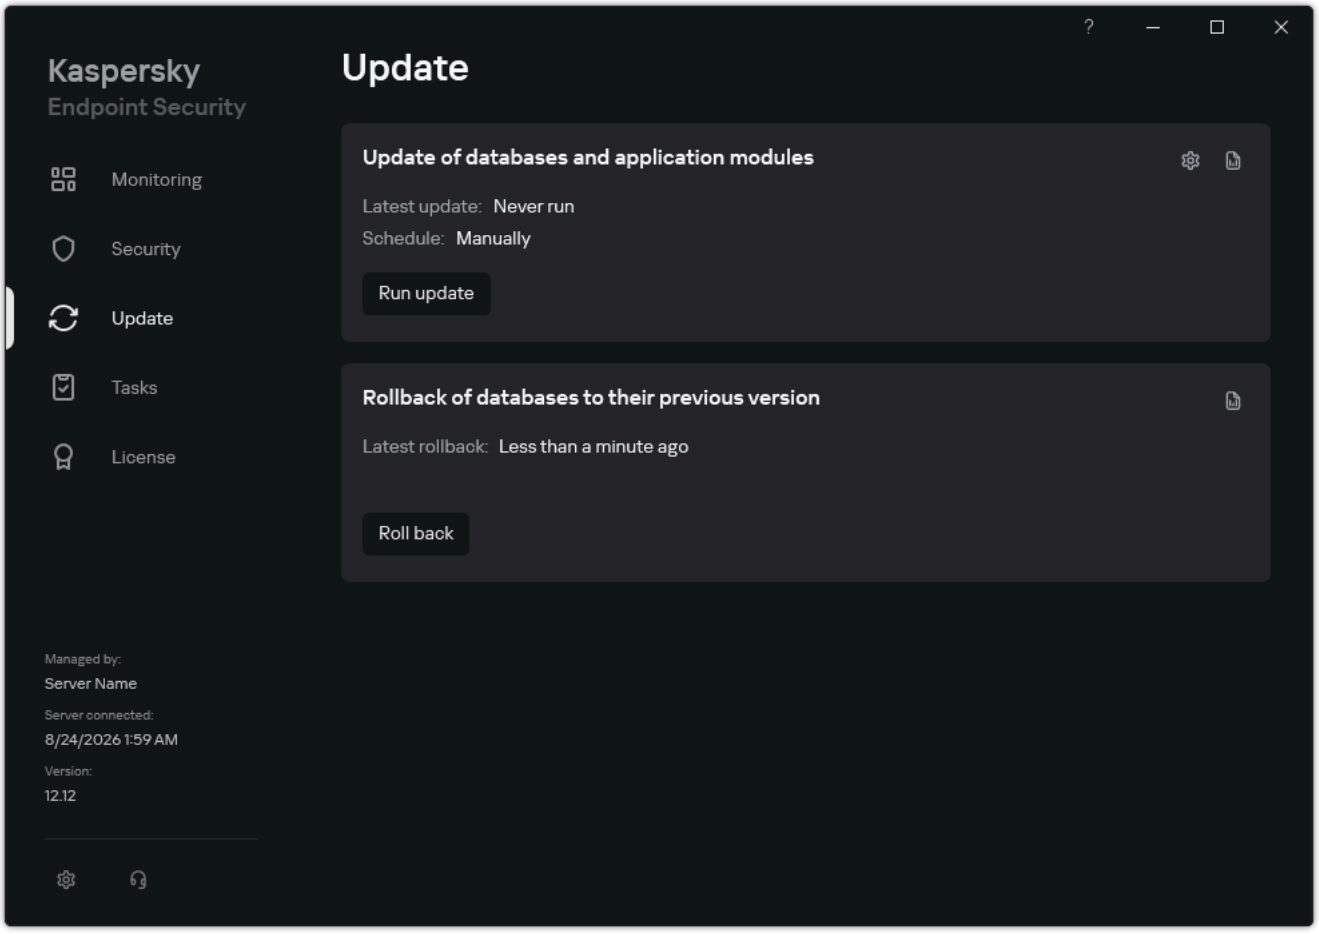

Local update tasks

2. This opens the task list; select the *Update of databases and application modules* task and click ⚙.

   The task properties window opens.

3. In the task properties window, click **Select update sources**.

4. In the list of update sources, make sure that the update from the **Kaspersky Security Center** source is enabled. Additionally, the **Kaspersky Security Center** source must have the highest priority.

5. If necessary, add the update sources:

   a. In the list of update sources, click the **Add** button.

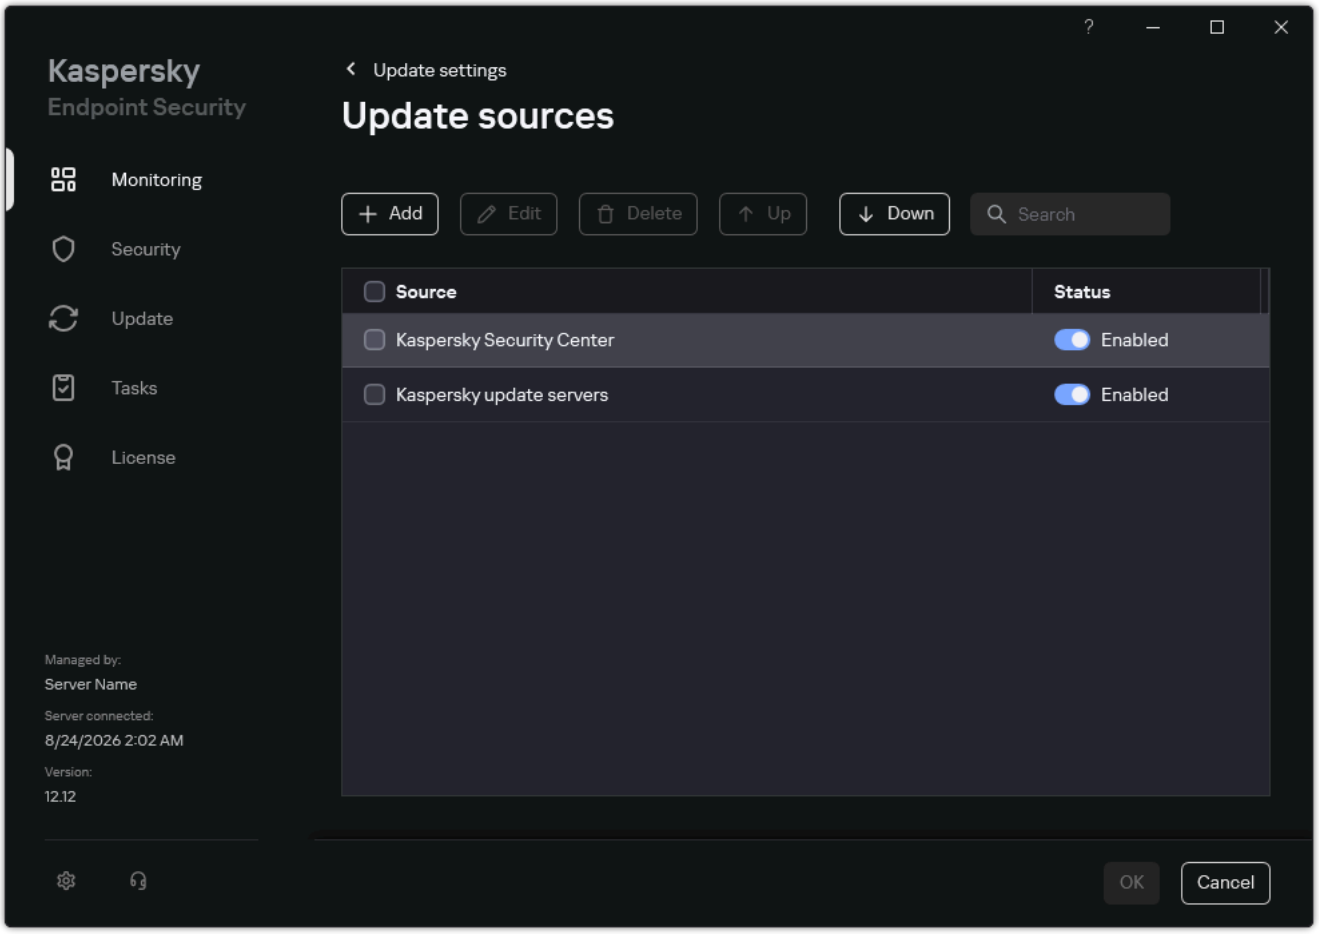

Sources of update

   a. Specify the address of the FTP- or HTTP server, network folder or local folder where Kaspersky Security Center will copy the update package received from Kaspersky update servers.

   > The address of the update source must match the address you specified in the **Folder for storing updates** field when you configured download of updates to the server storage (the *Download updates to the Administration Server repository* task).

   b. Click **Select**.

   You can exclude the update source without removing it from the list of update sources. To do so, set the toggle switch next to it to the off position.

6. Configure the priorities of update sources by using the **Up** and **Down** buttons.

   If an update cannot be performed from the first update source, Kaspersky Endpoint Security automatically switches over to the next source.

   > If a computer is managed by Kaspersky Security Center, it is not possible to configure the run mode for the *Update of databases and application modules* task. You can only run the task manually.

7. Save your changes.

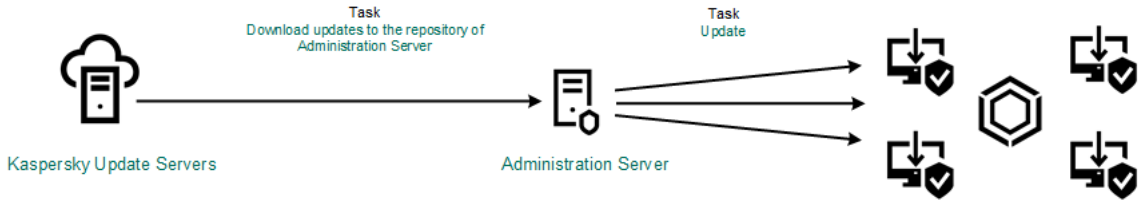

Updating from a server repository

Updating from a shared folder

To conserve Internet traffic, you can configure updates of databases and application modules on computers of the organization's LAN from a shared folder. For this purpose, one of the computers on the organization's LAN must receive update packages from the Kaspersky Security Center Administration Server or from Kaspersky update servers and then copy the received update package to the shared folder. Other computers on the organization's LAN will be able to receive the update package from this shared folder.

The version and localization of the Kaspersky Endpoint Security application that copies the update package to a shared folder must match the version and localization of the application that updates databases from the shared folder. If versions or localizations of the applications do not match, the database update may end with an error.

Configuring database and application module updates from a shared folder consists of the following steps:

1. Configuring database and application module updates from a server repository.

2. Enabling the copying of an update package to a shared folder on one of the computers on the local area network.

   How to enable copying of the update package to the shared folder in the Administration Console (MMC)

   1. Open the Kaspersky Security Center Administration Console.

   2. In the console tree, select **Tasks**.

      The *Update of databases and application modules* task must be assigned for one computer that will serve as the source of updates.

   3. Click the **Update of databases and application modules** task of Kaspersky Endpoint Security.

      The task properties window opens.

      The *Update of databases and application modules* task is created automatically by the Administration Server quick start wizard. To create the *Update of databases and application modules* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

4. In the task properties window, select the **Settings** section.

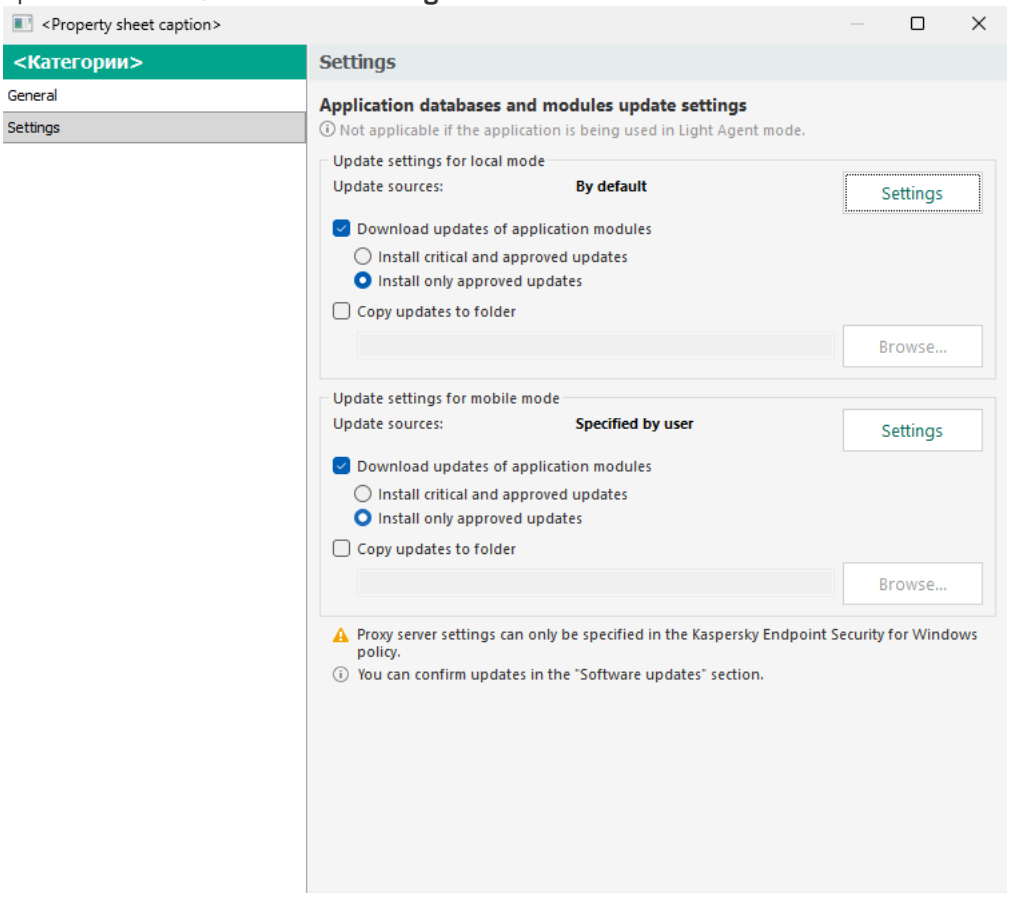

Update of databases and application modules task settings

5. In the **Update settings for local mode** block, click the **Settings** button.

6. Configure the sources of updates.

   The sources of updates can be Kaspersky update servers, Kaspersky Security Center Administration Server, other FTP- or HTTP servers, local folders, or network folders.

7. Select the **Copy updates to folder** check box.

8. In the **Folder path** field, enter the UNC path to the shared folder (for example, `\\<server name>\KLSHARE\Updates`).

   If the field is left blank, Kaspersky Endpoint Security will copy the update package to the folder `C:\Documents and Settings\All Users\Application Data\Kaspersky Lab\AVP12\Update distribution\`.

9. Save your changes.

How to enable copying of the update package to the shared folder in Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

   > The *Update* task must be assigned for one computer that will serve as the source of updates.

2. Click the **Update** task of Kaspersky Endpoint Security.

   The task properties window opens.

The *Update* task is created automatically by the Administration Server quick start wizard. To create the *Update* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

3. Select the **Application settings** → **Local mode** tab.

4. Configure the sources of updates.

   The sources of updates can be Kaspersky update servers, Kaspersky Security Center Administration Server, other FTP- or HTTP servers, local folders, or network folders.

5. Select the **Copy updates to folder** check box.

6. In the **Path** field, enter the UNC path to the shared folder (for example, `\\<server name>\KLSHARE\Updates`).

   If the field is left blank, Kaspersky Endpoint Security will copy the update package to the folder `C:\Documents and Settings\All Users\Application Data\Kaspersky Lab\AVP12\Update distribution\`.

7. Save your changes.

How to enable copying of the update package to the shared folder in the application interface

> You cannot configure the *Update of databases and application modules* group task in the application interface. Only a local update task, *Update of databases and application modules*, is available to the user. If the *Update of databases and application modules* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

1. In the main application window, go to the **Update** section.

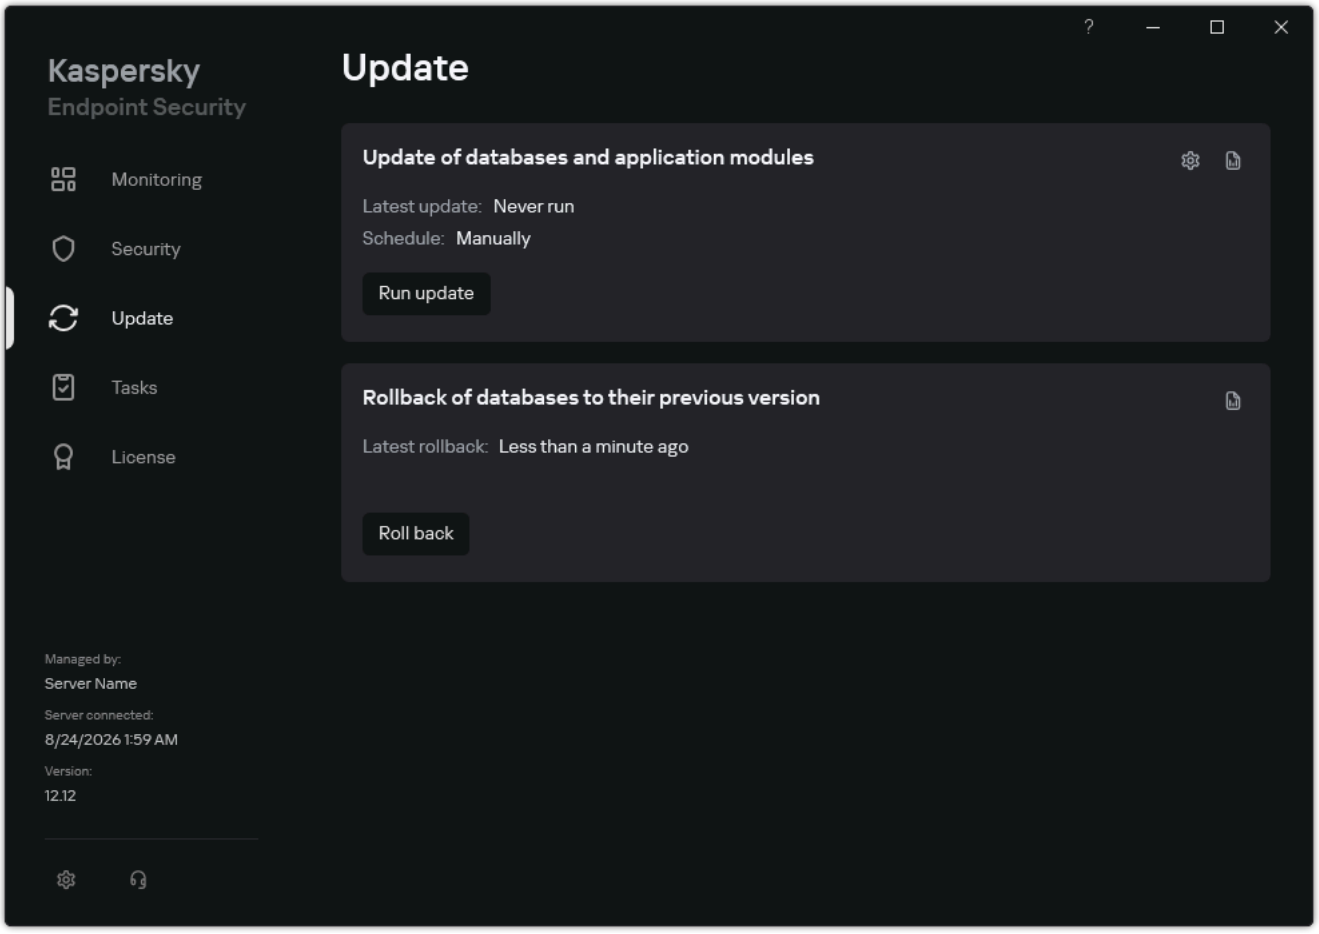

Local update tasks

2. This opens the task list; select the *Update of databases and application modules* task and click ⚙.

   The task properties window opens.

3. In the **Distributing updates** block, select the **Copy updates to folder** check box.

4. Enter the UNC path to the shared folder (for example, `\\<server name>\KLSHARE\Updates`).

5. Save your changes.

3. Configure database and application module updates from the specified shared folder to the remaining computers on the organization's LAN.

   How to configure updates from the shared folder in the Administration Console (MMC)

   1. In the main window of the Web Console, select **Tasks**.

      The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Update of databases and application modules**.

4. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

5. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Update of databases and application modules**.

Step 2. Selecting update sources

Add a new update source: a shared folder. The source address must match the address that you previously specified in the **Folder path** field when you configured copying of the update package to the shared folder. Configure the priorities of update sources by using the **Up** and **Down** buttons.

Step 3. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

The *Update of databases and application modules* task must be assigned to the computers of the organization's LAN, except the computer that serves as the update source.

Step 4. Selecting the account to run the task

Select an account to run the *Update of databases and application modules* task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.

Step 5. Configuring a task start schedule

Configure a schedule for starting a task, for example, manually or after anti-virus databases are downloaded to the repository.

Step 6. Defining the task name

Enter the name of the task, for example, *Updating from a shared folder*.

Step 7. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties. As a result, the update task will be executed on users' computers according to the specified schedule.

How to configure updates from the shared folder in Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Update**.

   c. In the **Task name** field, enter a brief description, for example, *Updating from a shared folder*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

   > The *Update* task must be assigned to the computers of the organization's LAN, except the computer that serves as the update source.

4. Select devices according to the selected task scope option and go to the next step.

5. Finish the wizard.

   A new task will be displayed in the table of tasks.

6. Click the newly created *Update* task.

   The task properties window opens.

7. Select the **Application settings** → **Local mode** tab.

8. In the **Update sources** block, click the **Add** button.

9. In the window that opens, enter the path to the shared folder.

   > The source address must match the address that you previously specified in the **Path** field when you configured copying of the update package to the shared folder (see the instructions above).

10. Click **OK**.

11. Configure the priorities of update sources by using the **Move up** and **Move down** buttons.

12. Save your changes.

How to configure updates from the shared folder in the application interface

> You cannot configure the *Update of databases and application modules* group task in the application interface. Only a local update task, *Update of databases and application modules*, is available to the user. If the *Update of databases and application modules* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

1. In the main application window, go to the **Update** section.

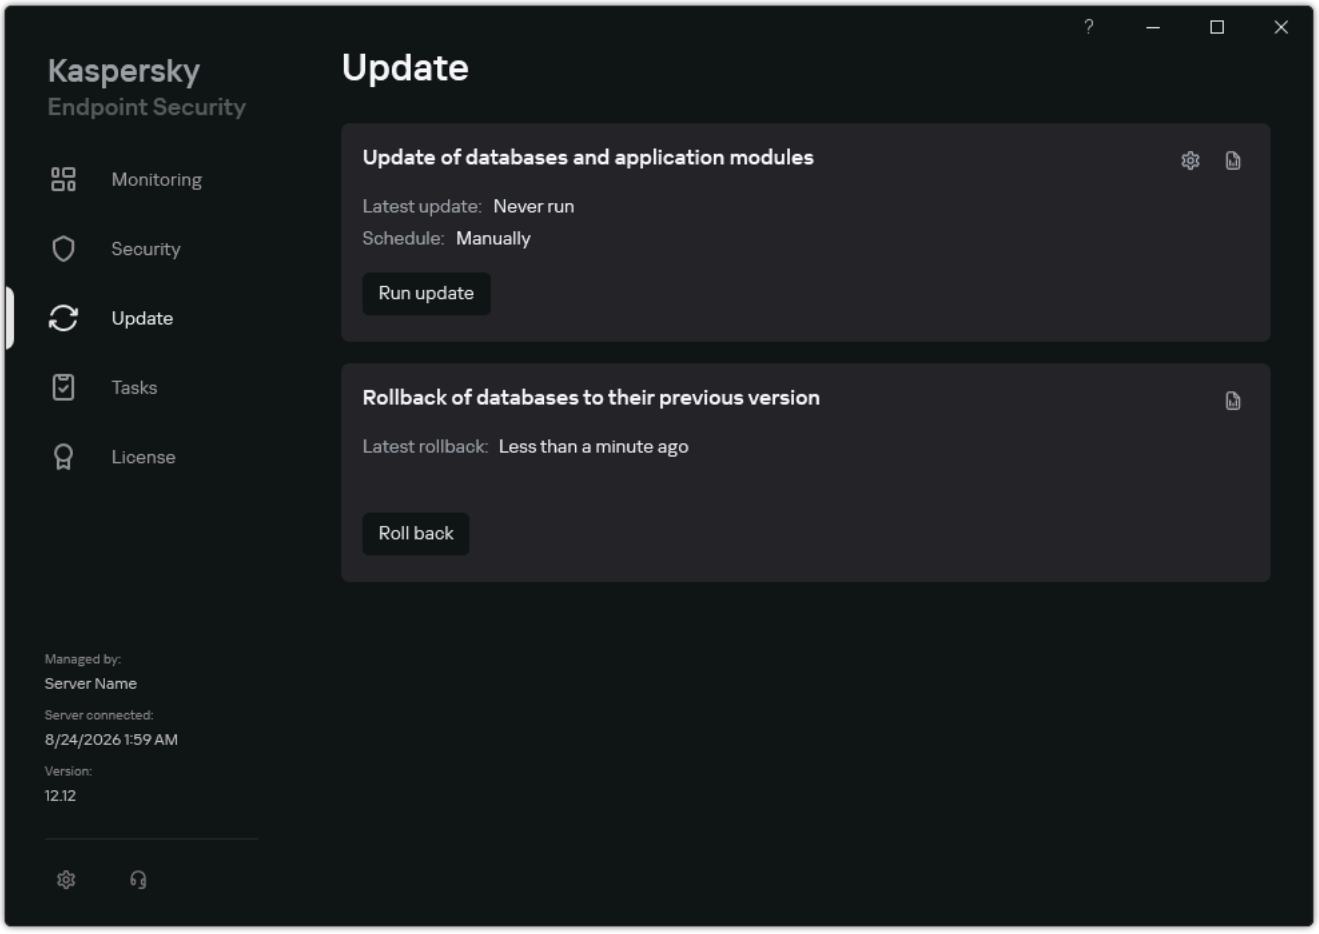

Local update tasks

2. This opens the task list; select the *Update of databases and application modules* task and click ⚙.

   The task properties window opens.

3. Click **Select update sources**.

4. In the window that opens, click the **Add** button.

5. In the window that opens, enter the path to the shared folder.

   > The source address must match the address that you previously specified when you configured copying of the update package to the shared folder (see the instructions above).

6. Click **Select**.

7. Configure the priorities of update sources by using the **Up** and **Down** buttons.

   If an update cannot be performed from the first update source, Kaspersky Endpoint Security automatically switches over to the next source.

8. Save your changes.

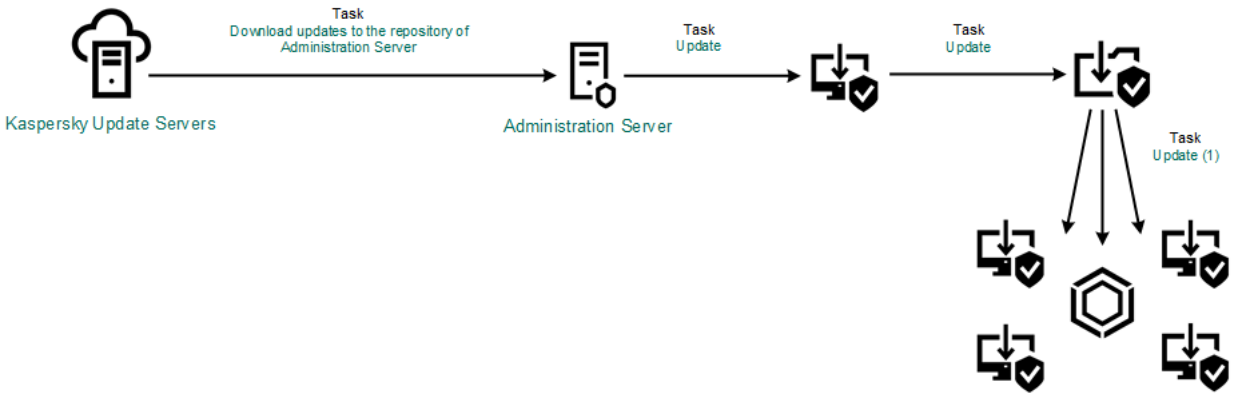

Updating from a shared folder

Updating using Kaspersky Update Utility

To conserve Internet traffic, you can configure updates of databases and application modules on computers of the organization's LAN from a shared folder using the Kaspersky Update Utility. For this purpose, one of the computers on the organization's LAN must receive update packages from the Kaspersky Security Center Administration Server or from Kaspersky update servers and then copy the received update packages to the shared folder using the utility. Other computers on the organization's LAN will be able to receive the update package from this shared folder.

The version and localization of the Kaspersky Endpoint Security application that copies the update package to a shared folder must match the version and localization of the application that updates databases from the shared folder. If versions or localizations of the applications do not match, the database update may end with an error.

Configuring database and application module updates from a shared folder consists of the following steps:

1. Configuring database and application module updates from a server repository.

2. Install the Kaspersky Update Utility on one of the computers of the organization's LAN.

3. Configure copying of the update package to the shared folder in the Kaspersky Update Utility settings.

   You can download the Kaspersky Update Utility distribution package from the Kaspersky Technical Support website. After installing the utility, select the update source (for example, the Administration Server repository) and the shared folder to which the Kaspersky Update Utility will copy update packages. For detailed information about using Kaspersky Update Utility, refer to the Kaspersky Knowledge Base.

4. Configure database and application module updates from the specified shared folder to the remaining computers on the organization's LAN.

How to configure updates from the shared folder in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Tasks**.

3. Click the **Update of databases and application modules** task of Kaspersky Endpoint Security.

   The task properties window opens.

   The *Update of databases and application modules* task is created automatically by the Administration Server quick start wizard. To create the *Update of databases and application modules* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

4. In the task properties window, select the **Settings** section.

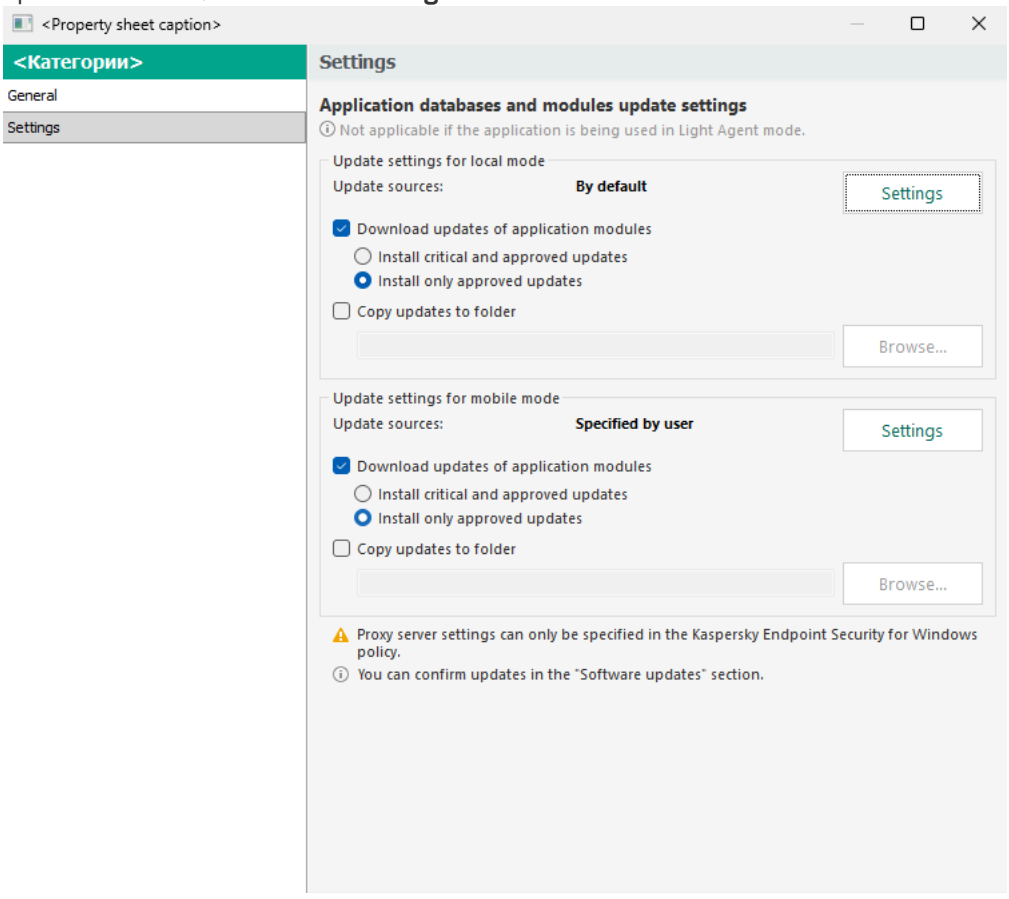

Update of databases and application modules task settings

5. In the **Update settings for local mode** block, click the **Settings** button.

6. In the list of update sources, click the **Add** button.

7. In the window that opens, enter the UNC path to the shared folder (for example, `\\<server name>\KLSHARE\Updates`).

   The source address must match the address indicated in the Kaspersky Update Utility settings.

8. Click **OK**.

9. Configure the priorities of update sources by using the **Up** and **Down** buttons.

   If an update cannot be performed from the first update source, Kaspersky Endpoint Security automatically switches over to the next source.

10. Save your changes.

How to configure updates from the shared folder in Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **Update** task of Kaspersky Endpoint Security.

   The task properties window opens.

   The *Update* task is created automatically by the Administration Server quick start wizard. To create the *Update* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

3. Select the **Application settings** → **Local mode** tab.

4. In the list of update sources, click the **Add** button.

5. In the window that opens, enter the UNC path to the shared folder (for example, `\\<server name>\KLSHARE\Updates`).

   > The source address must match the address indicated in the Kaspersky Update Utility settings.

6. Click **OK**.

7. Configure the priorities of update sources by using the **Up** and **Down** buttons.

   If an update cannot be performed from the first update source, Kaspersky Endpoint Security automatically switches over to the next source.

8. Save your changes.

How to configure updates from the shared folder in the application interface

> You cannot configure the *Update of databases and application modules* group task in the application interface. Only a local update task, *Update of databases and application modules*, is available to the user. If the *Update of databases and application modules* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

1. In the main application window, go to the **Update** section.

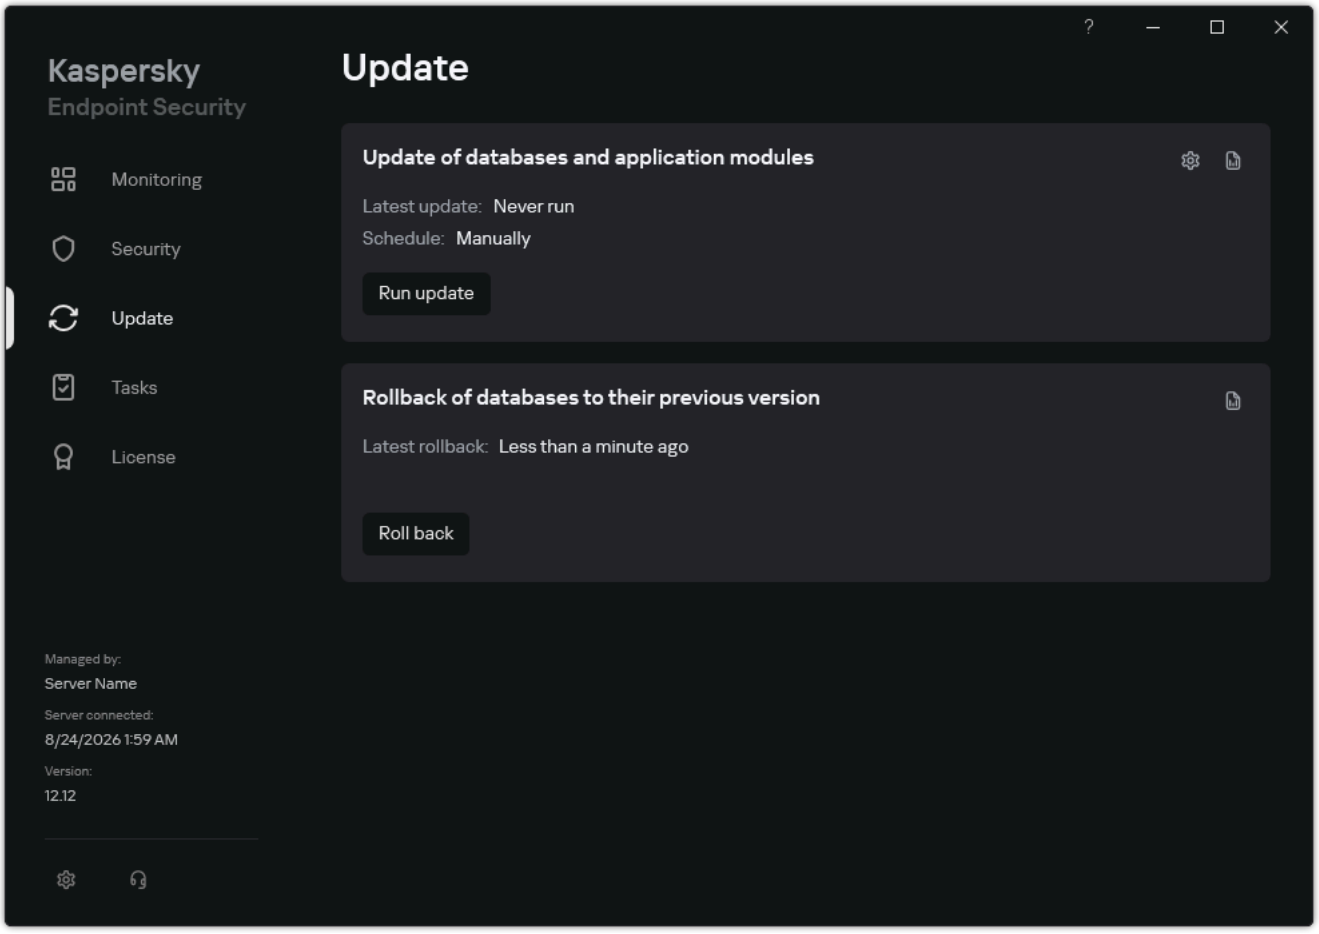

Local update tasks

2. This opens the task list; select the *Update of databases and application modules* task and click ⚙.

   The task properties window opens.

3. In the task properties window, click **Select update sources**.

4. In the list of update sources, click the **Add** button.

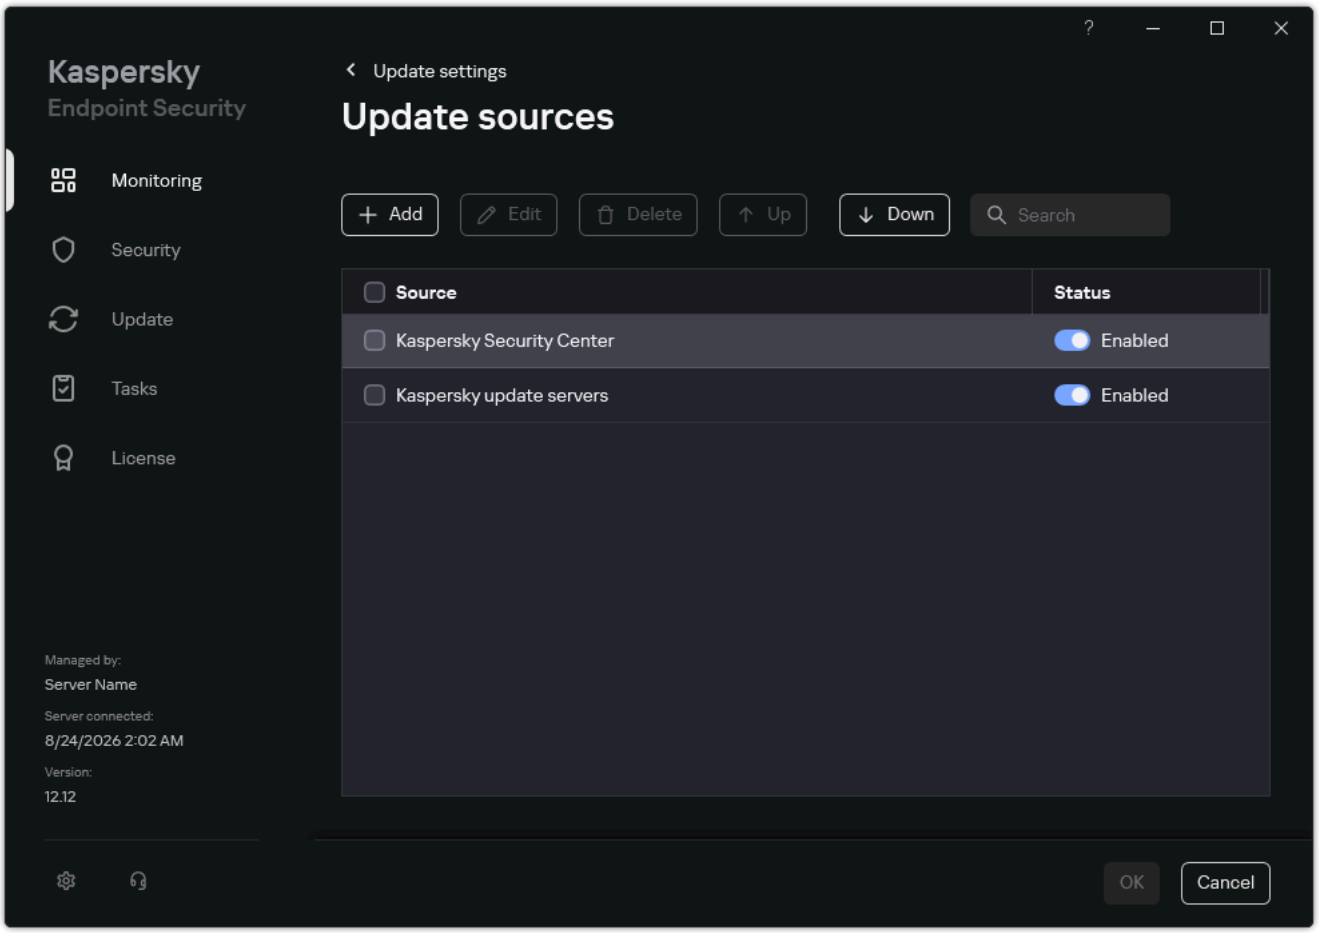

Sources of update

5. Enter the UNC path to the shared folder (for example, `\\<server name>\KLSHARE\Updates`).

> The source address must match the address indicated in the Kaspersky Update Utility settings.

6. Click **Select**.

7. Configure the priorities of update sources by using the **Up** and **Down** buttons.

   If an update cannot be performed from the first update source, Kaspersky Endpoint Security automatically switches over to the next source.

8. Save your changes.

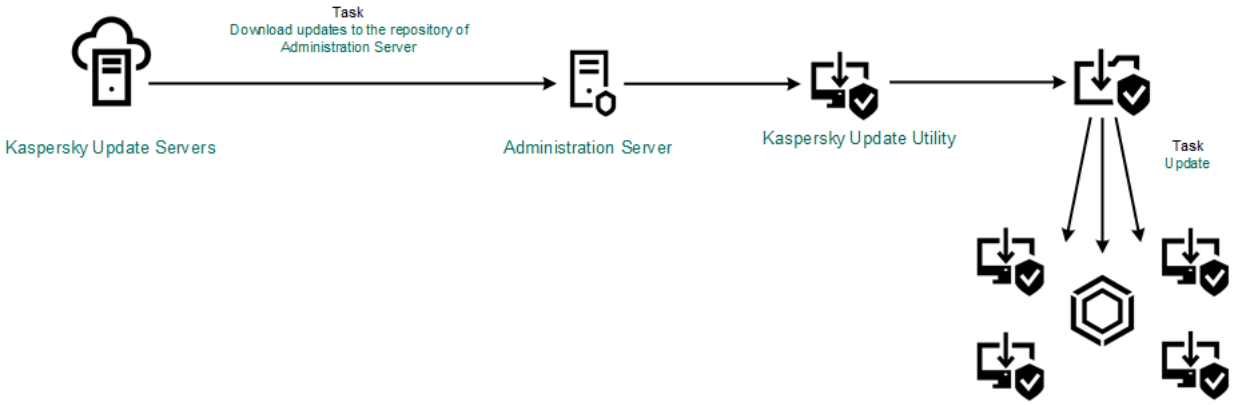

Updating using Kaspersky Update Utility

Updating in mobile mode

Mobile mode is the mode of Kaspersky Endpoint Security operation, when a computer leaves the organization network perimeter (*offline computer*). For more details about working with offline computers and out-of-office users, refer to the Kaspersky Security Center Help.

An offline computer outside of the organization's network cannot connect to the Administration Server to update databases and application modules. By default, only Kaspersky update servers are used as update source for updating databases and application modules in mobile mode. The use of a proxy server to connect to the Internet is determined by a special out-of-office policy. The out-of-office policy must be created separately. When Kaspersky Endpoint Security is switched to mobile mode, the update task is started every two hours.

How to configure the update settings for mobile mode in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Tasks**.

3. Click the **Update of databases and application modules** task of Kaspersky Endpoint Security.

   The task properties window opens.

   The *Update of databases and application modules* task is created automatically by the Administration Server quick start wizard. To create the *Update of databases and application modules* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

4. In the task properties window, select the **Settings** section.

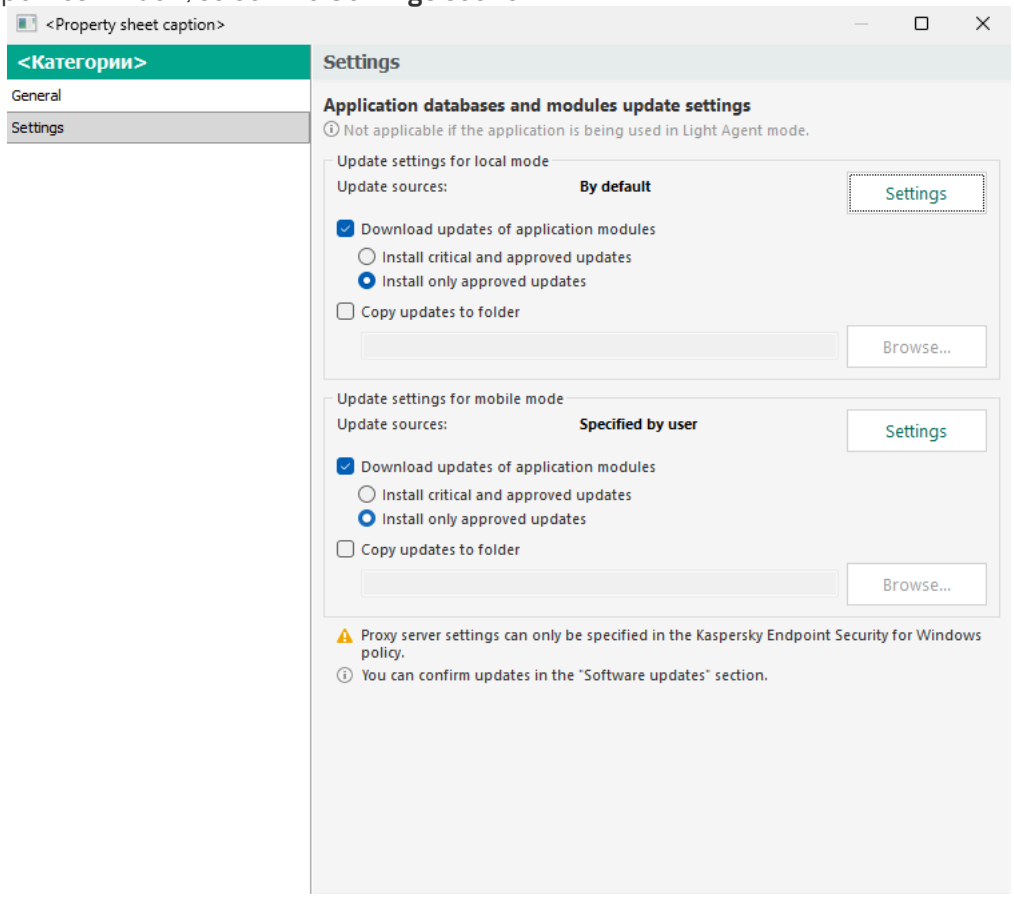

Update of databases and application modules task settings

5. In the **Update settings for mobile mode** block, click the **Settings** button.

6. Configure the sources of updates. The sources of updates can be Kaspersky update servers, other FTP- and HTTP servers, local folders, or network folders.

7. Save your changes.

How to configure the update settings for mobile mode in Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **Update** task of Kaspersky Endpoint Security.

   The task properties window opens.

   The *Update* task is created automatically by the Administration Server quick start wizard. To create the *Update* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

3. Select the **Application settings** → **Mobile mode** tab.

4. Configure the sources of updates. The sources of updates can be Kaspersky update servers, other FTP- and HTTP servers, local folders, or network folders.

5. Save your changes.

As a result, the databases and application modules will be updated on user computers when they switch to mobile mode.

Starting and stopping an update task

Regardless of the selected update task run mode, you can start or stop a Kaspersky Endpoint Security update task at any time.

To start or stop an update task:

1. In the main application window, go to the **Update** section.

2. In the **Update of databases and application modules** tile, click the **Update** button if you want to start the update task.

Kaspersky Endpoint Security will start updating the application modules and databases. The application will display the task progress, the size of the downloaded files, and the update source. You can stop the task at any time by clicking the **Stop update** button.

To start or stop the update task when the simplified application interface is displayed:

1. Right-click to bring up the context menu of the application icon that is in the taskbar notification area.

2. In the **Tasks** drop-down list in the context menu, do one of the following:

   - select a non-running update task to start it

   - select a running update task to stop it

   - select a paused update task to resume or restart it

Starting an update task under the rights of a different user account

By default, the Kaspersky Endpoint Security update task is started on behalf of the user whose account you have used to log in to the operating system. However, Kaspersky Endpoint Security may be updated from an update source that the user cannot access due to a lack of required rights (for example, from a shared folder that contains an update package) or an update source for which proxy server authentication is not configured. In the application settings, you can specify a user that has such rights and start the Kaspersky Endpoint Security update task under that user account.

To start an update task under a different user account:

> You cannot configure the *Update of databases and application modules* group task in the application interface. Only a local update task, *Update of databases and application modules*, is available to the user. If the *Update of databases and application modules* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

1. In the main application window, go to the **Update** section.

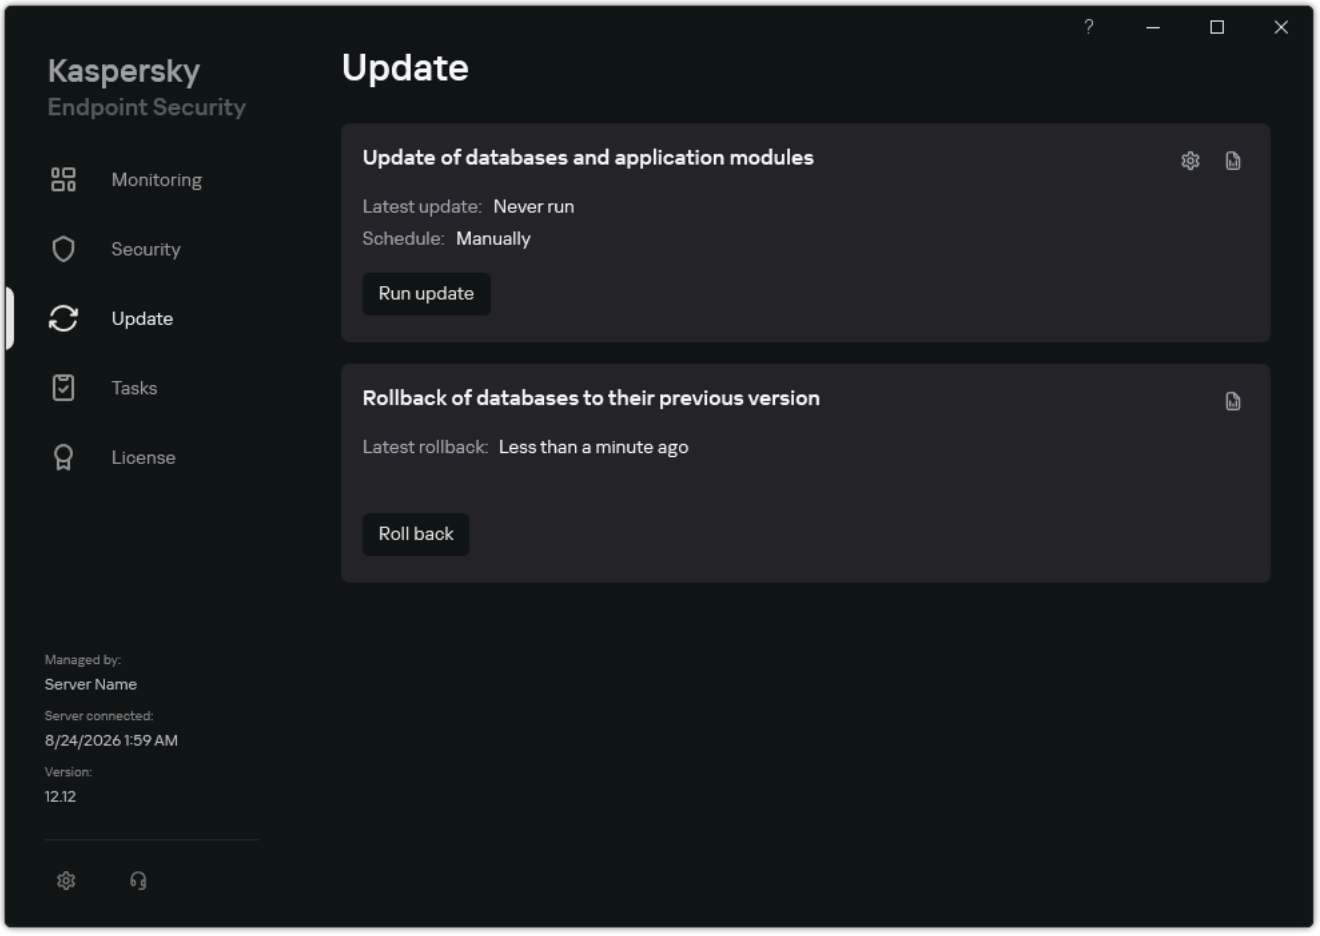

Local update tasks

2. This opens the task list; select the *Update of databases and application modules* task and click ⚙.

   The task properties window opens.

3. Click **Run database updates with user rights**.

4. In the window that opens, select **Other user**.

5. Enter the account credentials of a user with the necessary permissions to access the update source.

6. Save your changes.

Selecting the update task run mode

If it is not possible to run the update task for any reason (for example, the computer is not on at that time), you can configure the skipped task to be start automatically as soon as this becomes possible.

You can postpone starting the update task after the application starts if you select the **By schedule** update task run mode, and if the start time of Kaspersky Endpoint Security matches the update task start schedule. The update task can only be run after the specified time interval elapses after the startup of Kaspersky Endpoint Security.

To select the update task run mode:

> You cannot configure the *Update of databases and application modules* group task in the application interface. Only a local update task, *Update of databases and application modules*, is available to the user. If the *Update of databases and application modules* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

1. In the main application window, go to the **Update** section.

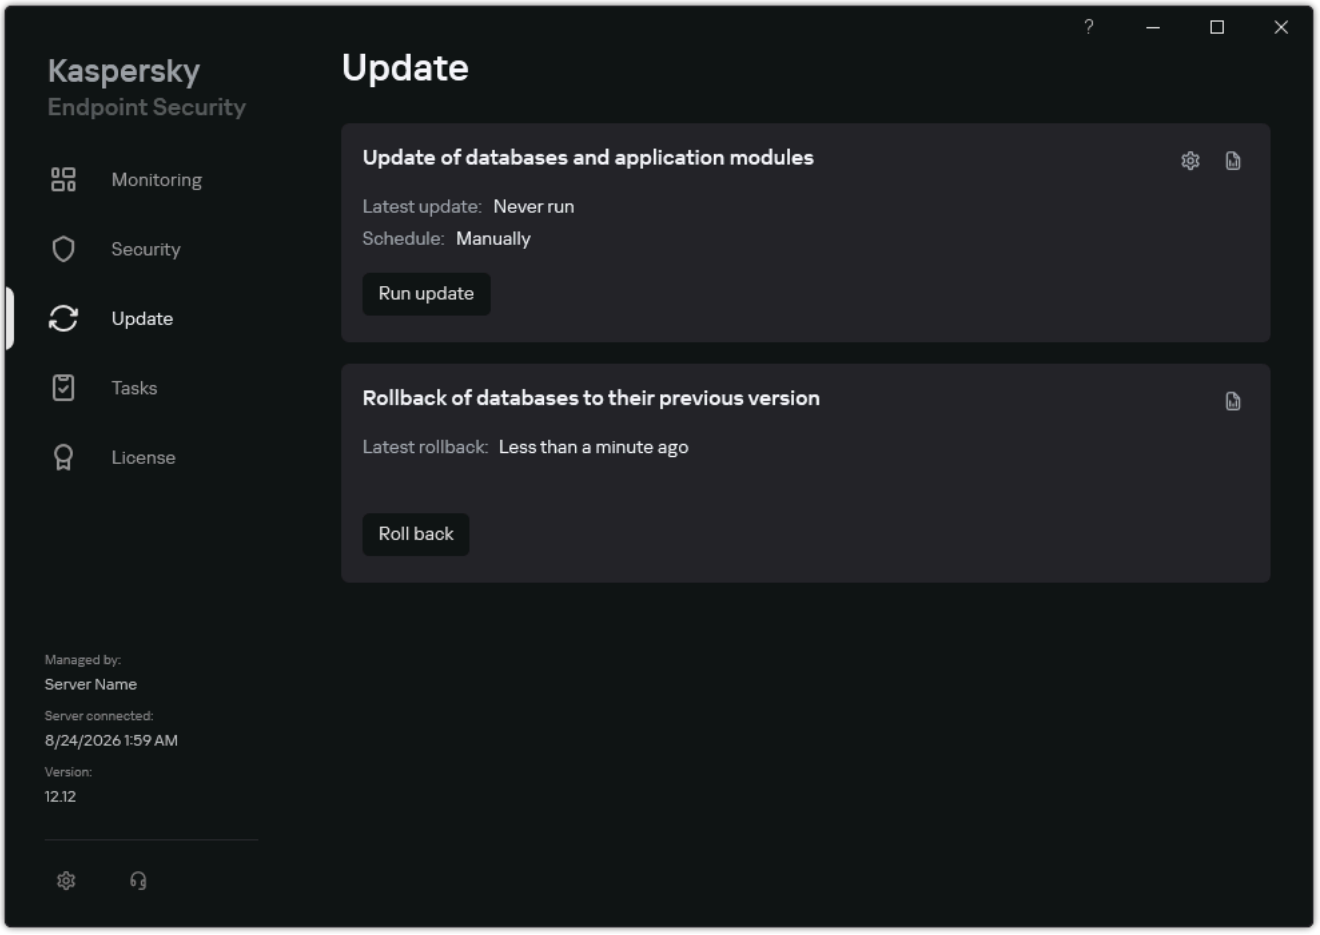

Local update tasks

2. This opens the task list; select the *Update of databases and application modules* task and click ⚙.

   The task properties window opens.

3. Click **Run mode**.

4. In the window that opens, select the update task run mode:

   - If you want Kaspersky Endpoint Security to run the update task depending on whether or not an update package is available from the update source, select **Automatically**. The frequency of checks by Kaspersky Endpoint Security for update packages increases during virus outbreaks and is less at other times.

   - If you want to start an update task manually, select **Manually**.

   - If you want to configure a schedule for running the update task, select other options. Configure the advanced settings for starting the update task:

     - In the **Postpone running after application startup for N minutes** field, enter the time interval by which you want to postpone the start of the update task after the startup of Kaspersky Endpoint Security.

     - Select the **Run scheduled scan on the next day if computer is turned off** if you want Kaspersky Endpoint Security to run missed update tasks at the first opportunity. When the application gets an opportunity to execute missed tasks, it runs the tasks randomly within a certain time interval to distribute the load on the computer.

5. Save your changes.

Adding an update source

An *update source* is a resource that contains updates for databases and application modules of Kaspersky Endpoint Security.

Update sources include the Kaspersky Security Center server, Kaspersky update servers, and network or local folders.

> If Kaspersky update servers are unavailable, Kaspersky Endpoint Security can use alternative domains to update its databases and application software modules. For detailed information, refer to the Technical Support Knowledge Base.

The default list of update sources includes Kaspersky Security Center and Kaspersky update servers. You can add other update sources to the list. You can specify HTTP/FTP servers and shared folders as update sources.

> Kaspersky Endpoint Security does not support updates from HTTPS servers unless they are Kaspersky's update servers.

If several resources are selected as update sources, Kaspersky Endpoint Security tries to connect to them one after another, starting from the top of the list, and performs the update task by retrieving the update package from the first available source.

By default, Kaspersky Endpoint Security uses the Kaspersky Security Center server as the first update source. This helps conserve traffic when updating. If a policy is not applied to the computer, Kaspersky servers are selected as the first update source in the settings of the *Update of databases and application modules* local task because the application may not have access to the Kaspersky Security Center server.

> If the application is running in Light Agent mode, a folder on the SVM is selected as the update source.

How to add an update source in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

   In the console tree, select **Tasks**.

2. Click the **Update of databases and application modules** task of Kaspersky Endpoint Security.

   The task properties window opens.

   The *Update of databases and application modules* task is created automatically by the Administration Server quick start wizard. To create the *Update of databases and application modules* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

3. In the task properties window, select the **Settings** section.

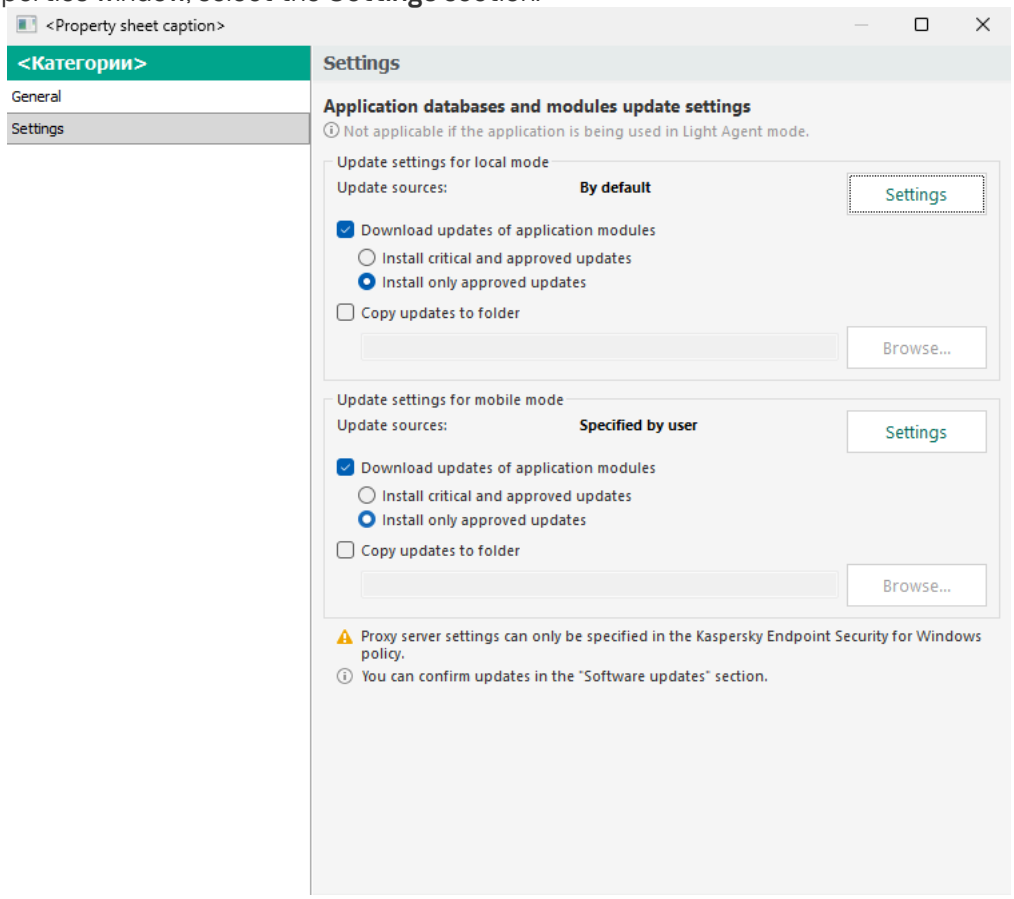

Update of databases and application modules task settings

4. In the **Update settings for local mode** block, click the **Settings** button.

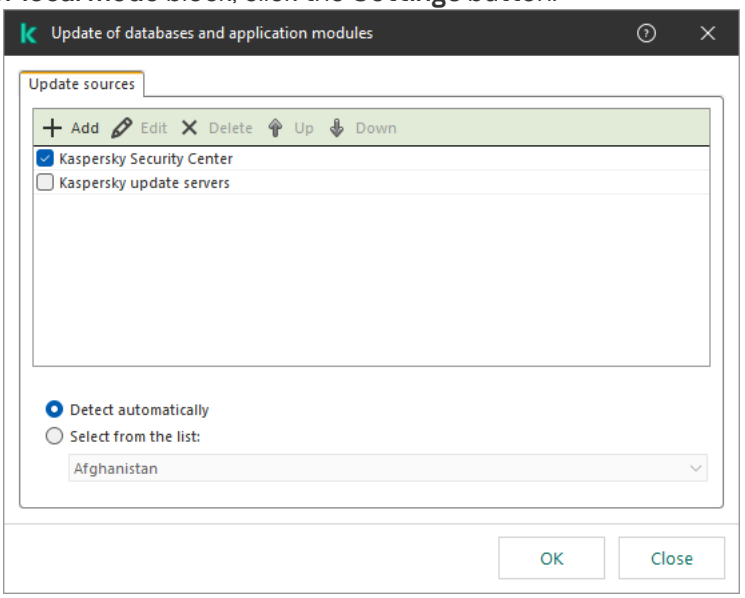

Sources of update

5. In the list of update sources, click the **Add** button.

6. In the **Update sources** field, specify the address of the FTP or HTTP server, network folder or local folder that contains the update package.

   The following path format is used for update source:

   - For an FTP or HTTP server, enter its web address or IP address.

     For example, `http://dnl-01.geo.kaspersky.com/` or `93.191.13.103`.

     For an FTP server, you can specify the authentication settings within the address in the following format: `ftp://<user name>:<password>@<node>:<port>`.

   - For a network folder, enter the UNC path.

     For example, `\\Server\Share\Update distribution`.

   - For a local folder, enter the full path to that folder.

     For example, `C:\Documents and Settings\All Users\Application Data\Kaspersky Lab\AVP12\Update distribution\`.

   You can exclude the update source without removing it from the list of update sources. To do so, clear the check box next to the object.

7. Click **OK**.

8. Configure the priorities of update sources by using the **Up** and **Down** buttons.

   If an update cannot be performed from the first update source, Kaspersky Endpoint Security automatically switches over to the next source.

9. If necessary, add an update source for mobile mode. *Mobile mode* is the mode of Kaspersky Endpoint Security operation, when a computer leaves the organization network perimeter (*offline computer*).

10. Save your changes.

How to add an update source in the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **Update** task of Kaspersky Endpoint Security.

   The task properties window opens.

   The *Update* task is created automatically by the Administration Server quick start wizard. To create the *Update* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

3. Select the **Application settings** → **Local mode** tab.

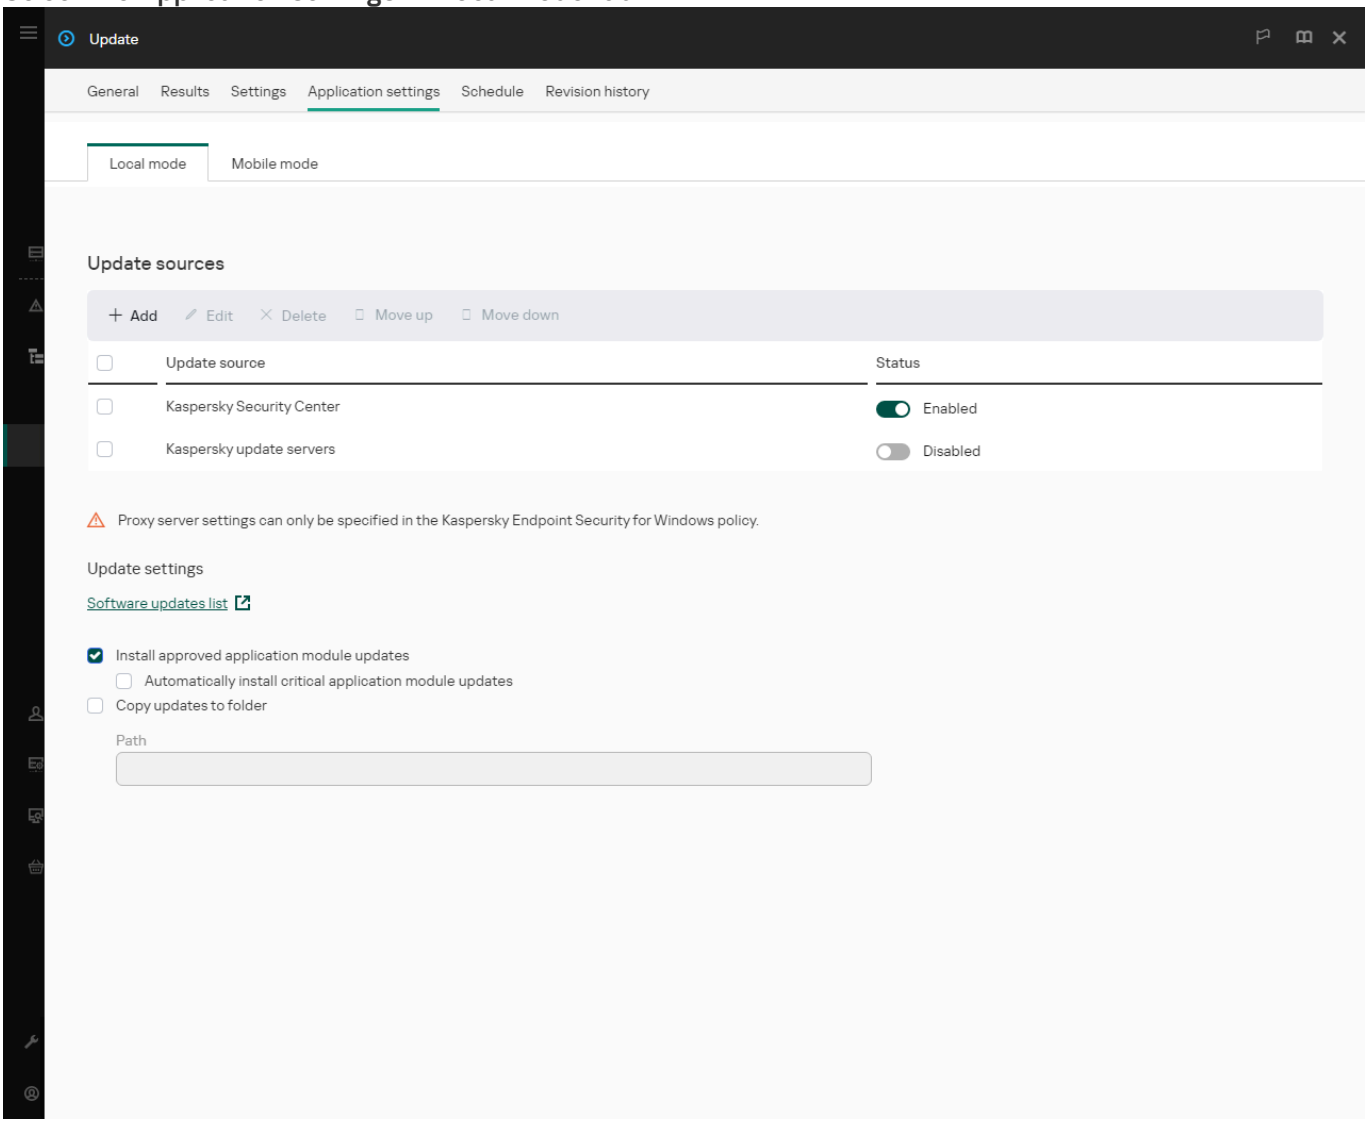

Sources of update

4. In the list of update sources, click the **Add** button.

5. In the window that opens, specify the address of the FTP or HTTP server, network folder or local folder that contains the update package.

   The following path format is used for update source:

   - For an FTP or HTTP server, enter its web address or IP address.

     For example, `http://dnl-01.geo.kaspersky.com/` or `93.191.13.103`.

     For an FTP server, you can specify the authentication settings within the address in the following format: `ftp://<user name>:<password>@<node>:<port>`.

- For a network folder, enter the UNC path.

  For example, `\\Server\Share\Update distribution`.

- For a local folder, enter the full path to that folder.

  For example, `C:\Documents and Settings\All Users\Application Data\Kaspersky Lab\AVP12\Update distribution\`.

You can exclude the update source without removing it from the list of update sources. To do so, set the toggle switch next to it to the off position.

6. Click **OK**.

7. Configure the priorities of update sources by using the **Move up** and **Move down** buttons.

   If an update cannot be performed from the first update source, Kaspersky Endpoint Security automatically switches over to the next source.

8. If necessary, add an update source for mobile mode. *Mobile mode* is the mode of Kaspersky Endpoint Security operation, when a computer leaves the organization network perimeter (*offline computer*).

9. Save your changes.

How to add an update source in the application interface

> You cannot configure the *Update of databases and application modules* group task in the application interface. Only a local update task, *Update of databases and application modules*, is available to the user. If the *Update of databases and application modules* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

1. In the main application window, go to the **Update** section.

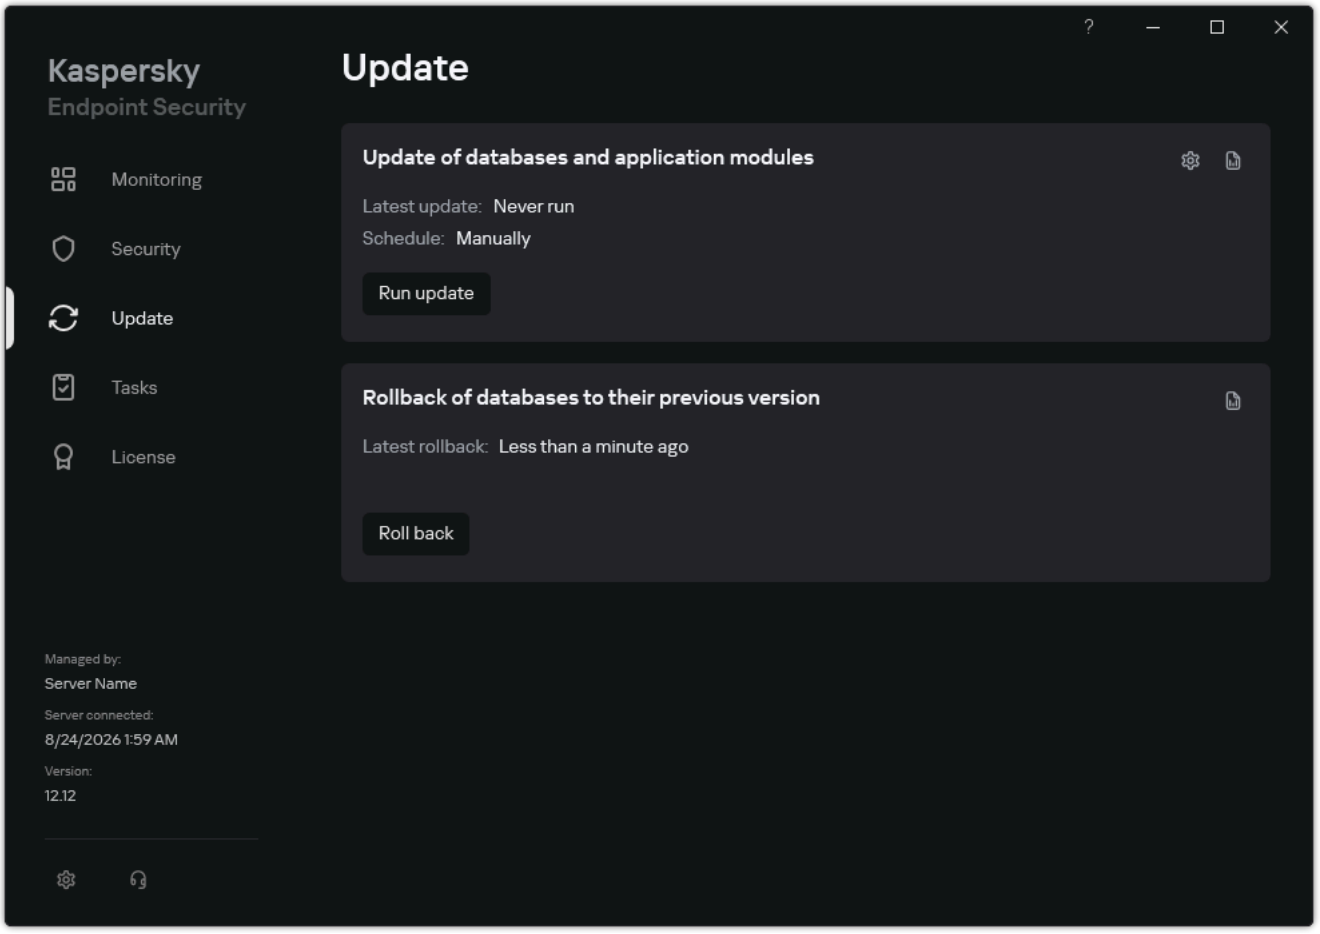

Local update tasks

2. This opens the task list; select the *Update of databases and application modules* task and click ⚙.

   The task properties window opens.

3. Click **Select update sources**.

4. In the window that opens, click the **Add** button.

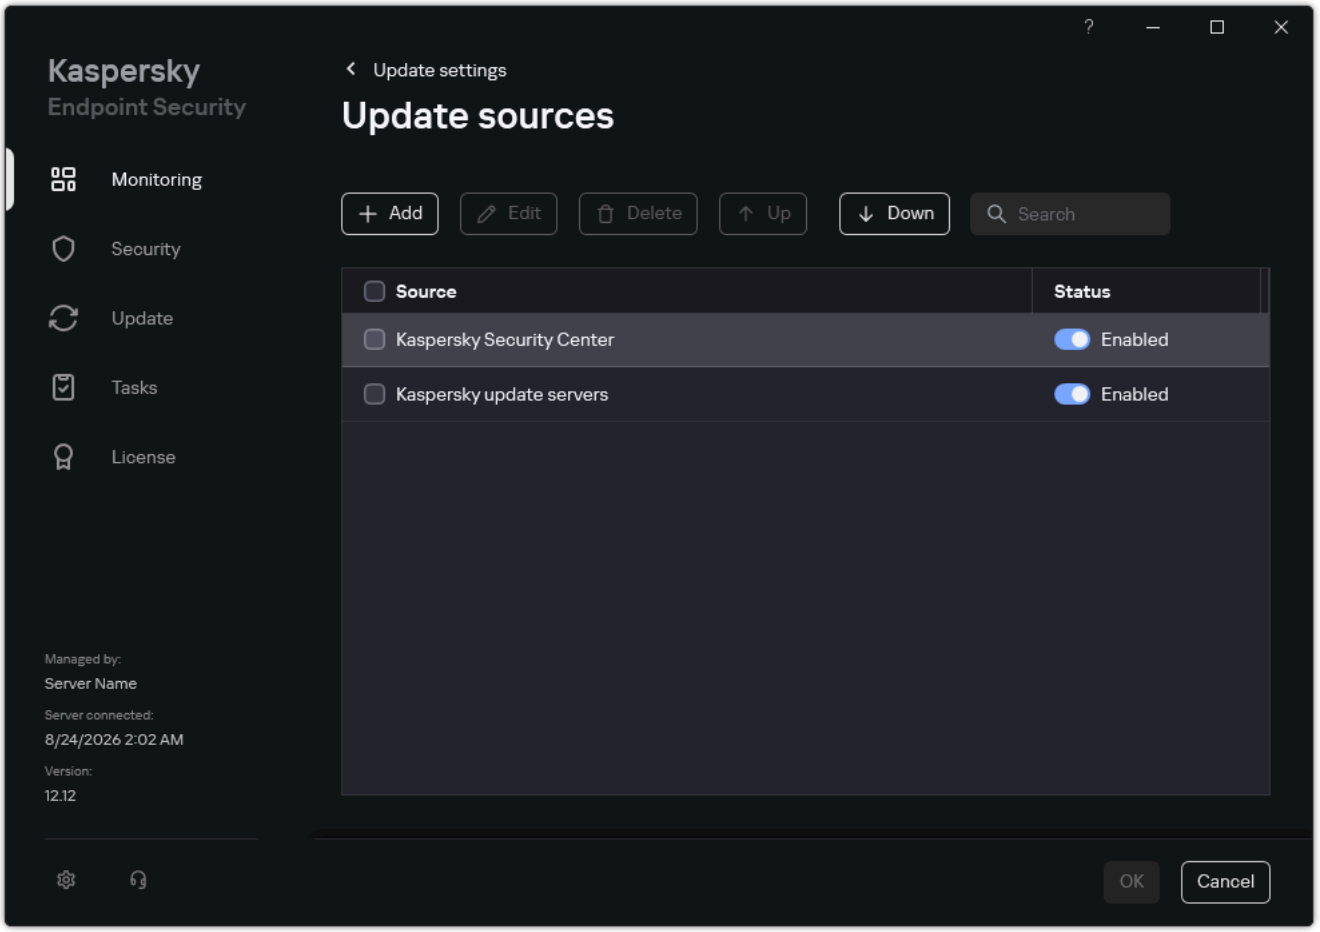

Sources of update

5. In the window that opens, specify the address of the FTP or HTTP server, network folder or local folder that contains the update package.

   The following path format is used for update source:

   - For an FTP or HTTP server, enter its web address or IP address.

     For example, `http://dnl-01.geo.kaspersky.com/` or `93.191.13.103`.

     For an FTP server, you can specify the authentication settings within the address in the following format: `ftp://<user name>:<password>@<node>:<port>`.

   - For a network folder, enter the UNC path.

     For example, `\\Server\Share\Update distribution`.

   - For a local folder, enter the full path to that folder.

     For example, `C:\Documents and Settings\All Users\Application Data\Kaspersky Lab\AVP12\Update distribution\`.

6. Click **Select**.

7. Configure the priorities of update sources by using the **Up** and **Down** buttons.

8. Save your changes.

Updating application modules

Application module updates fix errors, improve performance, and add new features. When a new application module update becomes available, you need to confirm installation of the update. You can confirm installation of an application module update either in the application interface or in Kaspersky Security Center. Whenever an update is available, the application displays a notification in the main window of Kaspersky Endpoint Security: . If application module updates require reviewing and accepting the terms of the End User License Agreement, the application installs updates after the terms of the End User License Agreement have been accepted.

After installing an application update, you may be required to restart your computer.

How to configure application module updates in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Tasks**.

3. Click the **Update of databases and application modules** task of Kaspersky Endpoint Security.

   The task properties window opens.

   The *Update of databases and application modules* task is created automatically by the Administration Server quick start wizard. To create the *Update of databases and application modules* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

4. In the task properties window, select the **Settings** section.

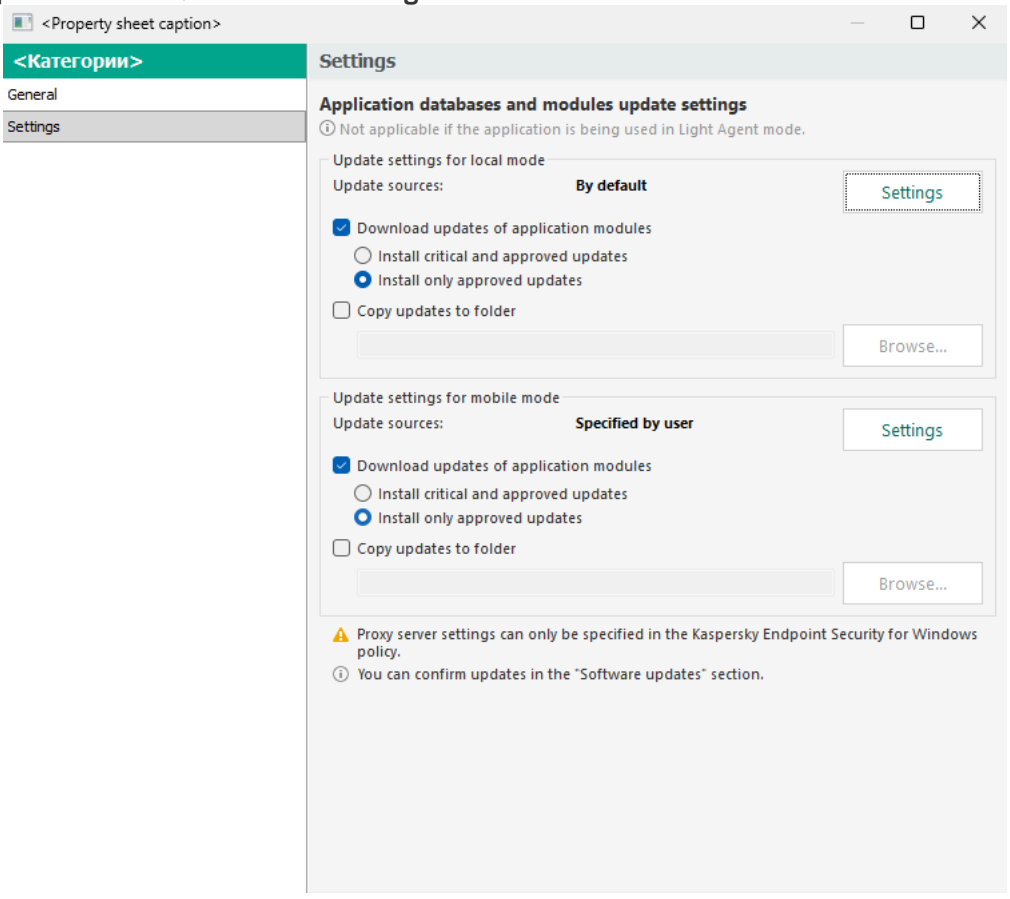

Update of databases and application modules task settings

5. In the **Update settings for local mode** block, select the **Download updates of application modules** check box.

   If you want to prevent application module updates from downloading, clear the **Download updates of application modules** check box and prohibit the use of local tasks by the user.

6. Select the application module updates that you want to install.

   - **Install critical and approved updates**. If this option is selected, when application module updates are available Kaspersky Endpoint Security installs critical updates automatically and all other application module updates only after their installation is approved locally via the application interface or on the side of Kaspersky Security Center.

   - **Install only approved updates**. If this option is selected, when application module updates are available Kaspersky Endpoint Security installs them only after their installation is approved locally via the application interface or on the side of Kaspersky Security Center. This option is selected by default.

7. If necessary, configure application module updates for mobile mode. *Mobile mode* is the mode of Kaspersky Endpoint Security operation, when a computer leaves the organization network perimeter (*offline computer*).

8. Save your changes.

How to configure application module updates in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **Update of databases and application modules** task of Kaspersky Endpoint Security.

   The task properties window opens.

   The *Update of databases and application modules* task is created automatically by the Administration Server quick start wizard. To create the *Update of databases and application modules* task, install the Kaspersky Endpoint Security for Windows Management Plug-in while running the Wizard.

3. Select the **Application settings** → **Local mode** tab.

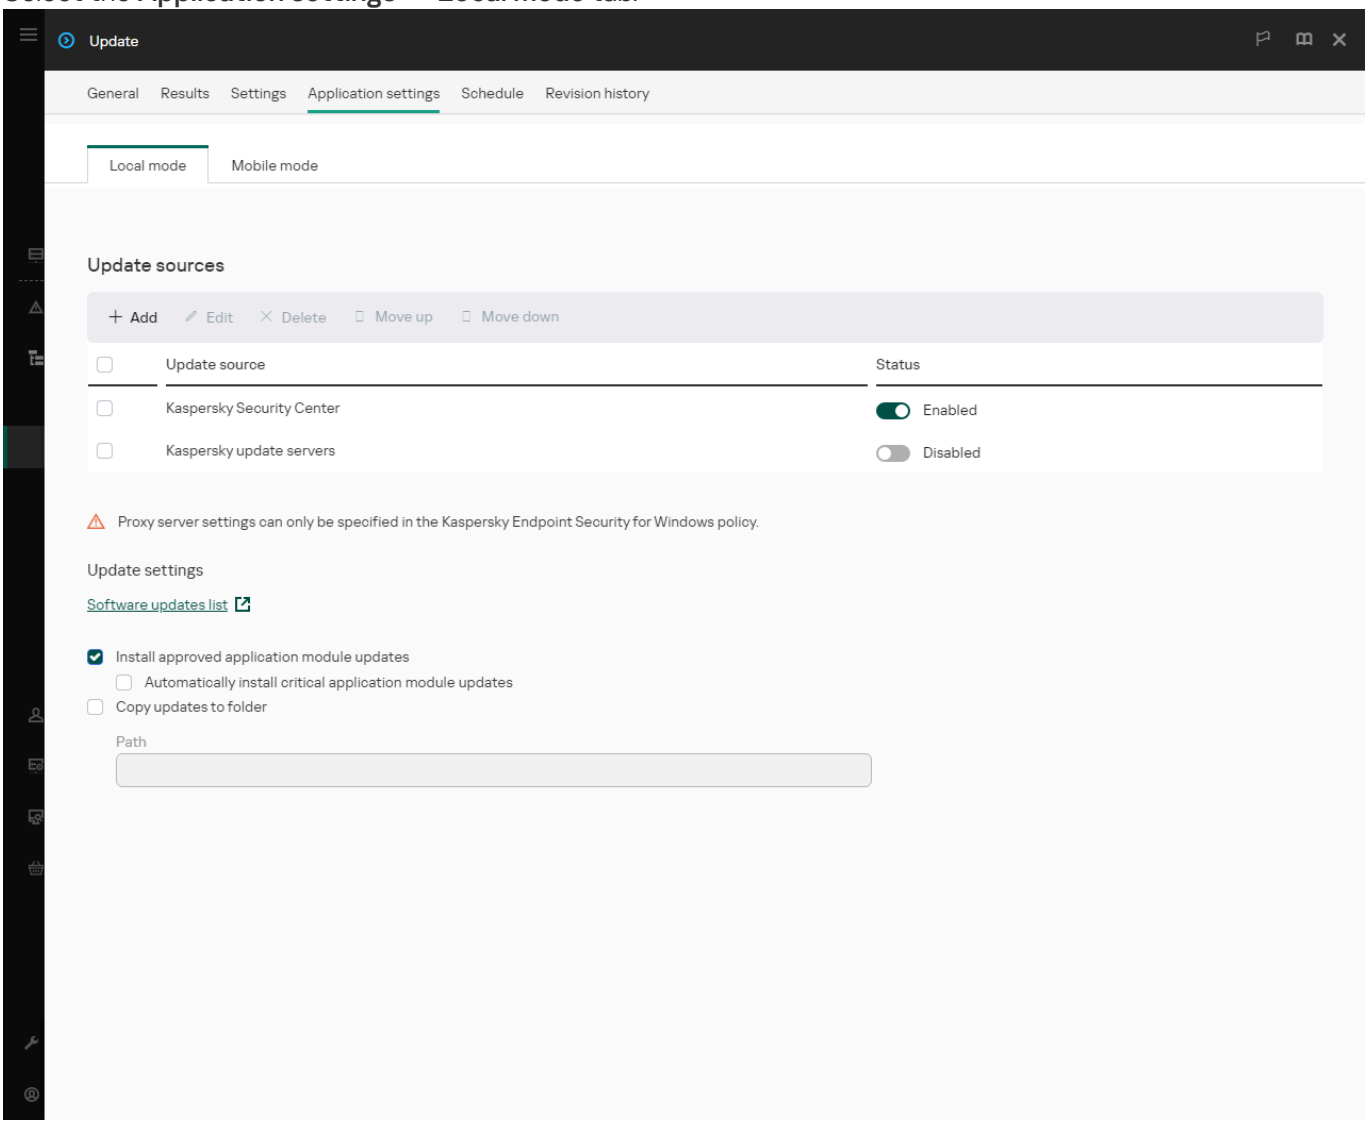

Update task settings

4. Under **Update settings**, select the application module updates that you want to install:

   - **Install approved application module updates**. If this option is selected, when application module updates are available Kaspersky Endpoint Security installs them only after their installation is approved locally via the application interface or on the side of Kaspersky Security Center. This option is selected by default.

   - **Automatically install critical application module updates**. If this option is selected, when application module updates are available Kaspersky Endpoint Security installs critical updates automatically and all other application module updates only after their installation is approved locally via the application interface or on the side of Kaspersky Security Center.

   If you want to prevent application module updates from downloading, clear the **Install approved application module updates** and **Automatically install critical application module updates** check boxes and prohibit the use of local tasks by the user.

5. If necessary, configure application module updates for mobile mode. *Mobile mode* is the mode of Kaspersky Endpoint Security operation, when a computer leaves the organization network perimeter (*offline computer*).

6. Save your changes.

How to configure application module updates in the application interface

> You cannot configure the *Update of databases and application modules* group task in the application interface. Only a local update task, *Update of databases and application modules*, is available to the user. If the *Update of databases and application modules* task is not displayed, it means the administrator has prohibited the use of local tasks in the policy.

1. In the main application window, go to the **Update** section.

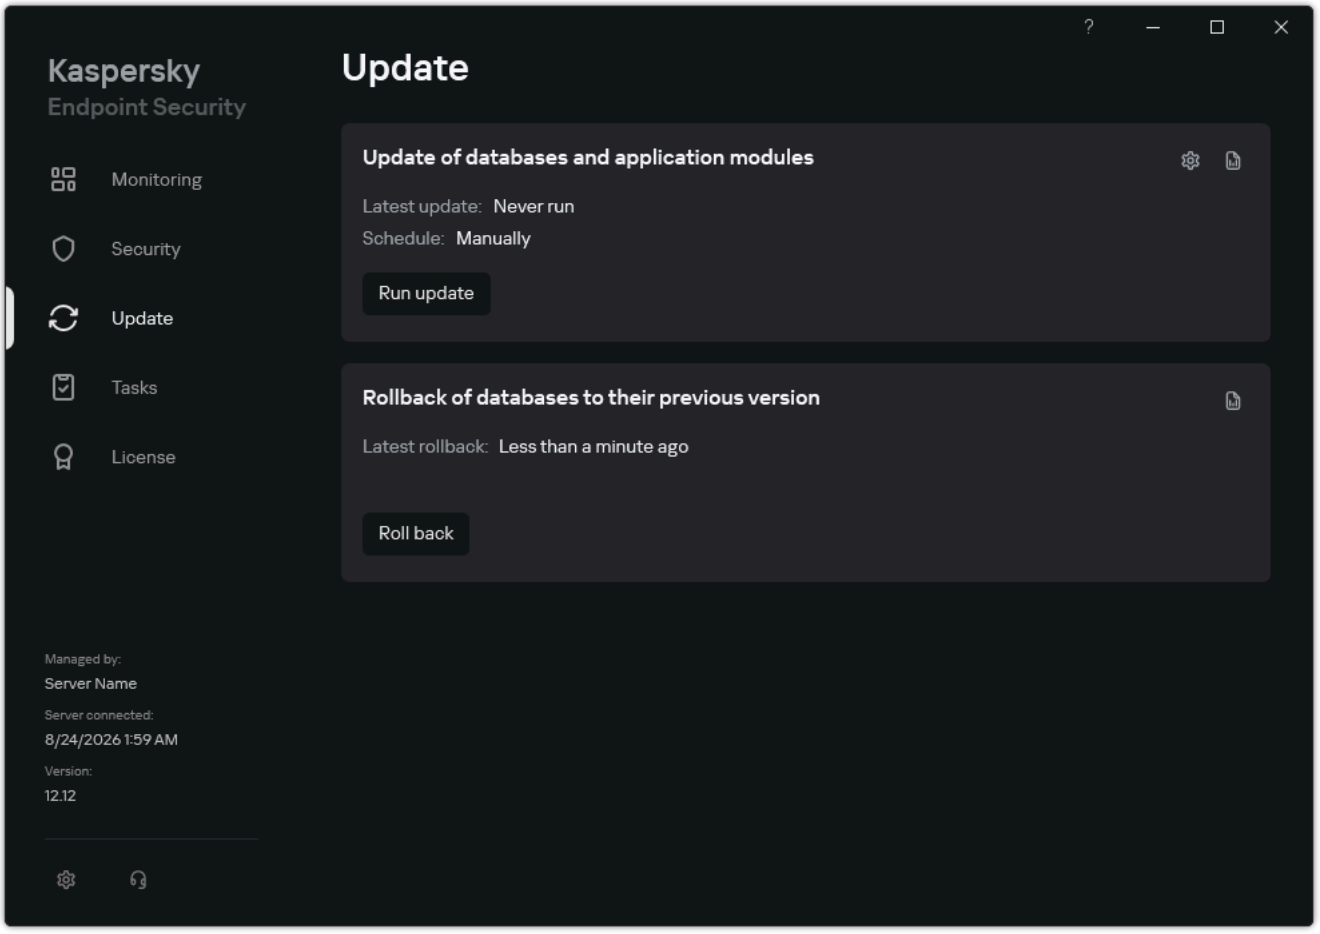

Local update tasks

2. This opens the task list; select the *Update of databases and application modules* task and click ⚙.

   The task properties window opens.

3. In the **Downloading and installing updates of application modules** block, select the **Download updates of application modules** check box.

4. Select the application module updates that you want to install.

   - **Install critical and approved updates**. If this option is selected, when application module updates are available Kaspersky Endpoint Security installs critical updates automatically and all other application module updates only after their installation is approved locally via the application interface or on the side of Kaspersky Security Center.

   - **Install only approved updates**. If this option is selected, when application module updates are available Kaspersky Endpoint Security installs them only after their installation is approved locally via the application interface or on the side of Kaspersky Security Center. This option is selected by default.

5. Save your changes.

Using a proxy server for updates

You may be required to specify proxy server settings to download database and application module updates from the update source. If there are multiple update sources, proxy server settings are applied for all sources. If a proxy server is not needed for some update sources, you can disable use of a proxy server in the policy properties. Kaspersky Endpoint Security will also use a proxy server to access Kaspersky Security Network and activation servers.

To configure a connection to update sources through a proxy server:

1. In the main window of the Web Console, click ⚙.

   The Administration Server properties window opens.

2. Go to the **Configuring internet access** section.

3. Select the **Use proxy server** check box.

4. Configure the proxy server connection settings: proxy server address, port, and authentication settings (user name and password).

5. Save your changes.

To disable use of a proxy server for a specific administration group:

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **Network Settings**.

5. In the **Proxy server** block, click the **Settings** button.

6. In the window that opens, select the **Bypass a proxy server for local addresses** check box.

7. Save your changes.

To configure the proxy server settings in the application interface:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Network settings**.

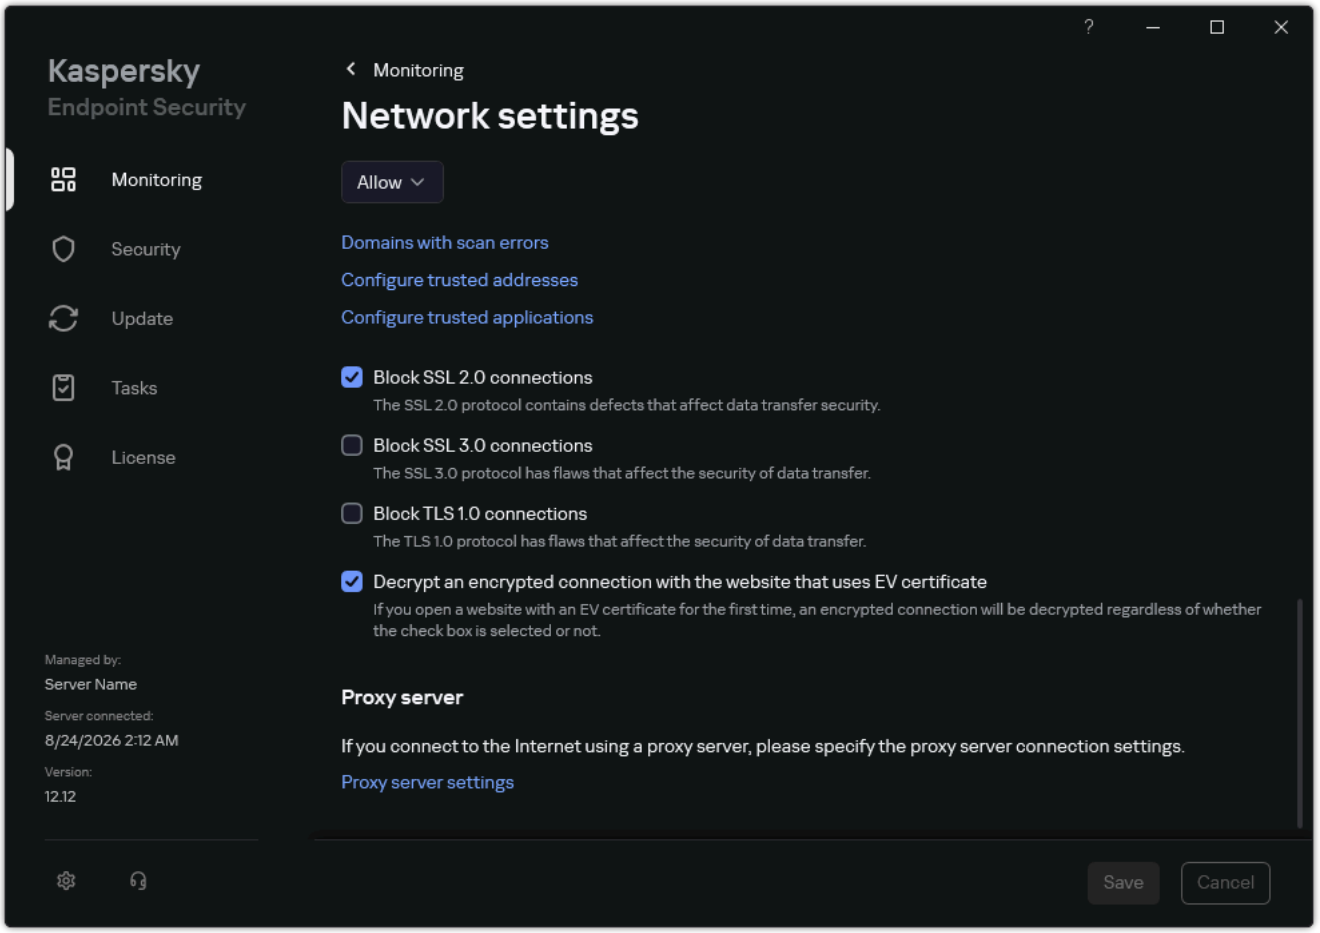

Application network settings

3. In the **Proxy server** block, click the **Proxy server settings** link.

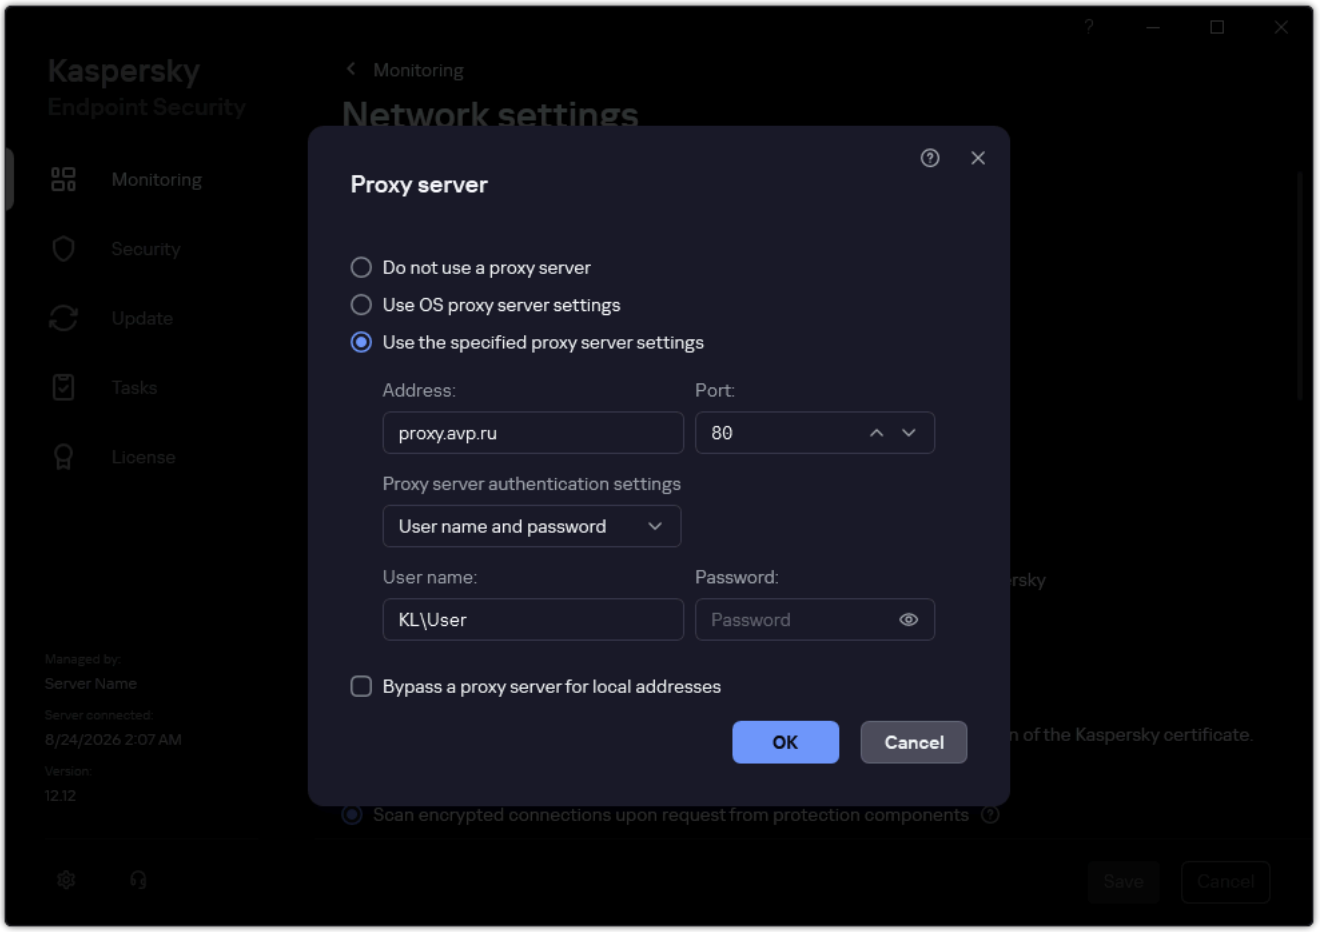

Proxy server connection settings

4. In the window that opens, select one of the following options for determining the proxy server address:

   - **Use OS proxy server settings**.

     This option is selected by default. Kaspersky Endpoint Security uses the proxy server settings that are defined in the operating system settings.

   - **Use the specified proxy server settings**.

     If you selected this option, configure the settings for connecting to the proxy server: proxy server address and port.

5. Select how you want the application to authenticate on the proxy server. By default, the application uses domain NTLM authentication of the current user.

6. If you want to disable proxy server use when updating databases and application modules from a shared folder, select the **Bypass a proxy server for local addresses** check box.

7. Save your changes.

As a result, Kaspersky Endpoint Security will use the proxy server to download application module and database updates. Kaspersky Endpoint Security will also use the proxy server to access KSN servers and Kaspersky activation servers. If authentication is required on the proxy server but the user account credentials were not provided or are incorrect, Kaspersky Endpoint Security will prompt you for the user name and password.

Last update rollback

After the databases and application modules are updated for the second time, the function of rolling back the databases and application modules to their previous versions becomes available.

Each time that a user starts the update process, Kaspersky Endpoint Security creates a backup copy of the current databases and application modules. This lets you roll back the databases and application modules to their previous versions when necessary. Rolling back the last update is useful, for example, if a new database version causes a false positive that results in Kaspersky Endpoint Security blocking a safe application.

Kaspersky Endpoint Security in Light Agent mode does not support the *Update rollback* task.

How to roll back the last update in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

1. Select **Kaspersky Endpoint Security for Windows (14.2)** → **Update rollback**.

Step 2. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 3. Configuring a task start schedule

Configure the task schedule, for example, manually.

Step 4. Defining the task name

Enter a name for the task.

Step 7. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

How to rollback the last update in the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Rollback**.

   c. In the **Task name** field, enter a brief description, for example, *Update rollback*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Select an account to run the task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.

6. Finish the wizard.

7. A new task will be displayed in the list of tasks.

8. Select the check box next to the task.

9. Click **Start**.

How to rollback the last update in the application interface

1. In the main application window, go to the **Update** section.

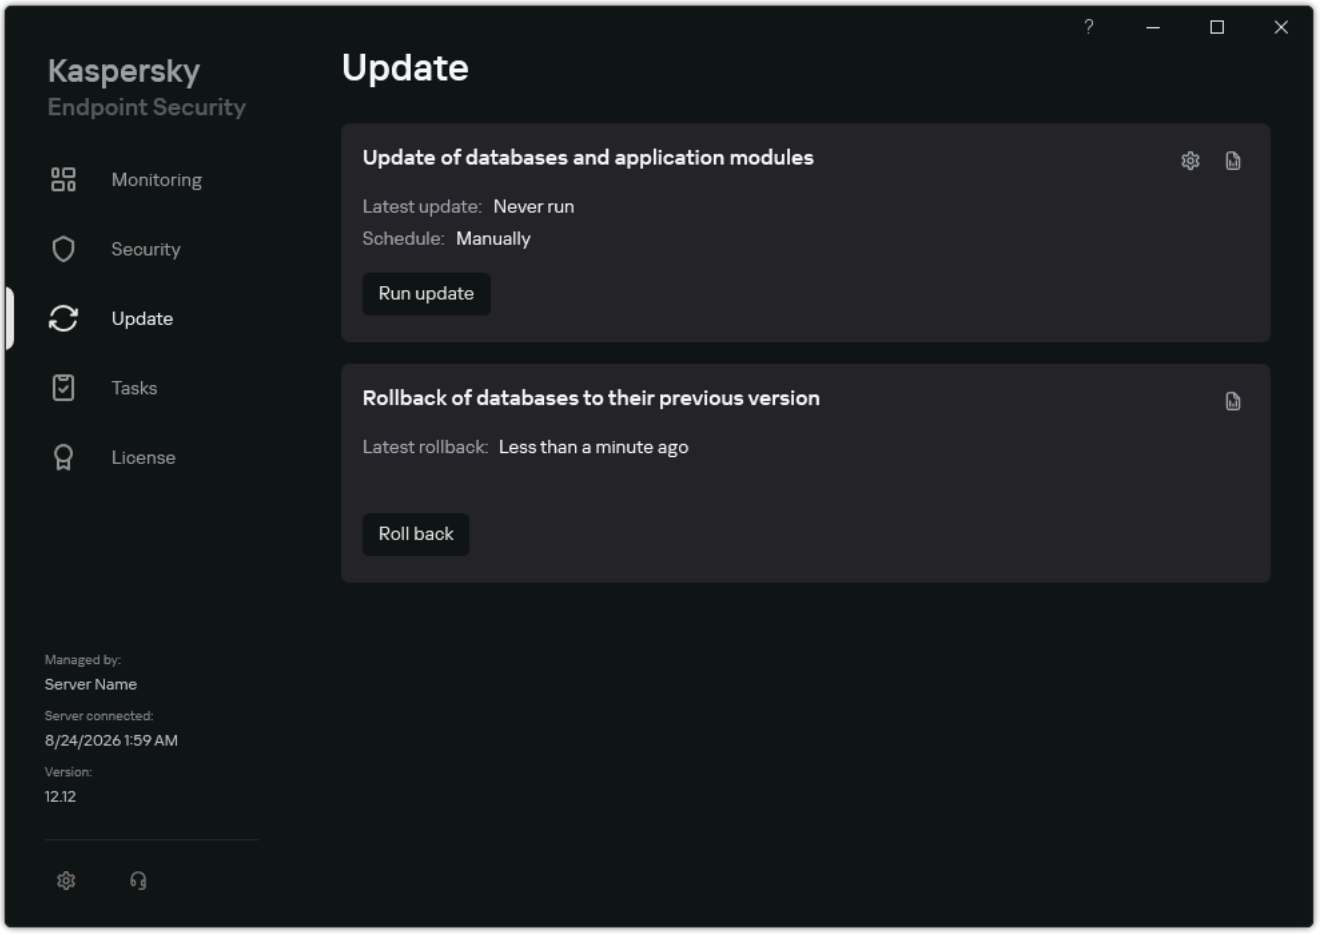

Local update tasks

2. In the **Rollback of databases to their previous version** tile, click the **Roll back** button.

   Kaspersky Endpoint Security will start rolling back the last database update. The application will display the rollback progress, the size of the downloaded files, and the update source. You can stop the task at any time by clicking the **Stop update** button.

Advanced disinfection technology

To work with active threats, Kaspersky Endpoint Security uses the Advanced Disinfection technology. Advanced Disinfection works differently for workstations and servers. You can configure advanced disinfection in *Malware Scan* task settings and in application settings.

If Kaspersky Endpoint Security cannot halt the execution of a piece of malware, you can use the Advanced Disinfection technology. For computers under policy, Advanced Disinfection is disabled by default because this technology uses a significant amount of computing resources. For computers not under policy, Advanced Disinfection is enabled by default.

> Advanced Disinfection works differently for workstations and servers. To use the technology on servers, you must enable immediate Advanced Disinfection in the properties of the *Malware Scan* task. This prerequisite is not necessary to use the technology on workstations.

How to enable or disable the Advanced Disinfection technology in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Application settings**.
4. In the **General** block, select or clear the **Enable Advanced Disinfection technology** check box to enable or disable Advanced Disinfection technology.
5. Save your changes.

How to enable or disable the Advanced Disinfection technology in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Select **General Settings** → **Detection Settings**.
5. In the **Advanced Disinfection Technology** block, turn on or turn off the **Advanced Disinfection Technology ENABLED** toggle switch to enable or disable Advanced Disinfection technology.
6. Save your changes.

How to enable or disable the Advanced Disinfection technology in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Application settings**.

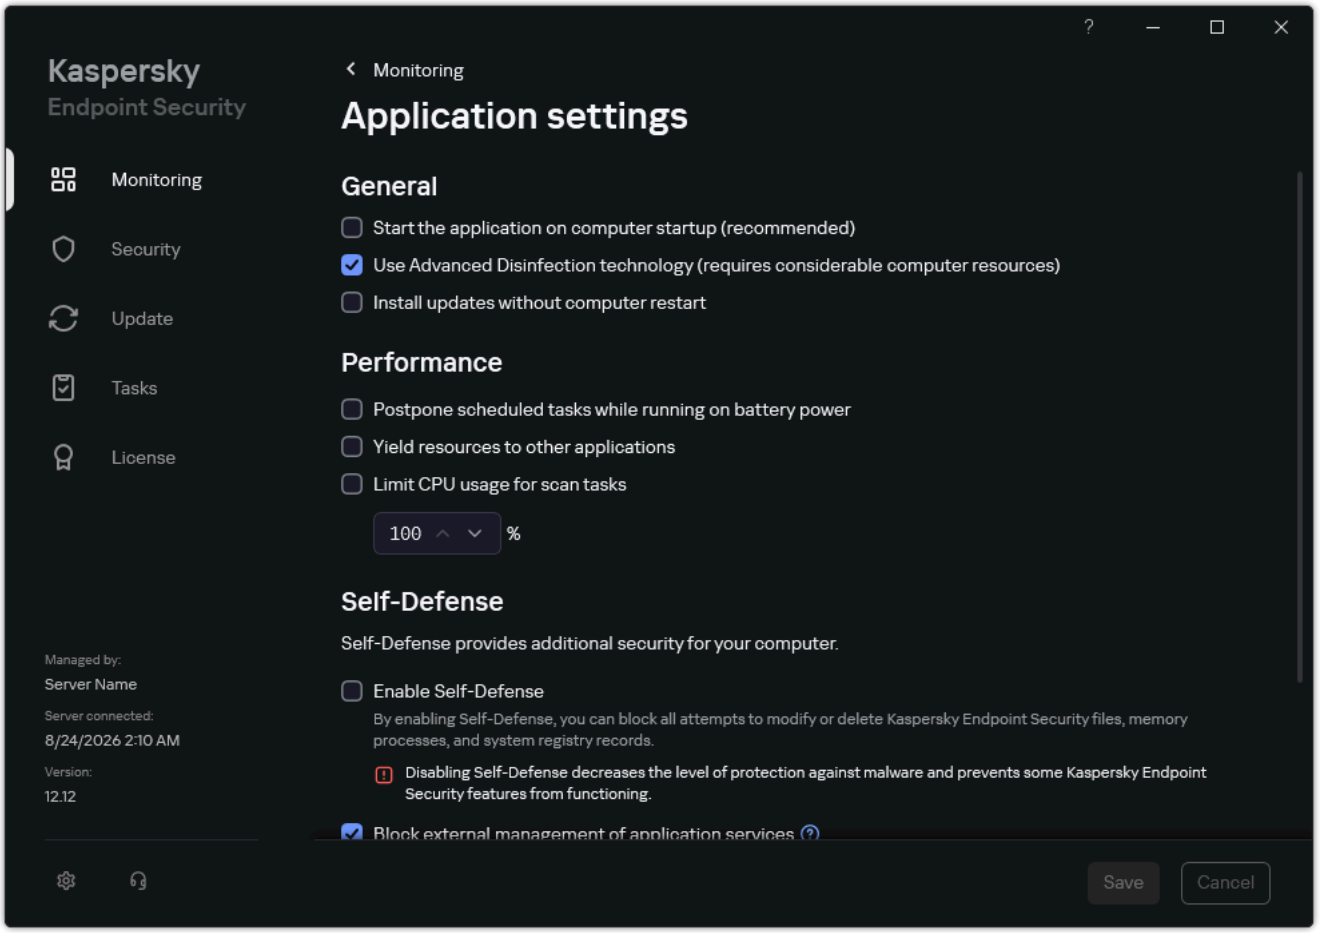

Kaspersky Endpoint Security for Windows settings

3. In the **General** block, select or clear the **Use Advanced Disinfection technology (requires considerable computer resources)** check box to enable or disable Advanced Disinfection technology.

4. Save your changes.

As a result, the user cannot use most operating system features while Advanced Disinfection is in progress. When the disinfection is complete, the computer will be rebooted.

Disinfection of active threats on workstations

To work with active threats on workstations, enable the Advanced Disinfection technology in the application settings. Next, configure the user experience in the *Malware Scan* task properties. There is a **Run Advanced Disinfection immediately** check box in the task properties. If the flag is set, Kaspersky Endpoint Security will perform disinfection without notifying the user. When the disinfection is complete, the computer will be rebooted. If the flag is unset, Kaspersky Endpoint Security will display a notification about active threats (see the figure below). You cannot close this notification without processing the file.

Advanced Disinfection during a virus scan task on a computer is performed only if the Advanced Disinfection feature is enabled in the properties of the policy applied to this computer.

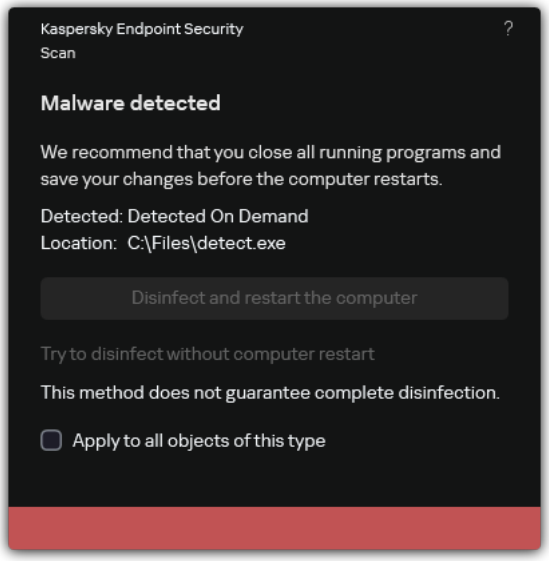

Notification about active threat

Disinfection of active threats on servers

To work with active threats on servers, you need to do the following:

- enable the Advanced Disinfection technology in the application settings;
- enable immediate Advanced Disinfection in the *Malware Scan* task properties.

If Kaspersky Endpoint Security is installed on a computer running Windows for Servers, Kaspersky Endpoint Security does not show the notification. Therefore, you cannot select an action to disinfect an active threat. To disinfect a threat, you need to enable Advanced Disinfection technology in application settings and enable immediate Advanced Disinfection in *Malware Scan* task settings. Then you need to start a *Malware Scan* task.

Eliminating unprocessed threats

Kaspersky Endpoint Security logs information about files that it has not processed for some reason. This information is recorded in the form of events in the list of active threats (see the figure below).

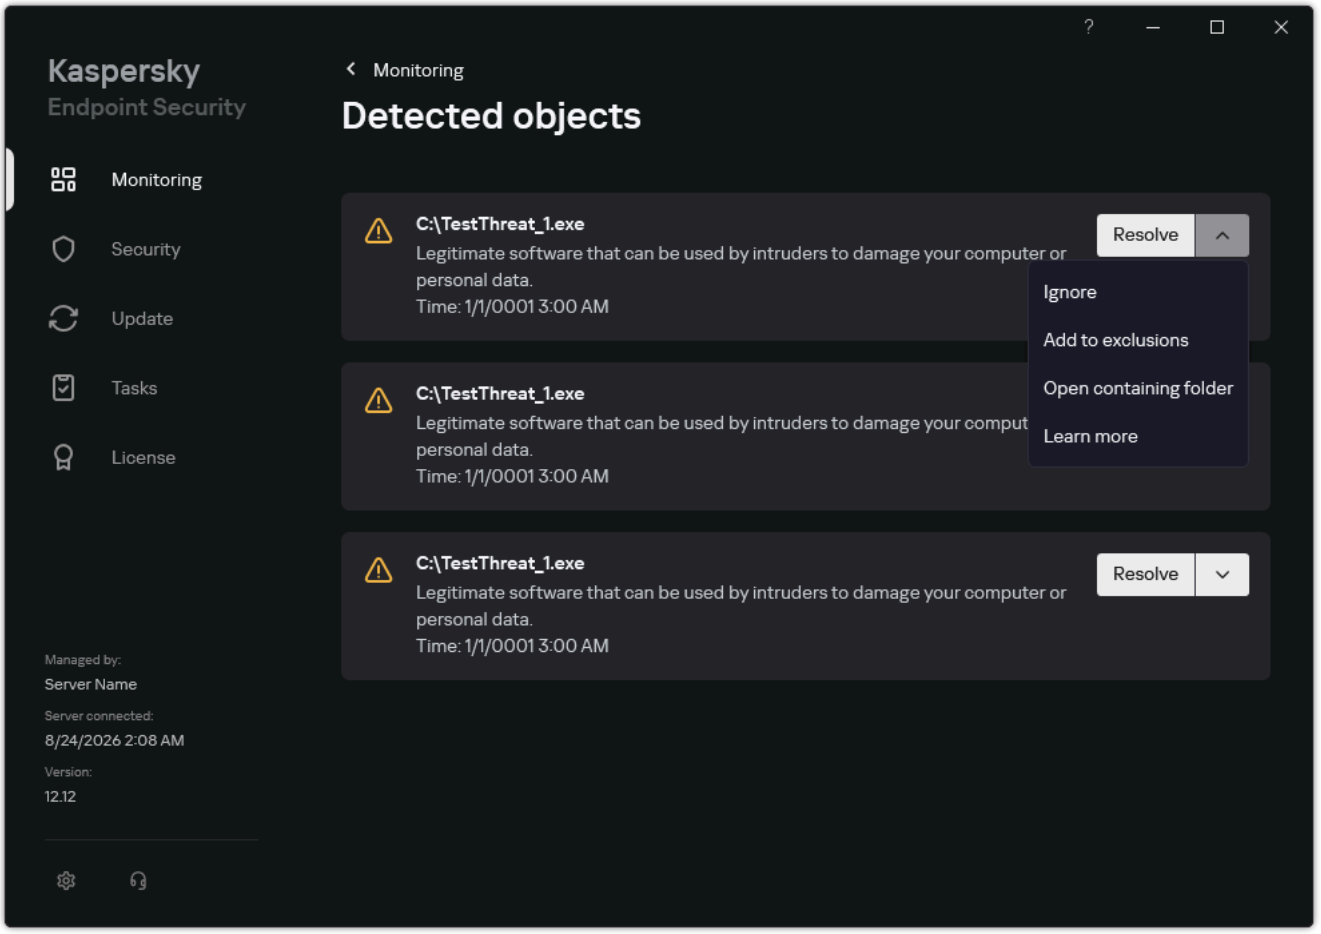

A list of active threats

An infected file is considered *processed* if Kaspersky Endpoint Security disinfected the file or removed the threat as part of scanning the computer for viruses and other malware.

Kaspersky Endpoint Security moves the file to the list of active threats if, for any reason, Kaspersky Endpoint Security failed to perform an action on this file according to the specified application settings while scanning the computer for viruses and other threats.

This situation is possible in the following cases:

- The scanned file is unavailable (for example, it is located on a network drive or on a removable drive without write privileges).
- In the *Malware Scan* task settings, the action on threat detection is set to **Inform**. Then, when the infected file notification was displayed on the screen, the user selected **Ignore**.

If there are any unprocessed threats, Kaspersky Endpoint Security changes the icon to . In the main application window, the threat notification is displayed (see the figure below). In the Kaspersky Security Center console, the status of the computer is changed to *Critical* – .

How to process a threat in the Administration Console (MMC)

1. In the Administration Console, go to the folder **Administration Server** → **Advanced** → **Repositories** → **Active threats**.

   The list of active threats opens.

2. Select the object that you want to process.

3. Choose how you want to handle the threat:

   - **Disinfect**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file.

   - **Delete**. If this option is selected, the application deletes infected file that are detected from active threats repository. In this case, the application keeps the detected file in the computer's memory. To eliminate the threat from the computer, select **Disinfect**.

How to process a threat in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Operations** → **Repositories** → **Active threats**.

   The list of active threats opens.

2. Select the object that you want to process.

3. Choose how you want to handle the threat:

   - **Disinfect**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file.

   - **Delete**. If this option is selected, the application deletes infected file that are detected from active threats repository. In this case, the application keeps the detected file in the computer's memory. To eliminate the threat from the computer, select **Disinfect**.

How to process a threat in the application interface

1. In the main application window, in the **Monitoring** section, click the **Protection is at risk** tile.

   The list of active threats opens.

2. Select the object that you want to process.

3. Choose how you want to handle the threat:

   - **Resolve**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file.

   - **Add to exclusions**. If this action is selected, Kaspersky Endpoint Security suggests adding the file to the list of scan exclusions. Settings of the exclusion are configured automatically. If adding an exclusion is not available, it means that the administrator has disabled adding exclusions in policy settings.

   - **Ignore**. If this option is selected, Kaspersky Endpoint Security deletes the entry from the list of active threats. If there are no active threats remaining on the list, the computer status will be changed to *OK*. If the object is detected again, Kaspersky Endpoint Security will add a new entry to the list of active threats.

- **Open containing folder**. If this option is selected, Kaspersky Endpoint Security opens the folder containing the object in the file manager. You can then manually delete the object or move the object to a folder that is not within the protection scope.

- **Learn more**. If this option is selected, Kaspersky Endpoint Security opens the Kaspersky vulnerabilities and threats database website.

To process active threats in the Kaspersky Security Center console, you must enable the transfer of information about unprocessed files to Administration Server. Data transfer is enabled by default.

How to enable the transfer of unprocessed file data in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Reports and Storage**.
4. In the **Data transfer to Administration Server** block, click the **Settings** button.
5. Select the **Unprocessed files** check box.
6. Save your changes.

How to enable the transfer of unprocessed file data in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **KSC Integration**.

5. In the **Data transfer to Administration Server** block, select the **About unprocessed files** check box.

6. Save your changes.

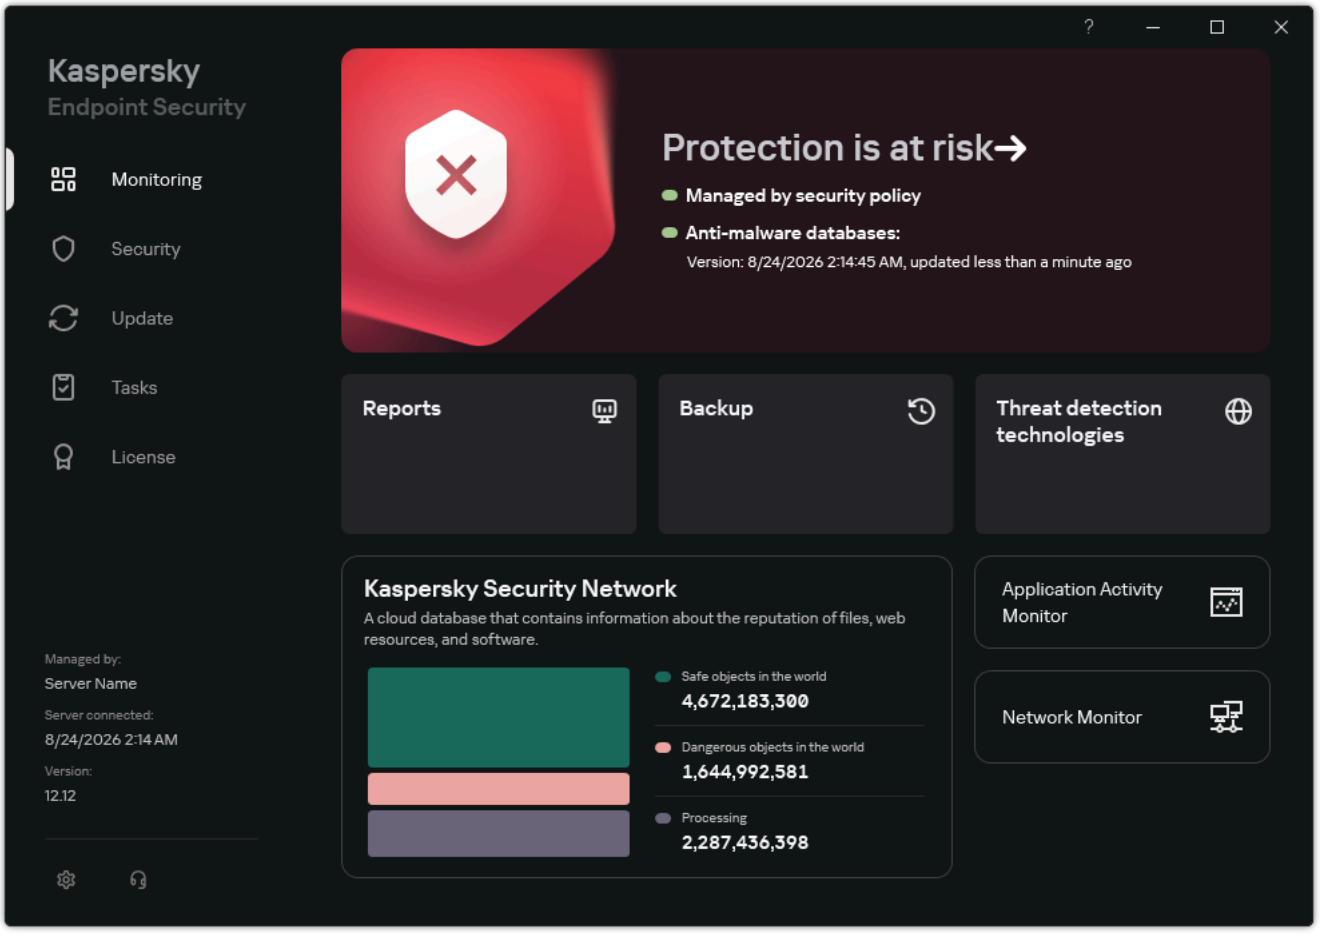

Main application window when a threat is detected

Computer protection

Real-Time Protection status

Kaspersky Endpoint Security sends the **Real-time protection status** setting to the Kaspersky Security Center Administration Server; the value of this setting depends on the current state of application protection components on the protected computer (see the table below).

Kaspersky Endpoint Security determines the real-time protection status based on the status of the following application components:

- File Threat Protection.
- Web Threat Protection.
- Mail Threat Protection.
- AMSI Protection.
- BadUSB Attack Prevention.
- Network Threat Protection.
- Firewall.
- Exploit Prevention.
- Behavior Detection.
- Remediation Engine.
- Host Intrusion Prevention.

You can check the real-time protection status of the application in a Kaspersky Security Center console.

How to find out the Real-Time Protection status in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Managed devices**.

   The current Real-Time Protection status is displayed in the list of devices, in the **Real-time protection status** column. If the **Real-time protection status** column is missing, manage column settings by clicking the **Add/Remove Columns** link.

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Managed devices**.

   The current Real-Time Protection status is displayed in the list of devices, in the **Real-time protection status** column. If the **Real-time protection status** column is missing, manage column settings by clicking the **Add/Remove Columns** link.

How to find out the Real-Time Computer Protection in the Web Console

In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.

The current Real-Time Protection status is displayed in the list of devices, in the **Real-time protection status** column. If the **Real-time protection status** is column missing, manage column settings (⚙).

Possible values of the Real-time protection status setting

Value	Description
Unknown	The Administration Server does not have information about the real-time protection status for this computer.
Not installed	No components are installed.
Not supported by license	The application is not activated or the license does not allow the installed components to work.
Failed	One or more components have malfunctioned.
Stopped	One or more components are disabled.
Paused	One or more components are paused.
Starting	One or more components are being turned on.
Running	Application components are up and running.

If the value of the **Real-time protection status** setting in Kaspersky Security Center is different from *Running*, check that the installed components of Kaspersky Endpoint Security from the list are enabled and the application is activated.

File Threat Protection

The File Threat Protection component lets you prevent infection of a computer file system. By default, the File Threat Protection component resides permanently in the computer's RAM and scans all files that are opened, saved, or run, in real time. This component scans files on all computer drives, including connected drives. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis.

The component scans the files accessed by a user or application. If a malicious file is detected, Kaspersky Endpoint Security blocks the file operation. The application then disinfects or deletes the malicious file, depending on the settings of the File Threat Protection component.

When attempting to access a file whose contents reside in OneDrive cloud storage, Kaspersky Endpoint Security downloads and scans the file contents.

Enabling and disabling File Threat Protection

By default, the File Threat Protection component is enabled and runs in the mode recommended by Kaspersky experts. For File Threat Protection, Kaspersky Endpoint Security can apply different groups of settings. These groups of settings that are stored in the application are called *security levels*: **High**, **Recommended**, **Low**. The **Recommended** security level settings are considered to be the optimal settings recommended by Kaspersky experts (see the table below). You can select one of the preset security levels or manually configure security level settings. If you change the security level settings, you can always revert back to the recommended security level settings.

File Threat Protection component uses data received from other application components. Enabling those components is optional. Components that provide additional data include:

- Kaspersky Security Network.
- Host Intrusion Prevention.
- Behavior Detection.

How to enable or disable the File Threat Protection component in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **File Threat Protection**.
4. Use the **File Threat Protection** check box to enable or disable the component.
5. If you enabled the component, do one of the following in the **Security level** block:
   - If you want to apply one of the preset security levels, select it with the slider:
     - **High**. When this file security level is selected, the File Threat Protection component takes the strictest control of all files that are opened, saved, and started. The File Threat Protection component scans all file types on all hard drives, removable drives, and network drives of the computer. It also scans archives, installation packages, and embedded OLE objects.
     - **Recommended**. This file security level is recommended by Kaspersky Lab experts. The File Threat Protection component scans only the specified file formats on all hard drives, removable drives, and network drives of the computer, and embedded OLE objects. The File Threat Protection component does not scan archives or installation packages.
     - **Low**. The settings of this file security level ensure maximum scanning speed. The File Threat Protection component scans only files with specified extensions on all hard drives, removable drives, and network drives of the computer. The File Threat Protection component does not scan compound files.
   - If you want to configure a custom security level, click the **Settings** button and define your own component settings (see the table below).

     You can restore the values of preset security levels by clicking the **By default** button.

6. In the **Action on threat detection** block, select the action that Kaspersky Endpoint Security performs on malicious objects:

   - **Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file.
   - **Disinfect, block if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application blocks this file.
   - **Block**. If this option is selected, the application automatically blocks the infected file without attempting to disinfect or delete it.
   - **Inform**. If this option is selected, Kaspersky Endpoint Security adds the information about infected files to the list of active threats on detection of these files.

   Before attempting to disinfect or delete an infected file, the application creates a backup copy of the file in case you need to restore the file or if it can be disinfected in the future.

7. Save your changes.

How to enable or disable the File Threat Protection component in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **File Threat Protection**.
5. Use the **File Threat Protection ENABLED** toggle to enable or disable the component.
6. If you want to add a new object to the protection scope:

   a. Under **Advanced settings**, select the **Protection scope** tab.

   b. Click **Add**.

   c. This opens a window; in that window, select the objects that you want to add to the protection scope.

Use masks:

- The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

- Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

- The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

You can use masks anywhere in a file or folder path. For example, if you want the scan scope to include the Downloads folder for all user accounts on the computer, enter the `C:\Users\*\Downloads\` mask.

You can exclude an object from protection without removing it from the list of objects in the protection scope. To do so, set the toggle switch next to it to the off position.

d. Save your changes.

7. In the **Action on threat detection** block, select the action that Kaspersky Endpoint Security performs on malicious objects:

   - **Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file.

   - **Disinfect, block if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application blocks this file.

   - **Block**. If this option is selected, the application automatically blocks the infected file without attempting to disinfect or delete it.

   Before attempting to disinfect or delete an infected file, the application creates a backup copy of the file in case you need to restore the file or if it can be disinfected in the future.

8. If necessary, edit the advanced settings of File Threat Protection.

9. Save your changes.

How to enable or disable the File Threat Protection component in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.

3. Use the **File Threat Protection** toggle to enable or disable the component.

4. If you enabled the component, do one of the following in the **Security level** block:

   - If you want to apply one of the preset security levels, select it with the slider:

     - **High**. When this file security level is selected, the File Threat Protection component takes the strictest control of all files that are opened, saved, and started. The File Threat Protection component scans all file types on all hard drives, removable drives, and network drives of the computer. It also scans archives, installation packages, and embedded OLE objects.

     - **Recommended**. This file security level is recommended by Kaspersky Lab experts. The File Threat Protection component scans only the specified file formats on all hard drives, removable drives, and network drives of the computer, and embedded OLE objects. The File Threat Protection component does not scan archives or installation packages.

     - **Low**. The settings of this file security level ensure maximum scanning speed. The File Threat Protection component scans only files with specified extensions on all hard drives, removable drives, and network drives of the computer. The File Threat Protection component does not scan compound files.

   - If you want to configure a custom security level, click the **Advanced settings** button and define your own component settings (see the table below).

     You can restore the values of preset security levels by clicking the **Restore recommended security level** button.

5. In the **Action on threat detection** block, select the action that Kaspersky Endpoint Security performs on malicious objects:

   - **Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file.

   - **Disinfect, block if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application blocks this file.

   - **Block**. If this option is selected, the application automatically blocks the infected file without attempting to disinfect or delete it.

   - **Inform**. If this option is selected, Kaspersky Endpoint Security adds the information about infected files to the list of active threats on detection of these files.

   > Before attempting to disinfect or delete an infected file, the application creates a backup copy of the file in case you need to restore the file or if it can be disinfected in the future.

6. Save your changes.

File Threat Protection settings recommended by Kaspersky experts (recommended security level)

Parameter	Value	Description
File types	**Files scanned by format**	If this setting is enabled, the application scans infectable files only. Before scanning a file for malicious code, the internal header of the file is analyzed to determine the format of the file (for example, .txt, .doc, or .exe). The scan also looks for files with particular file extensions.
Heuristic analysis	**Light scan**	The technology was developed for detecting threats that cannot be detected by using the current version of Kaspersky application databases. It detects files that may be infected with an unknown virus or a new variety of a known virus. When scanning files for malicious code, the heuristic analyzer executes instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.

Parameter	Value	Description
Scan only new and modified files	**On**	Scans only new files and those files that have been modified since the last time they were scanned. This helps reduce the duration of a scan. This mode applies both to simple and to compound files.
Use iSwift technology	**On**	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.
Use iChecker technology	**On**	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).
Scan files in Microsoft Office formats	**On**	Scans Microsoft Office files (DOC, DOCX, XLS, PPT and other Microsoft extensions). Office format files include OLE objects as well. The application scans office format files that are smaller than 1 MB, regardless of whether the check box is selected or not.
Scan email format files	**On**	Scans email format files. The application scans MSG and EML files. Email format files include OLE objects and MHT files as well. Kaspersky Endpoint Security scans email format files that are smaller than 1 MB, regardless of whether the check box is selected or not.
Scan mode	**Smart mode**	In this mode, File Threat Protection scans an object based on an analysis of actions taken on the object. For example, when working with a Microsoft Office document, Kaspersky Endpoint Security scans the file when it is first opened and last closed. Intermediate operations that overwrite the file do not cause it to be scanned.
Action on threat detection	**Disinfect, delete if disinfection fails**	If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file.

Automatic pausing of File Threat Protection

You can configure File Threat Protection to automatically pause at a specified time or when working with specific applications.

File Threat Protection should be paused only as a last resort when it conflicts with some applications. If any conflicts arise while a component is running, you are advised to contact Kaspersky Technical Support. The support experts will help you set up the File Threat Protection component to run simultaneously with other applications on your computer.

To configure automatic pausing of File Threat Protection:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.
3. Click **Advanced settings**.
4. In the **Pause File Threat Protection** block, click the **Pause File Threat Protection** link.
5. In the window that opens, configure the settings for pausing File Threat Protection:
   a. Configure a schedule for automatically pausing File Threat Protection.
   b. Create a list of applications whose operation should cause File Threat Protection to pause its activities.

6. Save your changes.

Changing the action taken on infected files by the File Threat Protection component

By default, the File Threat Protection component automatically tries to disinfect all infected files that are detected. If disinfection fails, the File Threat Protection component deletes these files.

To change the action taken on infected files by the File Threat Protection component:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.
3. In the **Action on threat detection** block, select the relevant option:
   - **Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file.
   - **Disinfect, block if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application blocks this file.
   - **Block**. If this option is selected, the application automatically blocks the infected file without attempting to disinfect or delete it.

   Before attempting to disinfect or delete an infected file, the application creates a backup copy of the file in case you need to restore the file or if it can be disinfected in the future.

4. Save your changes.

Forming the protection scope of the File Threat Protection component

The protection scope refers to the objects that the component scans when enabled. The protection scopes of different components have different properties. The location and type of files to be scanned are properties of the protection scope of the File Threat Protection component. By default, the File Threat Protection component scans only potentially infectable files that are run from hard drives, removable drives and network drives.

When selecting the type of files to scan, consider the following:

1. There is a low probability of introducing malicious code into files of certain formats and its subsequent activation (for example, TXT format). At the same time, there are file formats that contain executable code (such as .exe, .dll). The executable code may also be contained in files of formats that are not intended for this purpose (for example, the DOC format). The risk of intrusion and activation of malicious code in such files is high.

2. An intruder may send a virus or another malicious application to your computer in an executable file that has been renamed with the .txt extension. If you select scanning of files by extension, the application skips this file during scanning. If scanning of files by format is selected, Kaspersky Endpoint Security analyzes the file header regardless of its extension. If this analysis reveals that the file has the format of an executable file (for example, EXE), the application scans it.

To create the protection scope:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.

3. Click **Advanced settings**.

4. In the **File types** block, specify the type of files that you want the File Threat Protection component to scan:

   - **All files**. If this setting is enabled, Kaspersky Endpoint Security checks all files without exception (all formats and extensions).

   - **Files scanned by format**. If this setting is enabled, the application scans infectable files only. Before scanning a file for malicious code, the internal header of the file is analyzed to determine the format of the file (for example, .txt, .doc, or .exe). The scan also looks for files with particular file extensions.

   - **Files scanned by extension**. If this setting is enabled, the application scans infectable files only. The file format is then determined based on the file's extension.

5. Click the **Edit protection scope** link.

6. In the window that opens, select the objects that you want to add to the protection scope or exclude from it.

   > You cannot remove or edit objects that are included in the default protection scope.

7. If you want to add a new object to the protection scope:

   a. Click **Add**.

      The folder tree opens.

   b. In the **Path** field, enter the path to the folder or file.

Use masks:

- The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

- Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

- The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

You can use masks anywhere in a file or folder path. For example, if you want the scan scope to include the Downloads folder for all user accounts on the computer, enter the `C:\Users\*\Downloads\` mask.

The **This PC** object in the list of file resources of the computer includes the following objects: **All hard drives**, **All network drives** and **All removable drives**.

You can exclude an object from scans without deleting it from the list of objects in the scan scope. To do so, clear the check box next to the object.

8. Save your changes.

Using scan methods

Kaspersky Endpoint Security uses a scanning technique called Machine learning and signature analysis. During signature analysis, Kaspersky Endpoint Security matches the detected object with records in its database. Based on the recommendations of Kaspersky experts, machine learning and signature analysis is always enabled.

To increase the effectiveness of protection, you can use heuristic analysis. When scanning files for malicious code, the heuristic analyzer executes instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.

To configure the use of heuristic analysis in the operation of the File Threat Protection component:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.

3. Click **Advanced settings**.

4. If you want the application to use heuristic analysis for protection against file threats, select the **Heuristic analysis** check box in the **Scan methods** block. Then use the slider to set the heuristic analysis level: **Light scan**, **Medium scan** or **Deep scan**.

5. Save your changes.

Using scan technologies in the operation of the File Threat Protection component

To configure the use of scan technologies in the operation of the File Threat Protection component:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.

3. Click **Advanced settings**.

4. In the **Scan technologies** block, select the check boxes next to the names of technologies that you want to use for file threat protection:

   - **Use iSwift technology**. This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.

   - **Use iChecker technology**. This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).

5. Save your changes.

Optimizing file scanning

You can optimize the file scanning that is performed by the File Threat Protection component by reducing the scan time and increasing the operating speed of Kaspersky Endpoint Security. This can be achieved by scanning only new files and those files that have been modified since the previous scan. This mode applies both to simple and to compound files.

You can also enable the use of the iChecker and iSwift technologies that optimize the speed of file scanning by excluding files that have not been modified since the most recent scan.

To optimize file scanning:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.

3. Click **Advanced settings**.

4. In the **Optimization** block, select the **Scan only new and modified files** check box.

5. Save your changes.

Scanning compound files

A common technique of concealing viruses and other malware is to implant them in compound files, such as archives or databases. To detect viruses and other malware that are hidden in this way, the compound file must be unpacked, which may slow down scanning. You can limit the types of compound files to be scanned and thereby speed up scanning.

The method used to process an infected compound file (disinfection or deletion) depends on the type of file.

The File Threat Protection component disinfects compound files in the ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR and ICE formats and deletes files in all other formats (except mail databases).

To configure scanning of compound files:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.

3. Click **Advanced settings**.

4. In the **Scan of compound files** block, specify the types of compound files that you want to scan: archives, distribution packages, mail or office format files.

5. If scanning only new and modified files is disabled, configure the settings for scanning each type of compound file: scan all files of this type or only new files.

   If scanning only new and modified files is enabled, Kaspersky Endpoint Security scans only new and modified files of all types of compound files.

6. Configure the advanced settings for scanning compound files.

   - **Do not unpack large compound files**.

     If this check box is selected, Kaspersky Endpoint Security does not scan compound files if their size exceeds the specified value.

     If this check box is cleared, Kaspersky Endpoint Security scans compound files of all sizes.

     Kaspersky Endpoint Security scans large files that are extracted from archives, regardless of whether the **Do not unpack large compound files** check box is selected.

   - **Unpack compound files in the background**.

     If the check box is selected, Kaspersky Endpoint Security provides access to compound files that are larger than the specified value before these files are scanned. In this case, Kaspersky Endpoint Security unpacks and scans compound files in the background.

Kaspersky Endpoint Security provides access to compound files that are smaller than this value only after unpacking and scanning these files.

If the check box is not selected, Kaspersky Endpoint Security provides access to compound files only after unpacking and scanning files of any size.

7. Save your changes.

Changing the scan mode

Scan mode refers to the condition that triggers file scanning by the File Threat Protection component. By default, Kaspersky Endpoint Security scans files in smart mode. In this file scan mode, the File Threat Protection component decides whether or not to scan files after analyzing operations that are performed with the file by the user, by an application on behalf of the user (under the account that was used to log in or a different user account), or by the operating system. For example, when working with a Microsoft Office Word document, Kaspersky Endpoint Security scans the file when it is first opened and last closed. Intermediate operations that overwrite the file do not cause it to be scanned.

To change the file scan mode:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.

3. Click **Advanced settings**.

4. In the **Scan mode** block, select the required mode:

   - **Smart mode**. In this mode, File Threat Protection scans an object based on an analysis of actions taken on the object. For example, when working with a Microsoft Office document, Kaspersky Endpoint Security scans the file when it is first opened and last closed. Intermediate operations that overwrite the file do not cause it to be scanned.

   - **On access and modification**. In this mode, File Threat Protection scans objects whenever there is an attempt to open or modify them.

   - **On access**. In this mode, File Threat Protection scans objects only upon an attempt to open them.

   - **On execution**. In this mode, File Threat Protection only scans objects upon an attempt to run them.

5. Save your changes.

Container Scan

A *container* is an isolated environment in which an application can run without directly interacting with the operating system. Using containers involves the following risks:

- Hackers may be able to exploit containerization vulnerabilities to compromise applications inside the container.

- Hackers may exploit an insecure configuration of the container environment to gain unauthorized access to data on the computer or to compromise the integrity of the system.

- A successful attack on a container can allow a hacker to gain access to data on the computer.
- Hackers may exploit network vulnerabilities to intercept network traffic.

Kaspersky Endpoint Security scans files not just on disks but also inside containers. That is, Kaspersky Endpoint Security is an external tool for detecting malicious activity inside containers. This allows maintaining the performance of containers and prevents conflicts with other applications inside the container. Installing Kaspersky Endpoint Security inside the container is not supported.

In addition to providing container security, Kaspersky Endpoint Security allows managing applications inside containers using Application Control. Application Control is configured for containers in the same way as for applications installed on the computer. System Integrity Monitoring also supports containers.

Container requirements

- The container must be a Docker container. Other containerization tools are not supported.
- The container must run in process isolation mode. The Hyper-V isolation mode is not supported.
- The container must be placed on a Windows Server 2016, 2019, or 2022 server (Docker Host).
- The container must include a Windows image (Docker Image). Windows 10 and 11 are not supported. Linux images are not supported.

Action on threat detection

If a threat is detected inside a container, the application applies the action selected for the File Threat Protection component. Container Scan has additional settings (see the instructions below). If a threat is detected, the application blocks the malicious activity and performs the selected action (for example, attempts to disinfect the object). Kaspersky Endpoint Security can stop the container if the detected object cannot be disinfected. By default, the container stopping functionality is disabled.

How to configure containers scan in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **File Threat Protection**.
4. Click **Settings**.
5. This opens a window; in that window, select the **Additional** tab.

6. In the **Scan of file operations executed in Windows containers** block, configure the containers scan settings:

   - **Stop the container if disinfection fails**. The application may not have sufficient read and write rights for the detected object. In that case, disinfecting or deleting the detected object is impossible. If this check box is selected, the application blocks the detected object and stops the container. If this check box is cleared, the application only blocks the detected object.

   - **Do not scan file operations executed in Windows containers**. If the check box is selected, the application scans the container only at the container startup. If the check box is cleared, the application scans the container continuously in real time.

7. Save your changes.

How to configure containers scan in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **File Threat Protection**.

5. Under **Advanced settings**, select the **Performance** tab.

6. In the **Scan optimization** block, configure the containers scan settings:

   - **Stop container if disinfection fails**. The application may not have sufficient read and write rights for the detected object. In that case, disinfecting or deleting the detected object is impossible. If this check box is selected, the application blocks the detected object and stops the container. If this check box is cleared, the application only blocks the detected object.

   - **Do not scan file operations executed in Windows containers**. If the check box is selected, the application scans the container only at the container startup. If the check box is cleared, the application scans the container continuously in real time.

7. Save your changes.

How to configure containers scan in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **File Threat Protection**.

3. In the **Scan of file operations executed in Windows containers** block, configure the containers scan settings:

   - **Stop the container if disinfection fails**. The application may not have sufficient read and write rights for the detected object. In that case, disinfecting or deleting the detected object is impossible. If this check box is selected, the application blocks the detected object and stops the container. If this check box is cleared, the application only blocks the detected object.

   - **Do not scan file operations executed in Windows containers**. If the check box is selected, the application scans the container only at the container startup. If the check box is cleared, the application scans the container continuously in real time.

4. Save your changes.

Host Intrusion Prevention

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers.

The Host Intrusion Prevention component prevents applications from performing actions that may be dangerous for the operating system, and ensures control over access to operating system resources and personal data. The component provides computer protection with the help of anti-virus databases and the Kaspersky Security Network cloud service.

The component controls the operation of applications by using *application rights*. Application rights include the following access parameters:

- Access to operating system resources (for example, automatic startup options, registry keys)

- Access to personal data (for example, files and applications)

Network activity of applications is controlled by the Firewall component by using *network rules*.

During the first startup of the application, the Host Intrusion Prevention component performs the following actions:

1. Checks the security of the application by using downloaded anti-virus databases.

2. Checks the security of the application in Kaspersky Security Network.

   You are advised to participate in Kaspersky Security Network to help the Host Intrusion Prevention component work more effectively.

3. Places the application in one of the trust groups: *Trusted*, *Low Restricted*, *High Restricted*, *Untrusted*.

   A trust group defines the rights that Kaspersky Endpoint Security refers to when controlling application activity. Kaspersky Endpoint Security places an application in a trust group depending on the level of danger that this application may pose to the computer.

Kaspersky Endpoint Security places an application in a trust group for the Firewall and Host Intrusion Prevention components. You cannot change the trust group only for Firewall or Host Intrusion Prevention.

If you refused to participate in KSN or there is no network, Kaspersky Endpoint Security places the application in a trust group depending on the settings of the Host Intrusion Prevention component. After receiving the reputation of the application from KSN, the trust group can be changed automatically.

4. Blocks application actions depending on the trust group. For example, applications from the *High Restricted* trust group are denied access to the operating system modules.

The next time the application is started, Kaspersky Endpoint Security checks the integrity of the application. If the application is unchanged, the component uses the current application rights for it. If the application has been modified, Kaspersky Endpoint Security analyzes the application as if it were being started for the first time.

Enabling and disabling Host Intrusion Prevention

By default, the Host Intrusion Prevention component is enabled and runs in the mode recommended by Kaspersky experts.

How to enable or disable the Host Intrusion Prevention component in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

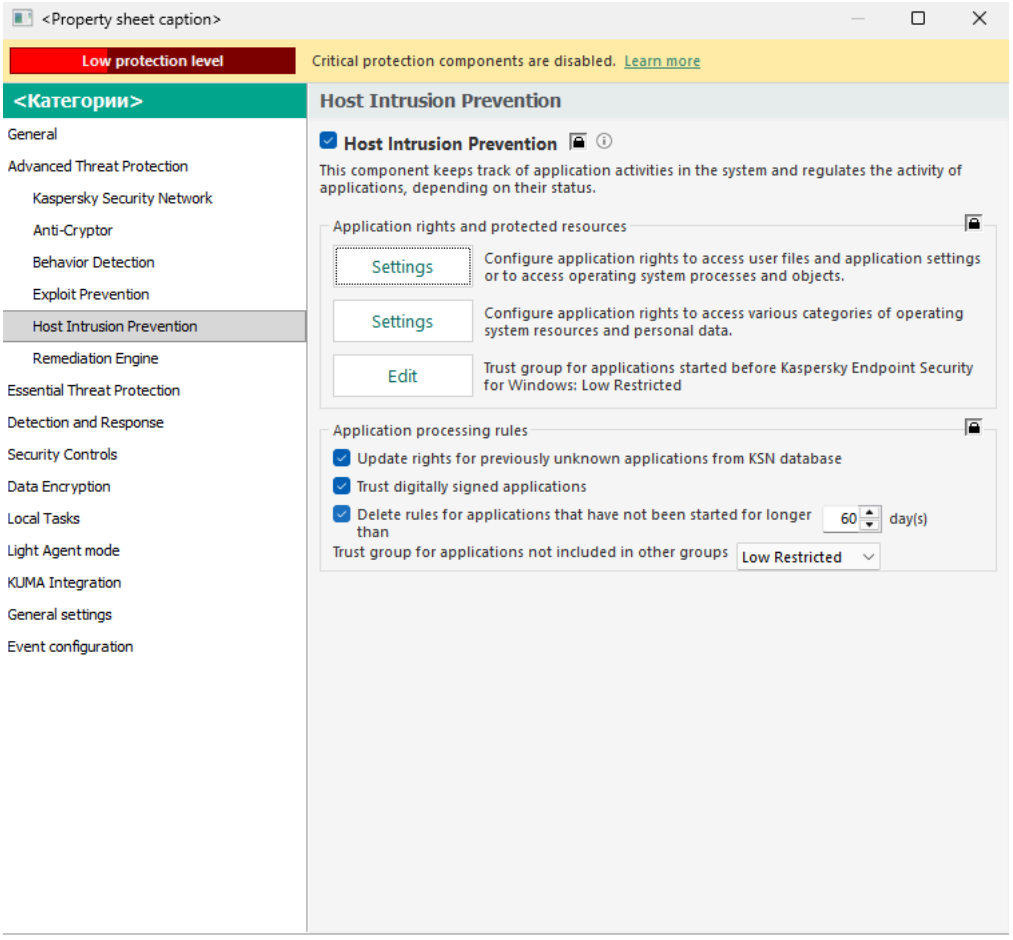

Intrusion Prevention settings

4. Use the **Host Intrusion Prevention** check box to enable or disable the component.

5. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable the Host Intrusion Prevention component in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Host Intrusion Prevention**.

5. Use the **Host Intrusion Prevention ENABLED** toggle to enable or disable the component.

6. Save your changes.

How to enable or disable the Host Intrusion Prevention component in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

3. Use the **Host Intrusion Prevention** toggle to enable or disable the component.

4. Save your changes.

If the Host Intrusion Prevention component is enabled, Kaspersky Endpoint Security will place an application in a trust group depending on the level of danger that this application may pose to the computer. Kaspersky Endpoint Security will then block the actions of the application depending on the trust group.

Managing application trust groups

When each application is started for the first time, the Host Intrusion Prevention component checks the security of the application and places the application into one of the trust groups.

At the first stage of the application scan, Kaspersky Endpoint Security searches the internal database of known applications for a matching entry and at the same time sends a request to the Kaspersky Security Network database (if an Internet connection is available). Based on the results of the search in the internal database and the Kaspersky Security Network database, the application is placed into a trust group. Each time the application is subsequently started, Kaspersky Endpoint Security sends a new query to the KSN database and places the application into a different trust group if the reputation of the application in the KSN database has changed.

You can select a trust group to which you want Kaspersky Endpoint Security to automatically place all unknown applications. Applications that have been running before Kaspersky Endpoint Security was started are automatically placed in the trust group set in the Host Intrusion Prevention settings.

> For applications that were started before Kaspersky Endpoint Security, only network activity is controlled. Control is performed according to the network rules defined in the Firewall settings.

Changing the trust group of an application

When each application is started for the first time, the Host Intrusion Prevention component checks the security of the application and places the application into one of the trust groups.

> Kaspersky specialists do not recommend moving applications from the automatically assigned trust group to a different trust group. Instead, you can modify rights for an individual application if necessary.

How to change the trust group of an application in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection → Host Intrusion Prevention**.

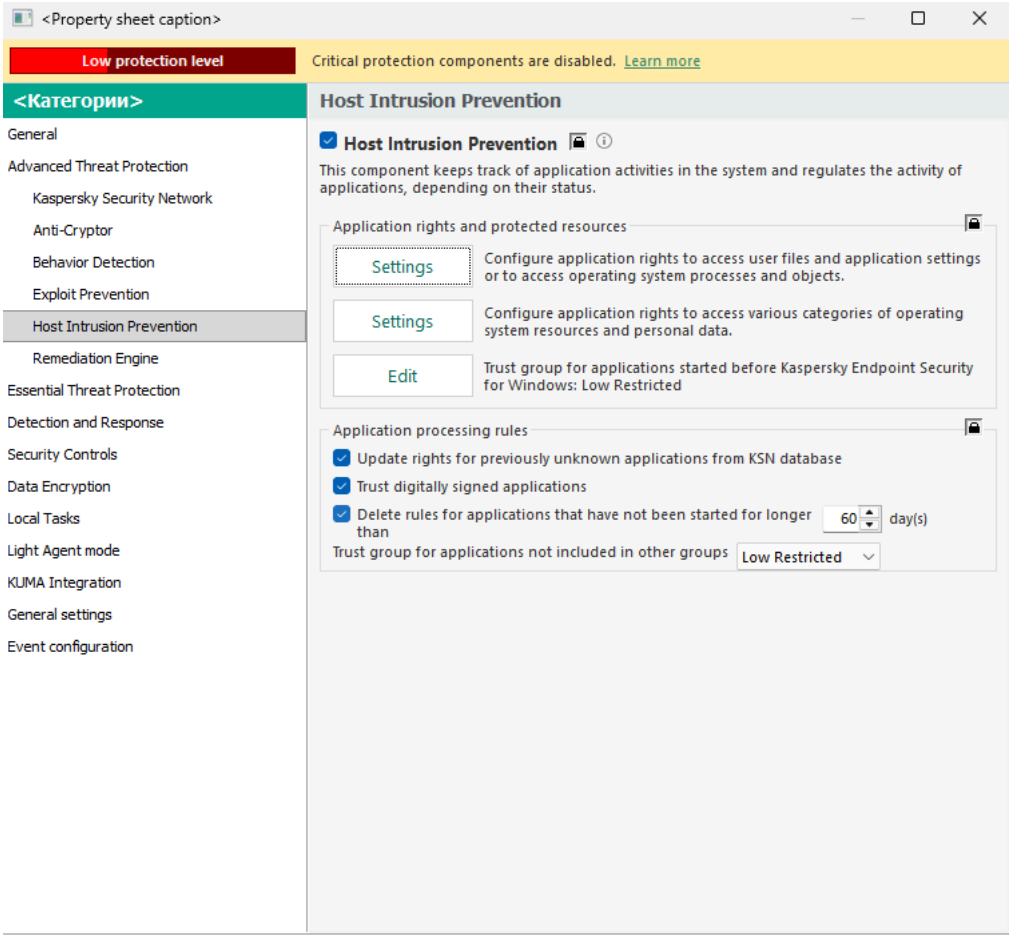

Intrusion Prevention settings

4. In the **Application rights and protected resources** block, click the **Settings** button.

   This opens the application rights configuration window and the list of protected resources.

5. Select the **Application rights** tab.

6. Click **Add**.

7. In the window that opens, enter criteria to search for the application whose trust group you want to change.

   You can enter the name of the application or the name of the vendor. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

8. Click **Refresh**.

   Kaspersky Endpoint Security will search for the application in the consolidated list of applications installed on managed computers. Kaspersky Endpoint Security will show a list of applications that satisfy your search criteria.

9. Select the necessary application.

10. In the **Add selected application to the trust group** drop-down list, select the necessary trust group for the application.

11. To apply the policy to computers, close the padlock icons and save your changes.

How to change the trust group of an application in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **Host Intrusion Prevention**.
5. In the **Application rights and protected resources** block, click the **Application rights and protected resources** link.

   This opens the application rights configuration window and the list of protected resources.
6. Select the **Application rights** tab.

   You will see a list of trust groups on the left side of the window and their properties on the right side.
7. Click **Add**.

   This starts the Wizard for adding an application to a trust group.
8. Select the relevant trust group for the application.
9. Select the **Application** type. Go to the next step.

   If you want to change the trust group for multiple applications, select the **Group** type and define a name for the application group.
10. In the opened list of applications, select the applications whose trust group you want to change.

    Use a filter. You can enter the name of the application or the name of the vendor. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.
11. Finish the wizard.

    The application will be added to the trust group.
12. Save your changes.

How to change the trust group of an application in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.
3. Click **Manage applications**.

   This opens the list of installed applications.
4. Select the necessary application.
5. In the context menu of the application, click **Restrictions** → **<trust group>**.
6. Save your changes.

As a result, the application will be put into the other trust group. Kaspersky Endpoint Security will then block the actions of the application depending on the trust group. The *(defined by user)* status will be assigned to the application. If the reputation of the application is changed in Kaspersky Security Network, the Host Intrusion Prevention component will leave this application's trust group unchanged.

Configuring trust group rights

The optimal application rights are created for different trust groups by default. The settings of rights for application groups that are in a trust group inherit values from the settings of the trust group rights.

How to change trust group rights in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

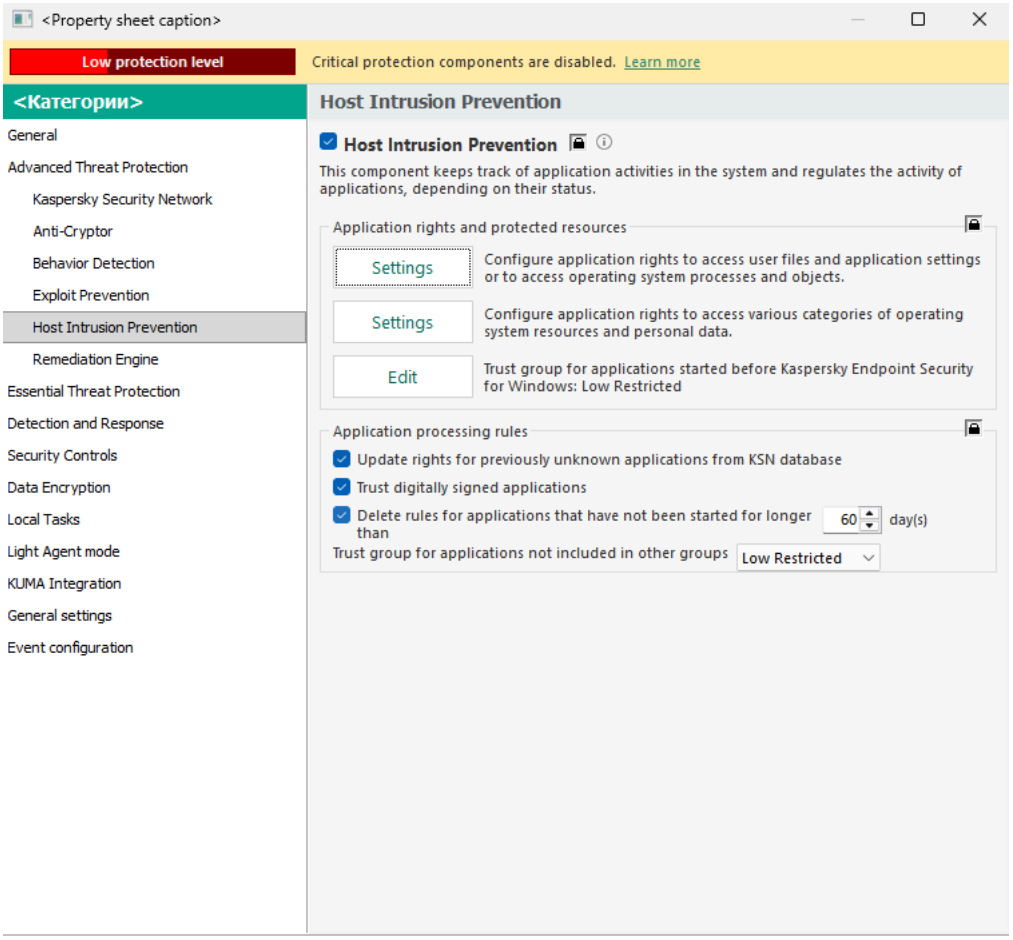

Intrusion Prevention settings

4. In the **Application rights and protected resources** block, click the **Settings** button.

   This opens the application rights configuration window and the list of protected resources.

5. Go to the **Application rights** tab.
6. Select the necessary trust group.
7. In the context menu of the trust group, select **Group rights**.

   This opens the trust group properties.

8. Do one of the following:

   - If you want to edit trust group rights that regulate operations with the operating system registry, user files, and application settings, select **Files and system registry**.

   - If you want to edit trust group rights that regulate access to operating system processes and objects, select **Rights**.

   Network activity of applications is controlled by the Firewall component by using *network rules*.

9. For the relevant resource, in the column of the corresponding action, right-click to open the context menu and select the necessary option: **Inherit**, **Allow** (✓) or **Block** (⊘).

10. If you want to monitor the use of computer resources, select **Log events** (✓ / ⊘).

    Kaspersky Endpoint Security will record information about the operation of the Host Intrusion Prevention component. Reports contain information about operations with computer resources performed by the application (allowed or forbidden). Reports also contain information about the applications that utilize each resource.

11. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to change trust group rights in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Host Intrusion Prevention**.

5. In the **Application rights and protected resources** block, click the **Application rights and protected resources** link.

   This opens the application rights configuration window and the list of protected resources.

6. Go to the **Application rights** tab.

   You will see a list of trust groups on the left side of the window and their properties on the right side.

7. In the left part of the window, select the relevant trust group.

8. In the right part of the window, in the drop-down list, do one of the following:

   - If you want to edit trust group rights that regulate operations with the operating system registry, user files, and application settings, select **Files and system registry**.

   - If you want to edit trust group rights that regulate access to operating system processes and objects, select **Rights**.

   Network activity of applications is controlled by the Firewall component by using *network rules*.

9. For the relevant resource, in the column of the corresponding action, select the necessary option: **Inherit**, **Allow** ( ), **Block** ( ).

10. If you want to monitor the use of computer resources, select **Log events** (/).

    Kaspersky Endpoint Security will record information about the operation of the Host Intrusion Prevention component. Reports contain information about operations with computer resources performed by the application (allowed or forbidden). Reports also contain information about the applications that utilize each resource.

11. Save your changes.

How to change trust group rights in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

3. Click **Manage applications**.

   This opens the list of installed applications.

4. Select the necessary trust group.

5. In the context menu of the trust group, select **Details and rules**.

   This opens the trust group properties.

6. Do one of the following:

   - If you want to edit trust group rights that regulate operations with the operating system registry, user files, and application settings, select **Files and system registry**.

   - If you want to edit trust group rights that regulate access to operating system processes and objects, select **Rights**.

   Network activity of applications is controlled by the Firewall component by using *network rules*.

7. For the relevant resource, in the column of the corresponding action, right-click to open the context menu and select the necessary option: **Inherit**, **Allow** ( ) or **Deny** ( ).

8. If you want to monitor the use of computer resources, select **Log events** ( ).

   Kaspersky Endpoint Security will record information about the operation of the Host Intrusion Prevention component. Reports contain information about operations with computer resources performed by the application (allowed or forbidden). Reports also contain information about the applications that utilize each resource.

9. Save your changes.

The trust group rights will be changed. Kaspersky Endpoint Security will then block the actions of the application depending on the trust group. The status (*Custom settings*) will be assigned to the trust group.

Selecting a trust group for applications started before Kaspersky Endpoint Security

For applications that were started before Kaspersky Endpoint Security, only network activity is controlled. Control is performed according to the network rules defined in the Firewall settings. To specify which network rules must be applied to network activity monitoring for such applications, you must select a trust group.

How to select a trust group for applications started before Kaspersky Endpoint Security in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

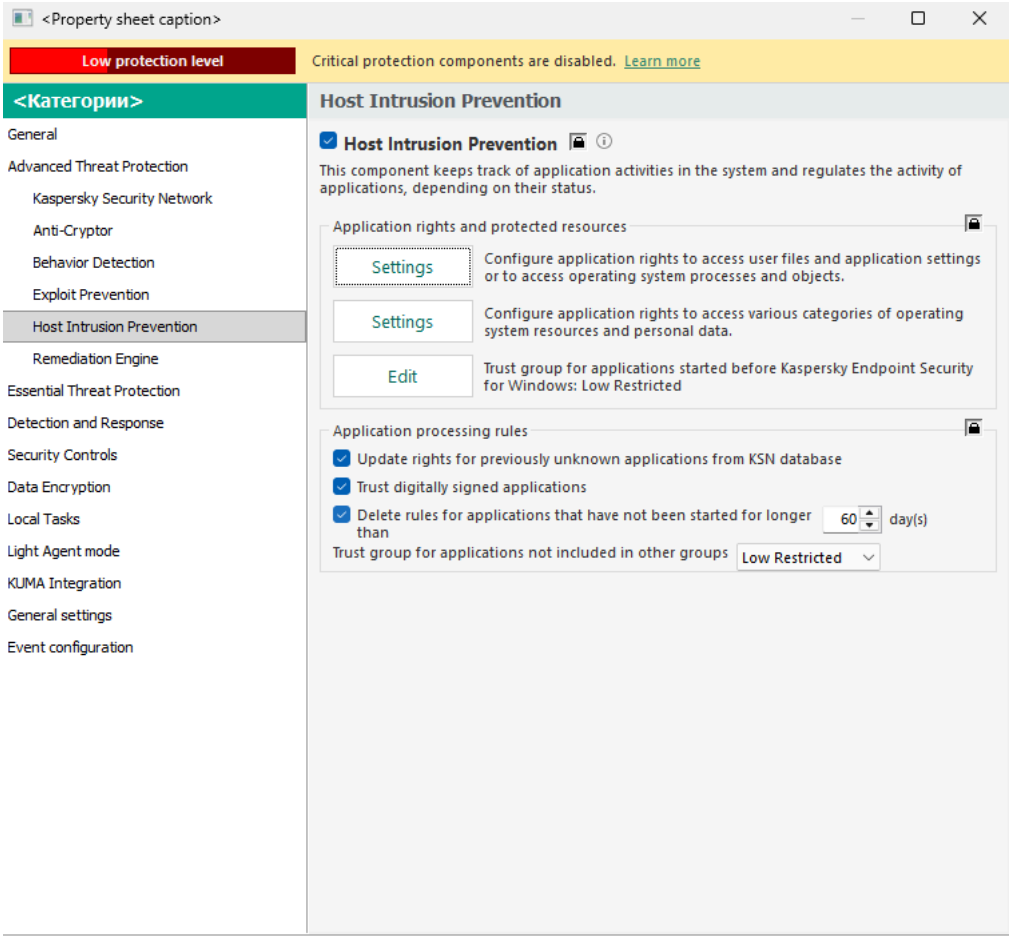

Intrusion Prevention settings

4. In the **Application rights and protected resources** block, click the **Edit** button.

5. For the **Trust group for applications started before Kaspersky Endpoint Security** setting, select the appropriate trust group.

6. To apply the policy to computers, close the padlock icons and save your changes.

How to select a trust group for applications started before Kaspersky Endpoint Security in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **Host Intrusion Prevention**.
5. For the **Trust group for applications started before Kaspersky Endpoint Security** setting, select the appropriate trust group.
6. Save your changes.

How to select a trust group for applications started before Kaspersky Endpoint Security in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.
3. In the **Trust group for applications started before Kaspersky Endpoint Security** block, select the appropriate trust group.
4. Save your changes.

As a result, an application that is started before Kaspersky Endpoint Security will be put into the other trust group. Kaspersky Endpoint Security will then block the actions of the application depending on the trust group.

Selecting a trust group for unknown applications

During the first startup of an application, the Host Intrusion Prevention component determines the trust group for the application. If you do not have Internet access or if Kaspersky Security Network has no information about this application, Kaspersky Endpoint Security will place the application into the *Low Restricted* group by default. When information about a previously unknown application is detected in KSN, Kaspersky Endpoint Security will update the rights of this application. You can then manually edit the application rights.

How to select a trust group for unknown applications in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

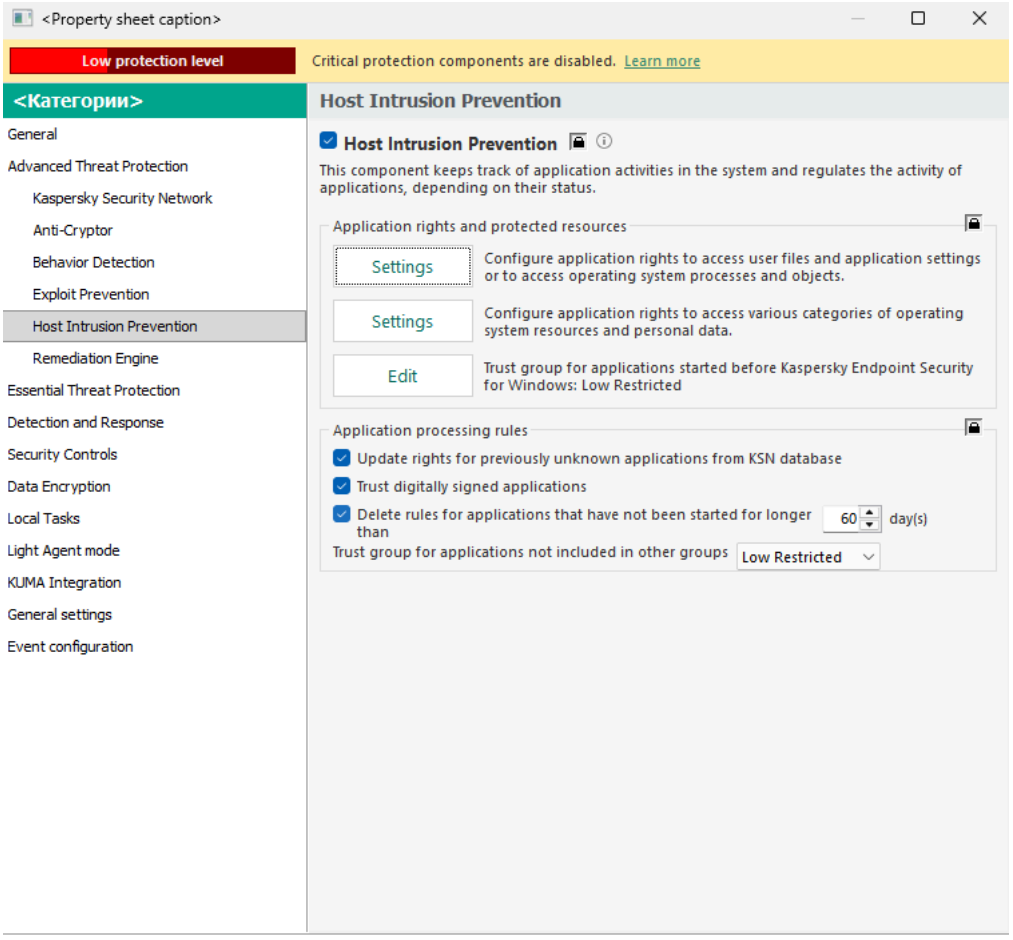

Intrusion Prevention settings

4. In the **Application processing rules** block, use the **Trust group for applications not included in other groups** drop-down list to select the necessary trust group.

   If participation in Kaspersky Security Network is enabled, Kaspersky Endpoint Security sends KSN a request for the reputation of an application each time the application is started. Based on the received response, the application may be moved to a trust group that is different from the one specified in the Host Intrusion Prevention component settings.

5. Use the **Update rights for previously unknown applications from KSN database** check box to configure automatic update of the rights of unknown applications.

6. To apply the policy to computers, close the padlock icons and save your changes.

How to select a trust group for unknown applications in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Host Intrusion Prevention**.

5. In the **Application processing rules** block, use the **Trust group for applications not included in other groups** drop-down list to select the necessary trust group.

   If participation in Kaspersky Security Network is enabled, Kaspersky Endpoint Security sends KSN a request for the reputation of an application each time the application is started. Based on the received response, the application may be moved to a trust group that is different from the one specified in the Host Intrusion Prevention component settings.

6. Use the **Update rights for previously unknown applications from KSN database** check box to configure automatic update of the rights of unknown applications.

7. Save your changes.

How to select a trust group for unknown applications in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

3. In the **Application processing rules** block, select the appropriate trust group.

   If participation in Kaspersky Security Network is enabled, Kaspersky Endpoint Security sends KSN a request for the reputation of an application each time the application is started. Based on the received response, the application may be moved to a trust group that is different from the one specified in the Host Intrusion Prevention component settings.

4. Use the **Update rules for previously unknown applications from KSN** check box to configure automatic update of the rights of unknown applications.

5. Save your changes.

Selecting a trust group for digitally signed applications

Kaspersky Endpoint Security always places applications signed by Microsoft certificates or Kaspersky certificates into the *Trusted* group.

How to select a trust group for digitally signed applications in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection → Host Intrusion Prevention**.

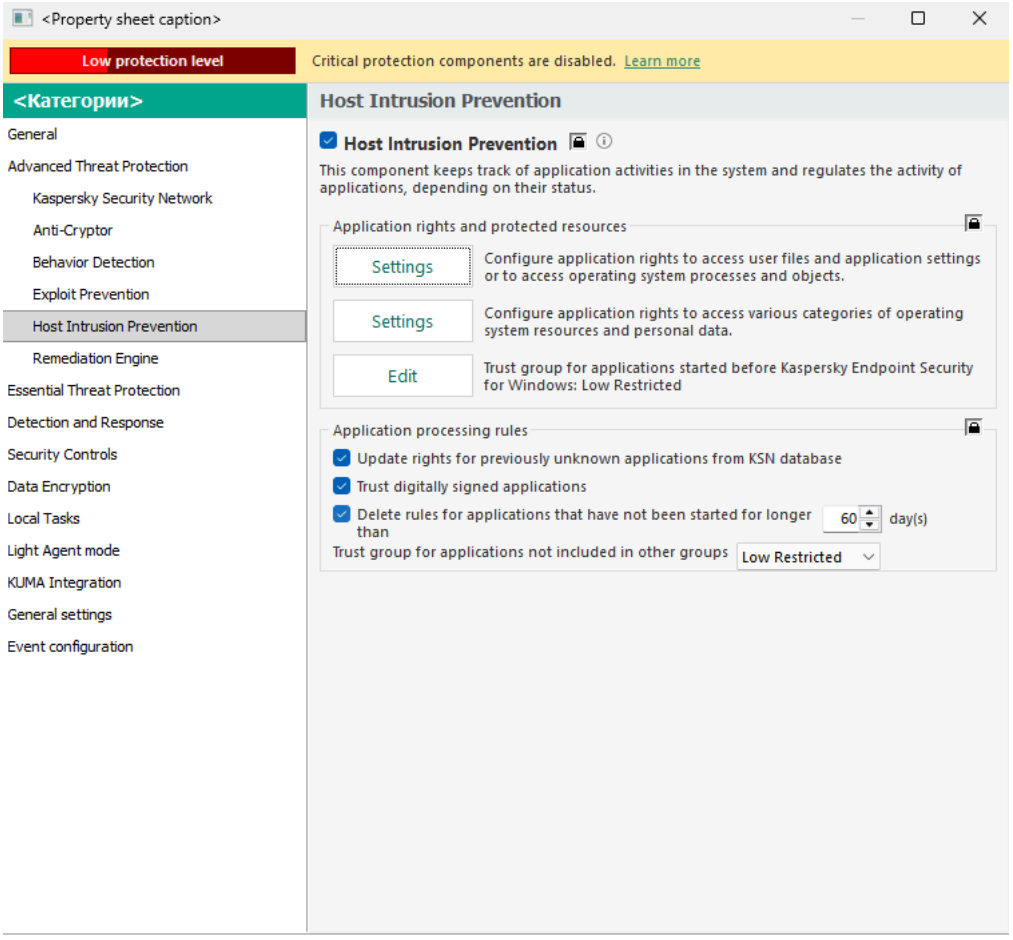

Intrusion Prevention settings

4. In the **Application processing rules** block, use the **Trust digitally signed applications** check box to enable or disable automatic assignment to the Trusted trust group for applications containing the digital signature of trusted vendors.

   Trusted vendors are those software vendors that are included in the trusted group by Kaspersky. You can also add vendor certificate to the trusted system certificate store manually.

   If this check box is cleared, the Host Intrusion Prevention component does not consider digitally signed applications to be trusted, and uses other parameters to determine their trust group.

5. To apply the policy to computers, close the padlock icons and save your changes.

How to select a trust group for digitally signed applications in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management → Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection → Host Intrusion Prevention**.

5. In the **Application processing rules** block, use the **Trust digitally signed applications** check box to enable or disable automatic assignment to the Trusted trust group for applications containing the digital signature of trusted vendors.

   Trusted vendors are those software vendors that are included in the trusted group by Kaspersky. You can also add vendor certificate to the trusted system certificate store manually.

If this check box is cleared, the Host Intrusion Prevention component does not consider digitally signed applications to be trusted, and uses other parameters to determine their trust group.

6. Save your changes.

How to select a trust group for digitally signed applications in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

3. In the **Application processing rules** block, use the **Trust digitally signed applications** check box to enable or disable automatic assignment to the Trusted trust group for applications containing the digital signature of trusted vendors.

   Trusted vendors are those software vendors that are included in the trusted group by Kaspersky. You can also add vendor certificate to the trusted system certificate store manually.

   If this check box is cleared, the Host Intrusion Prevention component does not consider digitally signed applications to be trusted, and uses other parameters to determine their trust group.

4. Save your changes.

Managing application rights

By default, application activity is controlled based on the application rights that are defined for the specific trust group that Kaspersky Endpoint Security assigned to the application when it started for the first time. If necessary, you can edit the application rights for an entire trust group, for an individual application, or for a group of applications within a trust group.

Manually defined application rights have a higher priority than application rights that were defined for a trust group. In other words, if manually defined application rights differ from the application rights defined for a trust group, the Host Intrusion Prevention component controls application activity according to the manually defined application rights.

The rules that you create for applications are inherited by child applications. For example, if you deny all network activity for cmd.exe, all network activity will also be denied for notepad.exe if it is started using cmd.exe. When an application is not a child of the application it runs from, rules are not inherited.

How to change application rights in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection → Host Intrusion Prevention**.

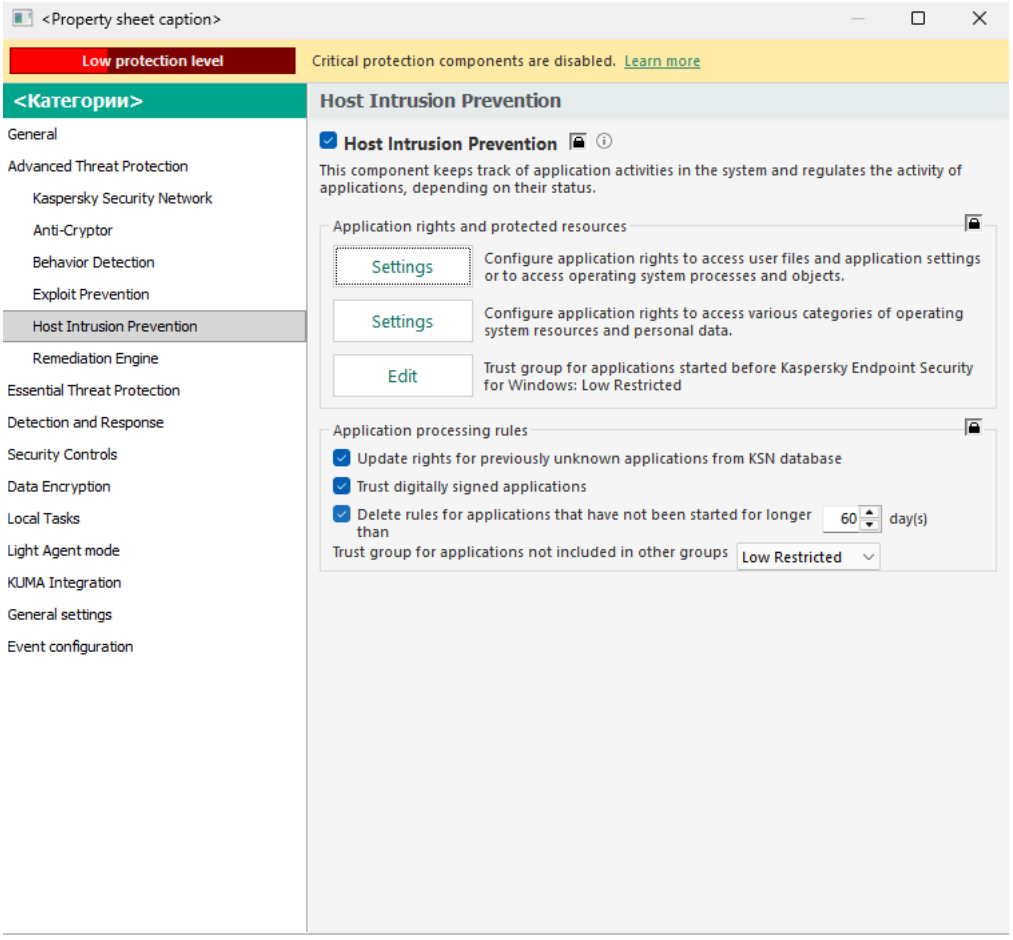

Intrusion Prevention settings

4. In the **Application rights and protected resources** block, click the **Settings** button.

   This opens the application rights configuration window and the list of protected resources.

5. Go to the **Application rights** tab.

6. Click **Add**.

7. In the window that opens, enter criteria to search for the application whose application rights you want to change.

   You can enter the name of the application or the name of the vendor. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

8. Click **Refresh**.

   Kaspersky Endpoint Security will search for the application in the consolidated list of applications installed on managed computers. Kaspersky Endpoint Security will show a list of applications that satisfy your search criteria.

9. Select the necessary application.

10. In the **Add selected application to the trust group** drop-down list, select **Default groups** and click **OK**.

    The application will be added to the default group.

11. Select the relevant application and then select **Application rights** from the context menu of the application.

    This opens the application properties.

12. Do one of the following:

    - If you want to edit trust group rights that regulate operations with the operating system registry, user files, and application settings, select **Files and system registry**.

    - If you want to edit trust group rights that regulate access to operating system processes and objects, select **Rights**.

    Network activity of applications is controlled by the Firewall component by using *network rules*.

13. For the relevant resource, in the column of the corresponding action, right-click to open the context menu and select the necessary option: **Inherit**, **Allow** (✓) or **Block** (⊘).

14. If you want to monitor the use of computer resources, select **Log events** (✓ / ⊘).

    Kaspersky Endpoint Security will record information about the operation of the Host Intrusion Prevention component. Reports contain information about operations with computer resources performed by the application (allowed or forbidden). Reports also contain information about the applications that utilize each resource.

15. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to change application rights in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Host Intrusion Prevention**.

5. In the **Application rights and protected resources** block, click the **Application rights and protected resources** link.

   This opens the application rights configuration window and the list of protected resources.

6. Go to the **Application rights** tab.

   You will see a list of trust groups on the left side of the window and their properties on the right side.

7. Click **Add**.

   This starts the Wizard for adding an application to a trust group.

8. Select the relevant trust group for the application.

9. Select the **Application** type. Go to the next step.

   If you want to change the trust group for multiple applications, select the **Group** type and define a name for the application group.

10. In the opened list of applications, select the applications whose application rights you want to change.

    Use a filter. You can enter the name of the application or the name of the vendor. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

11. Finish the wizard.

    The application will be added to the trust group.

12. In the left part of the window, select the relevant application.

13. In the right part of the window, in the drop-down list, do one of the following:

    - If you want to edit trust group rights that regulate operations with the operating system registry, user files, and application settings, select **Files and system registry**.

    - If you want to edit trust group rights that regulate access to operating system processes and objects, select **Rights**.

    > Network activity of applications is controlled by the Firewall component by using *network rules*.

14. For the relevant resource, in the column of the corresponding action, select the necessary option: **Inherit**, **Allow** ( ), **Block** ( ).

15. If you want to monitor the use of computer resources, select **Log events** (/).

    Kaspersky Endpoint Security will record information about the operation of the Host Intrusion Prevention component. Reports contain information about operations with computer resources performed by the application (allowed or forbidden). Reports also contain information about the applications that utilize each resource.

16. Save your changes.

How to change application rights in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

3. Click **Manage applications**.

   This opens the list of installed applications.

4. Select the necessary application.

5. In the context menu of the application, select **Details and rules**.

   This opens the application properties.

6. Do one of the following:

   - If you want to edit trust group rights that regulate operations with the operating system registry, user files, and application settings, select **Files and system registry**.

   - If you want to edit trust group rights that regulate access to operating system processes and objects, select **Rights**.

7. For the relevant resource, in the column of the corresponding action, right-click to open the context menu and select the necessary option: **Inherit**, **Allow** ( ) or **Deny** ( ).

8. If you want to monitor the use of computer resources, select **Log events** ( ).

   Kaspersky Endpoint Security will record information about the operation of the Host Intrusion Prevention component. Reports contain information about operations with computer resources performed by the application (allowed or forbidden). Reports also contain information about the applications that utilize each resource.

9. Select the **Exclusions** tab and configure the advanced settings of the application (see the table below).

10. Save your changes.

Advanced Settings of the application

Parameter	Description
Do not scan files opened by the application	All files that are opened by the application are excluded from scans by Kaspersky Endpoint Security. For example, if you are using applications to back up files, this feature helps reduce the consumption of resources by Kaspersky Endpoint Security.
Do not monitor application activity	Kaspersky Endpoint Security will not monitor the application's file- and network activity in the operating system. You can configure application activity monitoring for different components of Kaspersky Endpoint Security: • **Do not monitor for protection and control components**. Application activity is monitored by the following components: Behavior Detection, Exploit Prevention, Host Intrusion Prevention, Remediation Engine and Firewall. • **Do not monitor for Managed Detection and Response and Endpoint Detection and Response**. Application activity is monitored by built-in MDR agent and built-in EDR (KATA) agent. • **Do not intercept console interactive input for Endpoint Detection and Response**. Kaspersky Endpoint Security does not send telemetry data about managing the application on the console. Telemetry data is used by Kaspersky Anti Targeted Attack Platform (EDR).
Do not inherit restrictions from the parent process (application)	The restrictions configured for the parent process will not be applied by Kaspersky Endpoint Security to a child process. The parent process is started by an application for which application rights (Host Intrusion Prevention) and application network rules (Firewall) are configured.
Do not monitor child application activity	Kaspersky Endpoint Security will not monitor the file activity or network activity of applications that are started by this application. You can apply the exclusion recursively. So that the application does not monitor the activity of the entire chain of child applications.
Allow interaction with the Kaspersky Endpoint Security interface	Kaspersky Endpoint Security Self-Defense blocks all attempts to manage application services from a remote computer. If the check box is selected, the remote access application is allowed to manage Kaspersky Endpoint Security settings through the Kaspersky Endpoint Security interface.
Do not scan encrypted traffic / Do not scan all traffic	Network traffic initiated by the application will be excluded from scans by Kaspersky Endpoint Security. You can exclude either all traffic or only encrypted traffic from scans. You can also exclude individual IP addresses and port numbers from scans. Kaspersky Endpoint Security version 14.0 or earlier does not support excluding network traffic if a hash is specified for a trusted application instead of a path.

Protecting operating system resources and personal data

The Host Intrusion Prevention component manages the rights of applications to take actions on various categories of operating system resources and personal data. Kaspersky specialists have established preset categories of protected resources. For example, the *Operating system* category has a *Startup settings* subcategory that lists all the registry keys associated with autorun of applications. You cannot edit or delete the preset categories of protected resources or the protected resources that are within these categories.

How to add a protected resource in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

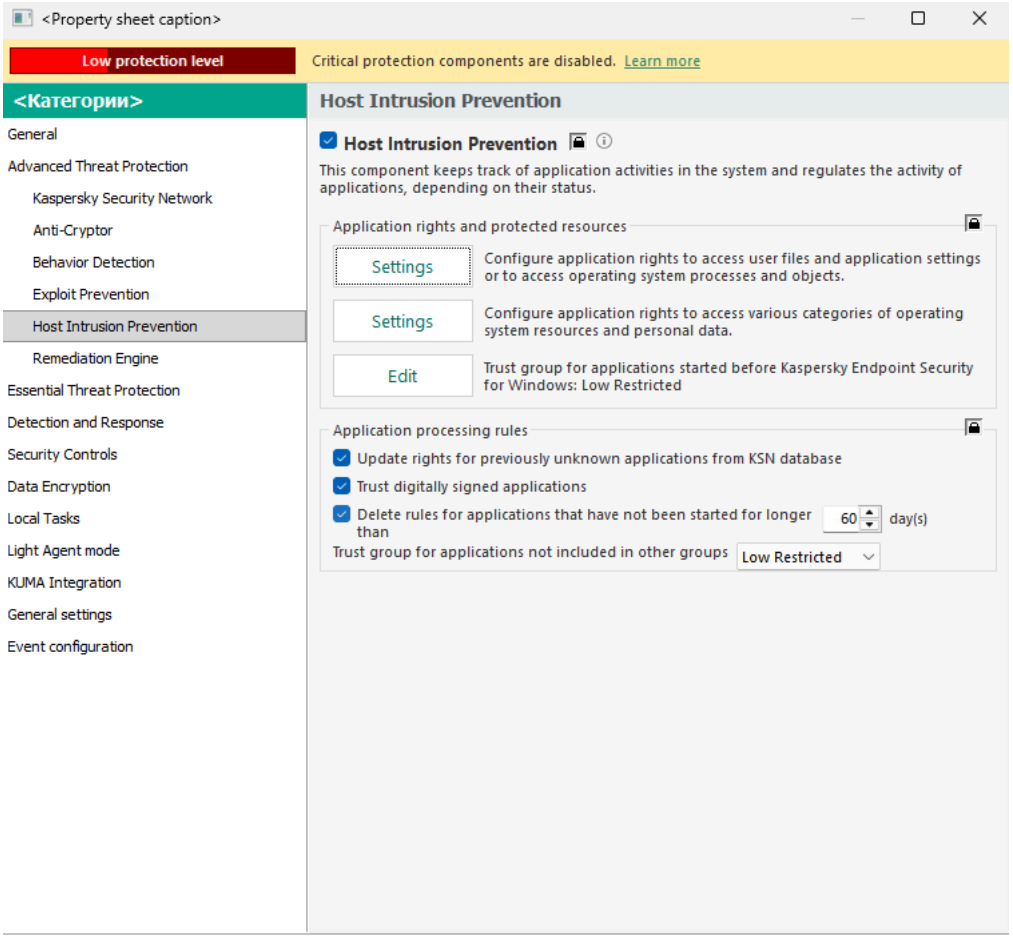

Intrusion Prevention settings

4. In the **Application rights and protected resources** block, click the **Settings** button.

   This opens the application rights configuration window and the list of protected resources.

5. Go to the **Protected resources** tab.

   You will see a list of protected resources in the left part of the window and the corresponding rights for accessing those resources depending on the specific trust group.

6. Select the category of protected resources to which you want to add a new protected resource.

   If you want to add a subcategory, click **Add** → **Category**.

7. Click the **Add** button. In the drop-down list, select the type of resource that you want to add: **File or folder** or **Registry key**.

8. In the window that opens, select a file, folder, or registry key.

   You can view applications' rights to access the added resources. To do so, select an added resource in the left part of the window and Kaspersky Endpoint Security will show the access rights for each trust group. You can also disable control of application activity with resources by using the check box next to a new resource.

9. To apply the policy to computers, close the padlock icons and save your changes.

How to add a protected resource in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Host Intrusion Prevention**.

5. In the **Application rights and protected resources** block, click the **Application rights and protected resources** link.

   This opens the application rights configuration window and the list of protected resources.

6. Go to the **Protected resources** tab.

   You will see a list of protected resources in the left part of the window and the corresponding rights for accessing those resources depending on the specific trust group.

7. Click **Add**.

   The New Resource Wizard starts.

8. In the **Group name** block, select the category of protected resources to which you want to add a new protected resource.

   If you want to add a subcategory, select the **Category of protected resources** option.

9. Select the type of resource that you want to add: **File or folder** or **Registry key**.

10. Select a file, folder, or registry key.

11. Finish the wizard.

    You can view applications' rights to access the added resources. To do so, select an added resource in the left part of the window and Kaspersky Endpoint Security will show the access rights for each trust group. You can also use the check box in the **Status** column to disable control of application activity with resources.

12. Save your changes.

How to add a protected resource in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

3. Click **Manage resources**.

   The list of protected resources opens.

4. Select the category of protected resources to which you want to add a new protected resource.

   If you want to add a subcategory, click **Add** → **Category**.

5. Click the **Add** button. In the drop-down list, select the type of resource that you want to add: **File or folder** or **Registry key**.

6. In the window that opens, select a file, folder, or registry key.

   You can view applications' rights to access the added resources. To do so, select an added resource in the left part of the window and Kaspersky Endpoint Security will show a list of applications and the access rights for each application. You can also disable control of application activity with resources by using the **Enable control** button in the **Status** column.

7. Save your changes.

Kaspersky Endpoint Security will control access to the added operating system resources and to personal data. Kaspersky Endpoint Security controls an application's access to resources based on the trust group assigned to the application. You can also change the trust group of an application.

Deleting information about unused applications

Kaspersky Endpoint Security uses application rights to control the activities of applications. Application rights are determined by their trust group. Kaspersky Endpoint Security puts an application into a trust group when the application is started for the first time. You can manually change the trust group of an application. You can also manually configure the rights of an individual application. Kaspersky Endpoint Security stores the following information about an application: trust group of the application, and rights of the application.

Kaspersky Endpoint Security automatically deletes information about unused applications to save computer resources. Kaspersky Endpoint Security deletes application information according to the following rules:

- If the trust group and rights of an application were determined automatically, Kaspersky Endpoint Security deletes information about this application after 30 days. It is not possible to change the storage term for application information or turn off automatic deletion.

- If you manually put an application into a trust group or configured its access rights, Kaspersky Endpoint Security deletes information about this application after 60 days (default storage term). You can change the storage term for application information, or turn off automatic deletion (see the instructions below).

When you start an application whose information has been deleted, Kaspersky Endpoint Security analyzes the application as if it were starting for the first time.

How to configure automatic deletion of information about unused applications in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection → Host Intrusion Prevention**.

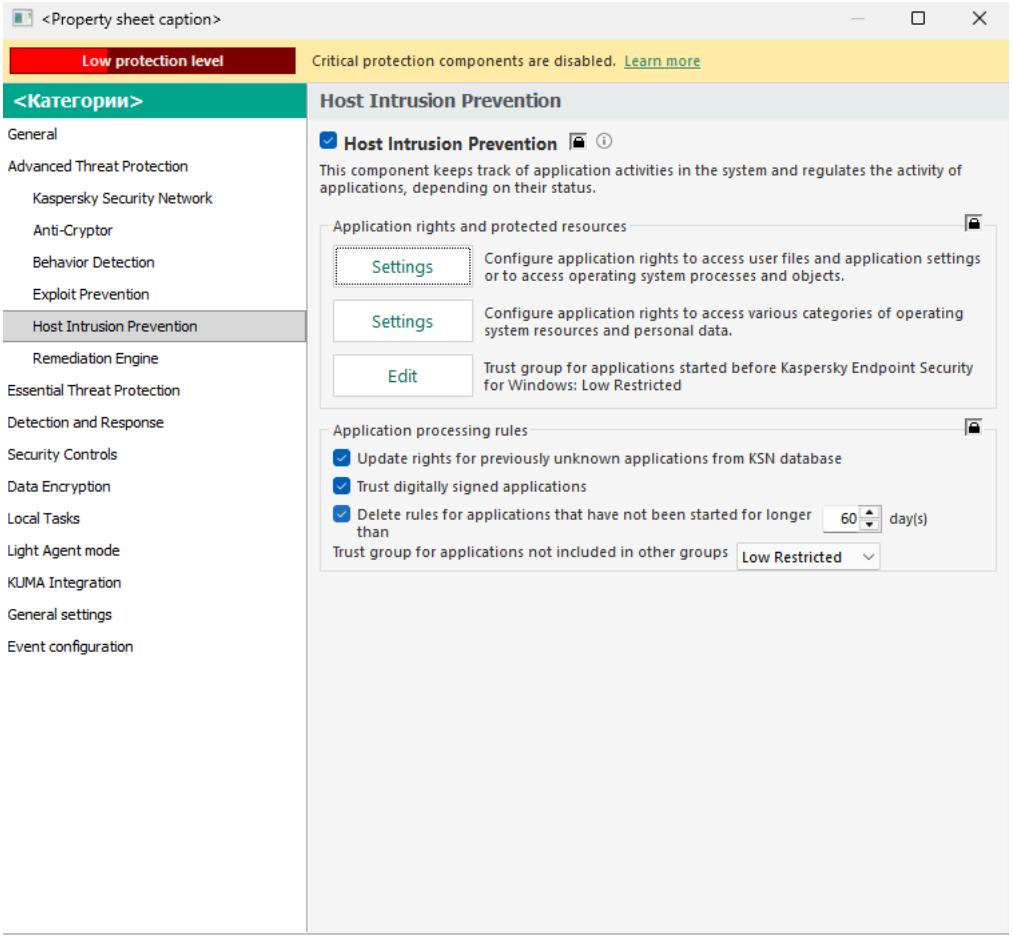

Intrusion Prevention settings

4. In the **Application processing rules** block, do one of the following:

   - If you want to configure automatic deletion, select the **Delete rules for applications that have not been started for longer than N day(s)** check box and enter the number of days.

     Information about the applications that you manually put into a trust group or whose access rights you manually configured will be deleted by Kaspersky Endpoint Security after the defined number of days. Information about applications whose trust group and application rights were automatically determined will also be deleted by Kaspersky Endpoint Security after 30 days.

   - If you want to turn off automatic deletion, clear the **Delete rules for applications that have not been started for longer than N day(s)** check box.

     Information about the applications that you manually put into a trust group or whose access rights you manually configured will be stored by Kaspersky Endpoint Security indefinitely, without any storage term limits. Kaspersky Endpoint Security will only delete information about applications whose trust group and application rights were automatically determined after 30 days.

5. To apply the policy to computers, close the padlock icons and save your changes.

How to configure automatic deletion of information about unused applications in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management → Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Host Intrusion Prevention**.

5. In the **Application processing rules** block, do one of the following:

   - If you want to configure automatic deletion, select the **Delete rules for applications that have not been started for longer than (days, 1 to 90)** check box and enter the number of days.

     Information about the applications that you manually put into a trust group or whose access rights you manually configured will be deleted by Kaspersky Endpoint Security after the defined number of days. Information about applications whose trust group and application rights were automatically determined will also be deleted by Kaspersky Endpoint Security after 30 days.

   - If you want to turn off automatic deletion, clear the **Delete rules for applications that have not been started for longer than (days, 1 to 90)** check box.

     Information about the applications that you manually put into a trust group or whose access rights you manually configured will be stored by Kaspersky Endpoint Security indefinitely, without any storage term limits. Kaspersky Endpoint Security will only delete information about applications whose trust group and application rights were automatically determined after 30 days.

6. Save your changes.

How to configure automatic deletion of information about unused applications in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Advanced Threat Protection** → **Host Intrusion Prevention**.

3. In the **Application processing rules** block, do one of the following:

   - If you want to configure automatic deletion, select the **Delete rules for applications that have not been started for longer than N days (from 1 to 90)** check box and enter the number of days.

     Information about the applications that you manually put into a trust group or whose access rights you manually configured will be deleted by Kaspersky Endpoint Security after the defined number of days. Information about applications whose trust group and application rights were automatically determined will also be deleted by Kaspersky Endpoint Security after 30 days.

   - If you want to turn off automatic deletion, clear the **Delete rules for applications that have not been started for longer than N days (from 1 to 90)** check box.

     Information about the applications that you manually put into a trust group or whose access rights you manually configured will be stored by Kaspersky Endpoint Security indefinitely, without any storage term limits. Kaspersky Endpoint Security will only delete information about applications whose trust group and application rights were automatically determined after 30 days.

4. Save your changes.

Monitoring Host Intrusion Prevention

You can receive reports on the operation of the Host Intrusion Prevention component. Reports contain information about operations with computer resources performed by the application (allowed or forbidden). Reports also contain information about the applications that utilize each resource.

To monitor Host Intrusion Prevention operations, you need to enable report writing. For example, you can enable forwarding of reports for individual applications in the Host Intrusion Prevention component settings.

When configuring Host Intrusion Prevention monitoring, take into account the potential network load when forwarding events to Kaspersky Security Center. You can also enable saving of reports only in the local log of Kaspersky Endpoint Security.

Protecting access to audio and video

The audio signal protection functionality and webcam access protection functionality is not supported on Arm-based computers.

Cybercriminals can use special programs to try to gain access to devices that record audio and video (such as microphones or webcams). Kaspersky Endpoint Security controls when applications receive an audio stream or video stream and protects data against unauthorized interception.

By default, Kaspersky Endpoint Security allows receiving audio and video streams only for applications from the *Trusted* group. The applications from *Low Restricted*, *High Restricted* and *Untrusted* groups are not allowed to receive the audio stream and video stream from devices. You can manually allow applications to receive the audio stream and video stream.

Special features of audio stream protection

Audio stream protection has the following special characteristics:

- The Host Intrusion Prevention component must be enabled for this functionality to work.
- If the application started receiving the audio stream before the Host Intrusion Prevention component was started, Kaspersky Endpoint Security allows the application to receive the audio stream and does not show any notifications.
- If you moved the application to the *Untrusted* group or *High Restricted* group after the application began receiving the audio stream, Kaspersky Endpoint Security allows the application to receive the audio stream and does not show any notifications.
- After the settings for the application's access to sound recording devices have been changed (for example, if the application has been blocked from receiving the audio stream), this application must be restarted to stop it from receiving the audio stream.
- Control of access to the audio stream from sound recording devices does not depend on an application's webcam access settings.
- Kaspersky Endpoint Security protects access to only built-in microphones and external microphones. Other audio streaming devices are not supported.

- Kaspersky Endpoint Security cannot guarantee the protection of an audio stream from such devices as DSLR cameras, portable video cameras, and action cameras.
- When you run audio and video recording or playback applications for the first time since installation of Kaspersky Endpoint Security, audio and video playback or recording may be interrupted. This is necessary in order to enable the functionality that controls access to sound recording devices by applications. The system service that controls audio hardware will be restarted when Kaspersky Endpoint Security is run for the first time.

Special features of application webcam access protection

Webcam access protection functionality has the following special considerations and limitations:

- The application controls video and still images derived from the processing of webcam data.
- The application controls the audio stream if it is part of the video stream received from the webcam.
- The application controls only webcams connected via USB or IEEE1394 that are displayed as Imaging Devices in the Windows Device Manager.
- Kaspersky Endpoint Security supports the following webcams:
  - Logitech HD Webcam C270
  - Logitech HD Webcam C310
  - Logitech Webcam C210
  - Logitech Webcam Pro 9000
  - Logitech HD Webcam C525
  - Microsoft LifeCam VX-1000
  - Microsoft LifeCam VX-2000
  - Microsoft LifeCam VX-3000
  - Microsoft LifeCam VX-800
  - Microsoft LifeCam Cinema

  Kaspersky cannot guarantee support for webcams that are not specified in this list.

BadUSB Attack Prevention

Some viruses modify the firmware of USB devices to trick the operating system into detecting the USB device as a keyboard. As a result, the virus may execute commands under your user account to download malware, for example.

The BadUSB Attack Prevention component prevents infected USB devices emulating a keyboard from connecting to the computer.

When a USB device is connected to a computer and identified as a keyboard by the operating system, the application prompts the user to enter a numerical code generated by the application from this keyboard or by using On-Screen Keyboard if available (see the figure below). This procedure is known as keyboard authorization.

If the code has been entered correctly, the application saves the identification parameters—VID/PID of the keyboard and the number of the port to which it has been connected—in the list of authorized keyboards. Keyboard authorization does not need to be repeated when the keyboard is reconnected or after the operating system is restarted.

> When the authorized keyboard is connected to a different USB port of the computer, the application shows a prompt for re-authorization of this keyboard.

If the numerical code has been entered incorrectly, the application generates a new code. You can configure the number of attempts for entering the numerical code. If the numerical code is entered incorrectly several times or the keyboard authorization window is closed (see figure below), the application blocks input from this keyboard. When the USB device blocking time elapses or the operating system is restarted, the application prompts the user to perform keyboard authorization again.

The application allows use of an authorized keyboard and blocks a keyboard that has not been authorized.

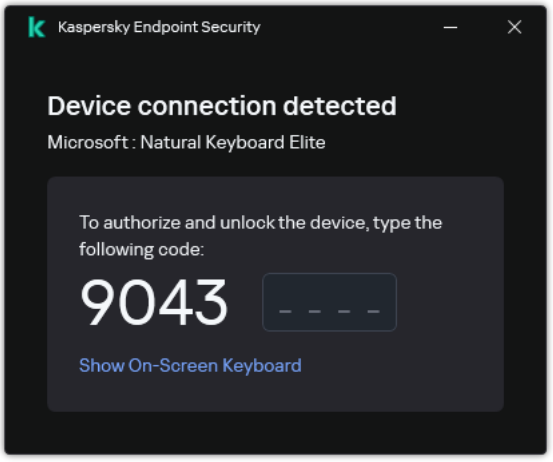

Keyboard authorization

Enabling and disabling BadUSB Attack Prevention

USB devices identified by the operating system as keyboards and connected to the computer before installation of the BadUSB Attack Prevention component are considered authorized after installation of the component.

How to enable or disable the BadUSB Attack Prevention component in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **BadUSB Attack Prevention**.
4. Use the **BadUSB Attack Prevention** check box to enable or disable the component.

5. In the **USB device authorization upon connection** block, adjust security settings for entering the authorization code:

   - **Maximum number of USB device authorization attempts**. Automatically blocking the USB device if the authorization code is entered incorrectly the specified number of times. Valid values are 1 to 10. For example, if you allow five attempts to enter the authorization code, the application blocks the USB device after the fifth unsuccessful attempt. Kaspersky Endpoint Security displays the blocking duration for the USB device. After this time elapses, you will once again have five attempts to enter the authorization code.

   - **Timeout when reaching the maximum number of attempts (minutes)**. USB device block duration after the specified number of unsuccessful attempts to enter the authorization code. Valid values are 1 to 180 (minutes).

6. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable the BadUSB Attack Prevention component in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **BadUSB Attack Prevention**.

5. Use the **BadUSB Attack Prevention ENABLED** toggle to enable or disable the component.

6. In the **Authorization of USB devices** block, adjust security settings for entering the authorization code:

   - **Maximum number of USB device authorization attempts**. Automatically blocking the USB device if the authorization code is entered incorrectly the specified number of times. Valid values are 1 to 10. For example, if you allow five attempts to enter the authorization code, the application blocks the USB device after the fifth unsuccessful attempt. Kaspersky Endpoint Security displays the blocking duration for the USB device. After this time elapses, you will once again have five attempts to enter the authorization code.

   - **Timeout when reaching the maximum number of attempts (min)**. USB device block duration after the specified number of unsuccessful attempts to enter the authorization code. Valid values are 1 to 180 (minutes).

7. Save your changes.

How to enable or disable the BadUSB Attack Prevention component in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **BadUSB Attack Prevention**.

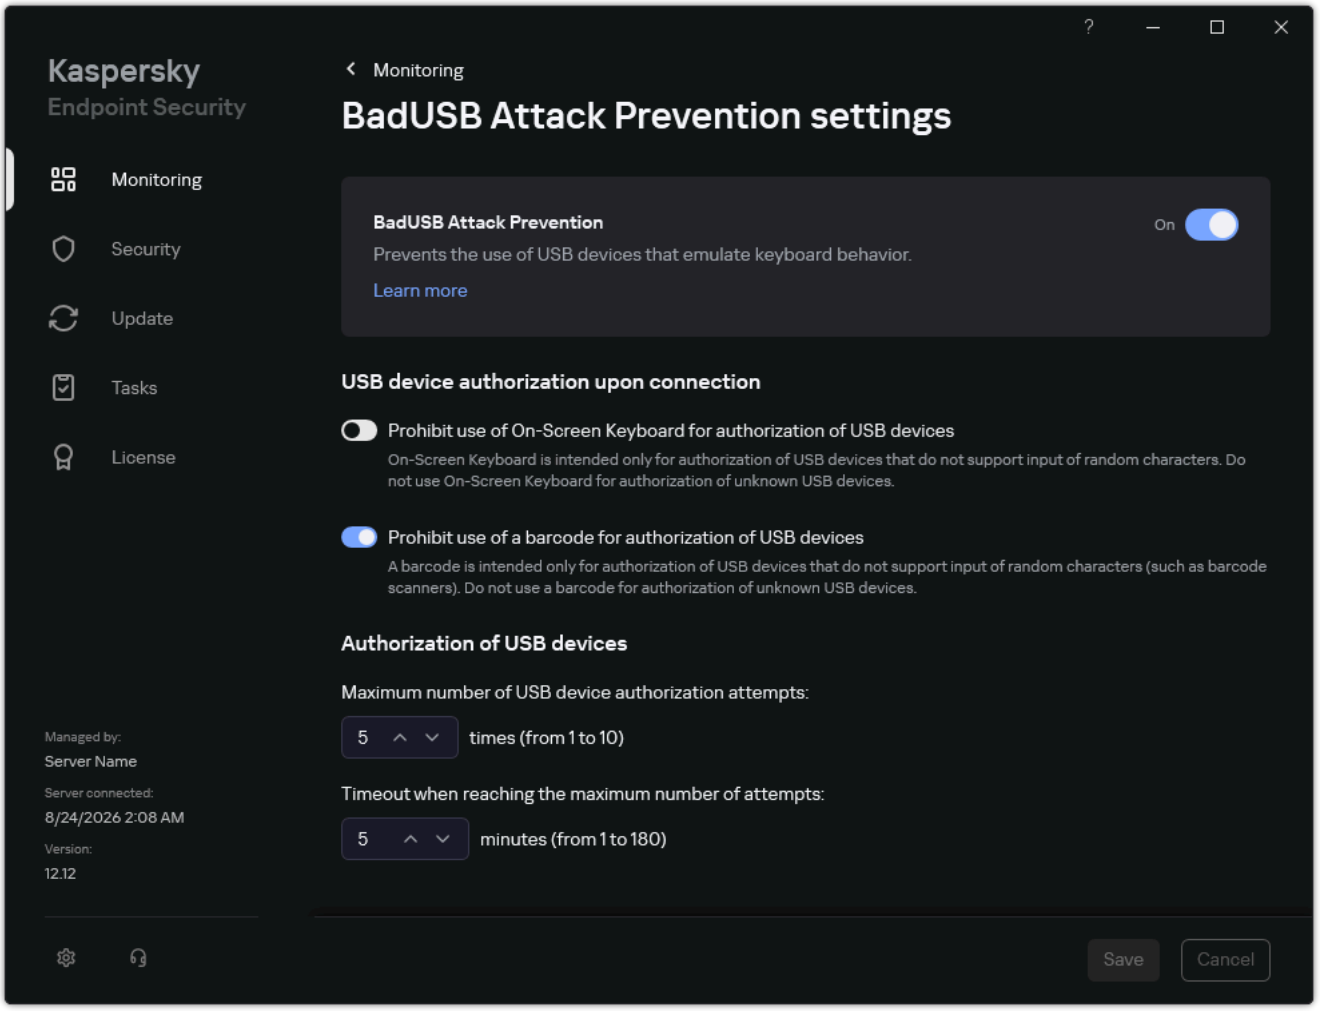

BadUSB Attack Prevention component settings

3. Use the **BadUSB Attack Prevention** toggle to enable or disable the component.

4. In the **USB device authorization upon connection** block, adjust security settings for entering the authorization code:

   - **Maximum number of USB device authorization attempts**. Automatically blocking the USB device if the authorization code is entered incorrectly the specified number of times. Valid values are 1 to 10. For example, if you allow five attempts to enter the authorization code, the application blocks the USB device after the fifth unsuccessful attempt. Kaspersky Endpoint Security displays the blocking duration for the USB device. After this time elapses, you will once again have five attempts to enter the authorization code.

   - **Timeout when reaching the maximum number of attempts**. USB device block duration after the specified number of unsuccessful attempts to enter the authorization code. Valid values are 1 to 180 (minutes).

5. Save your changes.

As a result, if BadUSB Attack Prevention is enabled, Kaspersky Endpoint Security requires authorization of a connected USB device identified as a keyboard by the operating system. The user cannot use an unauthorized keyboard until it is authorized.

Using On-Screen Keyboard for authorization of USB devices

On-Screen Keyboard should be used only for authorization of USB devices that do not support the input of random characters (such as barcode scanners). It is not recommended to use On-Screen Keyboard for authorization of unknown USB devices.

How to allow or prohibit the use of On-Screen Keyboard for authorization in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **BadUSB Attack Prevention**.
4. Use the **Prohibit use of On-Screen Keyboard for authorization of USB devices** check box to block or allow use of the On-Screen Keyboard for authorization.
5. Save your changes.

How to allow or prohibit the use of On-Screen Keyboard for authorization in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **BadUSB Attack Prevention**.
5. Use the **Prohibit use of On-Screen Keyboard for authorization of USB devices** toggle to block or allow use of the On-Screen Keyboard for authorization.
6. Save your changes.

How to allow or prohibit the use of On-Screen Keyboard for authorization in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **BadUSB Attack Prevention**.

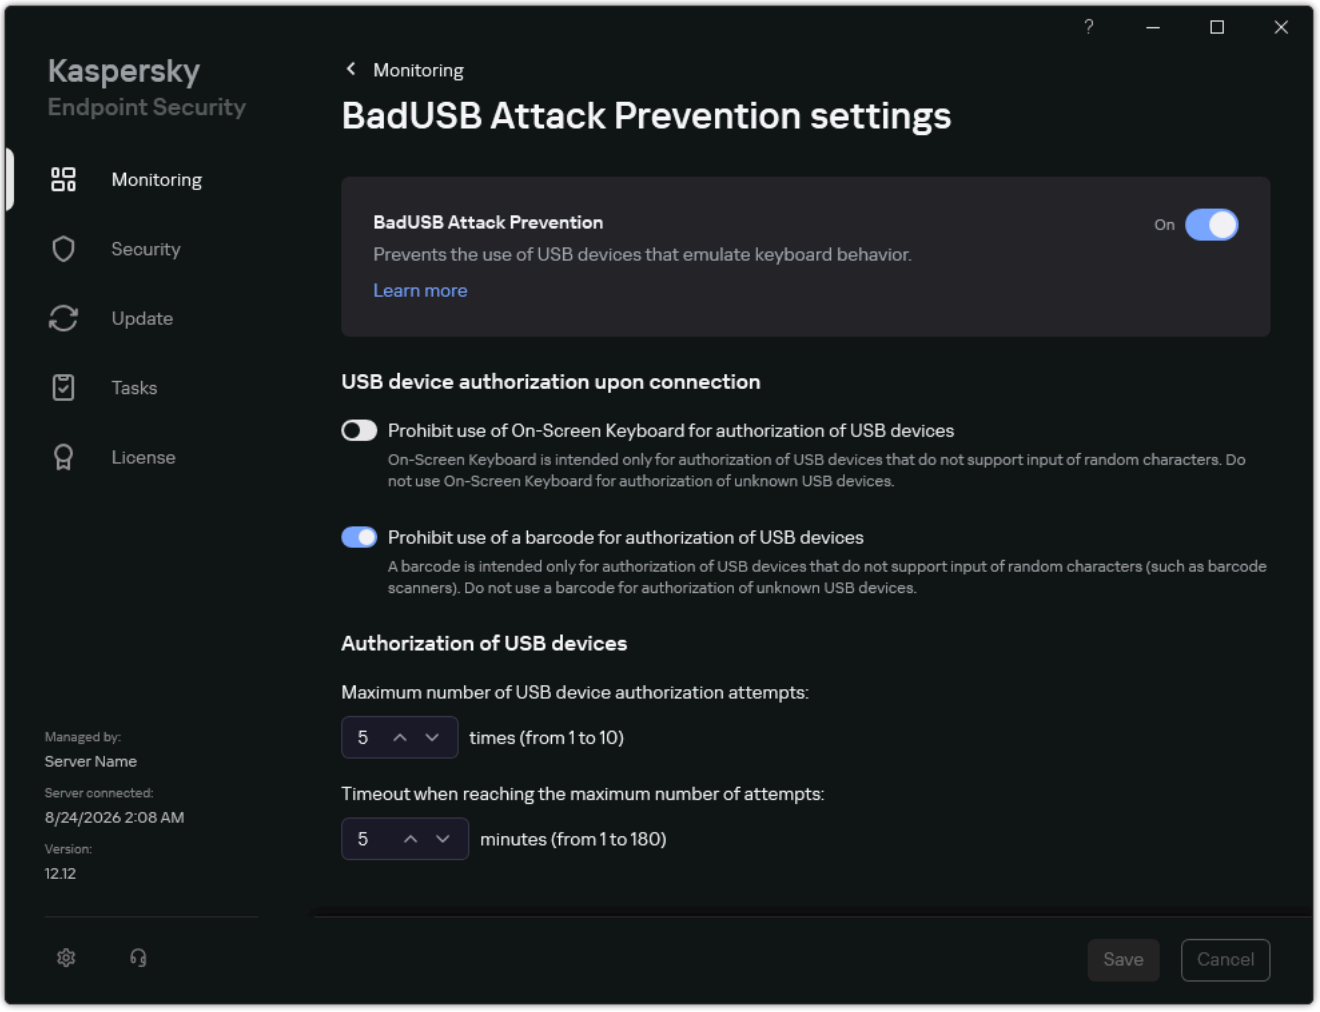

BadUSB Attack Prevention component settings

3. Use the **Prohibit use of On-Screen Keyboard for authorization of USB devices** toggle to block or allow use of the On-Screen Keyboard for authorization.

4. Save your changes.

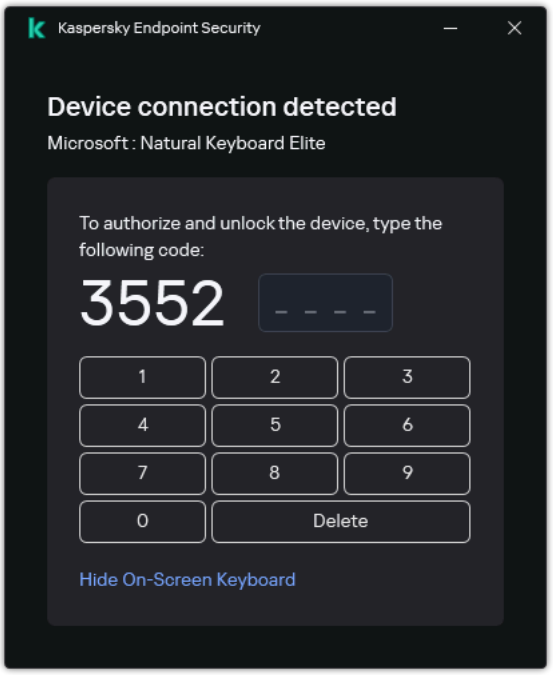

Authorization of USB devices

Barcode scanner authorization

When connecting a barcode scanner to the computer, the BadUSB Attack Prevention component identifies this device as an input device and prompts you to perform authorization. To authorize the barcode scanner, you must scan a barcode displayed on the screen. The application generates a barcode in the Code39 format that is supported by most barcode and QR code scanners.

Kaspersky Endpoint Security also supports another barcode scanner authorization method. If you are using touchscreen devices, you can use an on-screen keyboard to type a code. To do so, you need to allow the on-screen keyboard. This method is convenient, for example, in the case of stationary barcode scanners built into cash registers. Other barcode scanner authorization methods are forbidden.

By default the application does not use a barcode for authorization of USB devices.

How to enable USB device authorization by barcode in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Policies**.

3. Select the necessary policy and double-click to open the policy properties.

4. In the policy window, select **Essential Threat Protection** → **BadUSB Attack Prevention**.

5. Use the **Prohibit use of a barcode for authorization of USB devices** check box to block or allow use of the barcodes for authorization.

6. To apply the policy to computers, close the padlock icons and save your changes.

How to enable USB device authorization by barcode in the Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **BadUSB Attack Prevention**.
5. Use the **Prohibit use of a barcode for authorization of USB devices** toggle to block or allow use of the barcodes for authorization.
6. To apply the policy to computers, close the padlock icons and save your changes.

How to enable USB device authorization by barcode in the application interface

1. In the main application window, click the button.
2. In the application settings window, select **Essential Threat Protection** → **BadUSB Attack Prevention**.

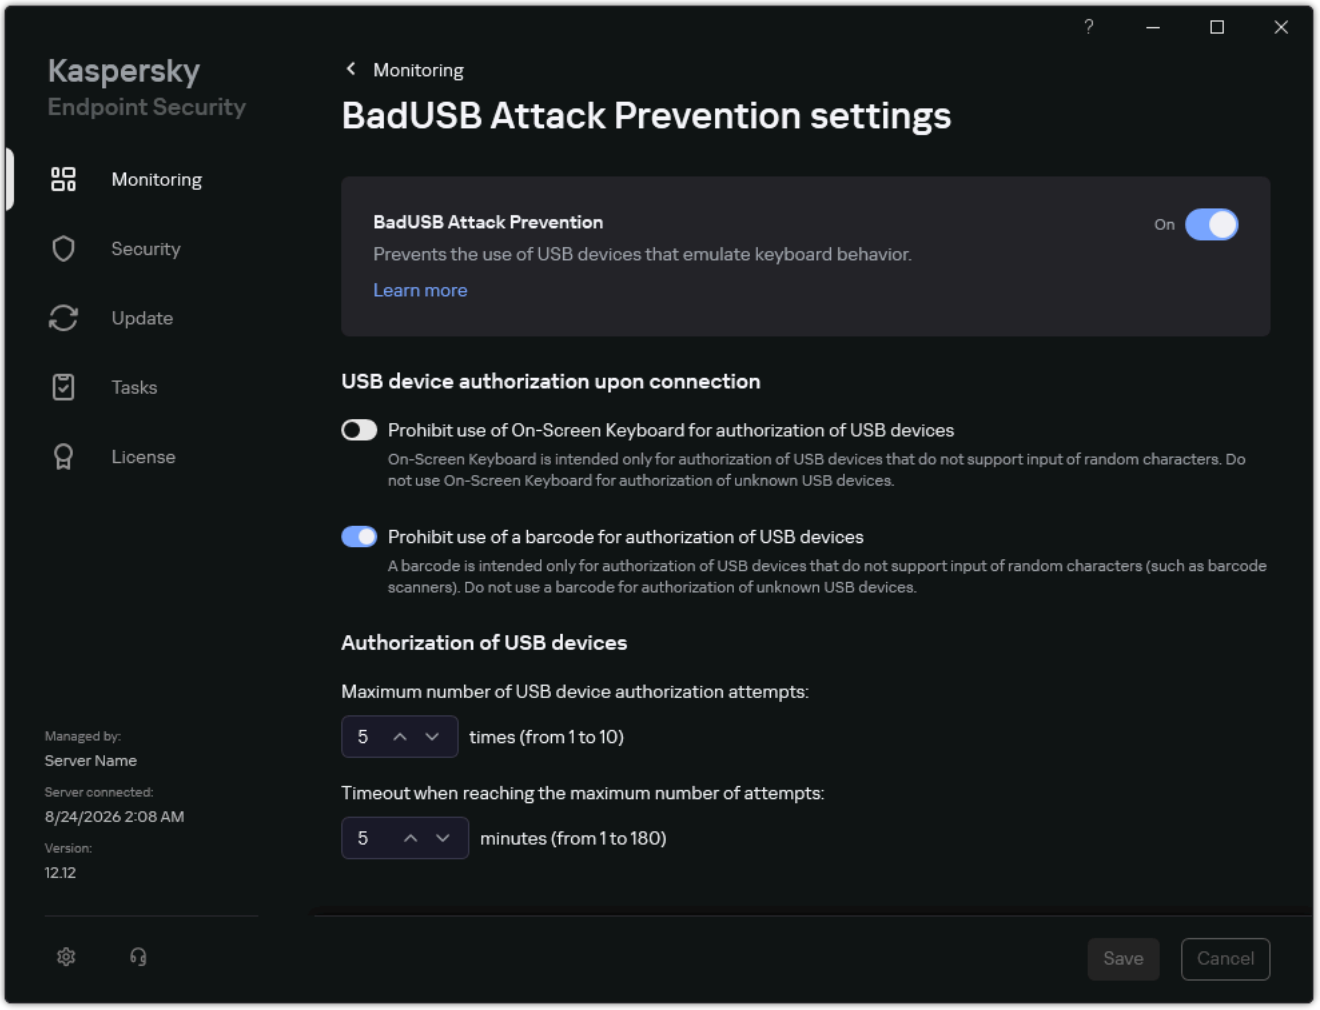

BadUSB Attack Prevention component settings

3. Use the **Prohibit use of a barcode for authorization of USB devices** toggle to block or allow use of the barcodes for authorization.

4. Save your changes.

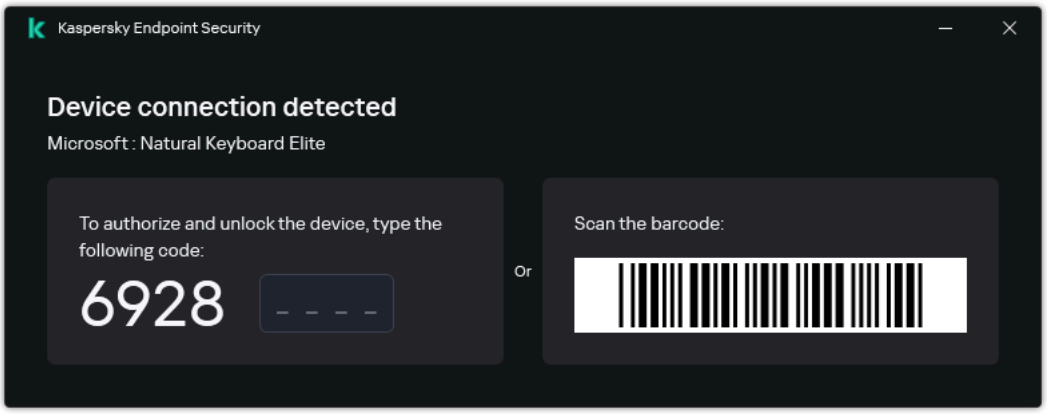

Barcode scanner authorization

AMSI Protection

The AMSI Protection component is intended to support Antimalware Scan Interface from Microsoft. *Antimalware Scan Interface (AMSI)* allows third-party applications with AMSI support to send objects (for example, PowerShell scripts) to Kaspersky Endpoint Security for an additional scan, and then receive the results from scanning these objects. Third-party applications may include, for example, Microsoft Office applications (see the figure below). For details on AMSI, please refer to the Microsoft documentation.

AMSI Protection can only detect a threat and notify a third-party application about the detected threat. A third-party application, after receiving a notification of a threat, does not allow the malicious actions (for example, it terminates the action).

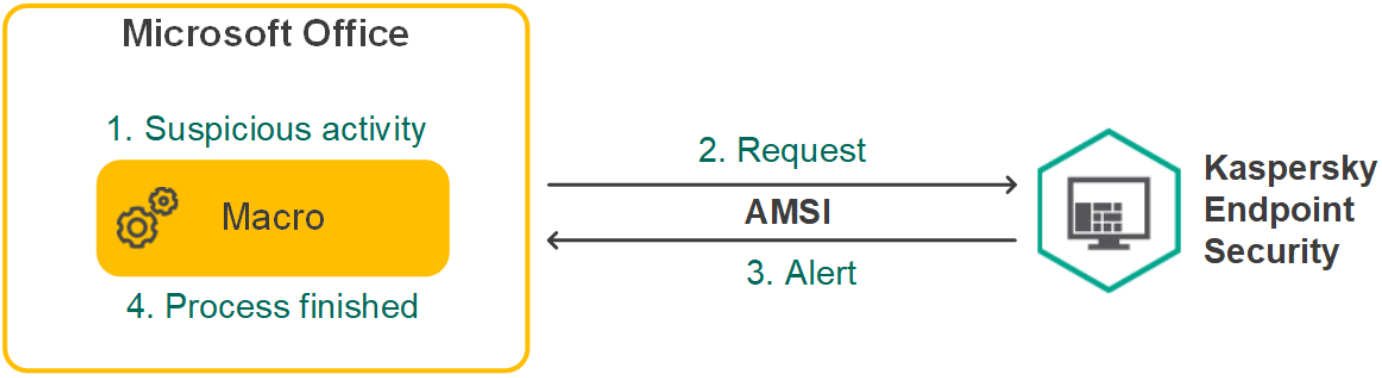

AMSI operation example

AMSI Protection component may decline a request from a third-party application, for example, if this application exceeds maximum number of requests within a specified interval. Kaspersky Endpoint Security sends information about a rejected request from a third-party application to the Administration Server. The AMSI Protection component does not deny requests from those third-party applications for which continuous integration with the AMSI Protection component is enabled.

AMSI Protection is available for the following operating systems for workstations and servers:

- Windows 10 Home / Pro / Pro for Workstations / Education / Enterprise / Enterprise multi-session
- Windows 11 Home / Pro / Pro for Workstations / Education / Enterprise / Enterprise multi-session
- Windows Server 2016 Essentials / Standard / Datacenter (including Server Core mode)
- Windows Server 2019 Essentials / Standard / Datacenter (including Server Core mode)
- Windows Server 2022 Standard / Datacenter / Datacenter: Azure Edition (including Server Core mode)
- Windows Server 2025 Standard / Datacenter

Enabling and disabling AMSI Protection

By default, AMSI Protection is enabled and working in the mode recommended by Kaspersky (see the table below).

How to enable or disable AMSI Protection in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **AMSI Scanner**.
4. Use the **AMSI Scanner** check box to enable or disable the component.
5. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable AMSI Protection in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **AMSI Protection**.
5. Use the **AMSI Protection ENABLED** toggle to enable or disable the component.
6. Save your changes. To apply the policy on computers, close the padlocks .

How to enable or disable AMSI Protection in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **AMSI Protection**.

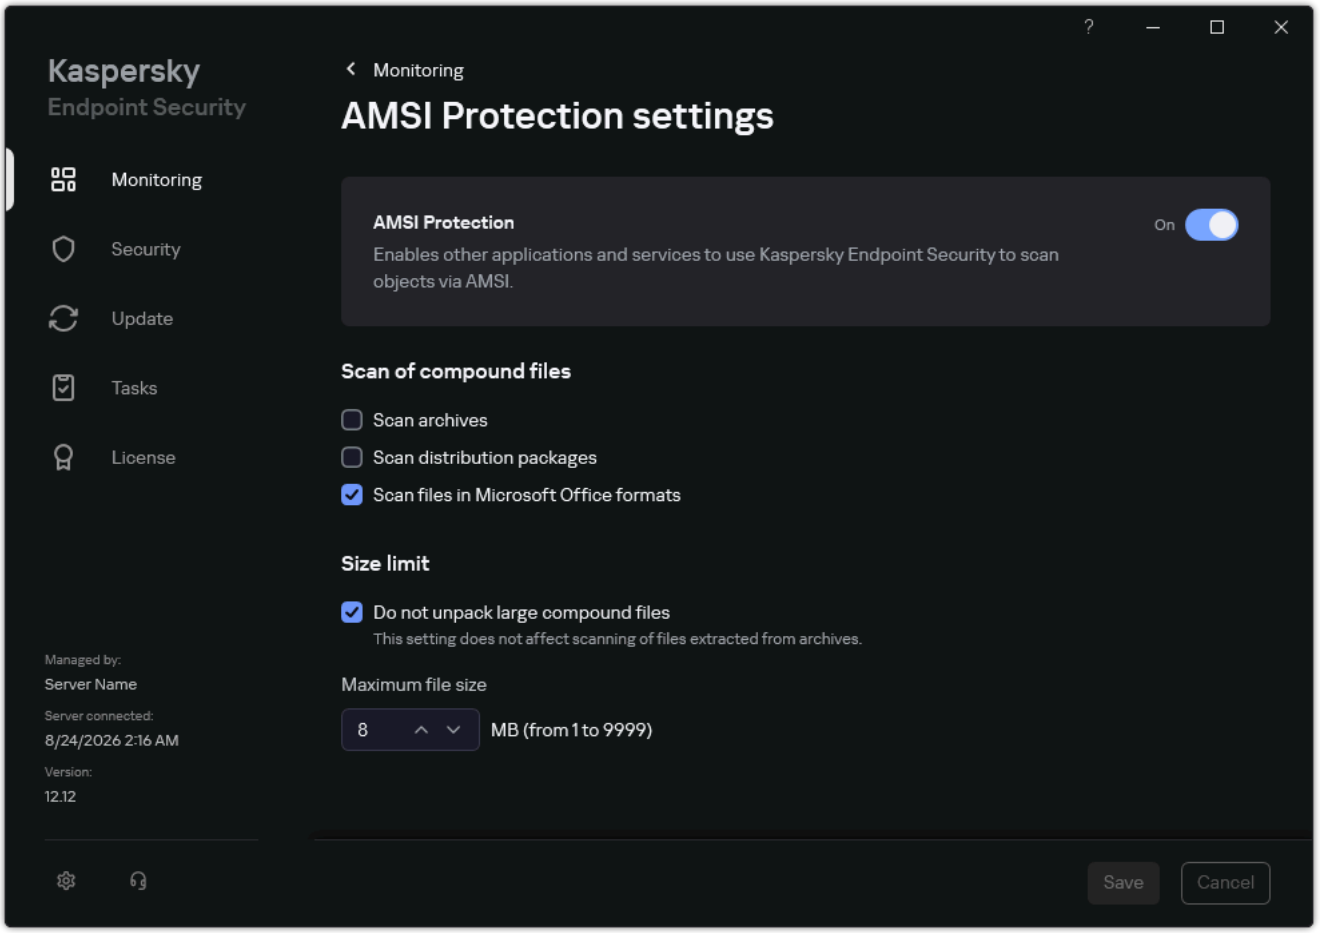

AMSI Protection settings

3. Use the **AMSI Protection** toggle to enable or disable the component.

4. Save your changes.

AMSI Protection settings recommended by Kaspersky experts

Parameter	Value	Description
Scan archives	**Off**	Scanning ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR, ICE, and other archives. The application scans archives not only by extension, but also by format. When checking archives, the application performs a recursive unpacking. This allows the detection of threats inside multi-level archives (an archive within an archive).
Scan distribution packages	**Off**	Scanning distribution packages of third-party applications.
Scan files in Microsoft Office formats	**On**	Scans Microsoft Office files (DOC, DOCX, XLS, PPT and other Microsoft extensions). Office format files include OLE objects as well. The application scans office format files that are smaller than 1 MB, regardless of whether the check box is selected or not.
Do not unpack large compound files	**Maximum file size 8 MB**	If this check box is selected, the application does not scan compound files if their size exceeds the specified value. If this check box is cleared, the application scans compound files of all sizes. The application scans large files that are extracted from archives regardless of whether the check box is selected or not.

Optimizing file scanning by AMSI Protection

You can optimize file scanning: reduce scan time and increase the operating speed of Kaspersky Endpoint Security. You can select the compound files that need scanning: archives, distribution packages, or files in office formats. You can also limit the size of compound files to be scanned. The AMSI Protection component will not unpack compound files that are larger than the specified size.

A common technique for concealing viruses and other malware is to embed them in compound files such as archives. To detect viruses and other malware that are hidden in this way, the compound file must be unpacked, which may slow down scanning. You can limit the types of compound files to be scanned and thereby speed up scanning.

How to optimize file scanning by AMSI Protection in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **AMSI Scanner**.
4. In the **Scan of compound files** block, specify the types of compound files that you want to scan: archives, distribution package, or files in office formats.
5. In the **Size limit** block, do one of the following:
   - To block the AMSI Protection component from unpacking large compound files, select the **Do not unpack large compound files** check box and specify the required value. The AMSI Protection component will not unpack compound files that are larger than the specified size.
   - To allow the AMSI Protection component to unpack large compound files, clear the **Do not unpack large compound files** check box.

   The AMSI Protection component scans large files that are extracted from archives, regardless of whether the **Do not unpack large compound files** check box is selected.
6. Save your changes. To apply the policy on computers, close the padlocks 🔒.

How to optimize file scanning by AMSI Protection in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **AMSI Protection**.
5. In the **Scan of compound files** block, specify the types of compound files that you want to scan: archives, distribution package, or files in office formats.

6. In the **Scan optimization** block, do one of the following:

   - To block the AMSI Protection component from unpacking large compound files, select the **Size limits enabled** check box and specify the required value. The AMSI Protection component will not unpack compound files that are larger than the specified size.

   - To allow the AMSI Protection component to unpack large compound files, clear the **Size limits enabled** check box.

   The AMSI Protection component scans large files that are extracted from archives, regardless of whether the **Size limits enabled** check box is selected.

7. Save your changes. To apply the policy on computers, close the padlocks 🔒.

How to optimize file scanning by AMSI Protection in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **AMSI Protection**.

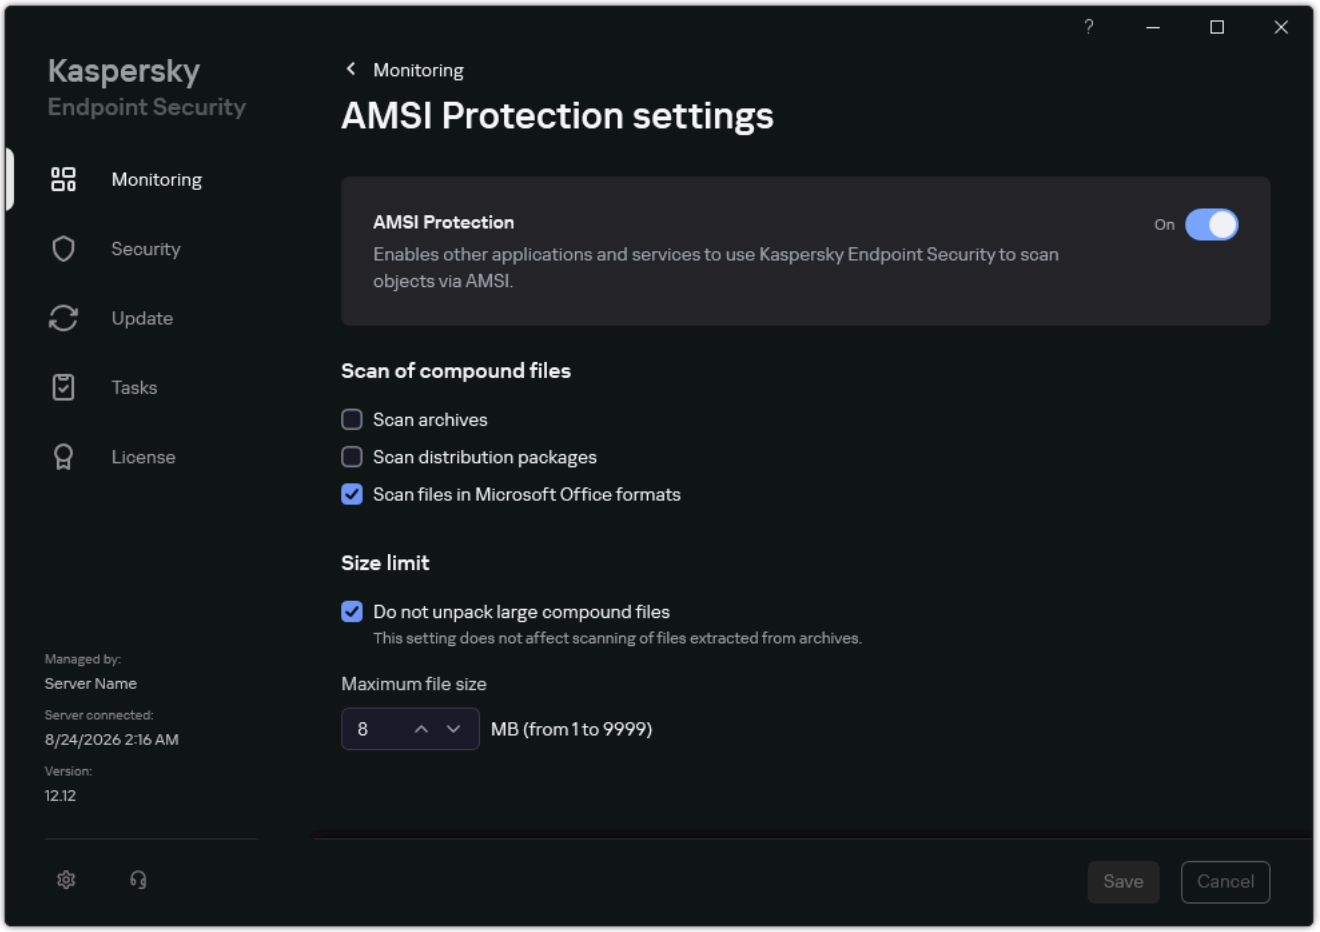

AMSI Protection settings

3. In the **Scan of compound files** block, specify the types of compound files that you want to scan: archives, distribution package, or files in office formats.

4. In the **Size limit** block, do one of the following:

   - To block the AMSI Protection component from unpacking large compound files, select the **Do not unpack large compound files** check box and specify the required value. The AMSI Protection component will not unpack compound files that are larger than the specified size.

   - To allow the AMSI Protection component to unpack large compound files, clear the **Do not unpack large compound files** check box.

   The AMSI Protection component scans large files that are extracted from archives, regardless of whether the **Do not unpack large compound files** check box is selected.

5. Save your changes.

Web Threat Protection

The Web Threat Protection component prevents downloads of malicious files from the internet, and also blocks the connection to malicious and phishing websites. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis.

Kaspersky Endpoint Security scans HTTP-, HTTPS-, and FTP-traffic. Kaspersky Endpoint Security scans URLs and IP addresses.

To use Web Threat Protection, you must complete the initial configuration of the application:

- For HTTPS traffic monitoring, enable encrypted connections scan (enabled by default).

- Select the ports that Kaspersky Endpoint Security must monitor (by default, the application monitors all ports).

- Select the applications whose traffic you want Kaspersky Endpoint Security to monitor. Most browsers are already present in the list of applications recommended by Kaspersky. If your browser is missing from the list, add it manually.

- We recommend to inject a web page interaction script into web traffic (by default, script injection is disabled). This script enables registration of Web Threat Protection events for the application event log, OS event log, and reports.

When a user tries to open a malicious or phishing website, Kaspersky Endpoint Security will block access and show a warning.

Enabling and disabling Web Threat Protection

By default, the Web Threat Protection component is enabled and runs in the mode recommended by Kaspersky experts. For Web Threat Protection, the application can apply different groups of settings. These groups of settings that are stored in the application are called *security levels*: **High**, **Recommended**, **Low**. The **Recommended** web traffic security level settings are considered to be the optimal settings recommended by Kaspersky experts (see the table below). You can select one of the pre-installed security levels for web traffic that is received or transmitted via the HTTP and FTP protocols, or configure a custom web traffic security level. If you change the web traffic security level settings, you can always revert to the recommended web traffic security level settings.

> You can select or configure the security level only in Administration Console (MMC) or the local interface of the application. You cannot select or configure the security level in Web Console or Cloud Console.

How to enable or disable the Web Threat Protection component in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **Web Threat Protection**.
4. Use the **Web Threat Protection** check box to enable or disable the component.
5. If you enabled the component, do one of the following in the **Security level** block:
   - If you want to apply one of the preset security levels, select it with the slider:
     - **High**. The security level under which the Web Threat Protection component performs maximum scanning of web traffic that a computer receives via HTTP and FTP. Web Threat Protection performs detailed scanning of all web traffic objects by using the full set of application databases, and performs the deepest possible heuristic analysis.
     - **Recommended**. The security level that provides the optimal balance between the performance of the application and the security of web traffic. The Web Threat Protection component performs heuristic analysis at the medium scan level. This web traffic security level is recommended by Kaspersky specialists. The values of settings for the recommended security level are provided in the table below.
     - **Low**. The settings of this web traffic security level ensure the maximum web traffic scanning speed. The Web Threat Protection component performs heuristic analysis at the light scan level.
   - If you want to configure a custom security level, click the **Settings** button and define your own component settings (see the table below).

     You can restore the values of preset security levels by clicking the **By default** button.

6. In the **Action on threat detection** block, select the action that Kaspersky Endpoint Security performs on malicious web traffic objects:

   - **Block**. If this option is selected and an infected object is detected in web traffic, the Web Threat Protection component blocks access to the object and displays a message in the browser.

   - **Inform**. If this option is selected and an infected object is detected in web traffic, Kaspersky Endpoint Security allows this object to be downloaded to the computer but adds information about the infected object to the list of active threats.

7. Save your changes.

How to enable or disable the Web Threat Protection component in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Communication & Web Protection** → **Web Threat Protection**.

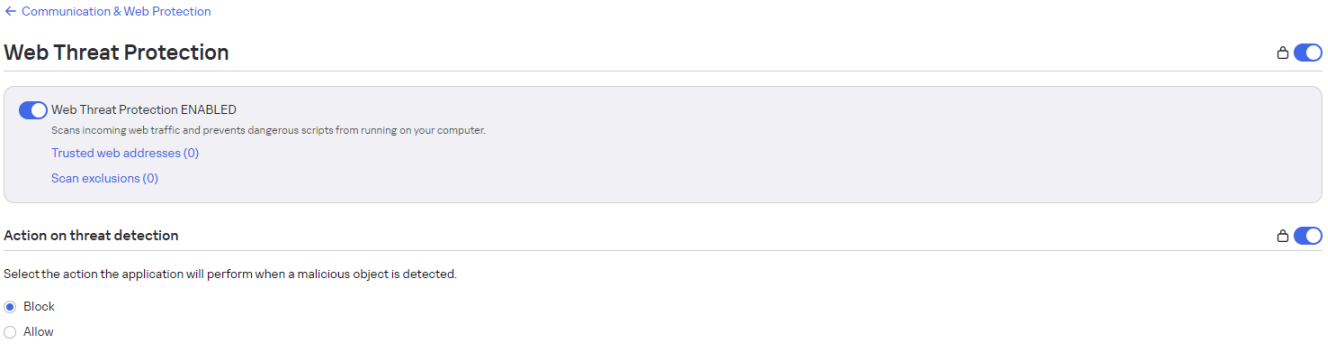

Web Threat Protection settings

5. Use the **Web Threat Protection ENABLED** toggle to enable or disable the component.

6. In the **Action on threat detection** block, select the action that Kaspersky Endpoint Security performs on malicious web traffic objects:

   - **Block**. If this option is selected and an infected object is detected in web traffic, the Web Threat Protection component blocks access to the object and displays a message in the browser.

   - **Allow, inform, or prompt for action (depends on OS)**. If this option is selected and an infected object is detected in web traffic, Kaspersky Endpoint Security allows this object to be downloaded to the computer but adds information about the infected object to the list of active threats.

7. If necessary, make a list of trusted web addresses.

8. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable the Web Threat Protection component

1. In the main application window, click the button.

2. In the application settings window, select **Essential Threat Protection** → **Web Threat Protection**.

3. Use the **Web Threat Protection** toggle to enable or disable the component.

4. If you enabled the component, do one of the following in the **Security level** block:

   - If you want to apply one of the preset security levels, select it with the slider:

     - **High**. The security level under which the Web Threat Protection component performs maximum scanning of web traffic that a computer receives via HTTP and FTP. Web Threat Protection performs detailed scanning of all web traffic objects by using the full set of application databases, and performs the deepest possible heuristic analysis.

     - **Recommended**. The security level that provides the optimal balance between the performance of the application and the security of web traffic. The Web Threat Protection component performs heuristic analysis at the medium scan level. This web traffic security level is recommended by Kaspersky specialists. The values of settings for the recommended security level are provided in the table below.

     - **Low**. The settings of this web traffic security level ensure the maximum web traffic scanning speed. The Web Threat Protection component performs heuristic analysis at the light scan level.

   - If you want to configure a custom security level, click the **Advanced settings** button and define your own component settings (see the table below).

     You can restore the values of preset security levels by clicking the **Restore recommended security level** button.

5. In the **Action on threat detection** block, select the action that Kaspersky Endpoint Security performs on malicious web traffic objects:

   - **Block**. If this option is selected and an infected object is detected in web traffic, the Web Threat Protection component blocks access to the object and displays a message in the browser.

   - **Inform**. If this option is selected and an infected object is detected in web traffic, Kaspersky Endpoint Security allows this object to be downloaded to the computer but adds information about the infected object to the list of active threats.

6. Save your changes.

Web Threat Protection settings recommended by Kaspersky experts (recommended security level)

Parameter	Value	Description
Check the web address against the database of malicious web addresses	**On**	Scanning the links to determine whether they are included in the database of malicious web addresses allows you to track websites that have been added to denylist. The database of malicious web addresses is maintained by Kaspersky, included in the application installation package, and updated during Kaspersky Endpoint Security database updates.
Check the web address against the database of phishing web addresses	**On**	The database of phishing web addresses includes the web addresses of currently known websites that are used to launch phishing attacks. Kaspersky supplements this database of phishing links with addresses obtained from the international organization known as the Anti-Phishing Working Group. The database of phishing addresses is included in the application installation package and supplemented with Kaspersky Endpoint Security database updates.
Use heuristic analysis (Web Threat Protection)	**Medium scan**	The technology was developed for detecting threats that cannot be detected by using the current version of Kaspersky application databases. It detects files that may be infected with an unknown virus or a new variety of a known virus. When web traffic is scanned for viruses and other applications that present a threat, the heuristic analyzer performs instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.

Parameter	Value	Description
Use heuristic analysis (Anti-Phishing)	**On**	The technology was developed for detecting threats that cannot be detected by using the current version of Kaspersky application databases. It detects files that may be infected with an unknown virus or a new variety of a known virus.
Action on threat detection	**Block**	If this option is selected and an infected object is detected in web traffic, the Web Threat Protection component blocks access to the object and displays a message in the browser.

Configuring malicious web address detection methods

Web Threat Protection detects malicious web addresses using anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis.

You can select malicious web address detection methods only in Administration Console (MMC) or the local interface of the application. You cannot select malicious web address detection methods in Web Console or Cloud Console. The default option is checking web addresses against the database of malicious addresses with heuristic analysis (medium scan).

Scanning using the database of malicious addresses

Scanning the links to determine whether they are included in the database of malicious web addresses allows you to track websites that have been added to denylist. The database of malicious web addresses is maintained by Kaspersky, included in the application installation package, and updated during Kaspersky Endpoint Security database updates.

Kaspersky Endpoint Security scans all links to determine if they are listed in databases of malicious web addresses. The application's secure connection scan settings do not affect the link scanning functionality. In other words, if encrypted connections scan is disabled, Kaspersky Endpoint Security checks links against databases of malicious web addresses even if network traffic is transmitted over an encrypted connection.

How to enable or disable the checking of web addresses against the database of malicious web addresses using the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **Web Threat Protection**.
4. In the **Security level** block, click the **Settings** button.
5. In the window that opens, in the **Scan methods** block, select or clear the **Check the web address against the database of malicious web addresses** check box to enable or disable the checking of addresses against the database of malicious web addresses.
6. Save your changes.

How to enable or disable the checking of addresses against the malicious address database in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Web Threat Protection**.
3. Click **Advanced settings**.
4. In the **Scan methods** block, select or clear the **Check the web address against the database of malicious web addresses** check box to enable or disable the checking of addresses against the database of malicious web addresses.
5. Save your changes.

Heuristic analysis

During heuristic analysis, Kaspersky Endpoint Security analyzes the activity of applications in the operating system. Heuristic analysis can detect threats for which there are currently no records in the Kaspersky Endpoint Security databases.

When web traffic is scanned for viruses and other applications that present a threat, the heuristic analyzer performs instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.

How to enable or disable the use of heuristic analysis in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **Web Threat Protection**.
4. In the **Security level** block, click the **Settings** button.
5. In the window that opens, in the **Scan methods** block, select the **Use heuristic analysis** check box if you want the application to use heuristic analysis when scanning web traffic for viruses and other malware.
6. Use the slider to set the heuristic analysis level: **light scan**, **medium scan** or **deep scan**.

   When web traffic is scanned for viruses and other applications that present a threat, the heuristic analyzer performs instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.
7. Save your changes.

How to enable or disable the use of heuristic analysis in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Web Threat Protection**.
3. Click **Advanced settings**.
4. In the **Scan methods** block, select the **Use heuristic analysis** check box if you want the application to use heuristic analysis when scanning web traffic for viruses and other malware.

   When web traffic is scanned for viruses and other applications that present a threat, the heuristic analyzer performs instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.
5. Save your changes.

Anti-Phishing

Web Threat Protection checks links to see if they belong to phishing web addresses. This helps prevent *phishing attacks*. A phishing attack can be disguised, for example, as an email message supposedly from your bank with a link to the official website of the bank. By clicking the link, you go to an exact copy of the bank's website and can even see its real web address in the browser, even though you are on a counterfeit site. From this point forward, all of your actions on the site are tracked and can be used to steal your money.

Because links to phishing websites may be received not only in an email message but also from other sources such as messengers, the Web Threat Protection component monitors attempts to access a phishing website at the web traffic scan level and blocks access to such websites. Lists of phishing URLs are included with the Kaspersky Endpoint Security distribution kit.

> You can configure Anti-Phishing only in Administration Console (MMC) or the local interface of the application. You cannot configure Anti-Phishing in Web Console or Cloud Console. By default, Anti-Phishing with heuristic analysis is enabled.

How to enable or disable Anti-Phishing in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **Web Threat Protection**.
4. In the **Security level** block, click the **Settings** button.

5. In the window that opens, in the **Anti-Phishing settings** block, select or clear the **Check the web address against the database of phishing web addresses** check box to enable or disable Anti-Phishing.

   The database of phishing web addresses includes the web addresses of currently known websites that are used to launch phishing attacks. Kaspersky supplements this database of phishing links with addresses obtained from the international organization known as the Anti-Phishing Working Group. The database of phishing addresses is included in the application installation package and supplemented with Kaspersky Endpoint Security database updates.

6. Select the **Use heuristic analysis** check box if you want the application to use heuristic analysis when scanning web pages for phishing links.

   During heuristic analysis, Kaspersky Endpoint Security analyzes the activity of applications in the operating system. Heuristic analysis can detect threats for which there are currently no records in the Kaspersky Endpoint Security databases.

   To scan links, in addition to anti-virus database and heuristic analysis, you can use Kaspersky Security Network reputation databases.

7. Save your changes.

How to enable or disable Anti-Phishing in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Web Threat Protection**.

3. Click **Advanced settings**.

4. If you want the Web Threat Protection component to check links against the databases of phishing web addresses, select the **Check the web address against the database of phishing web addresses** check box in the **Anti-Phishing** block. The database of phishing web addresses includes the web addresses of currently known websites that are used to launch phishing attacks. Kaspersky supplements this database of phishing links with addresses obtained from the international organization known as the Anti-Phishing Working Group.
   The database of phishing addresses is included in the application installation package and supplemented with Kaspersky Endpoint Security database updates.

5. Select the **Use heuristic analysis** check box if you want the application to use heuristic analysis when scanning web pages for phishing links.

   During heuristic analysis, Kaspersky Endpoint Security analyzes the activity of applications in the operating system. Heuristic analysis can detect threats for which there are currently no records in the Kaspersky Endpoint Security databases.

   To scan links, in addition to anti-virus database and heuristic analysis, you can use Kaspersky Security Network reputation databases.

6. Save your changes.

Creating the list of trusted web addresses

In addition to malicious and phishing websites, Web Threat Protection can block other websites. For example, Web Threat Protection blocks HTTP traffic that does not satisfy RFC standards. You can create a list of URLs whose content you trust. The Web Threat Protection component does not analyze information from trusted web addresses to check them for viruses or other threats. This option may be useful, for example, if the Web Threat Protection component interferes with downloading a file from a known website.

A URL may be the address of a specific web page or the address of a website.

How to add a trusted web address using Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Essential Threat Protection** → **Web Threat Protection**.
5. In the **Security level** block, click the **Settings** button.
6. In the window that opens, select the **Trusted web addresses** tab.
7. Select the **Do not scan web traffic from trusted web addresses** check box.

   If this option is selected, the Web Threat Protection component does not scan the content of web pages or websites whose addresses are included in the list of trusted web addresses. You can add both the specific address and the address mask of a web page/website to the list of trusted web addresses.
8. Create a list of URLs / web pages whose content you trust.

   Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask.

   You can also import a list of trusted web addresses from an XML file.
9. To apply the policy to computers, close the padlock icons and save your changes.

How to add a trusted web address in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to the **Trusted Zone** section.
5. In the window that opens, click the **Web addresses** link.

   This opens a window containing a list of trusted web addresses.
6. Create a list of URLs / web pages whose content you trust.

Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask.

You can also import a list of trusted web addresses from a JSON file.

7. To apply the policy to computers, close the padlock icons and save your changes.

How to add a trusted web address in the application interface

1. In the main application window, click the button.
2. In the application settings window, select **Essential Threat Protection** → **Web Threat Protection**.
3. Click **Advanced settings**.
4. Select the **Do not scan web traffic from trusted URLs** check box.

   If this option is selected, the Web Threat Protection component does not scan the content of web pages or websites whose addresses are included in the list of trusted web addresses. You can add both the specific address and the address mask of a web page/website to the list of trusted web addresses.

5. Create a list of URLs / web pages whose content you trust.

   Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask.

   You can also import a list of trusted web addresses from an XML file.

6. Save your changes.

As a result, Web Threat Protection does not scan traffic of trusted web addresses. The user always can open a trusted website and download a file from that website. If you could not gain access to the website, check the settings of Encrypted connections scan, Web Control, and Network ports monitoring components. If Kaspersky Endpoint Security detects a file downloaded from a trusted website as malicious, you can add this file to exclusions.

You can also create a general list of exclusions for encrypted connections. In this case, Kaspersky Endpoint Security does not scan the HTTPS traffic of trusted web addresses when the Web Threat Protection, Mail Threat Protection, and Web Control components are doing their work.

Exporting and importing the list of trusted web addresses

You can export the list of trusted web addresses to an XML file. Then you can modify the file to, for example, add a large number of web addresses of the same type. You can also use the export/import function to back up the list of trusted web addresses or to migrate the list to a different server.

How to export and import a list of trusted web addresses in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **Web Threat Protection**.
4. In the **Security level** block, click the **Settings** button.
5. In the window that opens, select the **Trusted web addresses** tab.

6. To export the list of trusted web addresses:

   a. Select the trusted web addresses that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.

      If you did not select any trusted web address, Kaspersky Endpoint Security will export all web addresses.

   b. Click the **Export** link.

   c. In the window that opens, specify the name of the XML file to which you want to export the list of trusted web addresses, and select the folder in which you want to save this file.

   d. Save the file.

      Kaspersky Endpoint Security exports the entire list of trusted web addresses to the XML file.

7. To import the list of trusted addresses:

   a. Click the **Import** link.

      In the window that opens, select the XML file from which you want to import the list of trusted addresses.

   b. Open the file.

      If the computer already has a list of trusted addresses, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

8. Save your changes.

How to export and import a list of trusted web addresses in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Communication & Web Protection** → **Web Threat Protection**.

5. To export the list of exclusions in the **Rules list** block:

   a. Select the trusted web addresses that you want to export.

   b. Click the → **Export** button.

      Kaspersky Endpoint Security exports the list of trusted web addresses to a JSON file in the default downloads folder.

6. To import the list of exclusions in the **Rules list** block:

   a. Click the → **Import** button.

      In the window that opens, select the JSON file from which you want to import the list of trusted addresses.

b. Open the file.

If the computer already has a list of trusted addresses, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.

7. Save your changes.

Mail Threat Protection

The Mail Threat Protection component scans the attachments of incoming and outgoing email messages for viruses and other threats. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis.

Mail Threat Protection can scan both incoming and outgoing messages. The application supports POP3, SMTP, IMAP, and NNTP in the following mail clients:

- Microsoft Office Outlook
- Mozilla Thunderbird
- Windows Mail
- MyOffice Mail
- R7-Office Organizer

To scan traffic in the Mozilla Thunderbird, MyOffice Mail, and R7-Office Organizer mail clients, you need to add a Kaspersky certificate to the certificate store and select the own certificate store.

Mail Threat Protection does not support other protocols and mail clients.

Mail Threat Protection may not always be able to gain *protocol-level* access to messages (for example, when using the Microsoft Exchange solution). For this reason, Mail Threat Protection includes an extension for Microsoft Office Outlook. The extension allows scanning messages at the *level of the mail client*. The Mail Threat Protection extension supports the 32-bit and 64-bit versions of Outlook 2010, 2013, 2016, 2019, 2021, 2024, and 365. On Arm-based computers, the Mail Threat Protection extension supports the 32-bit and 64-bit versions of Outlook 2016, Outlook 2021, Outlook 2024, and Outlook 365 for Arm64.

The Mail Threat Protection component does not scan messages if the mail client is open in a browser.

When a malicious file is detected in an attachment, Kaspersky Endpoint Security adds information about the performed action to the message subject, for example, *[Message has been processed] <message subject>*.

Enabling and disabling Mail Threat Protection

By default, the Mail Threat Protection component is enabled and runs in the mode recommended by Kaspersky experts. For Mail Threat Protection, the application can apply different groups of settings. These groups of settings that are stored in the application are called *security levels*: **High**, **Recommended**, **Low**. The **Recommended** mail security level settings are considered to be the optimal settings recommended by Kaspersky experts (see the table below). You can select one of the pre-installed email security levels or configure a custom email security level. If you have changed the email security level settings, you can always revert to the recommended email security level settings.

When working with the Mozilla Thunderbird mail client, the Mail Threat Protection component does not scan messages that are transmitted via the IMAP protocol for viruses and other threats if filters are used to move messages from the Inbox folder.

How to enable or disable the Mail Threat Protection component in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **Mail Threat Protection**.
4. Use the **Mail Threat Protection** check box to enable or disable the component.
5. If you enabled the component, do one of the following in the **Security level** block:
   - If you want to apply one of the preset security levels, select it with the slider:
     - **High**. When this email security level is selected, the Mail Threat Protection component scans email messages most thoroughly. The Mail Threat Protection component scans incoming and outgoing email messages, and performs deep heuristic analysis. The High mail security level is recommended for high-risk environments. An example of such an environment is a connection to a free email service from a home network that is not guarded by centralized email protection.
     - **Recommended**. The email security level that provides the optimal balance between the performance of the application and email security. The Mail Threat Protection component scans incoming and outgoing email messages, and performs medium-level heuristic analysis. This mail traffic security level is recommended by Kaspersky specialists. The values of settings for the recommended security level are provided in the table below.
     - **Low**. When this email security level is selected, the Mail Threat Protection component only scans incoming email messages, performs light heuristic analysis, and does not scan archives that are attached to email messages. At this mail security level, the Mail Threat Protection component scans email messages at maximum speed and uses a minimum of operating system resources. The Low mail security level is recommended for use in a well-protected environment. An example of such an environment might be an enterprise LAN with centralized email security.
   - If you want to configure a custom security level, click the **Settings** button and define your own component settings (see the table below).

     You can restore the values of preset security levels by clicking the **By default** button.

6. In the **Action on threat detection** block, select the action that Kaspersky Endpoint Security performs on malicious objects:

   - **Disinfect, delete if disinfection fails**. When an infected object is detected in an inbound or outbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application deletes the infected object. The application adds information about the performed action to the message subject, for example, *[Message has been processed] <message subject>*.

   - **Disinfect, block if disinfection fails**. When an infected object is detected in an inbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. When an infected object is detected in an outbound message, the application attempts to disinfect the detected object. If the object cannot be disinfected, the application blocks transmission of the message, and the mail client shows an error.

   - **Block**. If an infected object is detected in an inbound message, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. If an infected object is detected in an outbound message, the application blocks transmission of the message, and the mail client shows an error.

7. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable the Mail Threat Protection component in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Communication & Web Protection** → **Mail Threat Protection**.

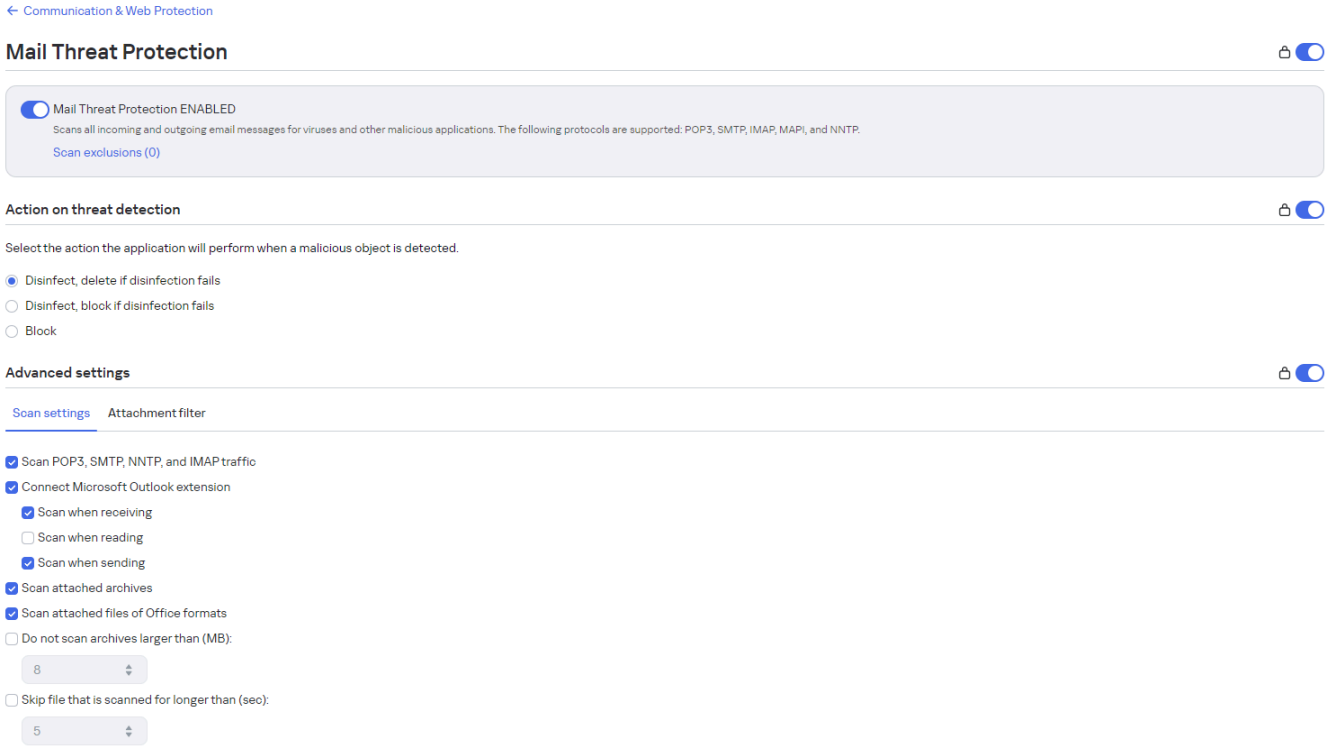

Mail Threat Protection settings

5. Use the **Mail Threat Protection ENABLED** toggle to enable or disable the component.

6. In the **Action on threat detection** block, select the action that Kaspersky Endpoint Security performs on malicious objects:

   - **Disinfect, delete if disinfection fails**. When an infected object is detected in an inbound or outbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application deletes the infected object. The application adds information about the performed action to the message subject, for example, *[Message has been processed] <message subject>*.

   - **Disinfect, block if disinfection fails**. When an infected object is detected in an inbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. When an infected object is detected in an outbound message, the application attempts to disinfect the detected object. If the object cannot be disinfected, the application blocks transmission of the message, and the mail client shows an error.

   - **Block**. If an infected object is detected in an inbound message, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. If an infected object is detected in an outbound message, the application blocks transmission of the message, and the mail client shows an error.

7. If necessary, edit the advanced settings of Mail Threat Protection.

8. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to enable or disable the Mail Threat Protection component in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Mail Threat Protection**.

3. Use the **Mail Threat Protection** toggle to enable or disable the component.

4. If you enabled the component, do one of the following in the **Security level** block:

   - If you want to apply one of the preset security levels, select it with the slider:

     - **High**. When this email security level is selected, the Mail Threat Protection component scans email messages most thoroughly. The Mail Threat Protection component scans incoming and outgoing email messages, and performs deep heuristic analysis. The High mail security level is recommended for high-risk environments. An example of such an environment is a connection to a free email service from a home network that is not guarded by centralized email protection.

     - **Recommended**. The email security level that provides the optimal balance between the performance of the application and email security. The Mail Threat Protection component scans incoming and outgoing email messages, and performs medium-level heuristic analysis. This mail traffic security level is recommended by Kaspersky specialists. The values of settings for the recommended security level are provided in the table below.

     - **Low**. When this email security level is selected, the Mail Threat Protection component only scans incoming email messages, performs light heuristic analysis, and does not scan archives that are attached to email messages. At this mail security level, the Mail Threat Protection component scans email messages at maximum speed and uses a minimum of operating system resources. The Low mail security level is recommended for use in a well-protected environment. An example of such an environment might be an enterprise LAN with centralized email security.

   - If you want to configure a custom security level, click the **Advanced settings** button and define your own component settings (see the table below).

     You can restore the values of preset security levels by clicking the **Restore recommended security level** button.

5. In the **Action on threat detection** block, select the action that Kaspersky Endpoint Security performs on malicious objects:

   - **Disinfect, delete if disinfection fails**. When an infected object is detected in an inbound or outbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application deletes the infected object. The application adds information about the performed action to the message subject, for example, *[Message has been processed] <message subject>*.

   - **Disinfect, block if disinfection fails**. When an infected object is detected in an inbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. When an infected object is detected in an outbound message, the application attempts to disinfect the detected object. If the object cannot be disinfected, the application blocks transmission of the message, and the mail client shows an error.

   - **Block**. If an infected object is detected in an inbound message, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. If an infected object is detected in an outbound message, the application blocks transmission of the message, and the mail client shows an error.

6. Save your changes.

Mail Threat Protection settings recommended by Kaspersky experts (recommended security level)

Parameter	Value	Description
Protection scope	**Incoming and outgoing messages**	The *Protection scope* includes objects that the component checks when it is run: incoming and outgoing messages or incoming messages only. In order to protect your computers, you need only scan incoming messages. You can turn on scanning for outgoing messages to prevent infected files from being sent in archives. You can also turn on the scanning of outgoing messages if you want to prevent files in particular formats from being sent, such as audio and video files, for example.
Connect Microsoft Outlook extension	**On**	If the check box is selected, scanning of email messages transmitted via the POP3, SMTP, NNTP, IMAP protocols is enabled on the side of the extension integrated into Microsoft Outlook. If mail is scanned using the extension for Microsoft Outlook, it is recommended to use Cached Exchange Mode. For more detailed information about Cached Exchange Mode and recommendations on its use, refer to the Microsoft Knowledge Base .
Scan attached archives	**On**	Scanning ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR, ICE, and other archives. The application scans archives not only by extension, but also by format. When checking archives, the application performs a recursive unpacking. This allows the detection of threats inside multi-level archives (an archive within an archive).
Scan attached files of Microsoft Office formats	**On**	Scans Microsoft Office files (DOC, DOCX, XLS, PPT and other Microsoft extensions). Office format files include OLE objects as well. The application scans office format files that are smaller than 1 MB, regardless of whether the check box is selected or not.
Attachment filter	**Rename attachments of selected types**	If this option is selected, the Mail Threat Protection component will replace the last extension character found in the attached files of the specified types with the underscore character (for example, attachment.doc_). Thus, in order to open the file, the user must rename the file.
Heuristic analysis	**Medium scan**	The technology was developed for detecting threats that cannot be detected by using the current version of Kaspersky application databases. It detects files that may be infected with an unknown virus or a new variety of a known virus. When scanning files for malicious code, the heuristic analyzer executes instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.
Action on threat detection	**Disinfect, delete if disinfection fails**	When an infected object is detected in an inbound or outbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application deletes the infected object. The application adds information about the performed action to the message subject, for example, *[Message has been processed] <message subject>*.

Changing the action to take on infected email messages

By default, the Mail Threat Protection component automatically attempts to disinfect all infected email messages that are detected. If disinfection fails, the Mail Threat Protection component deletes the infected email messages.

To change the action to take on infected email messages:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Mail Threat Protection**.

3. In the **Action on threat detection** block, select the action for Kaspersky Endpoint Security to perform when an infected message is detected:

   - **Disinfect, delete if disinfection fails**. When an infected object is detected in an inbound or outbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application deletes the infected object. The application adds information about the performed action to the message subject, for example, *[Message has been processed] <message subject>*.

   - **Disinfect, block if disinfection fails**. When an infected object is detected in an inbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. When an infected object is detected in an outbound message, the application attempts to disinfect the detected object. If the object cannot be disinfected, the application blocks transmission of the message, and the mail client shows an error.

   - **Block**. If an infected object is detected in an inbound message, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. If an infected object is detected in an outbound message, the application blocks transmission of the message, and the mail client shows an error.

4. Save your changes.

Forming the protection scope of the Mail Threat Protection component

Protection scope refers to the objects that are scanned by the component when it is active. The protection scopes of different components have different properties. The properties of the protection scope of the Mail Threat Protection component include the settings for integrating the Mail Threat Protection component into mail clients, and the type of email messages and email protocols whose traffic is scanned by the Mail Threat Protection component. By default, Kaspersky Endpoint Security scans both incoming and outgoing email messages and traffic of the POP3, SMTP, NNTP, and IMAP protocols, and is integrated into the Microsoft Office Outlook mail client.

To form the protection scope of the Mail Threat Protection component:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Mail Threat Protection**.

3. Click **Advanced settings**.

4. In the **Protection scope** block, select the messages to scan:

   - **Incoming and outgoing messages**.

   - **Incoming messages only**.

   In order to protect your computers, you need only scan incoming messages. You can turn on scanning for outgoing messages to prevent infected files from being sent in archives. You can also turn on the scanning of outgoing messages if you want to prevent files in particular formats from being sent, such as audio and video files, for example.

If you choose to scan only incoming messages, it is recommended that you perform a one-time scan of all outgoing messages because there is a chance that your computer has email worms that are being spread over email. This helps to avoid problems resulting from unmonitored mass emailing of infected messages from your computer.

5. In the **Connectivity** block, do the following:

   - If you want the Mail Threat Protection component to scan messages that are transmitted via the POP3, SMTP, NNTP, and IMAP protocols before they are received on the user's computer, select the **Scan POP3, SMTP, NNTP, and IMAP traffic** check box.

     If you do not want the Mail Threat Protection component to scan messages that are transmitted via the POP3, SMTP, NNTP, and IMAP protocols before they arrive on the user's computer, clear the **Scan POP3, SMTP, NNTP, and IMAP traffic** check box. In this case, messages are scanned by the Mail Threat Protection extension embedded in the Microsoft Office Outlook mail client after they are received on the user computer if the **Connect Microsoft Outlook extension** check box is selected.

     If you use a mail client other than Microsoft Office Outlook, the Mail Threat Protection component does not scan messages that are transmitted via the POP3, SMTP, NNTP, and IMAP protocols, when the **Scan POP3, SMTP, NNTP, and IMAP traffic** check box is cleared.

   - If you want to allow access to Mail Threat Protection component settings from Microsoft Office Outlook and enable scanning of messages that are transmitted via the POP3, SMTP, NNTP, IMAP, and MAPI protocols after they arrive on the computer using the extension that is embedded into Microsoft Office Outlook, select the **Connect Microsoft Outlook extension** check box.

     If you want to block access to Mail Threat Protection component settings from Microsoft Office Outlook and disable scanning of messages that are transmitted via the POP3, SMTP, NNTP, IMAP, and MAPI protocols after they arrive on the computer using the extension that is embedded into Microsoft Office Outlook, clear the **Connect Microsoft Outlook extension** check box.

     The Mail Threat Protection extension is embedded in the Microsoft Office Outlook mail client during installation of Kaspersky Endpoint Security.

6. Save your changes.

Scanning compound files attached to email messages

You can enable or disable scanning of message attachments, limit the maximum size of message attachments to be scanned, and limit the maximum message attachment scan duration.

To configure scanning of compound files attached to email messages:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Mail Threat Protection**.

3. Click **Advanced settings**.

4. In the **Scan of compound files** block, configure the scan settings:

   - **Scan attached files of Microsoft Office formats**. Scans Microsoft Office files (DOC, DOCX, XLS, PPT and other Microsoft extensions). Office format files include OLE objects as well. The application scans office format files that are smaller than 1 MB, regardless of whether the check box is selected or not.

   - **Scan attached archives**. Scanning ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR, ICE, and other archives. The application scans archives not only by extension, but also by format. When checking archives, the application performs a recursive unpacking. This allows the detection of threats inside multi-level archives (an archive within an archive).

     If, during the scan, the application detects a password for an archive in the text of the message, this password will be used to scan the content of the archive for malicious applications. In this case, the password is not saved. An archive is unpacked during the scan. If an application error occurs during the unpacking process, you can manually delete the unpacked files that are saved to the following path: %systemroot%\temp. The files have the PR prefix.

   - **Do not scan archives larger than N MB (from 1 to 9999)**. If this check box is selected, the Mail Threat Protection component excludes archives attached to email messages from scanning if their size exceeds the specified value. If the check box is cleared, the Mail Threat Protection component scans email attachment archives of any size.

   - **Limit the time for checking archives to N sec (from 1 to 9999)**. If the check box is selected, the time that is allocated for scanning archives attached to email messages is limited to the specified period.

5. Save your changes.

Email messages attachment filtering

The attachment filter is not applied to outgoing email messages.

Malicious applications can be distributed in the form of attachments in email messages. You can configure filtering based on the type of message attachments so that files of the specified types are automatically renamed or deleted. By renaming an attachment of a certain type, Kaspersky Endpoint Security can protect your computer against automatic execution of a malicious application.

To configure filtering of attachments:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Mail Threat Protection**.

3. Click **Advanced settings**.

4. In the **Attachment filter** block, do one of the following:

   - **Disable filtering**. If this option is selected, the Mail Threat Protection component does not filter files that are attached to email messages.

   - **Rename attachments of selected types**. If this option is selected, the Mail Threat Protection component will replace the last extension character found in the attached files of the specified types with the underscore character (for example, attachment.doc_). Thus, in order to open the file, the user must rename the file.

   - **Delete attachments of selected types**. If this option is selected, the Mail Threat Protection component deletes attached files of the specified types from email messages.

5. If you selected the **Rename attachments of selected types** option or the **Delete attachments of selected types** option during the previous step, select the check boxes opposite the relevant types of files.

6. Save your changes.

Exporting and importing extensions for attachment filtering

You can export the list of attachment filter extensions to an XML file. You can use the export/import function to back up the list of extensions or to migrate the list to a different server.

How to export and import a list of attachment filter extensions in the Administration Console (MMC)

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Communication & Web Protection** → **Mail Threat Protection**.

5. To export the list of extensions in the **Attachment filter** block:

   a. Select the extensions that you want to export.

   b. Click the **Export** link.

   c. In the window that opens, specify the name of the XML file to which you want to export the list of extensions, and select the folder in which you want to save this file.

   d. Save the file.

      Kaspersky Endpoint Security exports the entire list of extensions to the XML file.

6. To import the list of extensions in the **Attachment filter** block:

   a. Click the **Import** link.

   b. In the window that opens, select the XML file from which you want to import the list of extensions.

c. Open the file.

If the computer already has a list of extensions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

7. Save your changes.

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Essential Threat Protection** → **Mail Threat Protection**.

4. In the **Security level** block, click the **Settings** button.

5. This opens a window; in that window, select the **Attachment filter** tab.

6. To export the list of extensions:

   a. Select the extensions that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.

   b. Click the **Export** link.

   c. In the window that opens, specify the name of the XML file to which you want to export the list of extensions, and select the folder in which you want to save this file.

   d. Save the file.

   Kaspersky Endpoint Security exports the entire list of extensions to the XML file.

7. To import the list of extensions:

   a. Click the **Import** link.

   b. In the window that opens, select the XML file from which you want to import the list of extensions.

   c. Open the file.

   If the computer already has a list of extensions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

8. Save your changes.

Scanning emails in Microsoft Office Outlook

During installation of Kaspersky Endpoint Security, the Mail Threat Protection extension is embedded into Microsoft Office Outlook (hereinafter also referred to as Outlook). The extension allows scanning messages at the level of a mail client instead of the protocol level. In addition to messages, the extension lets you scan objects received through the MAPI interface from Microsoft Exchange repositories (for example, objects in the Calendar). This scanning takes place in the mail client.

You can open the Mail Threat Protection component settings from within Outlook, and specify when email messages are to be scanned for viruses and other threats.

The Mail Threat Protection extension supports the 32-bit and 64-bit versions of Outlook 2010, 2013, 2016, 2019, 2021, 2024, and 365.

On Arm-based computers, the Mail Threat Protection extension supports the 32-bit and 64-bit versions of Outlook 2016, Outlook 2021, Outlook 2024, and Outlook 365 for Arm64.

In Outlook, incoming messages are first scanned by the Mail Threat Protection component (if the Scan POP3, SMTP, NNTP, and IMAP traffic check box is selected in the interface of Kaspersky Endpoint Security) and then by the Mail Threat Protection extension for Outlook. If the Mail Threat Protection component detects a malicious object in a message, it notifies you about this event.

The Mail Threat Protection component settings can be configured directly in Outlook if the Microsoft Outlook extension is connected in the Kaspersky Endpoint Security interface (see the figure below).

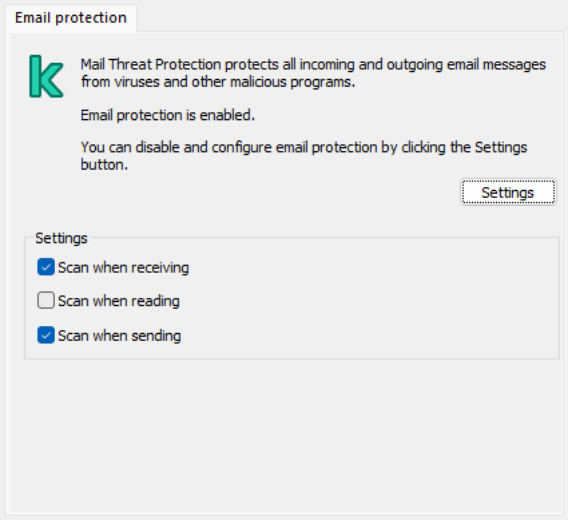

Mail Threat Protection component settings in Outlook

Outgoing messages are first scanned by the Mail Threat Protection extension for Outlook, and are then scanned by the Mail Threat Protection component.

When scanning email with the Mail Threat Protection extension for Outlook, we recommend using Exchange Server Cached Mode (Use Cached Exchange Mode). For more detailed information about Cached Exchange Mode and recommendations on its use, refer to the Microsoft Knowledge Base.

How to configure the operating mode of the Mail Threat Protection extension for Outlook in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Essential Threat Protection** → **Mail Threat Protection**.

5. In the **Security level** block, click the **Settings** button.

6. In the window that opens, in the **Connectivity** block, select the **Connect Microsoft Outlook extension** check box.

7. Click **Settings**.

8. In the **Email protection** window, do the following:

   - Select the **Scan when receiving** check box if you want the Mail Threat Protection extension for Outlook to scan incoming messages as they arrive to the mailbox.

   - Select the **Scan when reading** check box if you want the Mail Threat Protection extension for Outlook to scan incoming messages when the user opens them.

   - Select the **Scan when sending** check box if you want the Mail Threat Protection extension for Outlook to scan outgoing messages as they are sent.

9. To apply the policy to computers, close the padlock icons and save your changes.

How to configure the operating mode of the Mail Threat Protection extension for Outlook in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Communication & Web Protection** → **Mail Threat Protection**.

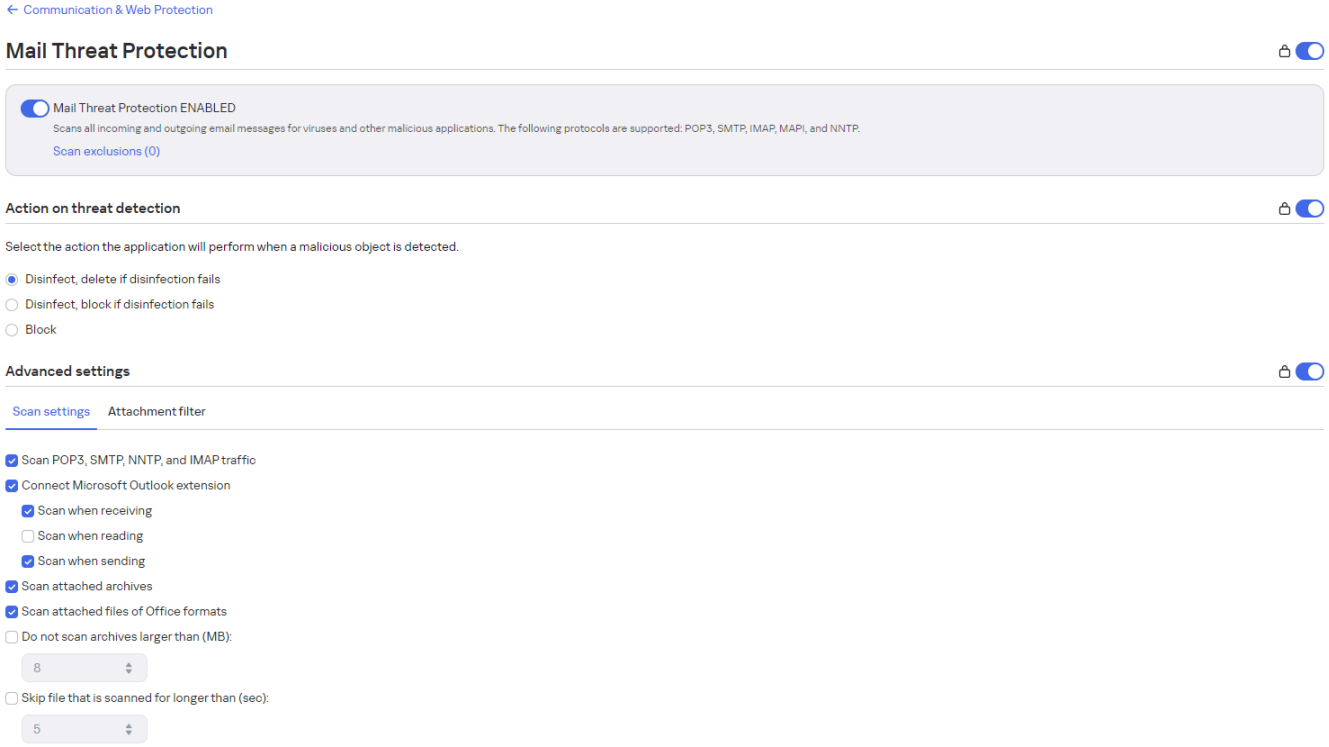

Mail Threat Protection settings

5. Under **Advanced settings**, select the **Scan settings** tab.

6. Select the **Connect Microsoft Outlook extension** check box.

7. Configure the mode of the extension:

   - Select the **Scan when receiving** check box if you want the Mail Threat Protection extension for Outlook to scan incoming messages as they arrive to the mailbox.

   - Select the **Scan when reading** check box if you want the Mail Threat Protection extension for Outlook to scan incoming messages when the user opens them.

   - Select the **Scan when sending** check box if you want the Mail Threat Protection extension for Outlook to scan outgoing messages as they are sent.

8. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

Scanning emails in Thunderbird, MyOffice, R7-Office

The Mail Threat Protection component scans the attachments of incoming and outgoing email messages for viruses and other threats. For Mozilla Thunderbird, MyOffice Mail, and R7-Office Organizer mail clients, the application gains access to messages only at the *protocol level* (POP3, SMTP, IMAP, NNTP).

To scan traffic in the Mozilla Thunderbird, MyOffice Mail, and R7-Office Organizer mail clients, you need to add a Kaspersky certificate to the certificate store and select the own certificate store.

The Mail Threat Protection component does not scan messages if the mail client is open in a browser.

Real-time Mail Threat Protection

Mail Threat Protection can scan both incoming and outgoing messages. By default, the Mail Threat Protection component automatically attempts to disinfect all infected email messages that are detected. If disinfection fails, the Mail Threat Protection component deletes the infected email messages. When a malicious file is detected in an attachment, Kaspersky Endpoint Security adds information about the performed action to the message subject, for example, *[Message has been processed] <message subject>*.

When working with the Mozilla Thunderbird mail client, the Mail Threat Protection component does not scan messages that are transmitted via the IMAP protocol for viruses and other threats if filters are used to move messages from the Inbox folder.

Malware Scan in mail databases

Mail Threat Protection prevents the infection of the computer at the protocol level, but if the computer had been infected before Kaspersky Endpoint Security was installed, the application may detect the threat in mail databases using the *Malware Scan* task. The application does not disinfect or delete infected files in mail databases, regardless of task settings. This is due to the fact that Kaspersky Endpoint Security does not parse messages from Thunderbird, MyOffice, and P7-Office into their parts (header, body, attachments) in the same way as messages from Microsoft Office Outlook. The application only adds information about detected objects to the list of active threats.

To eliminate active threats:

1. Manually find and delete the message with the detected object in the interface of the mail client.

   The application displays information about the detected object in the list of active threats.

   Example of detected object card:

!	**HEUR:Trojan.PDF.Phish.gen** Object: `C:\Users\admin\AppData\Roaming\Thunderbird\Profiles\ov56jpz0.default-release\Mail\mail.company.ru\Inbox//` `[From USER NAME <company@mail.com>][Date 25 Sep 2025 20:05:36] [Subj Mail title X]` `Object.pdf`

2. Perform the database compaction operation.

   When a message is deleted in the user interface, the mail client only adds a deletion mark. The mail client really deletes the message only after a database compaction. For details about database compaction, see the help of your mail client (for example, Mozilla Thunderbird).

3. Run the *Malware Scan* task again and make sure the threat is no longer present.

If deletion of messages with infected files is not available at the moment for whatever reason, you can process such threats in the Kaspersky Endpoint Security user interface. For email client files, you have two options for processing a threat: **Ignore** and **Add to exclusions**. To prevent the application from adding these objects to the list of active threats during a rescan, add them to the list of exclusions from scanning.

Network Threat Protection

The *Network Threat Protection* component (also called Intrusion Detection System, IDS) monitors inbound network traffic for activity characteristic of network attacks. When the application detects an attempted network attack on a user's computer, it blocks the network connection with the attacking computer. Descriptions of currently known types of network attacks and ways to counteract them are provided in the application databases. The list of network attacks that the Network Threat Protection component detects is updated during database and application module updates.

Enabling and disabling Network Threat Protection

By default, Network Threat Protection is enabled and running in the optimal mode. Kaspersky Endpoint Security monitors inbound network traffic for activity characteristic of network attacks and blocks the attacks.

How to enable or disable Network Threat Protection in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **Network Threat Protection**.
4. Use the **Network Threat Protection** check box to enable or disable the component.
5. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable Network Threat Protection in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Communication & Web Protection** → **Network Threat Protection**.

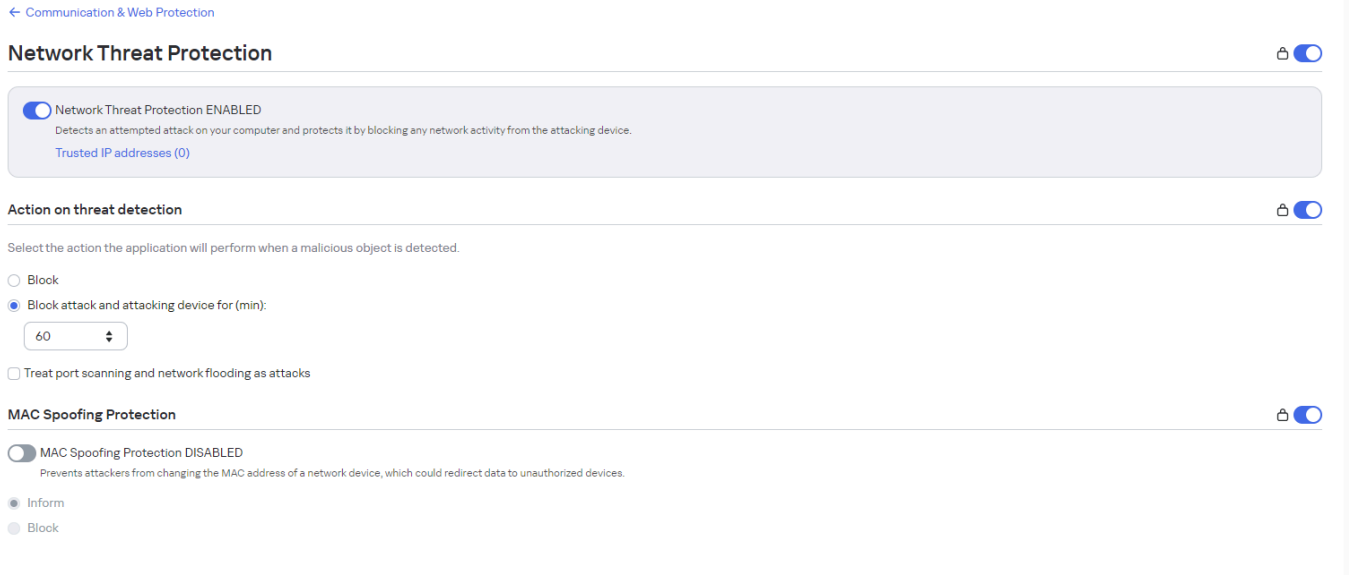

Network Threat Protection settings

5. Use the **Network Threat Protection ENABLED** toggle to enable or disable the component.
6. Save your changes.

How to enable or disable Network Threat Protection in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Network Threat Protection**.

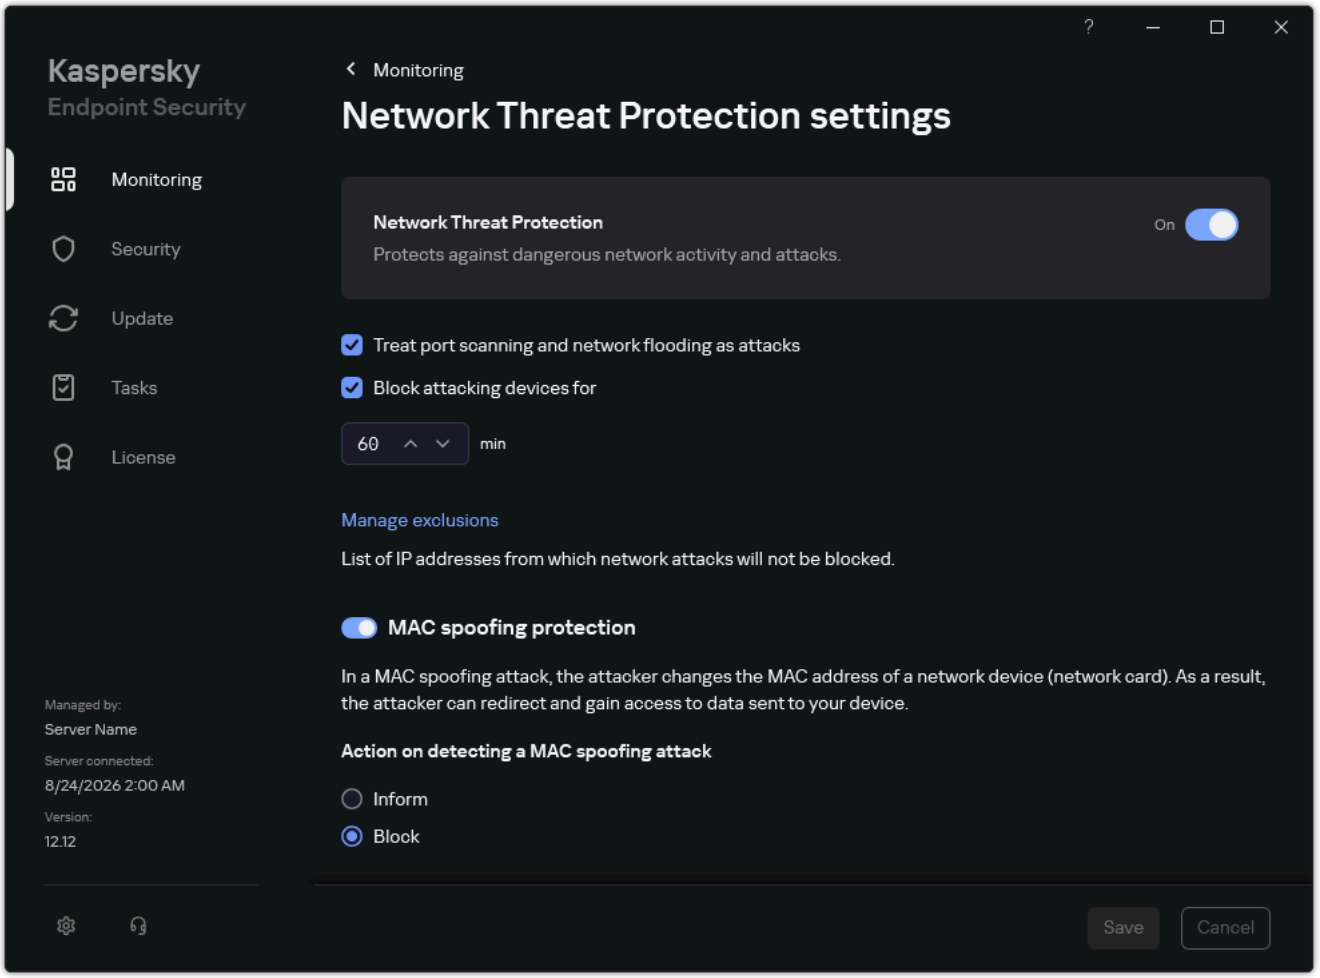

Network Threat Protection settings

3. Use the **Network Threat Protection** toggle to enable or disable the component.

4. Save your changes.

Blocking an attacking computer

If the Network Threat Protection component is enabled, Kaspersky Endpoint Security automatically blocks network threats. Additionally, the application can block the attacking computer and restrict the sending of network packets for a certain length of time. By default, Kaspersky Endpoint Security blocks the computer for one hour.

How to block an attacking computer in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Essential Threat Protection** → **Network Threat Protection**.

4. Under **Network Threat Protection settings**, select the **Block attacking devices for N min** check box.

   If this option is enabled, the Network Threat Protection component adds the attacking computer to the blocked list. This means that the Network Threat Protection component blocks the network connection with the attacking computer after the first network attack attempt for the specified amount of time. This block automatically protects the user's computer against possible future network attacks from the same address. The minimum time an attacking computer must spend in the block list is one minute. The maximum time is 999 minutes.

5. Set a different blocking duration for an attacking computer in the field to the right of the **Block attacking devices for N min** check box.

6. Save your changes.

How to block an attacking computer in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Communication & Web Protection** → **Network Threat Protection**.

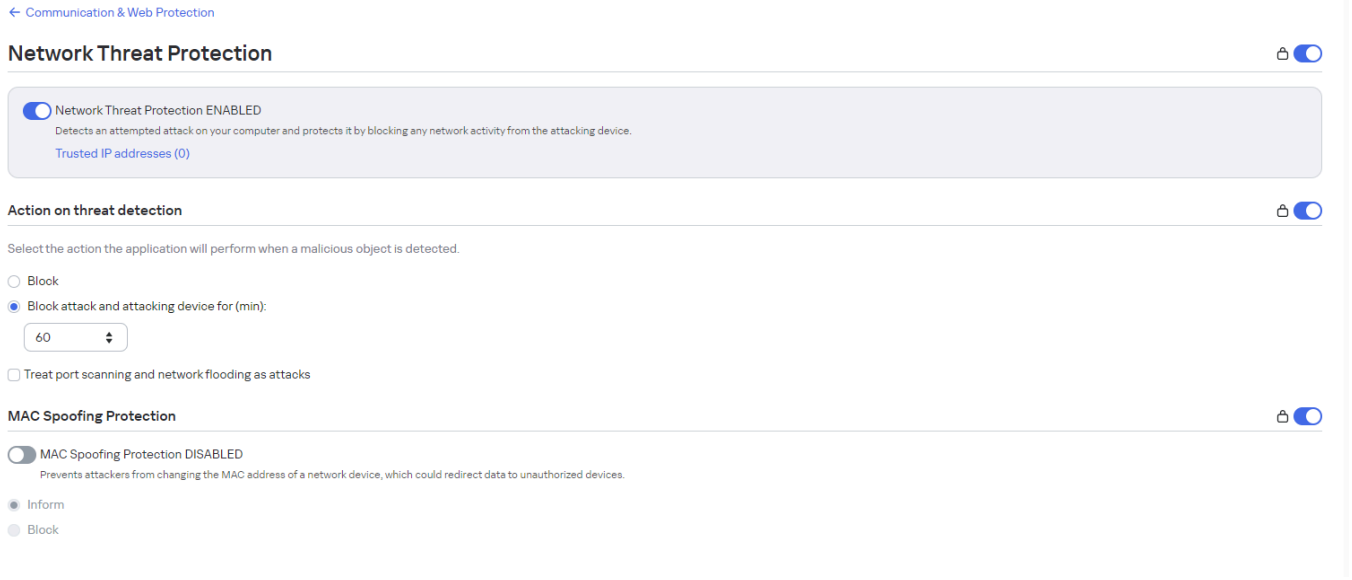

Network Threat Protection settings

5. In the **Action on threat detection** block, select the **Block attack and attacking device for (min)** check box.

   If this option is enabled, the Network Threat Protection component adds the attacking computer to the blocked list. This means that the Network Threat Protection component blocks the network connection with the attacking computer after the first network attack attempt for the specified amount of time. This block automatically protects the user's computer against possible future network attacks from the same address. The minimum time an attacking computer must spend in the block list is one minute. The maximum time is 999 minutes.

6. Change the blocking duration of the attacking computer.

7. Save your changes.

How to block an attacking computer in the user interface of the application

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Network Threat Protection**.

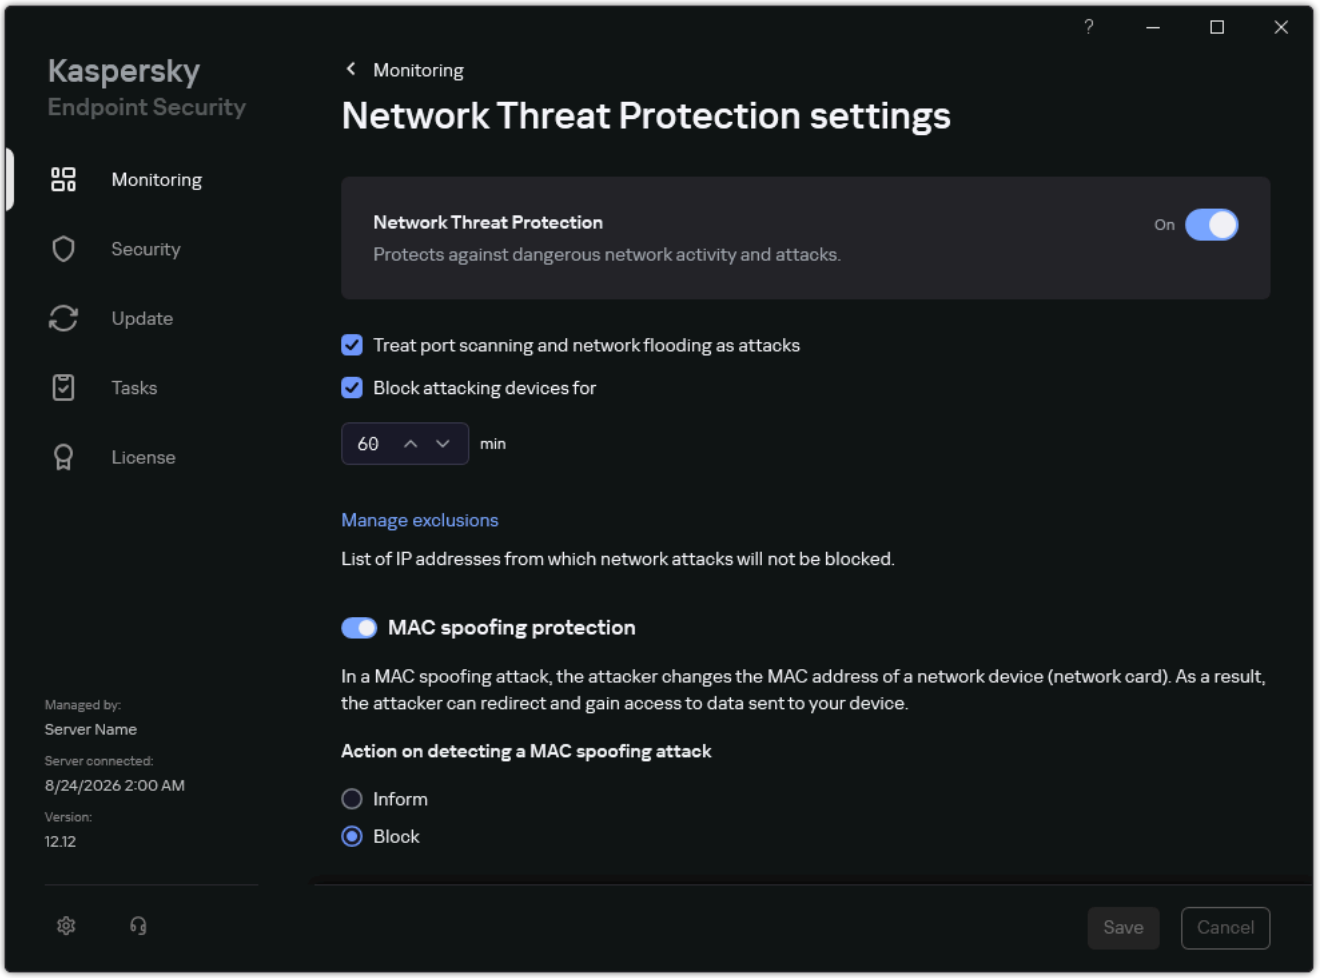

Network Threat Protection settings

3. Turn on the **Block attacking devices for N min** toggle.

   If this option is enabled, the Network Threat Protection component adds the attacking computer to the blocked list. This means that the Network Threat Protection component blocks the network connection with the attacking computer after the first network attack attempt for the specified amount of time. This block automatically protects the user's computer against possible future network attacks from the same address. The minimum time an attacking computer must spend in the block list is one minute. The maximum time is 999 minutes.

4. Set a different blocking duration for an attacking computer in the field below the **Block attacking devices for N min** toggle switch.

5. Save your changes.

As a result, when Kaspersky Endpoint Security detects an attempted network attack launched against a user's computer, it will block all connections with the attacking computer. Kaspersky Endpoint Security creates the *Network attack detected* event. The event contains information about the attacking computer: IP and MAC addresses.

> You can view the MAC address of the attacking computer in the user interface of the application or in the Kaspersky Security Center console version 15.1 or later.

Notification about network attack detection

Kaspersky Endpoint Security unblocks the computer when the specified time runs out. The Kaspersky Security Center console does not provide tools for monitoring blocked computers other than *Network attack detected* events in the report. You can only view a list of blocked computers in the interface of the application. This functionality is provided by the *Network Monitor* tool. You can also use the Network Monitor tool to unblock a computer.

To unblock a computer:

1. In the main application window, in the **Monitoring** section, click the **Network Monitor** tile.
2. Go to the **Blocked computers** tab.

   This opens a list of blocked computer (see figure below).

   > Kaspersky Endpoint Security clears the block list when the application is restarted and when the Network Threat Protection settings are changed.

3. Select the computer that you want to unblock and click **Unblock**.

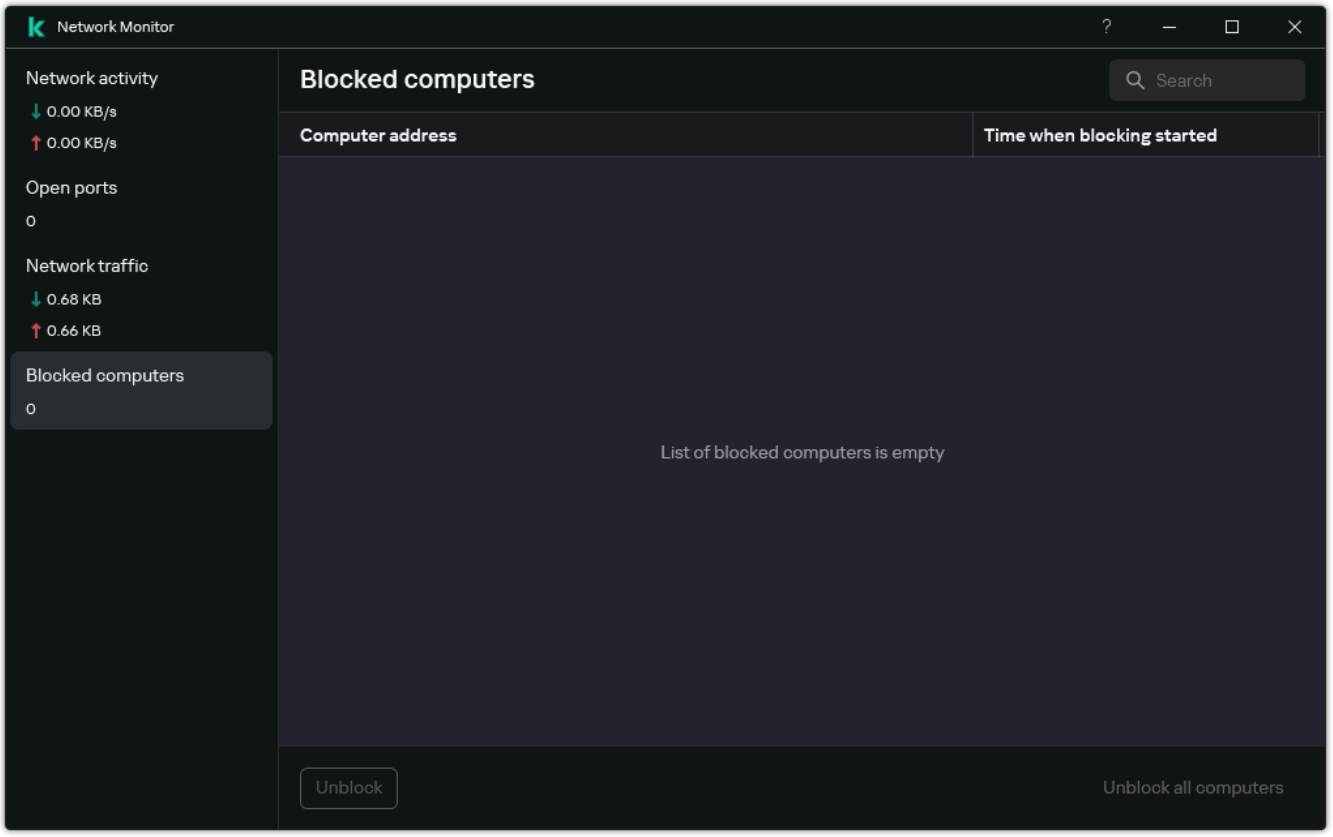

List of blocked computers

Configuring addresses of exclusions from blocking

Kaspersky Endpoint Security can recognize a network attack and block an unsecured network connection that is transmitting a large number of packets (for example, from surveillance cameras). To work with trusted devices, you can add the IP addresses of these devices to the list of exclusions. You can also select the protocol and port that are used for communication and allow specific network activities.

How to configure addresses of exclusions from blocking in Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Essential Threat Protection** → **Network Threat Protection**.
5. In the **Network Threat Protection settings** block, click the **Exclusions** button.
6. In the window that opens, click the **Add** button.
7. Enter the IP address of the computer from which network attacks must not be blocked.

   If required, select the protocol and ports through which data is transmitted.
8. To apply the policy to computers, close the padlock icons and save your changes.

How to configure addresses excluded from blocking in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to the **Trusted Zone** section.
5. In the window that opens, click the **IP addresses** link.
   This opens a window containing a list of trusted IP addresses.
6. In the window that opens, click the **Add** button.
7. Enter the IP address of the computer from which network attacks must not be blocked.
   If necessary, specify the subnet.
8. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to configure addresses of exclusions from blocking in the user interface of the application

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Network Threat Protection**.

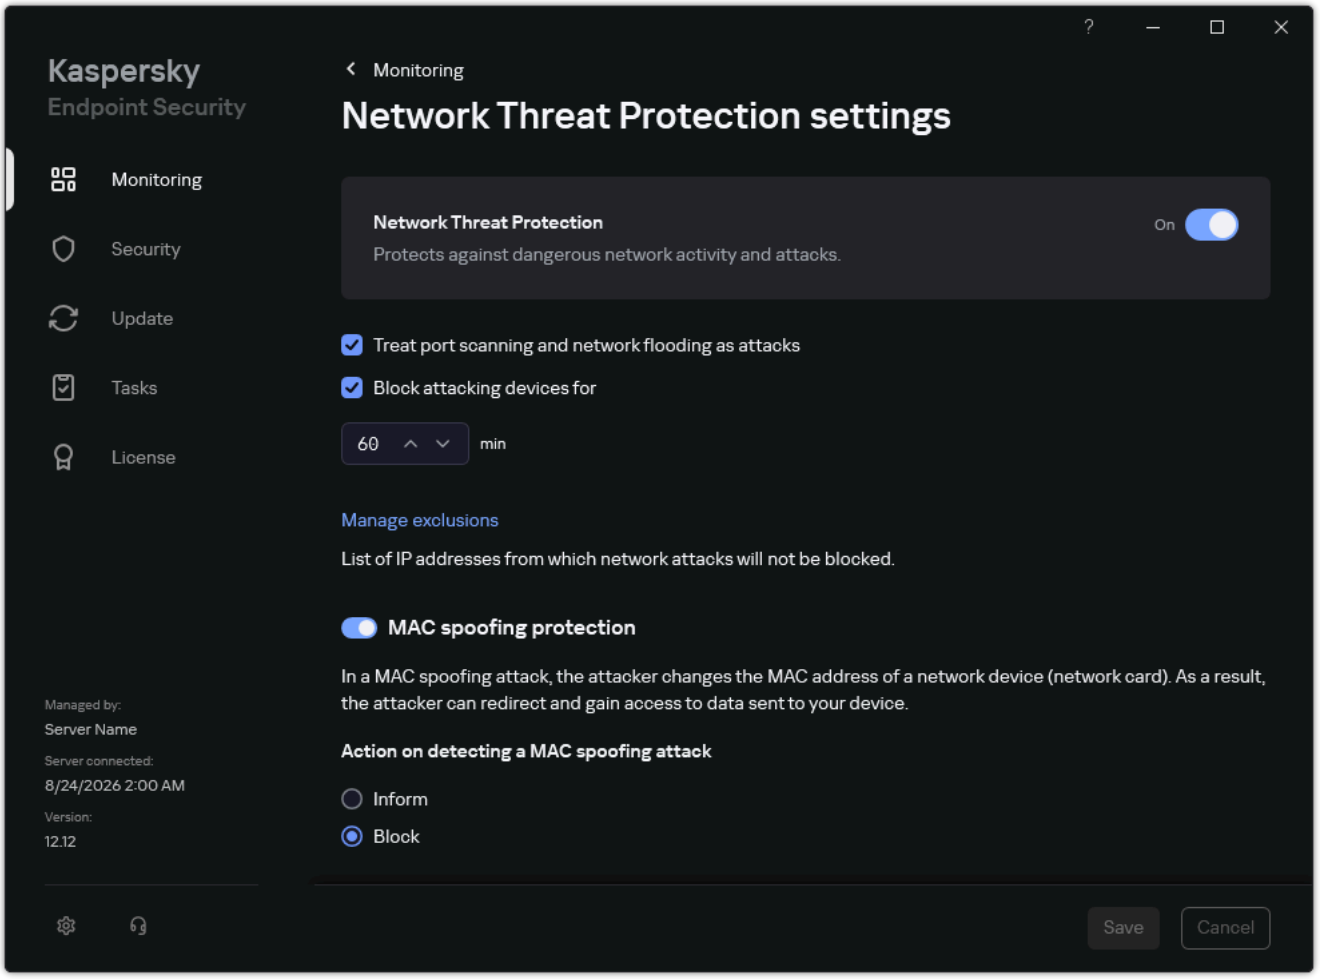

Network Threat Protection settings

3. Click the **Manage exclusions** link.

4. In the window that opens, click the **Add** button.

5. Enter the IP address of the computer from which network attacks must not be blocked.

   If required, select the protocol and ports through which data is transmitted.

6. Save your changes.

Exporting and importing the list of exclusions from blocking

You can export the list of exclusions to an XML file. Then you can modify the file to, for example, add a large number of addresses of the same type. You can also use the export/import function to back up the list of exclusions or to migrate the list to a different server.

How to export and import a list of exclusions in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Essential Threat Protection** → **Network Threat Protection**.

4. In the **Network Threat Protection settings** block, click the **Exclusions** button.

5. To export the list of rules:

   a. Select the exclusions that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.

      If you did not select any exclusion, Kaspersky Endpoint Security will export all exclusions.

   b. Click the → **Export** button.

   c. In the window that opens, specify the name of the XML file to which you want to export the list of exclusions, and select the folder in which you want to save this file.

   d. Save the file.

      Kaspersky Endpoint Security exports the entire list of exclusions to the XML file.

6. To import the list of exclusions:

   a. Click the → **Import** button.

   b. In the window that opens, select the XML file from which you want to import the list of exclusions.

   c. Open the file.

      If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

7. Save your changes.

How to export and import a list of exclusions in the Kaspersky Security Center Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Communication & Web Protection** → **Network Threat Protection**.
5. In the upper part of the window click the **Trusted IP addresses** link.
   The list of exclusions opens.
6. To export the list of rules:
   a. Select the exclusions that you want to export.
   b. Click the → **Export** button.
      Kaspersky Endpoint Security exports the list of exclusions to a JSON file in the default downloads folder.
7. To import the list of exclusions:
   a. Click the → **Import** button.
      In the window that opens, select the JSON file from which you want to import the list of exclusions.
   b. Open the file.
      If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.
8. Save your changes.

Configuring Network Threat Protection by type

Kaspersky Endpoint Security lets you manage protection against the following types of network attacks:

- *Network Flooding* is an attack on network resources of an organization (such as web servers). This attack consists of sending a large number of requests to overload the bandwidth of network resources. When this happens, users are unable to access the network resources of the organization.
- A *Port Scanning* attack consists of scanning UDP ports, TCP ports, and network services on the computer. This attack allows the attacker to identify the degree of vulnerability of the computer before conducting more dangerous types of network attacks. Port Scanning also enables the attacker to identify the operating system on the computer and select the appropriate network attacks for this operating system.
- A *MAC spoofing attack* consists of changing the MAC address of a network device (network card). As a result, an attacker can redirect data sent to a device to another device and gain access to this data. Kaspersky Endpoint Security lets you block MAC Spoofing attacks and receive notifications about the attacks.

You can disable detection of these types of attacks in case some of your allowed applications perform operations that are typical for these types of attacks. This will help avoid false alarms.

By default, Kaspersky Endpoint Security does not monitor Network Flooding, Port Scanning, and MAC spoofing attacks.

You cannot configure separate exclusions for these types of attacks. This means that even if individual IP addresses are added to the trusted zone, Kaspersky Endpoint Security blocks the attacking computer if such an attack is detected. You can enable or disable the detection of such attacks.

> We do not recommend enabling MAC spoofing protection on virtual machines in the Microsoft Hyper-V infrastructure. Due to the specifics of the Microsoft Hyper-V platform, Kaspersky Industrial CyberSecurity for Nodes may block the hypervisor due to false positive results.

How to configure Network Threat Protection by type in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **Network Threat Protection**.
4. Use the **Treat port scanning and network flooding as attacks** check box to enable or disable the detection of these attacks.

   If this functionality is enabled, Kaspersky Endpoint Security monitors network traffic for port scanning and network flooding. If such behavior is detected, the application notifies the user and sends the corresponding event to Kaspersky Security Center. The application provides information about the computer that is making the requests. This information is necessary for a timely response. However, Kaspersky Endpoint Security does not block the computer that is making the requests because such traffic may be a normal occurrence on the corporate network.
5. In the **MAC spoofing protection mode** block, select one of the following options:
   - **Do not track MAC spoofing**.
   - **Inform**.
   - **Block**.
6. Save your changes.

How to configure Network Threat Protection by type in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.

4. Go to **Communication & Web Protection** → **Network Threat Protection**.

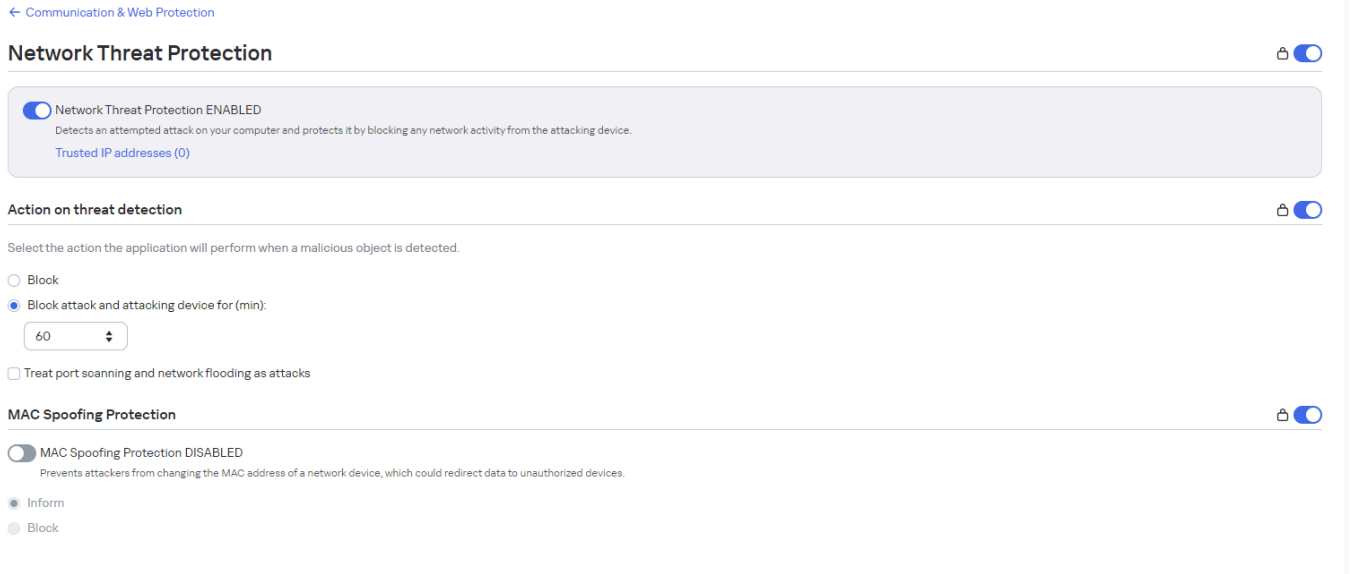

Network Threat Protection settings

5. Use the **Treat port scanning and network flooding as attacks** check box to enable or disable the detection of these attacks.

   If this functionality is enabled, Kaspersky Endpoint Security monitors network traffic for port scanning and network flooding. If such behavior is detected, the application notifies the user and sends the corresponding event to Kaspersky Security Center. The application provides information about the computer that is making the requests. This information is necessary for a timely response. However, Kaspersky Endpoint Security does not block the computer that is making the requests because such traffic may be a normal occurrence on the corporate network.

6. Under **MAC Spoofing Protection**, configure detection of MAC spoofing attacks:

   a. Use the toggle **MAC Spoofing Protection ENABLED** to enable or disable the detection of these attacks.

   b. Select the action to be performed when a MAC spoofing attack is detected:

      - **Inform**.
      - **Block**.

7. Save your changes.

How to configure Network Threat Protection by type in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Network Threat Protection**.

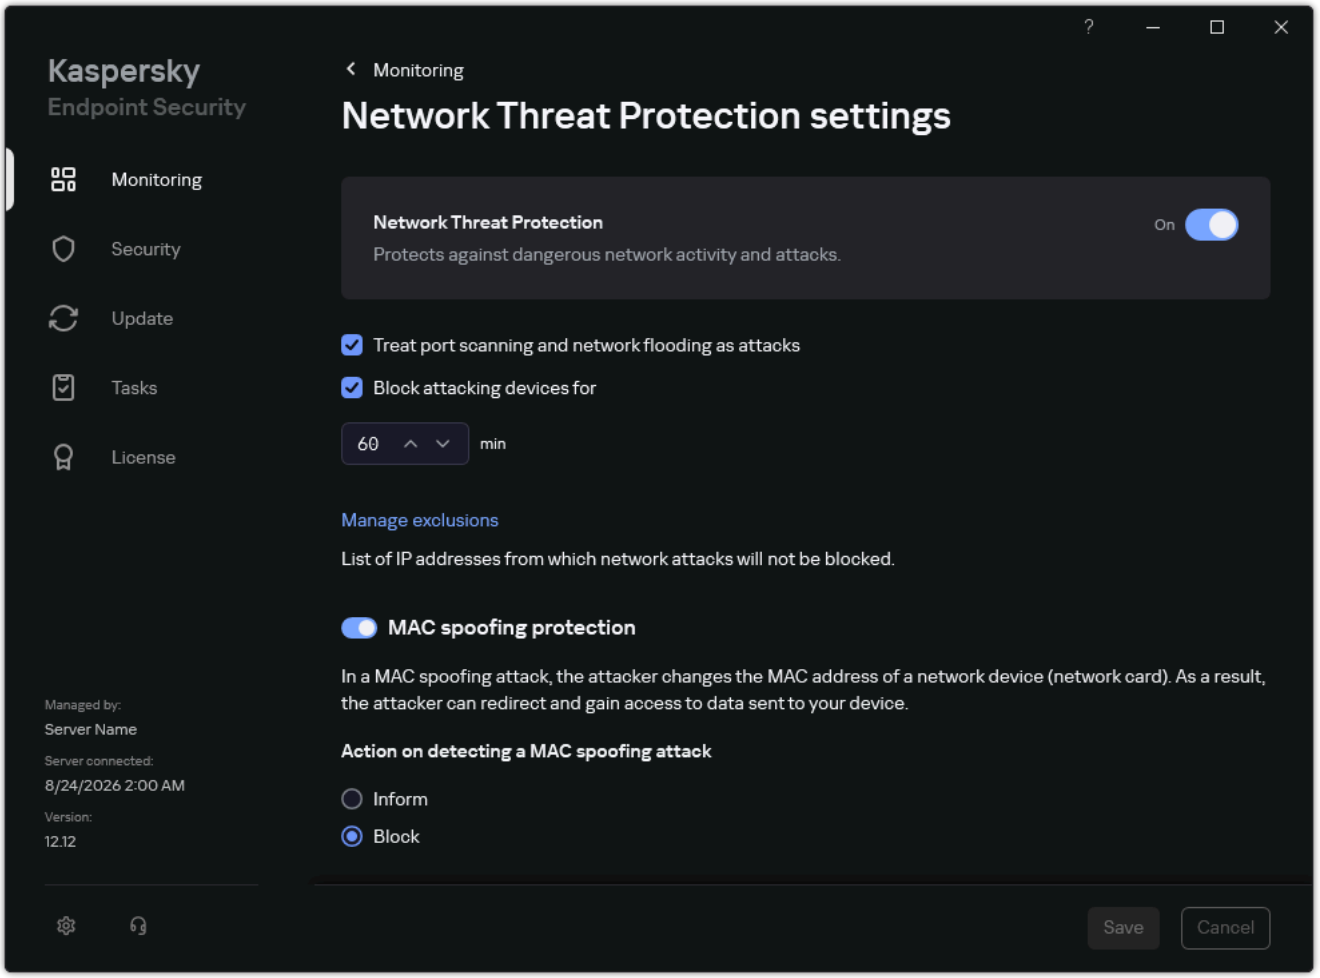

Network Threat Protection settings

3. Use the toggle **Treat port scanning and network flooding as attacks** to enable or disable the detection of these attacks.

   If this functionality is enabled, Kaspersky Endpoint Security monitors network traffic for port scanning and network flooding. If such behavior is detected, the application notifies the user and sends the corresponding event to Kaspersky Security Center. The application provides information about the computer that is making the requests. This information is necessary for a timely response. However, Kaspersky Endpoint Security does not block the computer that is making the requests because such traffic may be a normal occurrence on the corporate network.

4. Use the toggle **MAC spoofing protection** to enable or disable the detection of these attacks.

5. In the **Action on detecting a MAC spoofing attack** block, select one of the following options:

   - **Inform**.
   - **Block**.

6. Save your changes.

Firewall

The Firewall component blocks unauthorized connections to a computer while working on the internet or a local network. Firewall also controls the network activity of applications on the computer. This allows you to protect your corporate LAN from identity theft and other attacks. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and predefined *network rules*.

Network Agent is used for interaction with Kaspersky Security Center. Firewall automatically creates network rules required for the application and the Network Agent to work. As a result, the Firewall opens several ports on the computer. Which ports are opened depends on computer's role (for example, distribution point). To learn more about the ports that will be opened on the computer, refer to the Kaspersky Security Center Help.

Network rules

You can configure network rules at the following levels:

- *Network packet rules*. Network packet rules impose restrictions on network packets, regardless of the application. Such rules restrict inbound and outbound network traffic through specific ports of the selected data protocol. Kaspersky Endpoint Security has predefined network packet rules with permissions recommended by Kaspersky experts.
- *Application network rules*. Application network rules impose restrictions on the network activity of a specific application. They factor in not only the characteristics of the network packet, but also the specific application to which this network packet is addressed or which issued this network packet.

Controlled access of applications to operating system resources, processes and personal data is provided by the Host Intrusion Prevention component by using *application rights*.

During the first startup of the application, the Firewall performs the following actions:

1. Checks the security of the application by using downloaded anti-virus databases.
2. Checks the security of the application in Kaspersky Security Network.

   You are advised to participate in Kaspersky Security Network to help the Firewall work more effectively.
3. Places the application in one of the trust groups: *Trusted*, *Low Restricted*, *High Restricted*, *Untrusted*.

   A trust group defines the rights that Kaspersky Endpoint Security refers to when controlling application activity. Kaspersky Endpoint Security places an application in a trust group depending on the level of danger that this application may pose to the computer.

   Kaspersky Endpoint Security places an application in a trust group for the Firewall and Host Intrusion Prevention components. You cannot change the trust group only for Firewall or Host Intrusion Prevention.

If you refused to participate in KSN or there is no network, Kaspersky Endpoint Security places the application in a trust group depending on the settings of the Host Intrusion Prevention component. After receiving the reputation of the application from KSN, the trust group can be changed automatically.

4. It blocks network activity of the application depending on the trust group. For example, applications in the *High Restricted* trust group are not allowed to use any network connections.

The next time the application is started, Kaspersky Endpoint Security checks the integrity of the application. If the application is unchanged, the component uses the current network rules for it. If the application has been modified, Kaspersky Endpoint Security analyzes the application as if it were being started for the first time.

Network Rule Priorities

Each rule has a priority. The higher a rule is on the list, the higher its priority. If network activity is added to several rules, the Firewall regulates network activity according to the rule with the highest priority.

Network packet rules have a higher priority than network rules for applications. If both network packet rules and network rules for applications are specified for the same type of network activity, the network activity is handled according to the network packet rules.

Network rules for applications work in a particular way. Network rule for applications includes access rules based on the network status: *Public network*, *Local network*, *Trusted network*. For example, applications in the *High Restricted* trust group are not allowed any network activity in networks of all statuses by default. If a network rule is specified for an individual application (parent application), then the child processes of other applications will run according to the network rule of the parent application. If there is no network rule for the application, the child processes will run according to network access rule of the application's trust group.

For example, you have prohibited any network activity in networks of all statuses for all applications, except browser X. If you start browser Y installation (child process) from browser X (parent application), then browser Y installer will access the network and download the necessary files. After installation, browser Y will be denied any network connections according to the Firewall settings. To prohibit network activity of browser Y installer as a child process, you must add a network rule for the installer of browser Y.

Network connection types

The Firewall allows you to control network activity depending on the type of the network connection. Kaspersky Endpoint Security receives the network connection type from the computer's operating system. The type of the network connection in the operating system is set by the user when setting up the connection. You can change the type of the network connection in the Kaspersky Endpoint Security settings. The Firewall will monitor network activity depending on the network type, specified in the Kaspersky Endpoint Security settings, and not in the operating system.

The following network connection types are available:

- **Public network**. The network is not protected by antivirus applications, firewalls, or filters (such as Wi-Fi in a cafe). When the user operates a computer that is connected to such a network, Firewall blocks access to files and printers of this computer. External users are also unable to access data through shared folders and remote access to the desktop of this computer. Firewall filters the network activity of each application according to the network rules that are set for it.

  Firewall assigns *Public network* type to the Internet by default. You cannot change the type of the Internet.

- **Local network**. Network for users with restricted access to files and printers on this computer (such as for a corporate LAN or home network).

- **Trusted network**. Safe network in which a computer is not exposed to attacks or unauthorized data access attempts. Firewall permits any network activity within networks with this status.

Windows Defender Firewall compatibility

The operating system has its own built-in firewall, the *Windows Defender Firewall*. The application behaves differently depending on the type of operating system:

- **Workstation**. Using Kaspersky Firewall in parallel with Windows Defender Firewall can lead to faulty operation of the operating system. Therefore, Kaspersky Endpoint Security has a mechanism that prevents both Firewalls from being used simultaneously. When you enable the Kaspersky Firewall, the operating system automatically disables the Windows Defender Firewall. When you turn off the Kaspersky Firewall, the operating system automatically turns the Windows Defender Firewall back on to keep the computer protected.

- **Server**. Kaspersky Firewall and Windows Defender Firewall are incompatible with each other. The Kaspersky Endpoint Security installer automatically removes Windows Defender Firewall when installing the application.

Enabling or disabling Firewall

By default, Firewall is enabled and functions in the optimal mode.

How to enable or disable the Firewall in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Essential Threat Protection** → **Firewall**.

4. Use the **Firewall** check box to enable or disable the component.

5. Save your changes.

How to enable or disable the Firewall in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Select **Communication & Web Protection** → **Firewall**.

5. Use the **Firewall ENABLED** toggle to enable or disable the component.

6. Save your changes.

How to enable or disable the Firewall in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Firewall**.

3. Use the **Firewall** toggle to enable or disable the component.

4. Save your changes.

As a result, if the Firewall is enabled, Kaspersky Endpoint Security controls network activity and blocks unauthorized network connections to your computer, as well as blocks unauthorized network activity of applications on your computer. Network activity is also controlled by the Network Threat Protection component. The Network Threat Protection component (also called Intrusion Detection System, IDS) monitors inbound network traffic for activity characteristic of network attacks.

> Kaspersky Endpoint Security logs network attack events in its reports irrespective of the Firewall settings. Even if the Firewall blocks the network connection using rules and thus prevents a network attack, the Network Threat Protection component registers network attack events. It is required to generate statistical information about network attacks on the computers in your organization.

Changing the network connection type

Firewall assigns *Public network* type to the Internet by default. You cannot change the type of the Internet.

To change the network connection type:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Firewall**.

3. Click **Available networks**.

4. Select the network connection whose type you want to change.

5. In the **Network type** column, select the type of the network connection:

   - **Public network**. The network is not protected by antivirus applications, firewalls, or filters (such as Wi-Fi in a cafe). When the user operates a computer that is connected to such a network, Firewall blocks access to files and printers of this computer. External users are also unable to access data through shared folders and remote access to the desktop of this computer. Firewall filters the network activity of each application according to the network rules that are set for it.

   - **Local network**. Network for users with restricted access to files and printers on this computer (such as for a corporate LAN or home network).

   - **Trusted network**. Safe network in which a computer is not exposed to attacks or unauthorized data access attempts. Firewall permits any network activity within networks with this status.

6. Save your changes.

Managing network packet rules

You can perform the following actions while managing network packet rules:

- Create a new network packet rule.

  You can create a new network packet rule by creating a set of conditions and actions that is applied to network packets and data streams.

- Enable or disable a network packet rule.

  All network packet rules that are created by Firewall by default have *Enabled* status. When a network packet rule is enabled, Firewall applies this rule.

  You can disable any network packet rule that is selected in the list of network packet rules. When a network packet rule is disabled, Firewall temporarily does not apply this rule.

  > A new custom network packet rule is added to the list of network packet rules by default with *Enabled* status.

- Edit the settings of an existing network packet rule.

  After you create a new network packet rule, you can always return to editing its settings and modify them as needed.

- Change the Firewall action for a network packet rule.

  In the list of network packet rules, you can edit the action that is taken by Firewall on detecting network activity that matches a specific network packet rule.

- Change the priority of a network packet rule.

  You can raise or lower the priority of a network packet rule that is selected in the list.

- Remove a network packet rule.

  You can remove a network packet rule to stop Firewall from applying this rule on detecting network activity and to stop this rule from showing in the list of network packet rules with *Disabled* status.

Creating a network packet rule

Firewall filters all network activity on the computer in accordance with network packet rules. Network packet rules contain conditions (for example, direction, protocol) that Firewall applies to control network connections of the computer. Network packet rules also specify the action that Firewall performs with the connection that matches the rule (allow or block the connection).

Recommendations for creating network packet rules

You can specify an IP address or a range of IP addresses to filter network activity. You can also specify a DNS name.

If a DNS name is used in a rule, Kaspersky Endpoint Security resolves this DNS name to an IP address and subsequently treats the rule as if this IP address was specified in it.

Kaspersky Endpoint Security can resolve DNS names in the following cases:

- Application startup
- Changing Firewall settings

When the application is resolving DNS names from the computer on which the application is installed, a large number of queries to the DNS server can be made. To avoid this, we recommend using IP addresses rather than DNS names when creating rules.

In some cases, using DNS names in network packet names may be insecure because the owner of the DNS server can modify the parameters of the DNS record. A malicious actor can also spoof DNS messages and circumvent Firewall rules.

You can control network connections by DNS names using Web Control rules. If you need to specify a DNS name in Firewall rules:

- Ensure the security of the corporate LAN.
- Ensure the security of caching and authoritative DNS servers.
- Enable the protection of the DNS record from modification.

When creating network packet rules, remember that they have priority over network rules for applications.

Methods of creating network packet rules

You can create a network packet rule in the following ways:

- Use the Network Monitor tool.

  Network Monitor is a tool designed for viewing information about the network activity of a user's computer in real time. This is convenient because you do not need to configure all the rule settings. Some Firewall settings will be inserted automatically from Network Monitor data. Network Monitor is available only in the application interface.

- Configure the Firewall settings.

  This lets you fine-tune the Firewall settings. You can create rules for any network activity, even if there is no network activity at the current time.

How to use the Network Monitor tool to create a network packet rule in the application interface

1. In the main application window, in the **Monitoring** section, click the **Network Monitor** tile.
2. Go to the **Network activity** tab.

   The **Network activity** tab shows all currently active network connections with the computer. Both outbound and inbound network connections are displayed.
3. In the context menu of a network connection, select **Create network packet rule**.

   This opens the network rule properties.
4. Set the **Active** status for the packet rule.
5. Manually enter the name of the network service in the **Name** field.
6. Configure the network rule settings (see the table below).

   You can select a predefined rule template by clicking the **Network rule template** link. Rule templates describe the most frequently used network connections.

   All network rule settings will be filled in automatically.
7. If you want the actions of the network rule to be reflected in the report, select the **Log events** check box.
8. Click **Save**.

   The new network rule will be added to the list.
9. Use the **Up** / **Down** buttons to set the priority of the network rule.
10. Save your changes.

How to use Firewall settings to create a network packet rule in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Firewall**.
3. Click **Packet rules**.

   This opens the list of default network rules that are set by the Firewall.

4. Using the **Add** drop-down list, select the location of the rule in the list: at the top of the list, at the bottom of the list, or next to the selected rule.

   The position of the rule in the list determines the priority of the rule. The rule at the top of the list has the highest priority.

5. Set the **Active** status for the packet rule.

6. Manually enter the name of the network service in the **Name** field.

7. Configure the network rule settings (see the table below).

   You can select a predefined rule template by clicking the **Network rule template** link. Rule templates describe the most frequently used network connections.

   All network rule settings will be filled in automatically.

8. If you want the actions of the network rule to be reflected in the report, select the **Log events** check box.

9. Click **Save**.

   The new network rule will be added to the list.

10. Use the **Up** / **Down** buttons to set the priority of the network rule.

11. Save your changes.

How to create a network packet rule in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Essential Threat Protection** → **Firewall**.

4. In the **Firewall settings** block, click the **Settings** button.

   This opens the list of network packet rules and the list of application network rules.

5. Go to the **Network packet rules** tab.

   This opens the list of default network rules that are set by the Firewall.

6. Using the **Add** drop-down list, select the location of the rule in the list: at the top of the list, at the bottom of the list, or next to the selected rule.

   The position of the rule in the list determines the priority of the rule. The rule at the top of the list has the highest priority.

7. Manually enter the name of the network service in the **Name** field.

8. Configure the network rule settings (see the table below).

   You can select a predefined rule template by clicking the button. Rule templates describe the most frequently used network connections.

   All network rule settings will be filled in automatically.

9. If you want the actions of the network rule to be reflected in the report, select the **Log events** check box.

10. Save the new network rule.

11. Use the **Up** / **Down** buttons to set the priority of the network rule.

12. Save your changes.

The Firewall will control network packets according to the rule. You can disable a packet rule from Firewall operation without deleting it from the list. To do so, clear the check box next to the object.

How to create a network packet rule in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Select **Communication & Web Protection** → **Firewall**.

5. Select the **Network packet rules** tab.

   This opens the list of default network rules that are set by the Firewall.

6. Click **Add**.

   This opens the form for a new network rule.

7. Manually enter the name of the network service in the **Rule name** field.

8. Configure the network rule settings (see the table below).

   You can select a predefined rule template by clicking the **Select rule template** link. Rule templates describe the most frequently used network connections.

   All network rule settings will be filled in automatically.

9. If you want the actions of the network rule to be reflected in the report, select the **Log events** check box.

10. Save the network rule.

    The new network rule will be added to the list.

11. Use the **Move** button to set the priority of the network rule.

12. Save your changes.

The Firewall will control network packets according to the rule. You can disable a packet rule from Firewall operation without deleting it from the list. Use the toggle in the **Status** column to enable or disable the packet rule.

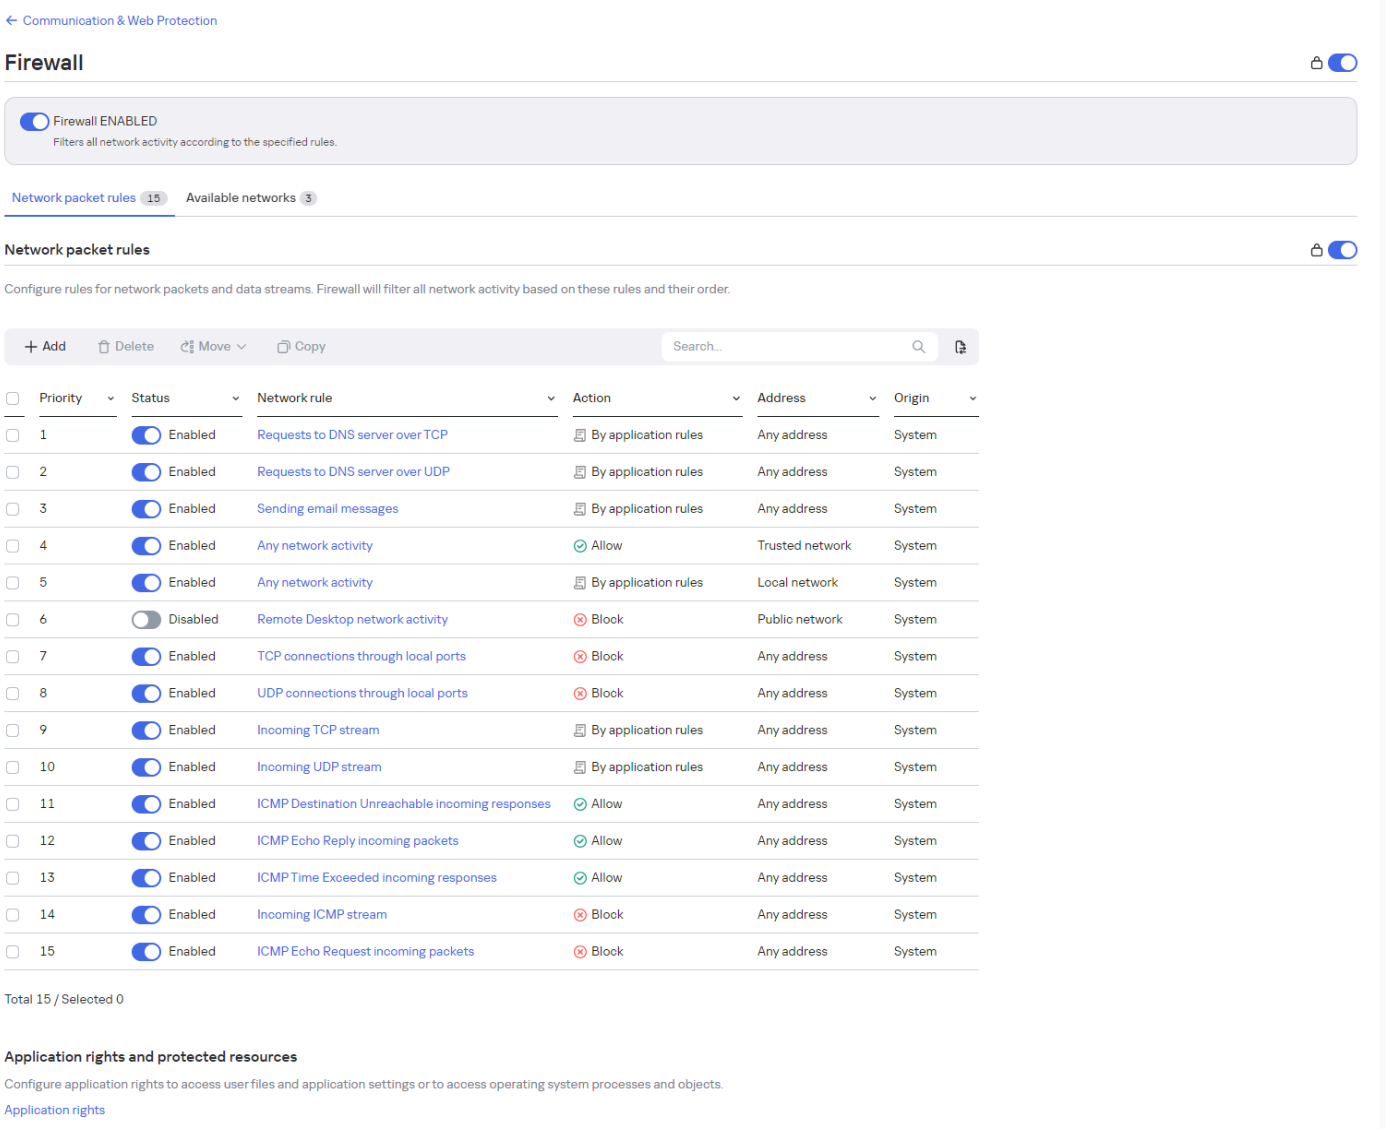

Firewall packet rules

Network packet rule settings

Parameter	Description
Action	**Allow**. **Block**. **By application rules**. If this option is selected, Firewall applies the application network rules to the network connection.
Protocol	Control network activity over the selected protocol: TCP, UDP, ICMP, ICMPv6, IGMP and GRE. If ICMP or ICMPv6 is selected as the protocol, you can define the ICMP packet type and code. If TCP or UDP is selected as the protocol type, you can specify the port numbers of the local and remote computers between which the connection is to be monitored. Range of possible values for the port numbers: 0–65535. In each field, you can enter multiple values separated by `,` or specify a range of values using `-`. For example: • `100,101` • `100-130` • `100,110-130`
Direction	**Inbound (packet)**. Firewall applies the network rule to all inbound network packets. **Inbound**. Firewall applies the network rule to all network packets sent via a connection that was initiated by a remote computer. **Inbound / Outbound**. Firewall applies the network rule to all inbound and outbound network packets. **Outbound (packet)**. Firewall applies the network rule to all outbound network packets. **Outbound**. Firewall applies the network rule to all network packets sent via a connection that was initiated by the user's computer.

Parameter	Description
Network adapters	Network adapters that can send and/or receive network packets. Specifying the settings of network adapters makes it possible to differentiate between network packets sent or received by network adapters with identical IP addresses.
Time to live (TTL)	Limiting the control of network packets by their lifetime (Time to Live, TTL).
Remote addresses	Network addresses of remote computers that can send and receive network packets. Firewall applies the network rule to the specified range of remote network addresses. You can include all IP addresses in a network rule, create a separate list of IP addresses, specify a range of IP addresses, or select a subnet (Trusted networks, Local networks, Public networks). You can also specify a DNS name of a computer instead of its IP address. You should use DNS names only for LAN computers or internal services. Interaction with cloud services (such as Microsoft Azure) and other Internet resources should be handled by the Web Control component. If in the network packet rule, you added a DNS name for which the IP address could not be determined, Kaspersky Endpoint Security will display a warning. In the list of network packet rules in Web Console, a column is added with a description of the error. In Administration Console (MMC), the error description is not available. Such packet rules are highlighted in color.
Local addresses	Network addresses of computers that can send and receive network packets. Firewall applies a network rule to the specified range of local network addresses. You can include all IP addresses in a network rule, create a separate list of IP addresses, or specify a range of IP addresses. The application stores local addresses only if a list of remote addresses is specified. That is, the **Addresses from the list** value has been selected for **Remote addresses** and at least one address has been added. Sometimes the local address cannot be obtained for applications. If this is the case, this parameter is ignored.

Enabling or disabling a network packet rule

To enable or disable a network packet rule:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Firewall**.
3. Click **Packet rules**.
   This opens a list of default network packet rules that are set by Firewall.
4. Select the necessary network packet rule in the list.
5. Use the toggle in the **Status** column to enable or disable the rule.
6. Save your changes.

Changing the Firewall action for a network packet rule

To change the Firewall action that is applied to a network packet rule:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Firewall**.

3. Click **Packet rules**.

   This opens a list of default network packet rules that are set by Firewall.

4. Select it in the list of network packet rules and click the **Edit** button.

5. In the **Action** drop-down list, select the action to be performed by Firewall on detecting this kind of network activity:

   - **Allow**.
   - **Block**.
   - **By application rules**. If this option is selected, Firewall applies the application network rules to the network connection.

6. Save your changes.

Changing the priority of a network packet rule

The priority of a network packet rule is determined by its position in the list of network packet rules. The topmost network packet rule in the list of network packet rules has the highest priority.

Every manually created network packet rule is added to the end of the list of network packet rules and is of the lowest priority.

Firewall executes rules in the order in which they appear in the list of network packet rules, from top to bottom. According to each processed network packet rule that applies to a particular network connection, Firewall either allows or blocks network access to the address and port that are specified in the settings of this network connection.

To change the network packet rule priority:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Firewall**.

3. Click **Packet rules**.

   This opens a list of default network packet rules that are set by Firewall.

4. In the list, select the network packet rule whose priority you want to change.

5. Use the **Up** / **Down** buttons to set the priority of the network rule.

6. Save your changes.

Exporting and importing network packet rules

You can export the list of network packet rules to an XML file. Then you can modify the file to, for example, add a large number of rules of the same type. You can use the export/import function to back up the list of network packet rules or to migrate the list to a different server.

How to export and import a list of network packet rules in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Essential Threat Protection** → **Firewall**.
4. In the **Firewall settings** block, click the **Settings** button.

   This opens the list of network packet rules and the list of application network rules.
5. Go to the **Network packet rules** tab.
6. To export the list of network packet rules:

   a. Select the rules that you want to export. To select multiple ports, use the **`CTRL`** or **`SHIFT`** keys.

      If you did not select any rule, Kaspersky Endpoint Security will export all rules.

   b. Click the **Export** link.

   c. In the window that opens, specify the name of the XML file to which you want to export the list of rules, and select the folder in which you want to save this file.

   d. Save the file.

      Kaspersky Endpoint Security exports the list of rules to the XML file.
7. To import a list of network packet rules:

   a. Click the **Import** link.

      In the window that opens, select the XML file from which you want to import the list of rules.

   b. Open the file.

      If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.
8. Save your changes.

How to export and import a list of network packet rules in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Select **Communication & Web Protection** → **Firewall**.

5. To export the list of rules, in the **Network packet rules** block:

   a. Select the rules that you want to export.

   b. Click the → **Export** button.

   Kaspersky Endpoint Security exports the list of rules to a JSON file in the default downloads folder.

6. To import the list of rules, in the **Network packet rules** block:

   a. Click the → **Import** button.

   In the window that opens, select the JSON file from which you want to import the list of rules.

   b. Open the file.

   If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.

7. Save your changes.

Defining network packet rules in XML

Firewall allows exporting network packet rules in XML format. Then you can modify the file to, for example, add a large number of rules of the same type.

The XML file contains two main nodes: `Rules` and `Resources`. The `Rules` node lists network packet rules. This node contains rules configured by default (*predefined rules*) as well as rules added by the user (*custom rules*).

Network packet rule markup

```
<key name="0000">
        <tDWORD name="RuleId">100</tDWORD>
        <tDWORD name="RuleState">1</tDWORD>
        <tDWORD name="RuleTypeId">4</tDWORD>
        <tQWORD name="AppIdEx">0</tQWORD>
        <tDWORD name="ResIdEx">812</tDWORD>
        <tDWORD name="ResIdEx2">0</tDWORD>
        <tDWORD name="AccessFlag">2</tDWORD>
</key>
```

Network packet rule settings in XML format

Parameter	Description	Value
`<key name="0000">`	Priority of the rule. The lower the value, the higher the priority.	Integer The priority value must consist of 4 digits. The nodes in the XML file must be arranged by priority value, starting with `0000`.
`RuleId`	ID of the rule.	**Predefined rules** `100` – **Requests to DNS server over TCP**. `101` – **Requests to DNS server over UDP**. `102` – **Sending email messages**. `110` – **Any network activity** (Trusted networks). `125` – **Any network activity** (Local networks). `130` – **Remote Desktop network activity**. `131` – **TCP connections through local ports**. `132` – **UDP connections through local ports**. `133` – **Incoming TCP stream**. `134` – **Incoming UDP stream**. `137` – **ICMP Destination Unreachable incoming responses**. `138` – **ICMP Echo Reply incoming packets**. `140` – **ICMP Time Exceeded incoming responses**. `142` – **Incoming ICMP stream**. `266` – **ICMPv6 Echo Request incoming packets**.
`RuleState`	Status of the rule.	`0` – predefined rule is disabled `1` – predefined rule is enabled `2` – custom rule is disabled `3` – custom rule is enabled
`RuleTypeId`	ID of the rule type.	`4` – network packet rule.
`AppIdEx`	ID of the application to which the network packet rule belongs.	If the rule does not belong to any application, the value is `0`.
`ResIdEx`	Main ID of the resource with rule settings. You can use this identifier to locate a block with rule settings in the `Resources` node.	Integer
`ResIdEx2`	ID of the network type.	`0` – **Any address**. `50` – **Trusted networks**. `51` – **Local networks**. `52` – **Public networks**. `<Network Identifier>` – **Addresses from the list** (addresses are defined manually).
`AccessFlag`	Value of the **Action** parameter.	`0` – **Allow**. `2` – **By application rules**. `3` – **Block**. `4` – **Allow** and **Log events**. `6` – **By application rules** and **Log events**. `7` – **Block** and **Log events**.
`</key>`		

The `Resources` node contains network packet rule settings. Custom network packet rule settings are listed in the `<key name="0004">` block.

Custom network packet rule markup

```
<key name="0026">
        <key name="Data">
                <key name="RemotePorts"> </key>
                <key name="LocalPorts"> </key>
                <key name="AdapterBindings">
                        <key name="0000">
                                <key name="IpAddresses">
                                        <key name="0000">
                                                <key name="IP">
                                                        <key name="V6">
                                                                <tQWORD name="Hi">0</tQWORD>
                                                                <tQWORD name="Lo">0</tQWORD>
                                                                <tDWORD name="Zone">0</tDWORD>
                                                                <tSTRING name="ZoneStr"/>
                                                        </key>
                                                        <tBYTE name="Version">4</tBYTE>
                                                        <tDWORD name="V4">16909060</tDWORD>
                                                        <tBYTE name="Mask">32</tBYTE>
                                                </key>
                                                <key name="AddressIP"> </key>
                                                <tSTRING name="Address"/>
                                        </key>
                                </key>
                                <key name="MacAddresses">
                                        <key name="0000">
                                                <tDWORD name="Type">0</tDWORD>
                                                <tQWORD name="AddressData0">1108152157446</tQWORD>
                                                <tQWORD name="AddressData1">0</tQWORD>
                                        </key>
                                </key>
                                <tSTRING name="AdapterName">ADAPTER TEST 123</tSTRING>
                                <tDWORD name="InterfaceType">3</tDWORD>
                        </key>
                </key>
                <tTYPE_ID name="unique">3213697024</tTYPE_ID>
                <tBYTE name="Proto">2</tBYTE>
                <tBYTE name="Direction">2</tBYTE>
                <tBYTE name="IcmpType">0</tBYTE>
                <tBYTE name="IcmpCode">0</tBYTE>
                <tDWORD name="Flags">1</tDWORD>
                <tBYTE name="TTL">255</tBYTE>
        </key>
        <key name="Childs"> </key>
        <tDWORD name="Id">1073747214</tDWORD>
        <tDWORD name="ParentID">7</tDWORD>
        <tDWORD name="Flags">38</tDWORD>
        <tSTRING name="Name">TEST1</tSTRING>
</key>
```

Custom network packet rule settings

Parameter	Description	Value
`<key name="Data">`	ID of the parameter block.	Integer
`RemotePorts`	Value of the **Remote ports** parameter.	List of remote port ranges.
`LocalPorts`	Value of the **Local ports** parameter.	List of local port ranges.

Parameter	Description	Value
`AdapterBindings`	Value of the **Network adapters** parameter.	`IpAddresses` – value of the **IP addresses** parameter. `MacAddresses` – value of the **MAC addresses** parameter. `AdapterName` – name of the network adapter. `InterfaceType` – value of the **Interface type** parameter: • `0` – **Other**. • `1` – **LoopBack**. • `2` – **Wired network (Ethernet)**. • `3` – **Wireless network (Wi-Fi)**. • `4` – **Tunnel**. • `5` – **PPP connection**. • `6` – **PPPoE connection**. • `7` – **VPN connection**. • `8` – **Modem connection**.
`unique`	Internal ID of the structure.	Integer It is recommended to leave this parameter unchanged.
`Proto`	Value of the **Protocol** parameter.	`0` – disabled. `1` – **ICMP**. `2` – **IGMP**. `6` – **TCP**. `17` – **UDP**. `47` – **GRE**. `58` – **ICMPv6**.
`Direction`	Value of the **Direction** parameter.	`1` – **Inbound (packet)**. `2` – **Outbound (packet)**. `3` – **Inbound / Outbound**. `4` – **Inbound**. `5` – **Outbound**.

Parameter	Description	Value
`IcmpType`	Value of the **ICMP type** parameter.	**ICMP protocol** `0` – **Echo Reply** (ICMP) or disabled. `3` – **Destination Unreachable** (ICMP). `4` – **Source Quench**. `5` – **Redirect**. `6` – **Alternate Host Address**. `8` – **Echo Request**. `9` – **Router Advertisement**. `10` – **Router Solicitation**. `11` – **Time Exceeded**. `12` – **Parameter Problem**. `13` – **Timestamp**. `14` – **Timestamp Reply**. `15` – **Information Request**. `16` – **Information Reply**. `17` – **Address Mask Request**. `18` – **Address Mask Reply**. `30` – **Traceroute**. `31` – **Datagram Conversion Error**. `32` – **Mobile Host Redirect**. `33` – **IPv6 Where-Are-You**. `34` – **IPv6 I-Am-Here**. `35` – **Mobile Registration Request**. `36` – **Mobile Registration Reply**. `37` – **Domain Name Request**. `38` – **Domain Name Reply**. `40` – **Photuris**. **ICMPv6 protocol** `1` – **Destination Unreachable**. `2` – **Packet Too Big**. `3` – **Time Exceeded**. `4` – **Parameter Problem**. `128` – **Echo Request**. `129` – **Echo Reply**. `130` – **Multicast Listener Query**. `131` – **Multicast Listener Report**. `132` – **Multicast Listener Done**. `133` – **Router Solicitation**. `134` – **Router Advertisement**. `135` – **Neighbor Solicitation**. `136` – **Neighbor Advertisement**. `137` – **Redirect Message**. `138` – **Router Renumbering**. `139` – **ICMP Node Information Query**. `141` – **Inverse Neighbor Discovery Solicitation Message**. `142` – **Inverse Neighbor Discovery Advertisement Message**. `143` – **Version 2 Multicast Listener Report**.

Parameter	Description	Value
		144 – **Home Agent Address Discovery Request Message**. 145 – **Home Agent Address Discovery Reply Message**. 146 – **Mobile Prefix Solicitation**. 147 – **Mobile Prefix Advertisement**. 148 – **Certification Path Solicitation Message**. 149 – **Certification Path Advertisement Message**. 151 – **Multicast Router Advertisement**. 152 – **Multicast Router Solicitation**. 153 – **Multicast Router Termination**.
`IcmpCode`	Value of the **ICMP code** parameter.	`0` – **Code 0** or disabled. `1` – **Code 1**. `2` – **Code 2**.
`Flags`	Structure attribute pointer.	Integer It is recommended to leave this parameter unchanged.
`TTL`	Value of the **Time to live (TTL)** parameter.	Value in seconds. If disabled, the value is `0`.
`</key>`		
`Id`	Main ID of the resource (see the `Rules` node).	Integer
`ParentID`	ID of the parent group.	Integer It is recommended to leave this parameter unchanged.
`Flags`	Status of the rule.	`6` – the rule is disabled. `38` – the rule is enabled.
`Name`	Name of the network packet rule.	String

Managing application network rules

By default, Kaspersky Endpoint Security groups all applications that are installed on the computer by the name of the vendor of the software whose file or network activity it monitors. Application groups are in turn categorized into trust groups. All applications and application groups inherit properties from their parent group: application control rules, application network rules, and their execution priority.

Like the Host Intrusion Prevention component, by default the Firewall component applies the network rules for an application group when filtering the network activity of all applications within the group. The application group network rules define the rights of applications within the group to access different network connections.

By default, Firewall creates a set of network rules for each application group that is detected by Kaspersky Endpoint Security on the computer. You can change the Firewall action that is applied to the application group network rules that are created by default. You cannot edit, remove, disable, or change the priority of application group network rules that are created by default.

You can also create a network rule for an individual application. Such a rule will have a higher priority than the network rule of the group to which the application belongs.

Creating an application network rule

By default, application activity is controlled by network rules that are defined for the trust group to which Kaspersky Endpoint Security assigned the application when it started the first time. If necessary, you can create network rules for an entire trust group, for an individual application, or for a group of applications that are within a trust group.

Manually defined network rules have a higher priority than network rules that were determined for a trust group. In other words, if manually defined application rules differ from the application rules determined for a trust group, Firewall controls application activity according to the manually defined rules for applications.

By default, Firewall creates the following network rules for each application:

- Any network activity in Trusted networks.
- Any network activity in Local networks.
- Any network activity in Public networks.

Kaspersky Endpoint Security controls the network activity of applications according to predefined network rules as follows:

- Trusted and Low Restricted: all network activity is allowed.
- High Restricted and Untrusted: all network activity is blocked.

Predefined application rules cannot be edited or deleted.

You can create an application network rule in the following ways:

- Use the Network Monitor tool.

  Network Monitor is a tool designed for viewing information about the network activity of a user's computer in real time. This is convenient because you do not need to configure all the rule settings. Some Firewall settings will be inserted automatically from Network Monitor data. Network Monitor is available only in the application interface.

- Configure the Firewall settings.

  This lets you fine-tune the Firewall settings. You can create rules for any network activity, even if there is no network activity at the current time.

When creating network rules for applications, remember that network packet rules have priority over application network rules.

How to use the Network Monitor tool to create an application network rule in the application interface

1. In the main application window, in the **Monitoring** section, click the **Network Monitor** tile.

2. Go to the **Network activity** or **Open ports** tab.

   The **Network activity** tab shows all currently active network connections with the computer. Both outbound and inbound network connections are displayed.

   The **Open ports** tab lists all open network ports of the computer.

3. In the context menu of a network connection, select **Create an application network rule**.

   The application rules and properties window opens.

4. Select the **Network rules** tab.

   This opens the list of default network rules that are set by the Firewall.

5. Click **Add**.

   This opens the network rule properties.

6. Manually enter the name of the network service in the **Name** field.

7. Configure the network rule settings (see the table below).

   You can select a predefined rule template by clicking the **Network rule template** link. Rule templates describe the most frequently used network connections.

   All network rule settings will be filled in automatically.

8. If you want the actions of the network rule to be reflected in the report, select the **Log events** check box.

9. Click **Save**.

   The new network rule will be added to the list.

10. Use the **Up** / **Down** buttons to set the priority of the network rule.

11. Save your changes.

How to use Firewall settings to create an application network rule in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Essential Threat Protection** → **Firewall**.

3. Click **Rules for applications**.

   This opens the list of default network rules that are set by the Firewall.

4. In the list of applications, select the application or application group for which you want to create a network rule.

5. Right-click to open the context menu and select **Details and rules**.

   The application rules and properties window opens.

6. Select the **Network rules** tab.

7. Click **Add**.

   This opens the network rule properties.

8. Manually enter the name of the network service in the **Name** field.

9. Configure the network rule settings (see the table below).

   You can select a predefined rule template by clicking the **Network rule template** link. Rule templates describe the most frequently used network connections.

   All network rule settings will be filled in automatically.

10. If you want the actions of the network rule to be reflected in the report, select the **Log events** check box.

11. Click **Save**.

    The new network rule will be added to the list.

12. Use the **Up** / **Down** buttons to set the priority of the network rule.

13. Save your changes.

How to create an application network rule in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Essential Threat Protection** → **Firewall**.

4. In the **Firewall settings** block, click the **Settings** button.

   This opens the list of network packet rules and the list of application network rules.

5. Go to the **Application network rules** tab.

6. Click **Add**.

7. In the window that opens, enter criteria to search for the application for which you want to create a network rule.

   You can enter the name of the application or the name of the vendor. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

8. Click **Refresh**.

   Kaspersky Endpoint Security will search for the application in the consolidated list of applications installed on managed computers. Kaspersky Endpoint Security will show a list of applications that satisfy your search criteria.

9. Select the necessary application.

10. In the **Add selected application to the trust group** drop-down list, select **Default groups** and click **OK**.

    The application will be added to the default group.

11. Select the relevant application and then select **Application rights** from the context menu of the application.

    The application rules and properties window opens.

12. Select the **Network rules** tab.

    This opens the list of default network rules that are set by the Firewall.

13. Click **Add**.

    This opens the network rule properties.

14. Manually enter the name of the network service in the **Name** field.

15. Configure the network rule settings (see the table below).

    You can select a predefined rule template by clicking the button. Rule templates describe the most frequently used network connections.

    All network rule settings will be filled in automatically.

16. If you want the actions of the network rule to be reflected in the report, select the **Log events** check box.

17. Save the new network rule.

18. Use the **Up** / **Down** buttons to set the priority of the network rule.

19. Save your changes.

How to create an application network rule in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Select **Communication & Web Protection** → **Firewall**.

5. In the **Application rights and protected resources** block, click the **Application rights** link.

   This opens the application rights configuration window and the list of protected resources.

6. Go to the **Application rights** tab.

   You will see a list of trust groups on the left side of the window and their properties on the right side.

7. In the **Applications** block, click the **Add** button.

   This starts the Wizard for adding an application to a trust group.

8. Select the relevant trust group for the application.

9. Select the **Application** type. Go to the next step.

   If you want to create a network rule for multiple applications, select the **Group** type and define a name for the application group.

10. In the opened list of applications, select the applications for which you want to create a network rule.

    Use a filter. You can enter the name of the application or the name of the vendor. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

11. Finish the wizard.

    The application will be added to the trust group.

12. In the left part of the window, select the relevant application.

13. In the right part of the window, select **Network rules** from the drop-down list.

    This opens the list of default network rules that are set by the Firewall.

14. Click **Add**.

    This opens the application rule properties.

15. Manually enter the name of the network service in the **Rule name** field.

16. Configure the network rule settings (see the table below).

    You can select a predefined rule template by clicking the **Select rule template** link. Rule templates describe the most frequently used network connections.

    All network rule settings will be filled in automatically.

17. If you want the actions of the network rule to be reflected in the report, select the **Log events** check box.

18. Save the network rule.

    The new network rule will be added to the list.

19. Use the **Move** button to set the priority of the network rule.

20. Save your changes.

Application network rule settings

Parameter	Description
Action	**Allow**. **Block**.
Protocol	Control network activity over the selected protocol: TCP, UDP, ICMP, ICMPv6, IGMP and GRE. If ICMP or ICMPv6 is selected as the protocol, you can define the ICMP packet type and code. If TCP or UDP is selected as the protocol type, you can specify the port numbers of the local and remote computers between which the connection is to be monitored. Range of possible values for the port numbers: 0–65535. In each field, you can enter multiple values separated by `,` or specify a range of values using `-`. For example: • `100,101` • `100-130` • `100,110-130`
Direction	**Inbound**. **Inbound / Outbound**. **Outbound**.
Remote addresses	Network addresses of remote computers that can send and receive network packets. Firewall applies the network rule to the specified range of remote network addresses. You can include all IP addresses in a network rule, create a separate list of IP addresses, specify a range of IP addresses, or select a subnet (Trusted networks, Local networks, Public networks). You can also specify a DNS name of a computer instead of its IP address. You should use DNS names only for LAN computers or internal services. Interaction with cloud services (such as Microsoft Azure) and other Internet resources should be handled by the Web Control component. If in the network packet rule, you added a DNS name for which the IP address could not be determined, Kaspersky Endpoint Security will display a warning. In the list of network packet rules in Web Console, a column is added with a description of the error. In Administration Console (MMC), the error description is not available. Such packet rules are highlighted in color.

Parameter	Description
Local addresses	Network addresses of computers that can send and receive network packets. Firewall applies a network rule to the specified range of local network addresses. You can include all IP addresses in a network rule, create a separate list of IP addresses, or specify a range of IP addresses. The application stores local addresses only if a list of remote addresses is specified. That is, the **Addresses from the list** value has been selected for **Remote addresses** and at least one address has been added. Sometimes the local address cannot be obtained for applications. If this is the case, this parameter is ignored.

Enabling and disabling an application network rule

To enable or disable an application network rule:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Firewall**.
3. Click **Rules for applications**.

   This opens the list of application rules.
4. In the list of applications, select the application or group of applications for which you want to create or edit a network rule.
5. Right-click to open the context menu and select **Details and rules**.

   The application rules and properties window opens.
6. Select the **Network rules** tab.
7. In the list of network rules for an application group, select the relevant network rule.

   The network rule properties window opens.
8. Set the **Active** or **Inactive** status of the network rule.

   You cannot disable an application group network rule that is created by Firewall by default.
9. Save your changes.

Changing the Firewall action for an application network rule

You can change the Firewall action that is applied to all network rules for an application or application group that were created by default, and change the Firewall action for a single custom network rule for an application or application group.

To change the Firewall action for all network rules for an application or group of applications:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Firewall**.
3. Click **Rules for applications**.

   This opens the list of application rules.
4. If you want to change the Firewall action that is applied to all network rules that are created by default, select an application or group of applications in the list. Manually created network rules are left unchanged.
5. Right-click to open the context menu, select **Network rules**, then select the action that you want to assign:
   - **Inherit**.
   - **Allow**.
   - **Block**.
6. Save your changes.

To change the Firewall response for one network rule for an application or application group:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Firewall**.
3. Click **Rules for applications**.

   This opens the list of application rules.
4. In the list, select the application or group of applications for which you want to change the action for one network rule.
5. Right-click to open the context menu and select **Details and rules**.

   The application rules and properties window opens.
6. Select the **Network rules** tab.
7. Select the network rule for which you want to change the Firewall action.
8. In the **Permission** column, right-click to bring up the context menu and select the action that you want to assign:
   - **Inherit**.
   - **Allow**.
   - **Deny**.
   - **Log events**.
9. Save your changes.

Changing the priority of an application network rule

The priority of a network rule is determined by its position in the list of network rules. Firewall executes the rules in the order in which they appear in the list of network rules, from top to bottom. According to each processed network rule that applies to a particular network connection, Firewall either allows or blocks network access to the address and port that are indicated in the settings of this network connection.

Manually created network rules have a higher priority than default network rules.

> You cannot change the priority of application group network rules that are created by default.

To change the priority of a network rule:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Essential Threat Protection** → **Firewall**.
3. Click **Rules for applications**.

   This opens the list of application rules.
4. In the list of applications, select the application or group of applications for which you want to change the priority of a network rule.
5. Right-click to open the context menu and select **Details and rules**.

   The application rules and properties window opens.
6. Select the **Network rules** tab.
7. Select the network rule whose priority you want to change.
8. Use the **Up** / **Down** buttons to set the priority of the network rule.
9. Save your changes.

Network Monitor

Network Monitor is a tool designed for viewing information about the network activity of a user's computer in real time.

To start Network Monitor:

In the main application window, in the **Monitoring** section, click the **Network Monitor** tile.

The Network Monitor window opens. In this window, information about the network activity of the computer is shown on four tabs:

- The **Network activity** tab shows all currently active network connections with the computer. Both outbound and inbound network connections are displayed. On this tab, you can also create network packet rules for Firewall operation.
- The **Open ports** tab lists all open network ports of the computer. On this tab, you can also create network packet rules and application rules for Firewall operation.
- The **Network traffic** tab shows the volume of inbound and outbound network traffic between the user's computer and other computers in the network to which the user is currently connected.
- The **Blocked computers** tab lists the IP addresses of remote computers whose network activity has been blocked by the Network Threat Protection component after detecting network attack attempts from such IP addresses.

Exploit Prevention

The Exploit Prevention component detects program code that takes advantage of vulnerabilities on a computer to exploit administrator privileges or to perform malicious activities. For example, exploits can utilize a buffer overflow attack. To do so, the exploit sends a large amount of data to a vulnerable application. When processing this data, the vulnerable application executes malicious code. As a result of this attack, the exploit can start an unauthorized installation of malware. When there is an attempt to run an executable file from a vulnerable application that was not performed by the user, Kaspersky Endpoint Security blocks this file from running or notifies the user.

The Exploit Prevention component additionally monitors network ports for application processes that may threaten the security of the computer. The application gets information about such processes with anti-virus databases.

Enabling and disabling Exploit Prevention

By default, Exploit Prevention is enabled and functions in the optimal mode. Kaspersky Endpoint Security monitors executable files being run by vulnerable applications. If Kaspersky Endpoint Security detects that an executable file from a vulnerable application was run by something other than the user, Kaspersky Endpoint Security will perform the selected action (for example, will block the operation).

How to enable or disable Exploit Prevention in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Advanced Threat Protection** → **Exploit Prevention**.
4. Use the **Exploit Prevention** check box to enable or disable the component.

5. Select the relevant action in the **On detecting exploit** block:

   - **Block**. If this item is selected, on detecting an exploit, Kaspersky Endpoint Security blocks the operations of this exploit and makes a log entry with information about this exploit.

   - **Inform**. If this item is selected, when Kaspersky Endpoint Security detects an exploit it logs an entry containing information about the exploit and adds information about this exploit to the list of active threats.

6. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable Exploit Prevention in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Behavior Analysis** → **Exploit Prevention**.

5. Use the **Exploit Prevention** toggle to enable or disable the component.

6. Select the relevant action in the **Action on threat detection** block:

   - **Block**. If this item is selected, on detecting an exploit, Kaspersky Endpoint Security blocks the operations of this exploit and makes a log entry with information about this exploit.

   - **Inform**. If this item is selected, when Kaspersky Endpoint Security detects an exploit it logs an entry containing information about the exploit and adds information about this exploit to the list of active threats.

7. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable Exploit Prevention in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Advanced Threat Protection** → **Exploit Prevention**.

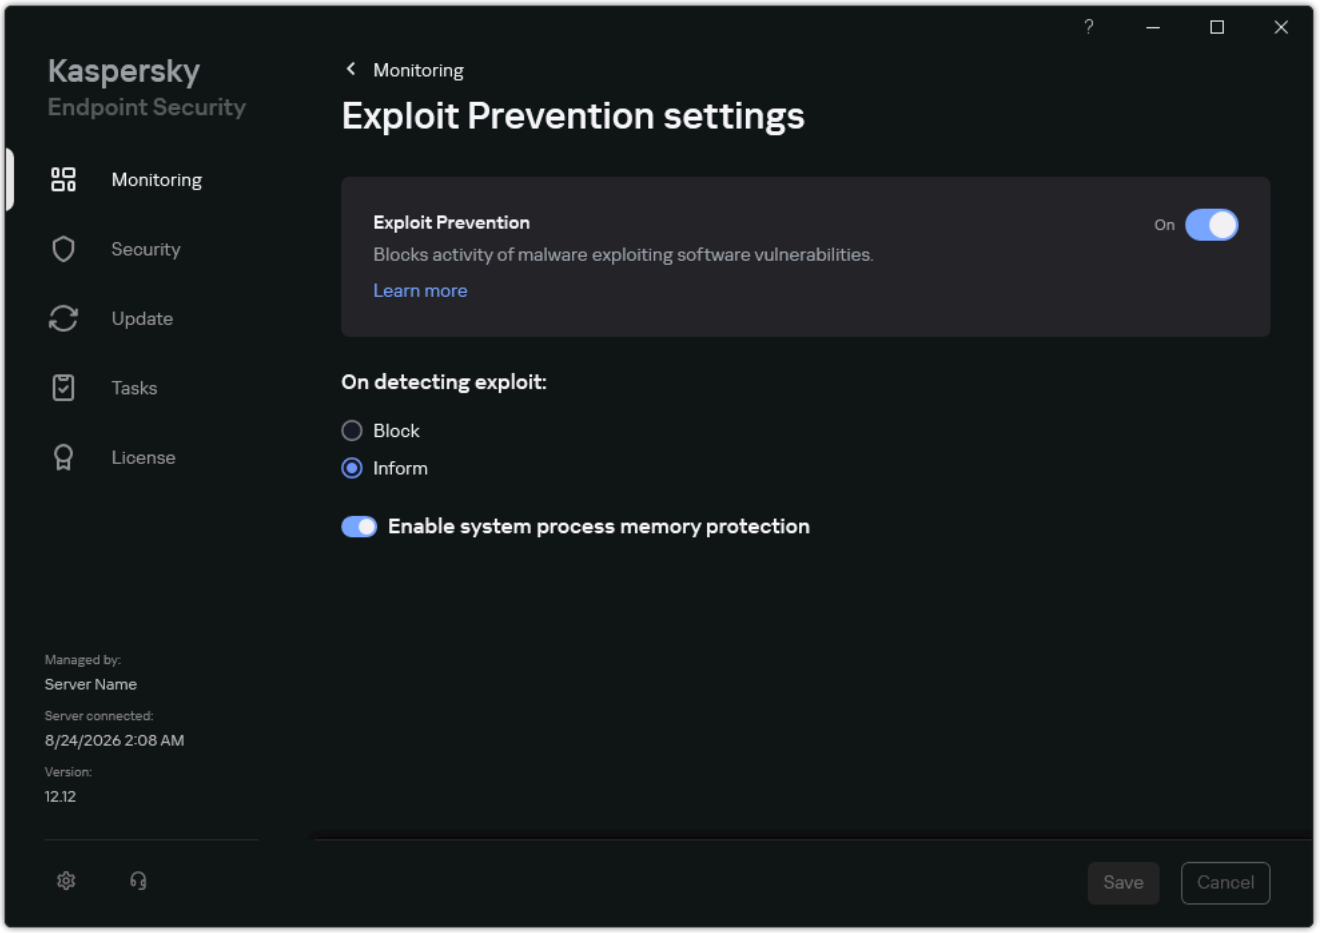

Exploit Prevention settings

3. Use the **Exploit Prevention** toggle to enable or disable the component.

4. Select the relevant action in the **On detecting exploit** block:

   - **Block**. If this item is selected, on detecting an exploit, Kaspersky Endpoint Security blocks the operations of this exploit and makes a log entry with information about this exploit.

   - **Inform**. If this item is selected, when Kaspersky Endpoint Security detects an exploit it logs an entry containing information about the exploit and adds information about this exploit to the list of active threats.

5. Save your changes.

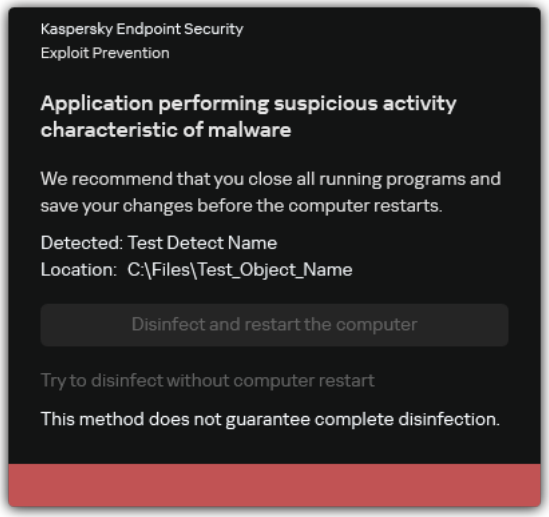

Notification about active threat

System processes memory protection

By default, protection of system process memory is enabled. Kaspersky Endpoint Security blocks external processes that attempt to gain access to system processes.

How to enable or disable the system process memory protection in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection** → **Exploit Prevention**.

4. Use the **Enable system process memory protection** check box to enable or disable the option.

5. Save your changes.

How to enable or disable the system process memory protection in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Behavior Analysis** → **Exploit Prevention**.

5. Use the **System process memory protection ENABLED** toggle to enable or disable this feature.

6. Save your changes.

How to enable or disable the system process memory protection in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Advanced Threat Protection** → **Exploit Prevention**.

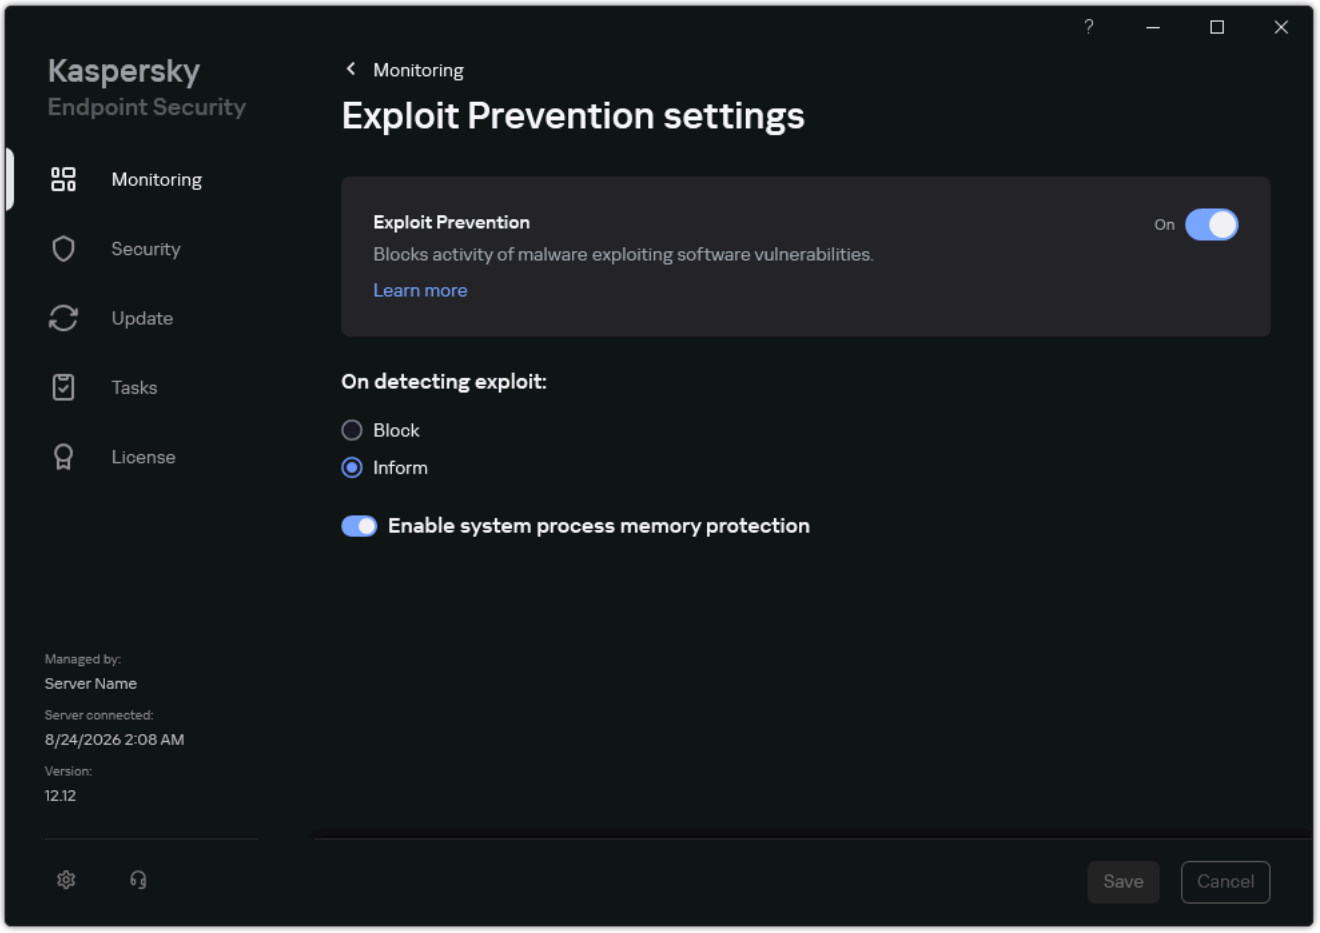

Exploit Prevention settings

3. Use the **Enable system process memory protection** toggle to enable or disable this feature.

4. Save your changes.

Behavior Detection

The Behavior Detection component receives data on the actions of applications on your computer and provides this information to other protection components, to improve their performance. The Behavior Detection component utilizes Behavior Stream Signatures (BSS) for applications. If application activity matches a behavior stream signature, Kaspersky Endpoint Security performs the selected responsive action. The Kaspersky Endpoint Security functionality is based on behavior stream signatures and provides proactive defense for the computer.

The Behavior Detection component additionally monitors network ports for application processes that may threaten the security of the computer. The application gets information about such processes with anti-virus databases.

By default, Behavior Detection is enabled and runs in the mode recommended by Kaspersky experts. When malicious activity is detected, Kaspersky Endpoint Security deletes the executable file of the malicious application.

> It is not recommended to disable Behavior Detection unless absolutely necessary because doing so would reduce the effectiveness of the protection components. The protection components may request data collected by the Behavior Detection component to detect threats.

How to enable or disable Behavior Detection in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Advanced Threat Protection** → **Behavior Detection**.
5. Use the **Behavior Detection** check box to enable or disable the component.
6. Select the relevant action in the **Action on malware activity detection** block:
   - **Delete**. If this item is selected, on detecting malicious activity Kaspersky Endpoint Security deletes the executable file of the malicious application and creates a backup copy of the file in Backup.
   - **Block**. If this item is selected, on detecting malicious activity Kaspersky Endpoint Security terminates this application.
   - **Inform**. If this item is selected and malware activity of an application is detected, Kaspersky Endpoint Security adds information about the malware activity of the application to the list of active threats.
7. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable Behavior Detection in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **Behavior Analysis** → **Behavior Detection**
5. Use the **Behavior Detection ENABLED** toggle to enable or disable the component.

6. Select the relevant action in the **Action on threat detection** block:

- **Delete**. If this item is selected, on detecting malicious activity Kaspersky Endpoint Security deletes the executable file of the malicious application and creates a backup copy of the file in Backup.
- **Block**. If this item is selected, on detecting malicious activity Kaspersky Endpoint Security terminates this application.
- **Inform**. If this item is selected and malware activity of an application is detected, Kaspersky Endpoint Security adds information about the malware activity of the application to the list of active threats.

7. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable Behavior Detection in the application interface

1. In the main application window, click the button.
2. In the application settings window, select **Advanced Threat Protection** → **Behavior Detection**.

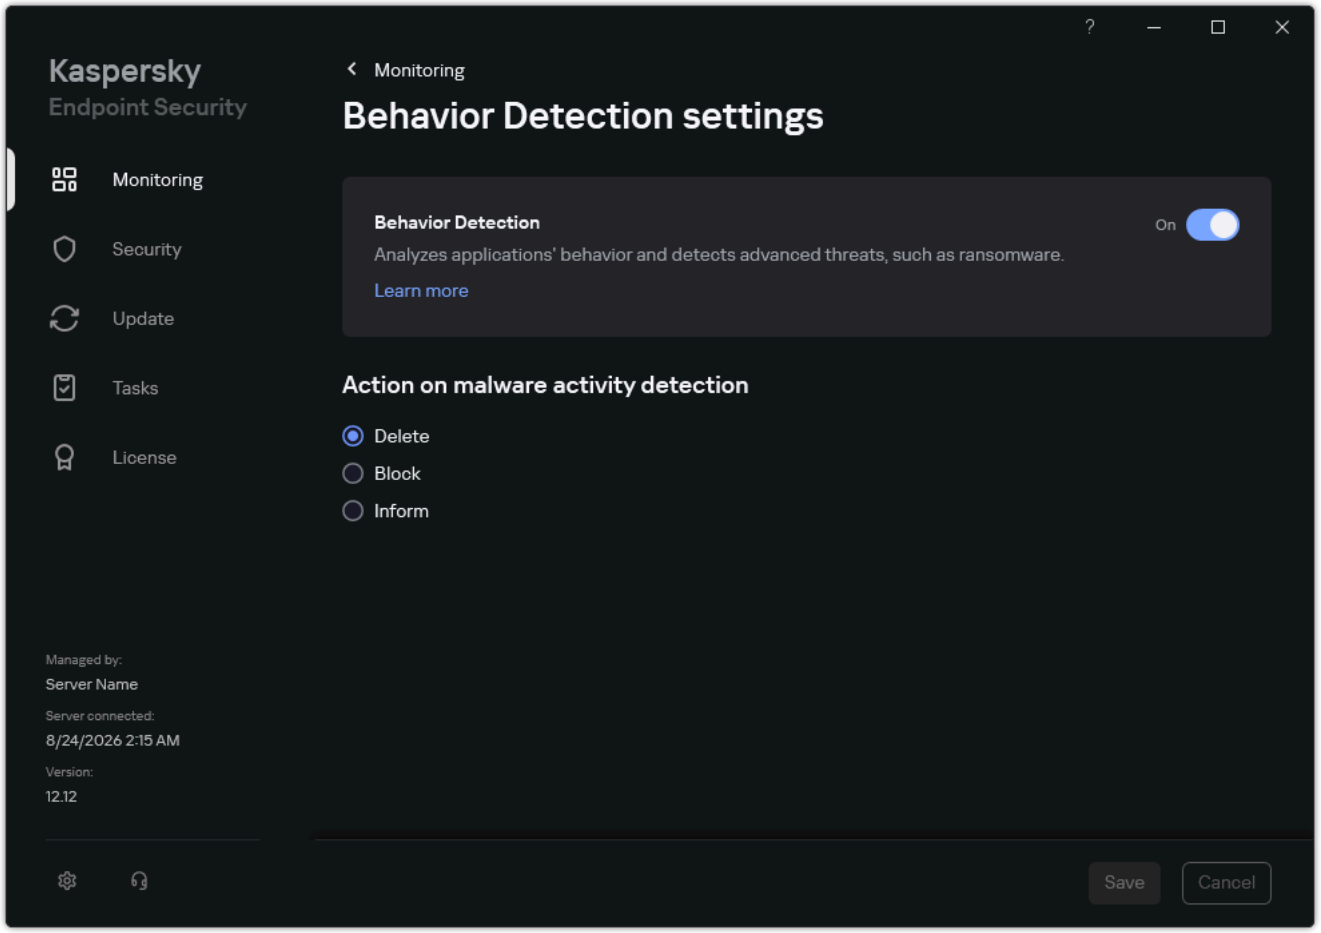

Behavior Detection settings

3. Use the **Behavior Detection** toggle to enable or disable the component.

4. Select the relevant action in the **Action on malware activity detection** block:

   - **Delete**. If this item is selected, on detecting malicious activity Kaspersky Endpoint Security deletes the executable file of the malicious application and creates a backup copy of the file in Backup.

   - **Block**. If this item is selected, on detecting malicious activity Kaspersky Endpoint Security terminates this application.

   - **Inform**. If this item is selected and malware activity of an application is detected, Kaspersky Endpoint Security adds information about the malware activity of the application to the list of active threats.

5. Save your changes.

As a result, if Behavior Detection is enabled, Kaspersky Endpoint Security will use behavior stream signatures to analyze the activity of applications in the operating system.

Anti-Cryptor

Starting with Kaspersky Endpoint Security 12.12 for Windows, the protection of shared folders from external encryption that used to be part of the Behavior Detection component is a separate component, Anti-Cryptor.

> The component monitors operations performed only with those files that are stored on mass storage devices with the NTFS file system and that are not encrypted with EFS.

The Anti-Cryptor component analyzes activity in shared folders. If this activity matches a behavior stream signature that is typical for external encryption, Kaspersky Endpoint Security performs the selected action.

> For the Anti-Cryptor component to work, you must enable the Behavior Detection component.

If Kaspersky Endpoint Security detects an attempt to modify files in shared folders, it takes the following actions:

- Blocks access to file modification for the session that initiated the malicious activity (the file will be read-only).

- Creates backup copies of files that are being modified.

- Adds an entry to local application interface reports and sends information about the detected malicious activity to Kaspersky Security Center.

- Also, if the Remediation Engine component is enabled, the modified files are restored from backup copies.

Enabling and disabling protection of shared folders against external encryption

By default, protection of shared folders against external encryption is enabled and working as recommended by Kaspersky experts. To configure this functionality, you can create a protection scope and configure exclusions, if necessary. By default, the application automatically identifies shared folders and monitors file activity in all folders. When an attempt to externally encrypt files in shared folders is detected, Kaspersky Endpoint Security blocks the session of the remote user for one hour (by default).

After Kaspersky Endpoint Security is installed, the protection of shared folders against external encryption will be limited until the computer is restarted.

How to enable or disable protection of shared folders against external encryption in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Advanced Threat Protection** → **Anti-Cryptor**.
4. Use the **Anti-Cryptor** check box to enable or disable detection of activity that is typical of external encryption.
5. Select the relevant action the application will take when an attempt to modify files in shared folders is detected:
   - **Block connection for N min**. If this option is selected, when Kaspersky Endpoint Security detects an attempt to modify files in shared folders, it blocks access to file modification for the session that initiated the malicious activity and creates backup copies of the modified files.

     If the Remediation Engine component is enabled and the **Block connection for N min** option is selected, modified files are restored from backup copies.

   - **Inform**. If this option is selected, on detecting an attempt to modify files in shared folders, Kaspersky Endpoint Security adds information about this attempt to the list of active threats, adds an entry to the local application interface reports, and sends information about the detected malicious activity to Kaspersky Security Center.
6. If necessary, edit a protection scope and define exclusions.
7. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable protection of shared folders against external encryption in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Behavior Analysis** → **Anti-Cryptor**.

5. Use the **Anti-Cryptor ENABLED** toggle to enable or disable detection of activity that is typical of external encryption.

6. Select the relevant action the application will take when an attempt to modify files in shared folders is detected:

   - **Block connection for (min) N min**. If this option is selected, when Kaspersky Endpoint Security detects an attempt to modify files in shared folders, it blocks access to file modification for the session that initiated the malicious activity and creates backup copies of the modified files.

     If the Remediation Engine component is enabled and the **Block connection for (min) N min** option is selected, modified files are restored from backup copies.

   - **Inform**. If this option is selected, on detecting an attempt to modify files in shared folders, Kaspersky Endpoint Security adds information about this attempt to the list of active threats, adds an entry to the local application interface reports, and sends information about the detected malicious activity to Kaspersky Security Center.

7. If necessary, edit a protection scope and define exclusions.

8. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable protection of shared folders against external encryption in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **Advanced Threat Protection** → **Anti-Cryptor**.

3. Use the **Protection of shared folders against external encryption** check box to enable or disable detection of activity that is typical of external encryption.

4. Use the **Protection of shared folders against external encryption** check box to enable or disable detection of activity that is typical of external encryption.

5. Select the relevant action the application will take when an attempt to modify files in shared folders is detected:

   - **Block connection for (min) N min**. If this option is selected, when Kaspersky Endpoint Security detects an attempt to modify files in shared folders, it blocks access to file modification for the session that initiated the malicious activity and creates backup copies of the modified files.

     If the Remediation Engine component is enabled and the **Block connection for (min) N min** option is selected, modified files are restored from backup copies.

   - **Inform**. If this option is selected, on detecting an attempt to modify files in shared folders, Kaspersky Endpoint Security adds information about this attempt to the list of active threats, adds an entry to the local application interface reports, and sends information about the detected malicious activity to Kaspersky Security Center.

6. If necessary, edit a protection scope and define exclusions.

7. Save your changes.

Configuring the blocking period of an untrusted computer

An *untrusted computer* is a remote computer that is engaging in malicious activity or data encryption. By default, Kaspersky Endpoint Security blocks the session of the remote user for one hour. When the blocking period expires, Kaspersky Endpoint Security removes the computer from the block list and restores access to the shared folder.

How to configure the blocking period of an untrusted computer in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection** → **Anti-Cryptor**.

4. In the **Action on threat detection** block, select **Block connection for N min**.

5. Configure the blocking period of an untrusted computer that is engaging in malicious activity or data encryption.

6. Save your changes.

How to configure the blocking period of an untrusted computer in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Host Threat Protection** → **Behavior Analysis** → **Anti-Cryptor**.

5. Under **Action on threat detection**, configure the blocking period of an untrusted computer that is engaging in malicious activity or data encryption.

6. Save your changes.

How to configure the blocking period of an untrusted computer in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Advanced Threat Protection** → **Anti-Cryptor**.

3. In the **Action on threat detection** block, select **Block connection for (min)**.

4. Configure the blocking period of an untrusted computer that is engaging in malicious activity or data encryption.

5. Save your changes.

As a result, the remote computer will be locked. To unlock the remote computer, you can restart Kaspersky Endpoint Security.

Editing the protection scope

The *protection scope* is a list of paths to shared folders in which Kaspersky Endpoint Security monitors file activity. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. By default, the application automatically identifies shared folders and monitors file activity in all folders.

Excluding a folder from the protection scope can reduce the amount of false positives if your organization uses data encryption when exchanging files using shared folders. For example, Behavior Detection can raise false positives when the user works with files with the ENC extension in a shared folder. Such activity matches a behavioral pattern that is typical for external encryption. If you have encrypted files in a shared folder to protect data, add that folder to exclusions.

> You can also exclude computers from which external encryption attempts must not be handled.

How to edit a protection scope in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Advanced Threat Protection** → **Anti-Cryptor**.
4. In the **Protection scope** block, select **Only specified shared folders**.
5. In the list of folders, click **Add**.
6. This opens a window; in that window, enter the path to the shared folder that you want to include in the protection scope (for example, `C:\Share`).

   > To add a shared folder to the protection scope, use a local path.

7. Click **OK**.
8. If necessary, define protection scope exclusions:

   a. In the **Scan exclusions** block, click the **By mask** button.

   b. In the window that opens, click the **Add** button.

   c. In the displayed window, specify a file extension in the `*.<file extension>` format or a folder path. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask.

   The application does not support some exclusion file extensions. Thus, you can specify an exclusion as `*.docx` or `**\Folder\**`.

You can exclude an object from scans without removing it from the list of objects in the protection scope. To do so, clear the check box next to the object.

9. Save your changes.

How to edit a protection scope in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **Behavior Analysis** → **Anti-Cryptor**.
5. In the **Protection scope** block, select **Only specified shared folders**.
6. In the list of folders, click **Add**.
7. This opens a window; in that window, enter the path to the shared folder that you want to include in the protection scope (for example, `C:\Share`).

   To add a shared folder to the protection scope, use a local path.
8. Click **OK**.
9. If necessary, define protection scope exclusions:

   a. In the upper part of the window click the **Scan exclusions** link.

   b. In the window that opens, click the **Add** button.

   c. In the displayed window, specify a file extension in the `*.<file extension>` format or a folder path. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask.

   The application does not support some exclusion file extensions. Thus, you can specify an exclusion as `*.docx` or `**\Folder\**`.

   You can exclude an object from scans without removing it from the list of objects in the protection scope. To do so, clear the check box next to the object.

10. Save your changes.

How to edit a protection scope in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Advanced Threat Protection** → **Anti-Cryptor**.
3. In the **Protection scope** block, select **Only specified shared folders**.
4. In the list of folders, click **Add**.

5. This opens a window; in that window, enter the path to the shared folder that you want to include in the protection scope (for example, `C:\Share`).

   To add a shared folder to the protection scope, use a local path.

6. Click **OK**.

7. If necessary, define protection scope exclusions:

   a. In the upper part of the window click the **Exclusions by mask** link.

   b. In the window that opens, click the **Add** button.

   c. In the displayed window, specify a file extension in the `*.<file extension>` format or a folder path. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask.

      The application does not support some exclusion file extensions. Thus, you can specify an exclusion as `*.docx` or `**\Folder\**`.

   You can exclude an object from scans without removing it from the list of objects in the protection scope. To do so, clear the check box next to the object.

8. Save your changes.

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.

3. In the **Exclusions** block, click the **Manage exclusions** link.

4. Click **Add**.

5. Click **Browse** and select the shared folder.

   You can also enter the path manually. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask:

   - The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

   - Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

   - The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

   You can use masks at the beginning, in the middle or at the end of the file path. For example, if you want to add a folder for all users to exclusions, enter the `?:\Users\*\Folder\` mask.

6. In the **Protection components** block, select the **Behavior Detection** component.

7. If necessary, in the **Comment** field, enter a brief comment on the scan exclusion that you are creating.

8. Select the **Active** status for the exclusion.

   You can use the toggle to stop an exclusion at any time.

9. Save your changes.

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to the **Trusted Zone** section.

5. In the window that opens, click the **Malware Scan exclusions** link.

6. Select the **Merge values when inheriting** check box if you want to create a consolidated list of exclusions for all computers in the company. The lists of exclusions in the parent and child policies will be merged. The lists will be merged provided that merging values when inheriting is enabled. Exclusions from the parent policy are displayed in child policies in a read-only view. Changing or deleting exclusions of the parent policy is not possible.

7. Select the **Allow use of local exclusions** check box if you want to enable the user to create a local list of exclusions. This way, a user can create their own local list of exclusions in addition to the general list of exclusions generated in the policy. An administrator can use Kaspersky Security Center to view, add, edit, or delete list items in the computer properties.

   If the check box is cleared, the user can access only the general list of exclusions generated in the policy. Also, if this check box is cleared, Kaspersky Endpoint Security hides the consolidated list of scan exclusions in the user interface of the application.

8. Click **Add** and select an action:

   - **Category**. You can group scan exclusions into separate categories. To create a new category, enter the name of the category and add at least one scan exclusion to the category.

   - **New exclusion**. Kaspersky Endpoint Security adds a new scan exclusion to the root of the list.

   - **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined scan exclusions*. Also predefined scan exclusions have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined scan exclusions depending on the purpose of the protected server.

9. Select how you want to add the exclusion **Path to the file or folder**.

10. Enter the path to the shared folder.

You can also enter the path manually. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask:

- The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

- Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

- The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

You can use masks at the beginning, in the middle or at the end of the file path. For example, if you want to add a folder for all users to exclusions, enter the `C:\Users\*\Folder\` mask.

11. In the **Apply exclusion to** block, select the **Behavior Detection** component.

12. If necessary, in the **Comment** field, enter a brief comment on the scan exclusion that you are creating.

13. Select the **Add to exclusions** status for the exclusion.

    You can use the toggle to stop an exclusion at any time.

14. Save your changes.

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **General settings** → **Exclusions and object types**.

4. In the **Scan exclusions and trusted applications** → **Scan exclusions** block, click the **Settings** button.

   This opens a window containing a list of exclusions.

5. Select the **Merge values when inheriting** check box if you want to create a consolidated list of exclusions for all computers in the company. The lists of exclusions in the parent and child policies will be merged. The lists will be merged provided that merging values when inheriting is enabled. Exclusions from the parent policy are displayed in child policies in a read-only view. Changing or deleting exclusions of the parent policy is not possible.

6. Select the **Allow use of local exclusions** check box if you want to enable the user to create a local list of exclusions. This way, a user can create their own local list of exclusions in addition to the general list of exclusions generated in the policy. An administrator can use Kaspersky Security Center to view, add, edit, or delete list items in the computer properties.

   If the check box is cleared, the user can access only the general list of exclusions generated in the policy. Also, if this check box is cleared, Kaspersky Endpoint Security hides the consolidated list of scan exclusions in the user interface of the application.

7. Click **Add** and select an action:

   - **Category**. You can group scan exclusions into separate categories. To create a new category, enter the name of the category and add at least one scan exclusion to the category.

   - **New exclusion**. Kaspersky Endpoint Security adds a new scan exclusion to the root of the list.

   - **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined scan exclusions*. Also predefined scan exclusions have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined scan exclusions depending on the purpose of the protected server.

8. Click **Add**.

9. In the **Properties** block, select the **File or folder** check box.

10. Click the **Select file or folder** link in the **Scan exclusion description (click underlined items to edit them)** block to open the **Name of file or folder** window.

11. Click **Browse** and select the shared folder.

    You can also enter the path manually. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask:

    - The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

    - Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

    - The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

    You can use masks at the beginning, in the middle or at the end of the file path. For example, if you want to add a folder for all users to exclusions, enter the `?:\Users\*\Folder\` mask.

12. If necessary, in the **Comment** field, enter a brief comment on the scan exclusion that you are creating.

13. Click the link in the **Scan exclusion description (click underlined items to edit them)** block to open the **Protection components** window.

14. Select the check box next to the **Behavior Detection** component.

15. Save your changes.

Adding trusted computers for external data encryption

If your organization uses external data encryption in its file exchange workflow, you must create a list of trusted computers. Kaspersky Endpoint Security does not monitor data encryption by trusted computers.

> The Audit Logon service must be enabled to enable exclusions of addresses from protection of shared folders against external encryption. By default, the Audit Logon service is disabled (for detailed information about enabling the Audit Logon service, please visit the Microsoft website).

> The functionality for excluding addresses from shared folder protection does not work on a remote computer if the remote computer was turned on before Kaspersky Endpoint Security was started. You can restart this remote computer after Kaspersky Endpoint Security is started to ensure that the functionality for excluding addresses from shared folder protection works on this remote computer.

How to add a trusted computer for external data encryption in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Advanced Threat Protection** → **Anti-Cryptor**.
5. In the **Scan exclusions** block, click the **By name or IP address** button.
6. In the window that opens, click the **By name or IP address** button.
7. Enter IP addresses, IP address range, or names of computers from which external encryption attempts must not be handled.

   Examples:

   - `192.168.0.0 - 192.168.255.255`
   - `192.168.0.0/24`
   - `192.168.2-3.0-128`
   - `2001:db8:fd0c::/64`
   - `2001:db8:fd0c:: - 2001:db8:fd0c:ffff:ffff:ffff:ffff:ffff`
8. To apply the policy to computers, close the padlock icons and save your changes.

How to add a trusted computer for external encryption of data in the Kaspersky Security Center Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to the **Trusted Zone** section.
5. In the right part of the window click the **Anti-Cryptor exclusions** link.
6. In the window that opens, click the **Add** button.
7. Enter IP addresses, IP address range, or names of computers from which external encryption attempts must not be handled.

   Examples:

   - `192.168.0.0 - 192.168.255.255`
   - `192.168.0.0/24`
   - `192.168.2-3.0-128`
   - `2001:db8:fd0c::/64`
   - `2001:db8:fd0c:: - 2001:db8:fd0c:ffff:ffff:ffff:ffff:ffff`
8. To apply the policy to computers, close the padlock icons and save your changes.

How to add a trusted computer for external data encryption in the application interface

1. In the main application window, click the button.
2. In the application settings window, select **Advanced Threat Protection** → **Anti-Cryptor**.
3. In the upper part of the window click the **Exclusions by name or IP address** link.
4. In the window that opens, click the **Add** button.
5. Enter IP addresses, IP address range, or names of computers from which external encryption attempts must not be handled.

   Examples:

   - `192.168.0.0 - 192.168.255.255`
   - `192.168.0.0/24`
   - `192.168.2-3.0-128`

- `2001:db8:fd0c::/64`
- `2001:db8:fd0c:: - 2001:db8:fd0c:ffff:ffff:ffff:ffff:ffff`

6. Save your changes.

Exporting and importing a list of exclusions from protection of shared folders against external encryption

You can export the list of exclusions to an XML file. Then you can modify the file to, for example, add a large number of addresses of the same type. You can also use the export/import function to back up the list of exclusions or to migrate the list to a different server.

How to export and import a list of exclusions in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Advanced Threat Protection** → **Anti-Cryptor**.
4. In the **Scan exclusions** block, click the **By name or IP address** button.
5. To export the list of rules:
   a. Select the exclusions that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.
      If you did not select any exclusion, Kaspersky Endpoint Security will export all exclusions.
   b. Click the → **Export** button.
   c. In the window that opens, specify the name of the XML file to which you want to export the list of exclusions, and select the folder in which you want to save this file.
   d. Save the file.
      Kaspersky Endpoint Security exports the entire list of exclusions to the XML file.
6. To import the list of exclusions:
   a. Click the → **Import** button.
   b. In the window that opens, select the XML file from which you want to import the list of exclusions.
   c. Open the file.
      If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.
7. Save your changes.

How to export and import a list of exclusions in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **Behavior Analysis** → **Anti-Cryptor**.
5. Click the **Exclusions by name or IP address** link.
6. To export the list of rules:
   a. Select the exclusions that you want to export.
   b. Click the → **Export** button.
      Kaspersky Endpoint Security exports the list of exclusions to a JSON file in the default downloads folder.
7. To import the list of exclusions:
   a. Click the → **Import** button.
      In the window that opens, select the JSON file from which you want to import the list of exclusions.
   b. Open the file.
      If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.
8. Save your changes.

Remediation Engine

The Remediation Engine component lets Kaspersky Endpoint Security roll back actions that have been performed by malware in the operating system.

When rolling back malware activity in the operating system, Kaspersky Endpoint Security handles the following types of malware activity:

- **File activity**
  Kaspersky Endpoint Security performs the following actions:
  - Deletes executable files that were created by malware (on all media except network drives).
  - Deletes executable files that were created by programs that have been infiltrated by malware.
  - Restores files that have been modified or deleted by malware.

  The file recovery feature has a number of limitations.
- **Registry activity**

Kaspersky Endpoint Security performs the following actions:

- Deletes registry keys that were created by malware.
- Does not restore registry keys that have been modified or deleted by malware.

- **System activity**

  Kaspersky Endpoint Security performs the following actions:

  - Terminates processes that have been initiated by malware.
  - Terminates processes into which a malicious application has penetrated.
  - Does not resume processes that have been halted by malware.

- **Network activity**

  Kaspersky Endpoint Security performs the following actions:

  - Blocks the network activity of malware.
  - Blocks the network activity of processes that have been infiltrated by malware.

A rollback of malware actions can be started by the File Threat Protection or Behavior Detection component, or during a malware scan.

Rolling back malware operations affects a strictly defined set of data. Rollback has no adverse effects on the operating system or on the integrity of your computer data.

How to enable or disable the Remediation Engine component in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Advanced Threat Protection** → **Remediation Engine**.
4. Use the **Remediation Engine** check box to enable or disable the component.
5. Save your changes.

How to enable or disable the Remediation Engine component in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Host Threat Protection** → **Behavior Analysis** → **Remediation Engine**.
5. Use the **Remediation Engine ENABLED** toggle to enable or disable the component.
6. Save your changes.

How to enable or disable the Remediation Engine component in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Advanced Threat Protection** → **Remediation Engine**.
3. Use the **Remediation Engine** toggle to enable or disable the component.
4. Save your changes.

As a result, if Remediation Engine is enabled, Kaspersky Endpoint Security will roll back the actions taken by malicious applications in the operating system.

Kaspersky Security Network

To protect your computer more effectively, Kaspersky Endpoint Security uses data that is received from users around the globe. Kaspersky Security Network is designed for obtaining this data.

KSN functionality may not be available in the application in the U.S.

Kaspersky Security Network (KSN) is an infrastructure of cloud services providing access to the online Kaspersky Knowledge Base that contains information about the reputation of files, web resources, and software. The use of data from Kaspersky Security Network ensures faster responses by Kaspersky Endpoint Security to new threats, improves the performance of some protection components, and reduces the likelihood of false positives. If you are participating in Kaspersky Security Network, KSN services provide Kaspersky Endpoint Security with information about the reputation of scanned web addresses, as well as information about the category and reputation of scanned files. For more details on configuring access to KSN, refer to the Kaspersky Security Center Help.

Use of Kaspersky Security Network is voluntary. The application prompts you to use KSN during initial configuration of the application. Users can begin or discontinue participation in KSN at any time.

For more detailed information about sending Kaspersky statistical information that is generated during participation in KSN, and about the storage and destruction of such information, please refer to the Kaspersky Security Network Statement and the Kaspersky website. The ksn_<language ID>.txt file with the text of the Kaspersky Security Network Statement is included in the application distribution kit.

The infrastructure of Kaspersky reputation databases

Kaspersky Endpoint Security supports the following infrastructure solutions for working with Kaspersky reputation databases:

- *Kaspersky Security Network (KSN)* is the solution that is used by most Kaspersky applications. KSN participants receive information from Kaspersky and send Kaspersky information about objects detected on the user's computer to be analyzed additionally by Kaspersky analysts and to be included in the reputation and statistical databases.

- *Kaspersky Private Security Network (KPSN)* is a solution that enables users of computers hosting Kaspersky Endpoint Security or other Kaspersky applications to obtain access to Kaspersky reputation databases, and to other statistical data without sending data to Kaspersky from their own computers. KPSN is designed for corporate customers who are unable to participate in Kaspersky Security Network for any of the following reasons:

  - Local workstations are not connected to the Internet.

  - Transmission of any data outside the country or outside the corporate LAN is prohibited by law or restricted by corporate security policies.

Enabling and disabling the usage of Kaspersky Security Network

By default, Kaspersky Endpoint Security uses the Extended KSN mode. *Extended KSN mode* is a mode in which Kaspersky Endpoint Security sends additional data to Kaspersky.

How to enable or disable KSN Usage in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Advanced Threat Protection** → **Kaspersky Security Network**.

4. Use the **Kaspersky Security Network** toggle to enable or disable the component.

   If you enabled the use of KSN, Kaspersky Endpoint Security will display the Kaspersky Security Network Statement. Please read and accept the Kaspersky Security Network (KSN) Statement terms of use if you agree to them.

5. If necessary, clear the **Enable extended KSN mode** check box. By default, the extended KSN mode is enabled.

6. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable KSN Usage in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **Kaspersky Security Network**.

5. Use the **Use of Kaspersky Security Network (KSN) ENABLED** toggle to enable or disable the component.

   If you enabled the use of KSN, Kaspersky Endpoint Security will display the Kaspersky Security Network Statement. Please read and accept the Kaspersky Security Network (KSN) Statement terms of use if you agree to them.

6. If required, flip the **Use extended KSN mode** toggle off. By default, the extended KSN mode is enabled.

7. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable KSN Usage in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **Advanced Threat Protection** → **Kaspersky Security Network**.

3. Use the **Kaspersky Security Network** toggle to enable or disable the component.

   If you enabled the use of KSN, Kaspersky Endpoint Security will display the Kaspersky Security Network Statement. Please read and accept the Kaspersky Security Network (KSN) Statement terms of use if you agree to them.

4. If required, flip the **Enable extended KSN mode** toggle off. By default, the extended KSN mode is enabled.

5. Save your changes.

As a result, if use of KSN is enabled, Kaspersky Endpoint Security uses information about the reputation of files, web resources, and applications received from Kaspersky Security Network.

Limitations of Kaspersky Private Security Network

Kaspersky Private Security Network (KPSN) is a solution that enables users of computers hosting Kaspersky Endpoint Security or other Kaspersky applications to obtain access to Kaspersky reputation databases, and to other statistical data without sending data to Kaspersky from their own computers. Kaspersky Private Security Network lets you use your own local reputation database to check the reputation of objects (files or web addresses). The reputation of an object added to the local reputation database has a higher priority than one added to KSN/KPSN. For example, imagine that Kaspersky Endpoint Security is scanning a computer and requests the reputation of a file in KSN/KPSN. If the file has an *Untrusted* reputation in the local reputation database but has a *Trusted* reputation in KSN/KPSN, Kaspersky Endpoint Security will detect the file as *Untrusted* and will take the action defined for detected threats.

However, in some cases Kaspersky Endpoint Security might not request the reputation of an object in KSN/KPSN. If this is the case, Kaspersky Endpoint Security will not receive data from the local reputation database of KPSN. Kaspersky Endpoint Security might not request the reputation of an object in KSN/KPSN for the following reasons:

- Kaspersky applications are using offline reputation databases. Offline reputation databases are designed to optimize resources during operation of Kaspersky applications and to protect critically important objects on the computer. Offline reputation databases are created by Kaspersky experts based on data from Kaspersky Security Network. Kaspersky applications update offline reputation databases with anti-virus databases of the specific application. If offline reputation databases contain information about an object being scanned, the application does not request the reputation of this object from KSN/KPSN.

- Scan exclusions (trusted zone) are configured in the application settings. If this is the case, the application does not take into account the reputation of the object in the local reputation database.

- The application uses scan optimization technologies, such as iSwift or iChecker, or is caching reputation requests to KSN / KPSN. If this is the case, the application might not request the reputation of previously scanned objects.

- To optimize its workload, the application scans files of a certain format and size. The list of relevant formats and size limits are determined by Kaspersky experts. This list is updated with the application's anti-virus databases. You can also configure scan optimization settings in the application interface, for example, for the File Threat Protection component.

- Kaspersky Endpoint Security in Light Agent mode communicates with KSN servers through a KSN proxy server. Direct communication with KSN is not supported.

Enabling and disabling cloud mode for protection components

Cloud mode refers to the application operating mode in which Kaspersky Endpoint Security uses a light version of anti-virus databases. Kaspersky Security Network supports the operation of the application when light anti-virus databases are being used. The light version of anti-virus databases lets you use approximately half of the computer RAM that would otherwise be used with the usual databases. If you do not participate in Kaspersky Security Network or if cloud mode is disabled, Kaspersky Endpoint Security downloads the full version of anti-virus databases from Kaspersky servers.

When using Kaspersky Private Security Network, cloud mode functionality is available starting with Kaspersky Private Security Network version 3.0.

If the application is working in Light Agent mode, Cloud mode is not available.

How to enable or disable cloud mode for protection components in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Advanced Threat Protection** → **Kaspersky Security Network**.
4. Use the **Enable cloud mode** check box to enable or disable the component.
5. To apply the policy to computers, close the padlock icons and save your changes.

How to enable or disable cloud mode for protection components in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Kaspersky Security Network**.

5. Use the **Use cloud mode** toggle to enable or disable the component.

6. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to enable or disable cloud mode for protection components in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Advanced Threat Protection** → **Kaspersky Security Network**.

3. Use the **Enable cloud mode** toggle to enable or disable the component.

4. Save your changes.

As a result, Kaspersky Endpoint Security downloads a light version or full version of anti-virus databases during the next update.

> If the light version of anti-virus databases is not available for use, Kaspersky Endpoint Security automatically switches to the premium version of anti-virus databases.

KSN Proxy settings

User computers managed by Kaspersky Security Center Administration Server can interact with KSN either directly or via the KSN Proxy service.

> If the application is running in Light Agent mode, direct communication with KSN is not supported. Kaspersky Endpoint Security communicates with KSN servers through a KSN proxy server.

The KSN Proxy service provides the following capabilities:

- The user's computer can query KSN and submit information to KSN even without direct access to the Internet.
- The KSN Proxy service caches processed data, thereby reducing the load on the external network communication channel and speeding up receipt of the information that is requested by the user's computer.

By default, after KSN is enabled and the KSN Statement is accepted, the application uses a proxy server to connect to Kaspersky Security Network. The proxy server used by the application is the Kaspersky Security Center Administration Server via TCP port 13111. Therefore, if KSN Proxy is not available, you need to verify the following:

- The `ksnproxy` service is running on the Administration Server.
- The Firewall on the computer is not blocking port 13111.

You can configure the use of KSN Proxy as follows: enable or disable KSN Proxy, and configure the port for the connection. To do so, you need to open the Administration Server properties. For more details on KSN Proxy configuration, refer to the Kaspersky Security Center Help. You can also enable or disable KSN Proxy for individual computers in the Kaspersky Endpoint Security policy.

How to enable or disable KSN Proxy in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Advanced Threat Protection** → **Kaspersky Security Network**.
4. In the **KSN Proxy Settings** block, use the **Use Administration Server as a KSN proxy server** check box to enable or disable KSN Proxy.
5. If necessary, select the **Use Kaspersky Security Network servers if the KSN proxy server is unavailable** check box.

   If the check box is selected, Kaspersky Endpoint Security uses KSN servers when the KSN Proxy service is unavailable. KSN servers may be located both on the side of Kaspersky and on the side of third parties (when Kaspersky Private Security Network is used).
6. Save your changes.

How to enable or disable KSN Proxy in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Kaspersky Security Network**.
5. Use the **Use Administration Server as a KSN proxy server** check box to enable or disable KSN Proxy.
6. If necessary, select the **Use Kaspersky Security Network servers if the KSN proxy server is unavailable** check box.

   If the check box is selected, Kaspersky Endpoint Security uses KSN servers when the KSN Proxy service is unavailable. KSN servers may be located both on the side of Kaspersky and on the side of third parties (when Kaspersky Private Security Network is used). By default, the check box is cleared.
7. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

The KSN Proxy address matches the Administration Server address. When the Administration Server domain name is changed, you need to manually update the KSN Proxy address.

To configure the KSN Proxy address:

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select the **Advanced** → **Remote installation** → **Installation packages** folder.
3. In the context menu of the **Installation packages** folder, select **Properties**.
4. On the **General** tab in the opened window, specify the new address of the KSN proxy server.
5. Save your changes.

Checking the reputation of a file in Kaspersky Security Network

If you are doubtful of the security of a file, you can check its reputation in Kaspersky Security Network.

You can check the reputation of a file if you have accepted the terms of the Kaspersky Security Network Statement.

To check the reputation of a file in Kaspersky Security Network:

Open the file context menu and select the **Check reputation in KSN** option (see the figure below).

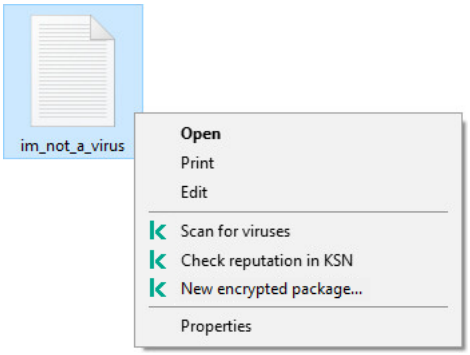

File context menu

Kaspersky Endpoint Security displays the file reputation:

Trusted (Kaspersky Security Network). The application considers a file trusted if one or more of the following conditions are met:

- the file is digitally signed by a trusted vendor;
- the file has a trusted reputation in Kaspersky Security Network;
- the user has placed the file in the Trusted group.

Legitimate software that can be used by intruders to damage your computer or personal data. Although they do not have any malicious functions, such applications can be exploited by intruders. For details on legitimate software that could be used by criminals to harm the computer or personal data of a user, please refer to the Kaspersky IT Encyclopedia website. You can add these applications to the trusted list.

Untrusted (Kaspersky Security Network). A virus or other application that poses a threat.

Unknown (Kaspersky Security Network). Kaspersky Security Network does not have any information about the file. You can scan a file using anti-virus databases (the **Scan for viruses** option in the context menu).

Kaspersky Endpoint Security displays the KSN solution that was used to determine the reputation of the file: *Kaspersky Security Network* or *Kaspersky Private Security Network*.

Kaspersky Endpoint Security also displays additional information about the file (see the figure below).

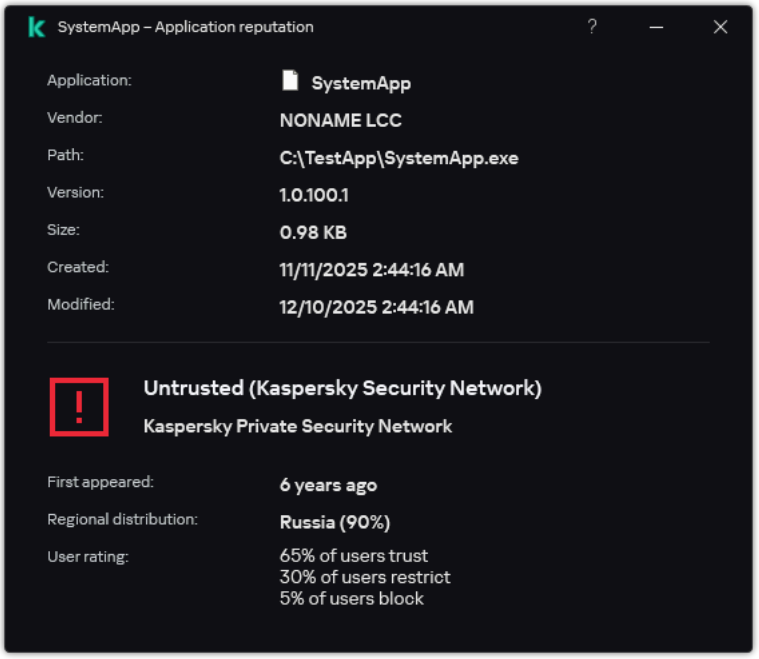

Reputation of a file in Kaspersky Security Network

Encrypted connections scan

After installation, Kaspersky Endpoint Security adds a Kaspersky certificate to the system storage for trusted certificates (Windows certificate store). Kaspersky Endpoint Security uses this certificate to scan encrypted connections. Kaspersky Endpoint Security also includes the use of system storage of trusted certificates in Firefox and Thunderbird to scan the traffic of these applications.

The Web Control, Mail Threat Protection, Web Threat Protection, Behavior Detection and Exploit Prevention components can decrypt and scan network traffic transmitted over encrypted connections using the following protocols:

- SSL 3.0.
- TLS 1.0, TLS 1.1, TLS 1.2, TLS 1.3.

Enabling encrypted connections scan

By default, Kaspersky Endpoint Security does not always scan encrypted connections, but only when requested by protection components.

How to enable encrypted connections scan in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.

4. In the policy window, select **General settings** → **Network settings**.

5. In the **Encrypted connections scan** block, select the encrypted connection scanning mode:

   - **Scan encrypted connections**. Kaspersky Endpoint Security will not have access to the contents of websites whose addresses begin with `https://`.

   - **Scan encrypted connections upon request from protection components**. Kaspersky Endpoint Security will scan encrypted traffic only when requested by the Web Threat Protection, Mail Threat Protection, and Web Control components.

   - **Always scan encrypted connections**. Kaspersky Endpoint Security will scan encrypted network traffic even if protection components are disabled.

   > Kaspersky Endpoint Security does not scan encrypted connections that were established by trusted applications for which traffic scanning is disabled. Kaspersky Endpoint Security does not scan encrypted connections from the predefined list of trusted websites. The predefined list of trusted websites is created by Kaspersky experts. This list is updated with the application's anti-virus databases. You can view the predefined list of trusted websites only in the Kaspersky Endpoint Security interface. You cannot view the list in the Kaspersky Security Center Console.

6. If necessary, add scan exclusions: trusted addresses and applications.

7. Configure the settings for scanning encrypted connections (see the table below).

8. To apply the policy to computers, close the padlock icons and save your changes.

How to enable encrypted connections scan in the Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **Network Settings**.

5. Under **Encrypted Connections Scan**, turn on the **Encrypted Connections Scan ENABLED** switch.

   If the toggle button is switched off, Kaspersky Endpoint Security will not have access to the contents of websites whose addresses begin with `https://`.

6. Click **Settings** and select the encrypted connection scanning mode:

   - **Scan encrypted connections upon request from protection components**. Kaspersky Endpoint Security will scan encrypted traffic only when requested by the Web Threat Protection, Mail Threat Protection, and Web Control components.

   - **Always scan encrypted connections**. Kaspersky Endpoint Security will scan encrypted network traffic even if protection components are disabled.

Kaspersky Endpoint Security does not scan encrypted connections that were established by trusted applications for which traffic scanning is disabled. Kaspersky Endpoint Security does not scan encrypted connections from the predefined list of trusted websites. The predefined list of trusted websites is created by Kaspersky experts. This list is updated with the application's anti-virus databases. You can view the predefined list of trusted websites only in the Kaspersky Endpoint Security interface. You cannot view the list in the Kaspersky Security Center Console.

7. If necessary, add scan exclusions: trusted addresses and applications.

8. Configure the settings for scanning encrypted connections (see the table below).

9. To apply the policy to computers, close the padlock icons and save your changes.

How to enable encrypted connections scan in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **General settings** → **Network settings**.

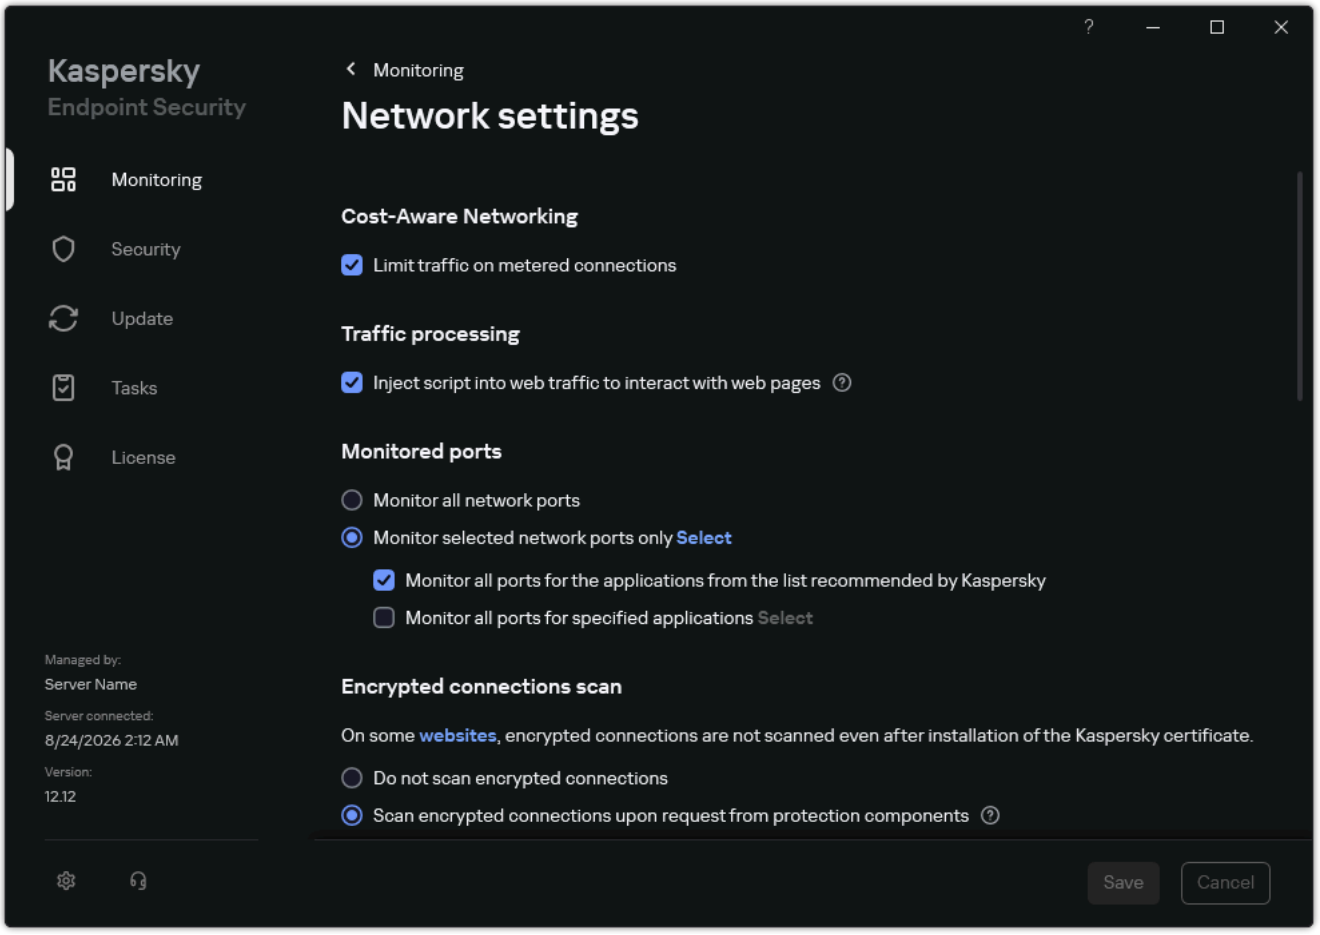

Encrypted connections scan settings

3. In the **Encrypted connections scan** block, select the encrypted connection scanning mode:

- **Do not scan encrypted connections**. Kaspersky Endpoint Security will not have access to the contents of websites whose addresses begin with `https://`.
- **Scan encrypted connections upon request from protection components**. Kaspersky Endpoint Security will scan encrypted traffic only when requested by the Web Threat Protection, Mail Threat Protection, and Web Control components.
- **Always scan encrypted connections**. Kaspersky Endpoint Security will scan encrypted network traffic even if protection components are disabled.

Kaspersky Endpoint Security does not scan encrypted connections that were established by trusted applications for which traffic scanning is disabled. Kaspersky Endpoint Security does not scan encrypted connections from the predefined list of trusted websites. The predefined list of trusted websites is created by Kaspersky experts. This list is updated with the application's anti-virus databases. You can view the predefined list of trusted websites only in the Kaspersky Endpoint Security interface. You cannot view the list in the Kaspersky Security Center Console.

4. If necessary, add scan exclusions: trusted addresses and applications.

5. Configure the settings for scanning encrypted connections (see the table below).

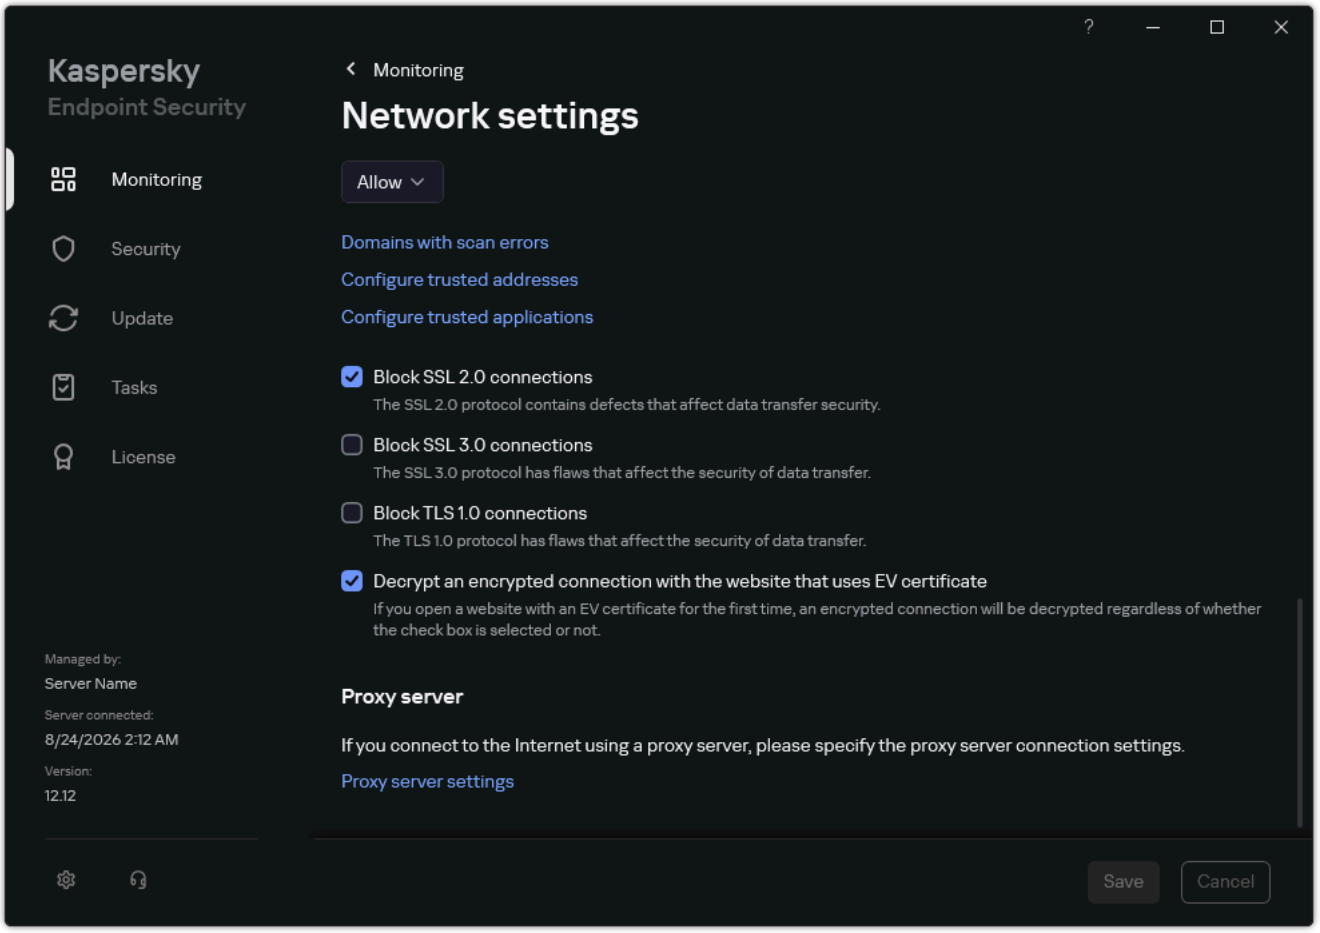

Additional settings for scanning encrypted connections

6. Save your changes.

Parameter	Description
Trusted root certificates	List of trusted root certificates. Kaspersky Endpoint Security lets you install trusted root certificates on user computers if, for example, you need to deploy a new certification center. The application lets you add a certificate to a special Kaspersky Endpoint Security certificate store. In this case, the certificate is considered trusted only for the Kaspersky Endpoint Security application. In other words, the user can gain access to a website with the new certificate in the browser. If another application tries to gain access to the website, you can get a connection error because of a certificate issue. To add to the system certificate store, you can use Active Directory group policies.
Visiting a domain with an untrusted certificate	• **Allow**. When visiting a domain with an untrusted certificate, Kaspersky Endpoint Security allows the network connection. When opening a domain with an untrusted certificate in a browser, Kaspersky Endpoint Security displays an HTML page showing a warning and the reason why visiting that domain is not recommended. A user can click the link from the HTML warning page to obtain access to the requested web resource. If a third-party application or service establishes a connection with a domain with an untrusted certificate, Kaspersky Endpoint Security creates its own certificate to scan traffic. The new certificate has the *Untrusted* status. This is necessary to warn the third-party application about the untrusted connection because the HTML page cannot be shown in this case and the connection can be established in background mode. • **Block**. When visiting a domain with an untrusted certificate, Kaspersky Endpoint Security blocks the network connection. When opening a domain with an untrusted certificate in a browser, Kaspersky Endpoint Security displays an HTML page showing the reason why that domain is blocked.
Visiting a domain with an encrypted connections scan error	• **Block**. If an encrypted connection scan error occurs, Kaspersky Endpoint Security blocks the network connection. • **Allow and add domain to exclusions**. If an encrypted connection scan error occurs, Kaspersky Endpoint Security adds the domain that resulted in the error to the list of domains with scan errors and does not monitor encrypted network traffic when this domain is visited. You can view a list of domains with encrypted connections scan errors only in the local interface of the application. To clear the list contents, you need to select **Block**. Kaspersky Endpoint Security also generates an event for the encrypted connection scan error.
Block SSL 2.0 connections	If the check box is selected, the application monitors and blocks network connections established over the SSL 2.0 protocol. If the check box is cleared, the application does not block network connections established over the SSL 2.0 protocol. However, the application does not monitor network traffic over this protocol.
Block SSL 3.0 connections	If the check box is selected, the application blocks network connections established over the SSL 3.0 protocol. If the check box is cleared, the application does not block network connections established over the SSL 3.0 protocol. The application monitors network traffic over this protocol. All components of the application work without restrictions.
Block TLS 1.0 connections	If the check box is selected, the application blocks network connections established over the TLS 1.0 protocol. If the check box is cleared, the application does not block network connections established over the TLS 1.0 protocol. The application monitors network traffic over this protocol. All components of the application work without restrictions.
Decrypt an encrypted connection with the website that uses EV certificate	EV certificates (Extended Validation Certificate) confirm the authenticity of websites and enhance the security of the connection. Browsers use a lock icon in their address bar to indicate that a website has an EV certificate. Browsers may also fully or partially color the address bar in green. If the check box is selected, the application decrypts and monitors encrypted connections with websites that use an EV certificate. If the check box is cleared, the application does not have access to the contents of HTTPS traffic. For this reason, the application monitors HTTPS traffic only based on the website address, for example, `https://bing.com`. If you are opening a website with an EV certificate for the first time, the encrypted connection will be decrypted regardless of whether or not the check box is selected.

Installing trusted root certificates

Kaspersky Endpoint Security lets you install trusted root certificates on user computers if, for example, you need to deploy a new certification center. The application lets you add a certificate to a special Kaspersky Endpoint Security certificate store. In this case, the certificate is considered trusted only for the Kaspersky Endpoint Security application. In other words, the user can gain access to a website with the new certificate in the browser. If another application tries to gain access to the website, you can get a connection error because of a certificate issue. To add to the system certificate store, you can use Active Directory group policies.

How to install trusted root certificates in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Network settings**.
4. In the **Trusted root certificates** block, click the **Add** button.
5. This opens a window; in that window, select a trusted root certificate.
   Kaspersky Endpoint Security supports certificates with PEM, DER, and CRT extensions.
6. Save your changes.

How to install trusted root certificates in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Network Settings**.
5. Click the **Trusted root certificates** link.
6. This opens a window; in that window, click **Add** and select a trusted root certificate.
   Kaspersky Endpoint Security supports certificates with PEM, DER, and CRT extensions.
7. Save your changes.

How to install trusted root certificates in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Network settings**.
3. In the **Encrypted connections scan** block, click the **Show certificates** button.
4. This opens a window; in that window, click **Add** and select a trusted root certificate.
   Kaspersky Endpoint Security supports certificates with PEM, DER, and CRT extensions.
5. Save your changes.

As a result, when scanning traffic, in addition to the system certificate store, Kaspersky Endpoint Security uses its own certificate store.

Scanning encrypted connections with an untrusted certificate

After installation, Kaspersky Endpoint Security adds a Kaspersky certificate to the system storage for trusted certificates (Windows certificate store). Kaspersky Endpoint Security uses this certificate to scan encrypted connections. When visiting a domain with an untrusted certificate, you can allow or deny user access to that domain (see the instructions below).

If you have allowed the user to visit domains with untrusted certificates, Kaspersky Endpoint Security performs the following actions:

- When visiting a domain with an untrusted certificate in the *browser*, Kaspersky Endpoint Security uses the Kaspersky certificate to scan traffic. Kaspersky Endpoint Security displays a HTML page with a warning and information about the reason why it is not recommended to visit the relevant domain (see the figure below). A user can click the link from the HTML warning page to obtain access to the requested web resource. After following this link, during the next hour Kaspersky Endpoint Security will not display warnings about an untrusted certificate when visiting other resources on this same domain. Kaspersky Endpoint Security also generates an event about establishing an encrypted connection with an untrusted certificate.

  > In some cases, Kaspersky Endpoint Security cannot technically display an HTML page with a warning in the browser (see figure below). For example, if a web resource uses an outdated version of a network protocol and a non-standard port. In these cases, Kaspersky Endpoint Security blocks access to this domain and the browser will show the standard `ERR_CONNECTION_RESET` window. To access a web resource, you can add domain to exclusions or use a trusted certificate.

- If *a third-party application or service* establishes a connection with a domain with an untrusted certificate, Kaspersky Endpoint Security creates its own certificate to scan traffic. The new certificate has the *Untrusted* status. This is necessary to warn the third-party application about the untrusted connection because the HTML page cannot be shown in this case and the connection can be established in background mode. Therefore, if a third-party application has built-in certificate verification tools, the connection may be terminated. In that case, you must contact the owner of the domain and set up a trusted connection. If setting up a trusted connection is impossible, you can add that third-party application to the list of trusted applications. Kaspersky Endpoint Security also generates an event about establishing an encrypted connection with an untrusted certificate.

How to configure the scanning of encrypted connections with an untrusted certificate in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Network settings**.
4. In the **Encrypted connections scan** block, click the **Advanced settings** button.
5. In the window that opens, select the application operating mode when visiting a domain with an untrusted certificate: **Allow** or **Block**.
6. Save your changes.

How to configure the scanning of encrypted connections with an untrusted certificate in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Network Settings**.
5. In the **Encrypted Connections Scan** block, click the **Settings** link.
6. In the window that opens, select the application operating mode when visiting a domain with an untrusted certificate: **Allow connection** or **Block connection**.
7. Save your changes.

How to configure the scanning of encrypted connections with an untrusted certificate in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Network settings**.
3. In the **Encrypted connections scan** block, select the application operating mode when visiting a domain with an untrusted certificate: **Allow** or **Block**.
4. Save your changes.

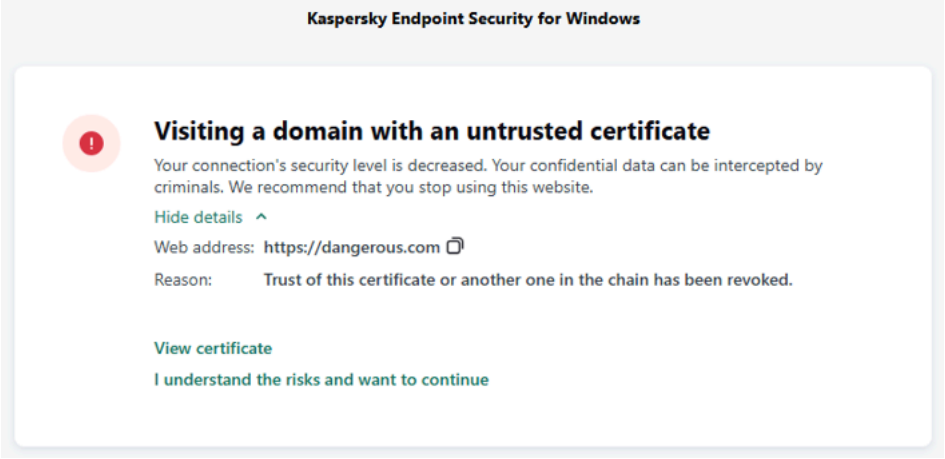

Warning about visiting a domain with an untrusted certificate

Adding Kaspersky certificate to the own certificate store

Browsers and mail clients use the certificate to verify the security and authenticity of web resources. The certificate also provides data encryption between web resources and the user. Most browsers and mail clients use the trusted certificate store (Windows certificate store). For example, Google Chrome. Some browsers and mail clients use their own certificate store by default instead of the Windows certificate store. For example, Firefox and Thunderbird.

After installation, Kaspersky Endpoint Security adds a Kaspersky certificate to the system storage for trusted certificates (Windows certificate store). If Kaspersky Security Center is deployed in your organization and a policy is being applied to a computer, Kaspersky Endpoint Security automatically enables the use of Windows certificate store in browsers and mail clients to scan the traffic of these applications. If a policy is not being applied to the computer, you can choose the certificate store that will be used by browsers and mail clients. If you selected the own certificate store, add the Kaspersky certificate to the store manually. This will help avoid errors when working with HTTPS traffic.

To scan traffic in the Mozilla Firefox browser and the Thunderbird mail client, you must enable the Encrypted Connections Scan. If Encrypted Connections Scan is disabled, the application does not scan traffic in the Mozilla Firefox browser and Thunderbird mail client. Encrypted connections scan should also be enabled to scan traffic in MyOffice Mail and R7-Office Organizer mail clients.

Before you add a certificate to the browser's or the mail agent's own certificate store, export the Kaspersky certificate from the Windows Control Panel (Internet properties). You can learn more about adding a certificate to the store, for example, on the Mozilla technical support website.

You can choose the certificate store only in the local interface of the application.

To choose a certificate store for scanning encrypted connections in browsers and mail clients:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Network settings**.
3. In the **Encrypted connections scan** block, select the **To scan encrypted connections in applications with their own certificate store, use** check box.
4. Select a certificate store:
   - **Windows certificate store (recommended)**. The Kaspersky root certificate is added to this store during installation of Kaspersky Endpoint Security.
   - **Own certificate store**. Mozilla Firefox and Thunderbird use their own certificate stores. If the Mozilla certificate store is selected, you need to manually add the Kaspersky root certificate to this store through the browser properties.

     MyOffice Mail and R7-Office Organizer mail clients also use their own certificate store.
5. Save your changes.

Excluding encrypted connections from scanning

Most web resources use encrypted connections. Kaspersky experts recommend that you enable Encrypted connections scan. If encrypted connections scan interferes with work-related activity, you can add a website to exclusions referred to as *trusted addresses*. In this case, Kaspersky Endpoint Security does not scan the HTTPS traffic of trusted web addresses when the Web Threat Protection, Mail Threat Protection, and Web Control components are doing their work.

If a trusted application uses an encrypted connection, you can disable encrypted connections scan for this application. For example, you can disable encrypted connections scan for cloud storage applications that use two-factor authentication with their own certificate.

How to exclude a web address from encrypted connection scans in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Network settings**.
5. In the **Encrypted connections scan** block, click the **Configure trusted addresses** button.
6. Click **Add**.
7. Enter a domain name or an IP address if you do not want Kaspersky Endpoint Security to scan encrypted connections established when visiting that domain.

   Kaspersky Endpoint Security supports the `*` character for entering a mask in the domain name.

   > Kaspersky Endpoint Security does not support the `*` symbol for IP addresses. You can select a range of IP addresses using a subnet mask (for example, 198.51.100.0/24).

   Examples:

   - `domain.com` – the record is inclusive of the following addresses: `https://domain.com`, `https://www.domain.com`, `https://domain.com/page123`. The record is exclusive of subdomains (for example, `subdomain.domain.com`).
   - `subdomain.domain.com` – the record is inclusive of the following addresses: `https://subdomain.domain.com`, `https://subdomain.domain.com/page123`. The record is exclusive of the `domain.com` domain.
   - `*.domain.com` – the record is inclusive of the following addresses: `https://movies.domain.com`, `https://images.domain.com/page123`. The record is exclusive of the `domain.com` domain.
8. To apply the policy to computers, close the padlock icons and save your changes.

How to exclude a web address from encrypted connection scans in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Network Settings**.
5. In the **Encrypted Connections Scan** block, click the **Trusted domains** button.
6. Click **Add**.
7. Enter a domain name or an IP address if you do not want Kaspersky Endpoint Security to scan encrypted connections established when visiting that domain.

Kaspersky Endpoint Security supports the `*` character for entering a mask in the domain name.

> Kaspersky Endpoint Security does not support the `*` symbol for IP addresses. You can select a range of IP addresses using a subnet mask (for example, 198.51.100.0/24).

Examples:

- `domain.com` – the record is inclusive of the following addresses: `https://domain.com`, `https://www.domain.com`, `https://domain.com/page123`. The record is exclusive of subdomains (for example, `subdomain.domain.com`).
- `subdomain.domain.com` – the record is inclusive of the following addresses: `https://subdomain.domain.com`, `https://subdomain.domain.com/page123`. The record is exclusive of the `domain.com` domain.
- `*.domain.com` – the record is inclusive of the following addresses: `https://movies.domain.com`, `https://images.domain.com/page123`. The record is exclusive of the `domain.com` domain.

8. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to exclude a web address from encrypted connection scans in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Network settings**.

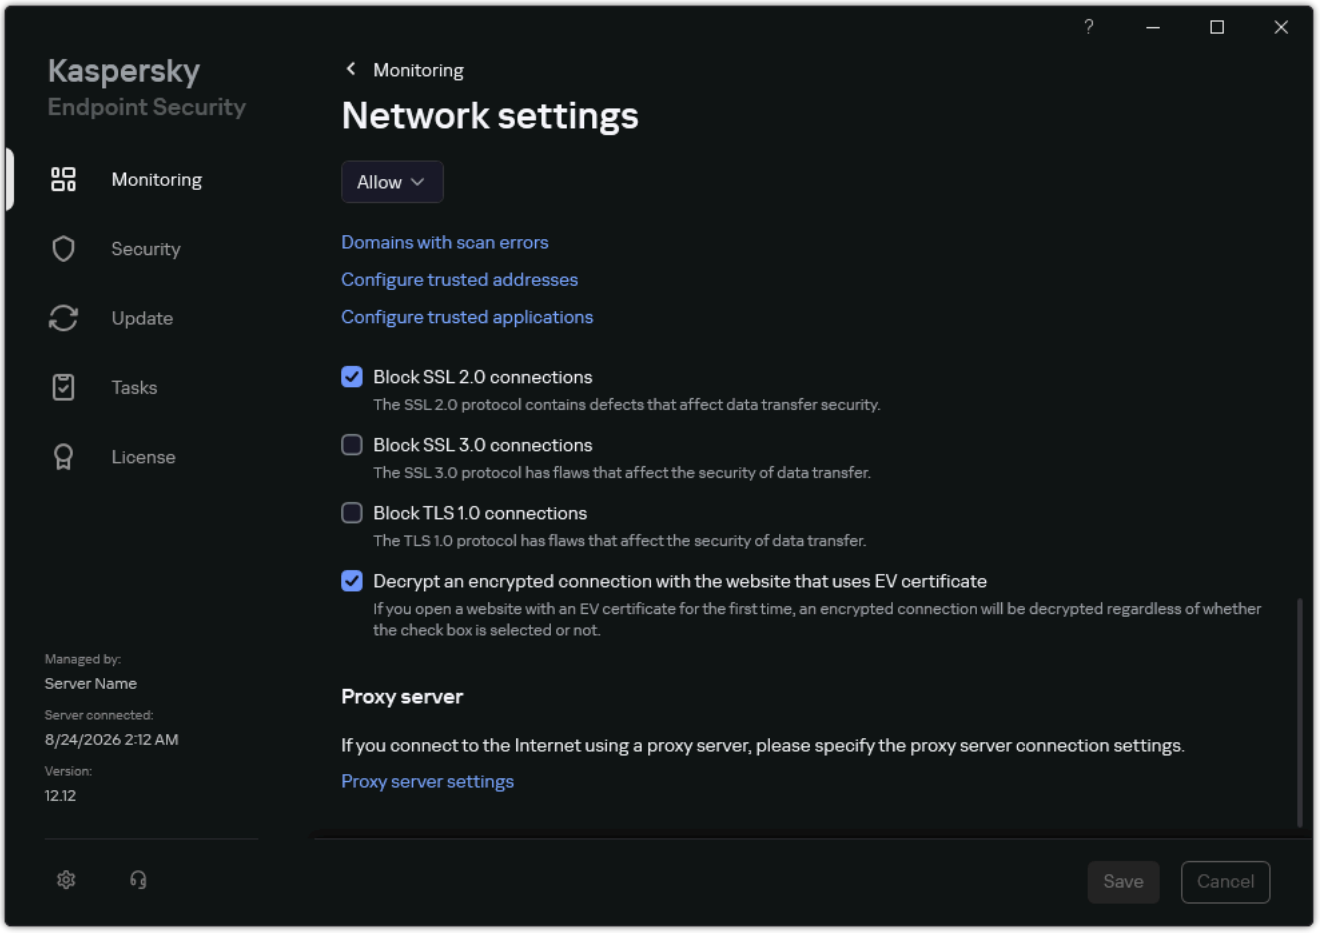

Application network settings

3. In the **Encrypted connections scan** block, click the **Configure trusted addresses** button.

4. Click **Add**.

5. Enter a domain name or an IP address if you do not want Kaspersky Endpoint Security to scan encrypted connections established when visiting that domain.

   Kaspersky Endpoint Security supports the `*` character for entering a mask in the domain name.

   > Kaspersky Endpoint Security does not support the `*` symbol for IP addresses. You can select a range of IP addresses using a subnet mask (for example, 198.51.100.0/24).

   Examples:

   - `domain.com` – the record is inclusive of the following addresses: `https://domain.com`, `https://www.domain.com`, `https://domain.com/page123`. The record is exclusive of subdomains (for example, `subdomain.domain.com`).
   - `subdomain.domain.com` – the record is inclusive of the following addresses: `https://subdomain.domain.com`, `https://subdomain.domain.com/page123`. The record is exclusive of the `domain.com` domain.
   - `*.domain.com` – the record is inclusive of the following addresses: `https://movies.domain.com`, `https://images.domain.com/page123`. The record is exclusive of the `domain.com` domain.

6. Save your changes.

By default, Kaspersky Endpoint Security does not scan encrypted connections when errors occur and adds the website to a special list of *Domains with scan errors*. Kaspersky Endpoint Security compiles a separate list for each user and does not send data to Kaspersky Security Center. You can enable blocking the connection when a scan error occurs. You can view a list of domains with encrypted connections scan errors only in the local interface of the application.

To view the list of domains with scan errors:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Network settings**.
3. In the **Encrypted connections scan** block, click the **Domains with scan errors** button.

   A list of domains with scan errors opens. To reset the list, enable blocking connection when scan errors occur in the policy, apply the policy, then reset the parameter to its initial value and apply the policy again.

Kaspersky specialists make a list of *global exceptions* — trusted websites that Kaspersky Endpoint Security does not check regardless of the application settings.

To view the global exclusions from encrypted traffic scans:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Network settings**.

3. In the **Encrypted connections scan** block, click the list of trusted websites link.

   This opens a list of websites compiled by Kaspersky experts. Kaspersky Endpoint Security does not scan protected connections for websites on the list. The list may be updated when Kaspersky Endpoint Security databases and modules are updated.

Blocking access to domains with untrusted certificates

In some cases, when blocking access to a domain with an untrusted certificate, Kaspersky Endpoint Security displays an HTML warning page in the browser that is missing the link to the requested web resource.

This can happen for the following reasons:

- The administrator blocked access to a domain with an untrusted certificates.

- The domain has an untrusted or invalid certificate, and the web server uses the HTTP Strict Transport Security (HSTS) mechanism. *HSTS* is a security mechanism that enforces the use of the secure HTTPS protocol for communication between a client and a web server. In this case, you cannot gain access to the domain even if you have added it to the list of trusted addresses. The HSTS mechanism is described in RFC 6797.

  In some cases, the website can be opened directly in a browser without using Kaspersky Endpoint Security. Browsers do not always detect revoked certificates, whereas Kaspersky Endpoint Security performs an online check for certificate revocation when establishing a connection. This allows the application to detect a certificate issue before the browser does and display the corresponding error message.

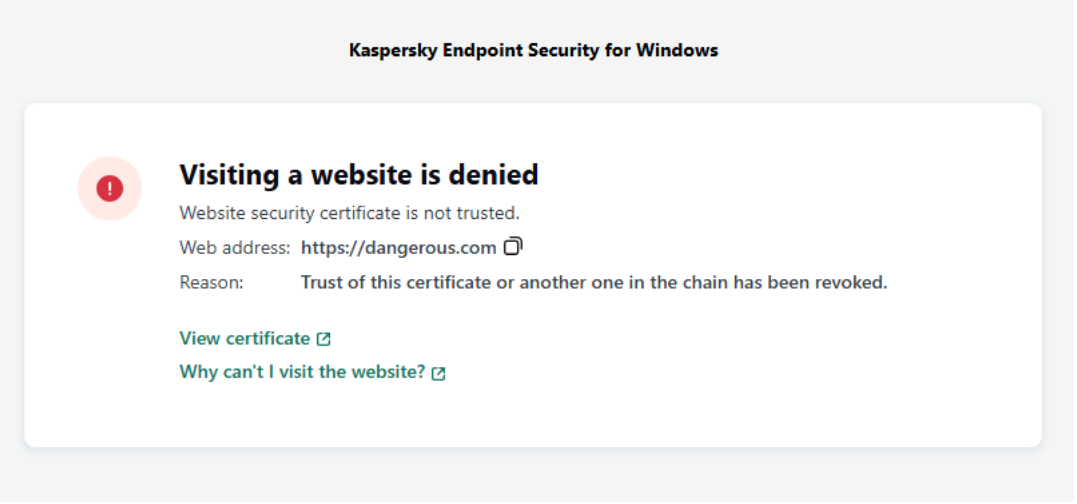

Warning about visiting a domain with an untrusted certificate

Wipe Data

Kaspersky Endpoint Security lets you use a task to remotely delete data from users' computers.

Kaspersky Endpoint Security deletes data as follows:

- In silent mode;
- On hard drives and removable drives;
- For all user accounts on the computer.

Kaspersky Endpoint Security performs the *Wipe data* task no matter which licensing type is being used, even after the license has expired.

Data Wipe modes

This task enables you to delete data in the following modes:

- Immediate data deletion.

  In this mode, you can, for example, delete outdated data to free up disk space.

- Postponed data deletion.

  This mode is intended, for example, to protect data on a laptop in case it is lost or stolen. You can configure automatic data deletion if the laptop goes outside the boundaries of the corporate network and has not been synchronized with Kaspersky Security Center in a long time.

It is not possible to set a schedule for deleting data in task properties. You can only delete data immediately after starting the task manually, or configure delayed data deletion if there is no connection with Kaspersky Security Center.

Limitations

Data Wipe has the following limitations:

- Only a Kaspersky Security Center administrator can manage the *Wipe data* task. You cannot configure or start a task in the local interface of Kaspersky Endpoint Security.
- For the NTFS file system, Kaspersky Endpoint Security deletes only the names of the main data streams. Alternate data stream names cannot be deleted.
- When you delete a symbolic link file, Kaspersky Endpoint Security also deletes the files whose paths are specified in the symbolic link.

Creating a Wipe data task

To delete data on users' computers:

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Wipe data**.

   c. In the **Task name** field, enter a brief description, for example, *Wipe data (Anti-Theft)*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

   > If new computers are added to an administration group within the task scope, the immediate data deletion task is run on the new computers only if the task is completed within 5 minutes of the addition of the new computers.

5. Finish the wizard.

   A new task will be displayed in the list of tasks.

6. Click the **Wipe data** task of Kaspersky Endpoint Security.

   The task properties window opens.

7. Select the **Application settings** tab.

8. Select the data deletion method:

   - **Delete by means of the operating system**. Kaspersky Endpoint Security uses the operating system resources to delete files without sending them to the recycle bin.

   - **Delete completely, no recovery possible**. Kaspersky Endpoint Security overwrites files with random data. It is practically impossible to restore data after it is deleted.

9. If you want to postpone data deletion, select the **Automatically wipe data when there is no connection to Kaspersky Security Center for more than N days** check box. Define the number of days.

   > The postponed data deletion task will be performed each time that a connection with Kaspersky Security Center is absent for the defined period of time.

When configuring postponed data deletion, keep in mind that employees may have different work schedules. Also consider the work schedule of offline users. For more details about working with offline computers and out-of-office users, refer to the Kaspersky Security Center Help.

> If the computer is powered off and the connection has been absent for longer than the configured duration, after the computer is powered on, Kaspersky Endpoint Security does not delete data immediately. The application awaits synchronization with Kaspersky Security Center for one hour. This is necessary to prevent unauthorized data deletion on computers of users who powered off their computers, for example, before going on a vacation.

If the check box is cleared, the task will be performed immediately after synchronization with Kaspersky Security Center.

10. Create a list of objects to delete:

    - **Folders**. Kaspersky Endpoint Security deletes all files in the folder, and its subfolders. Kaspersky Endpoint Security does not support masks and environment variables for entering a folder path.
    - **Files by extension**. Kaspersky Endpoint Security searches for files with the specified extensions on all computer drives, including removable drives. Use the "`;`" or "`,`" characters to specify multiple extensions.
    - **Predefined scope**. Kaspersky Endpoint Security will delete files from the following areas:
        - **Documents**. Files in the standard *Documents* folder of the operating system, and its subfolders.
        - **Cookies**. Files in which the browser saves data from the websites visited by the user (such as user authorization data).
        - **Desktop**. Files in the standard *Desktop* folder of the operating system, and its subfolders.
        - **Temporary Internet Explorer files**. Temporary files related to the operation of Internet Explorer, such as copies of web pages, images, and media files.
        - **Temporary files**. Temporary files related to the operation of applications installed on the computer. For example, Microsoft Office applications create temporary files containing backup copies of documents.
        - **Outlook files**. Files related to the operation of the Outlook mail client: data files (PST), offline data files (OST), offline address book files (OAB), and personal address book files (PAB).
        - **User profile**. Set of files and folders that store operating system settings for the local user account.

    You can create a list of objects to delete on each tab. Kaspersky Endpoint Security will create a consolidated list and delete files from this list when a task is complete.

    > You cannot delete files that are required for operation of Kaspersky Endpoint Security.

11. Save your changes.
12. Select the check box next to the task.
13. Click **Start**.

As a result, data on users' computers will be deleted according to the selected mode: immediate or when a

connection is absent. If Kaspersky Endpoint Security cannot delete a file, such as when a user is currently using a file, the application does not attempt to delete it again. To complete data deletion, run the task again.

Computer control

Web Control

Web Control manages user access to web resources. This helps reduce traffic and inappropriate use of work time. When a user tries to open a website that is restricted by Web Control, Kaspersky Endpoint Security will block access or show a warning (see the figure below).

To use Web Control, you must complete the initial configuration of the application:

- For HTTPS traffic monitoring, enable encrypted connections scan (enabled by default).
- Select the ports that Kaspersky Endpoint Security must monitor (by default, the application monitors all ports).
- Select the applications whose traffic you want Kaspersky Endpoint Security to monitor. Most browsers are already present in the list of applications recommended by Kaspersky. If your browser is missing from the list, add it manually.
- We recommend to inject a web page interaction script into web traffic (by default, script injection is disabled). This script enables registration of Web Control events for the application event log, OS event log, and reports.

Methods for managing access to websites

Web Control lets you configure access to websites by using the following methods:

- **Website category**. Websites are categorized according to the Kaspersky Security Network cloud service, heuristic analysis, and the database of known websites (included in application databases). For example, you can restrict user access to the *Social networks* category or to other categories.
- **Data type**. You can restrict user access to data on a website, and hide images, for example. Kaspersky Endpoint Security determines the data type based on the file format and not based on its extension.

  > Kaspersky Endpoint Security does not scan files within archives. For example, if image files were placed in an archive, Kaspersky Endpoint Security identifies the *Archives* data type and not *Graphics*.

- **Individual address**. You can enter a web address or use masks.

You can simultaneously use multiple methods for regulating access to websites. For example, you can restrict access to the *Office applications files* data type just for the *Web-based email* website category.

Website access rules

Web Control manages users' access to websites by using *access rules*. You can configure the following advanced settings for a website access rule:

- Users to which the rule applies.

  For example, you can restrict Internet access through a browser for all users of the company except the IT department.

- Rule schedule.

  For example, you can restrict Internet access through a browser during working hours only.

Access rule priorities

Each rule has a priority. The higher a rule is on the list, the higher its priority. If a website has been added to multiple rules, Web Control regulates access to the website based on the rule with the highest priority. For example, Kaspersky Endpoint Security may identify a corporate portal as a social network. To restrict access to social networks and provide access to the corporate web portal, create two rules: one block rule for the *Social networks* website category and one allow rule for the corporate web portal. The access rule for the corporate web portal must have a higher priority than the access rule for social networks.

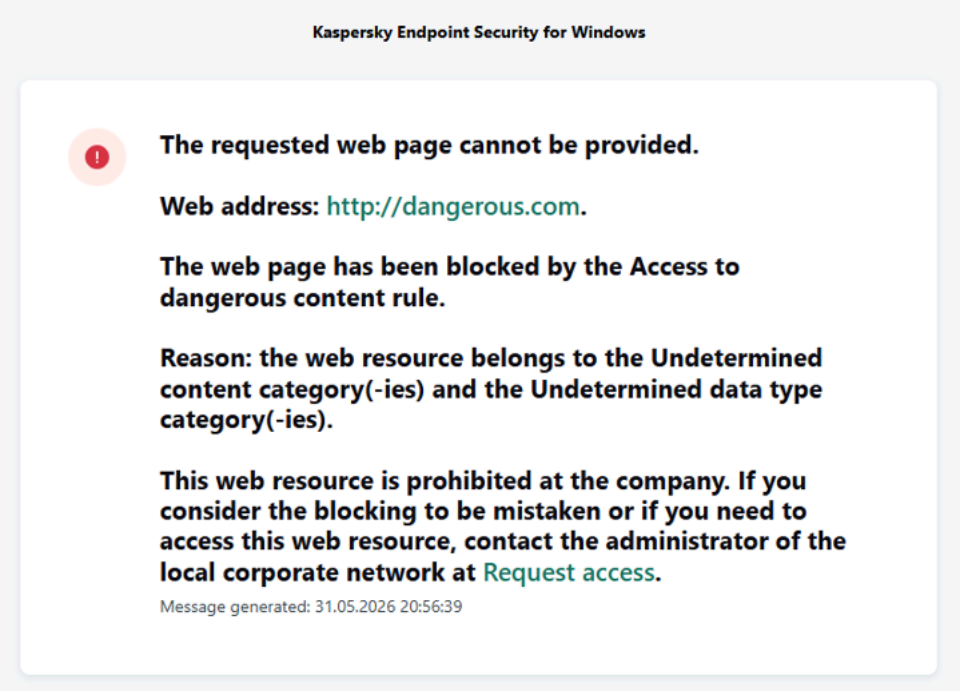

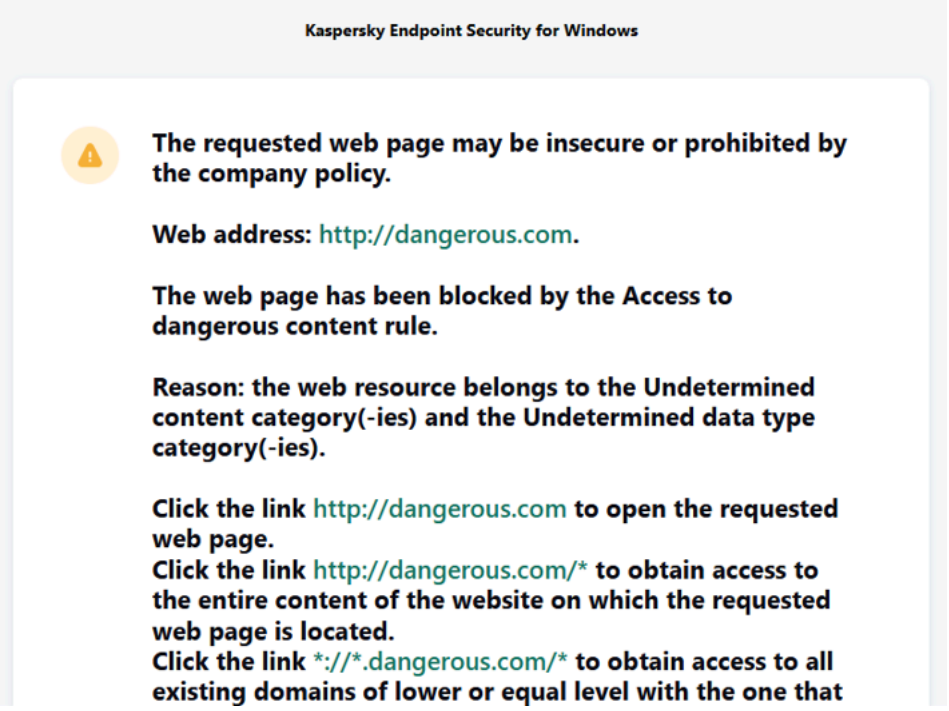

Web Control messages

Adding a web resource access rule

A *web resource access rule* is a set of filters and actions that Kaspersky Endpoint Security applies when users visit web resources. Access rules can include a rule schedule.

It is not recommended to create more than 1000 rules of access to web resources, as this can cause the system to become unstable.

A web resource access rule is a set of filters and actions that Kaspersky Endpoint Security performs when the user visits web resources that are described in the rule during the time span that is indicated in the rule schedule. Filters allow you to precisely specify a pool of web resources to which access is controlled by the Web Control component.

The following filters are available:

- **Filter by content**. Web Control categorizes web resources by content and data type. You can control user access to web resources with content and data falling into the types defined by these categories. When the users visit web resources that belong to the selected content category and / or data type category, Kaspersky Endpoint Security performs the action that is specified in the rule.

- **Filter by web resource addresses**. You can control user access to all web resource addresses or to individual web resource addresses and / or groups of web resource addresses.

  If filtering by content and filtering by web resource addresses are specified, and the specified web resource addresses and / or groups of web resource addresses belong to the selected content categories or data type categories, Kaspersky Endpoint Security does not control access to all web resources in the selected content categories and / or data type categories. Instead, the application controls access only to the specified web resource addresses and / or groups of web resource addresses.

- **Filter by names of users and user groups**. You can specify the names of users and / or groups of users for which access to web resources is controlled according to the rule.

- **Rule schedule**. You can specify the rule schedule. The rule schedule determines the time span during which Kaspersky Endpoint Security monitors access to web resources covered by the rule.

After Kaspersky Endpoint Security is installed, the list of rules of the Web Control component is not empty. The *Default rule* is preset. This rule is applied to any web resources that are not covered by other rules, and allows or blocks access to these web resources for all users.

Each rule has a priority. The higher a rule is on the list, the higher its priority. If a website has been added to multiple rules, Web Control regulates access to the website based on the rule with the highest priority. For example, Kaspersky Endpoint Security may identify a corporate portal as a social network. To restrict access to social networks and provide access to the corporate web portal, create two rules: one block rule for the *Social networks* website category and one allow rule for the corporate web portal. The access rule for the corporate web portal must have a higher priority than the access rule for social networks.

How to add a web resource access rule in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **Web Control**.

4. Select the **Web Control** check box.

5. In the **Web Control settings** block, click the **Add** button.

   The **Rule of access to web resources** window opens.

6. Configure the web resource access rule (see the table below).

7. If you want Web Control to terminate the connection with the prohibited web resource immediately after the policy is applied, select the **Terminate active user browser sessions after the rule is applied** check box.

   > Web Control allows immediately disconnecting web resources only in web browsers. For other applications, Web Control only restricts new connections.

   If the check box is cleared, Web Control restricts only new connections to prohibited web resources. Web Control does not terminate active connections.

8. Save your changes.

How to add a web resource access rule in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Web Control**.

5. Turn on the **Web Control ENABLED** toggle.

6. In the **Rules list** block, click the **Add** button.

7. Configure the web resource access rule (see the table below).

8. If you want Web Control to terminate the connection with the prohibited web resource immediately after the policy is applied, select the **Terminate active user browser sessions after the rule is applied** check box.

   > Web Control allows immediately disconnecting web resources only in web browsers. For other applications, Web Control only restricts new connections.

   If the check box is cleared, Web Control restricts only new connections to prohibited web resources. Web Control does not terminate active connections.

9. Save your changes.

How to add a web resource access rule in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Web Control**.

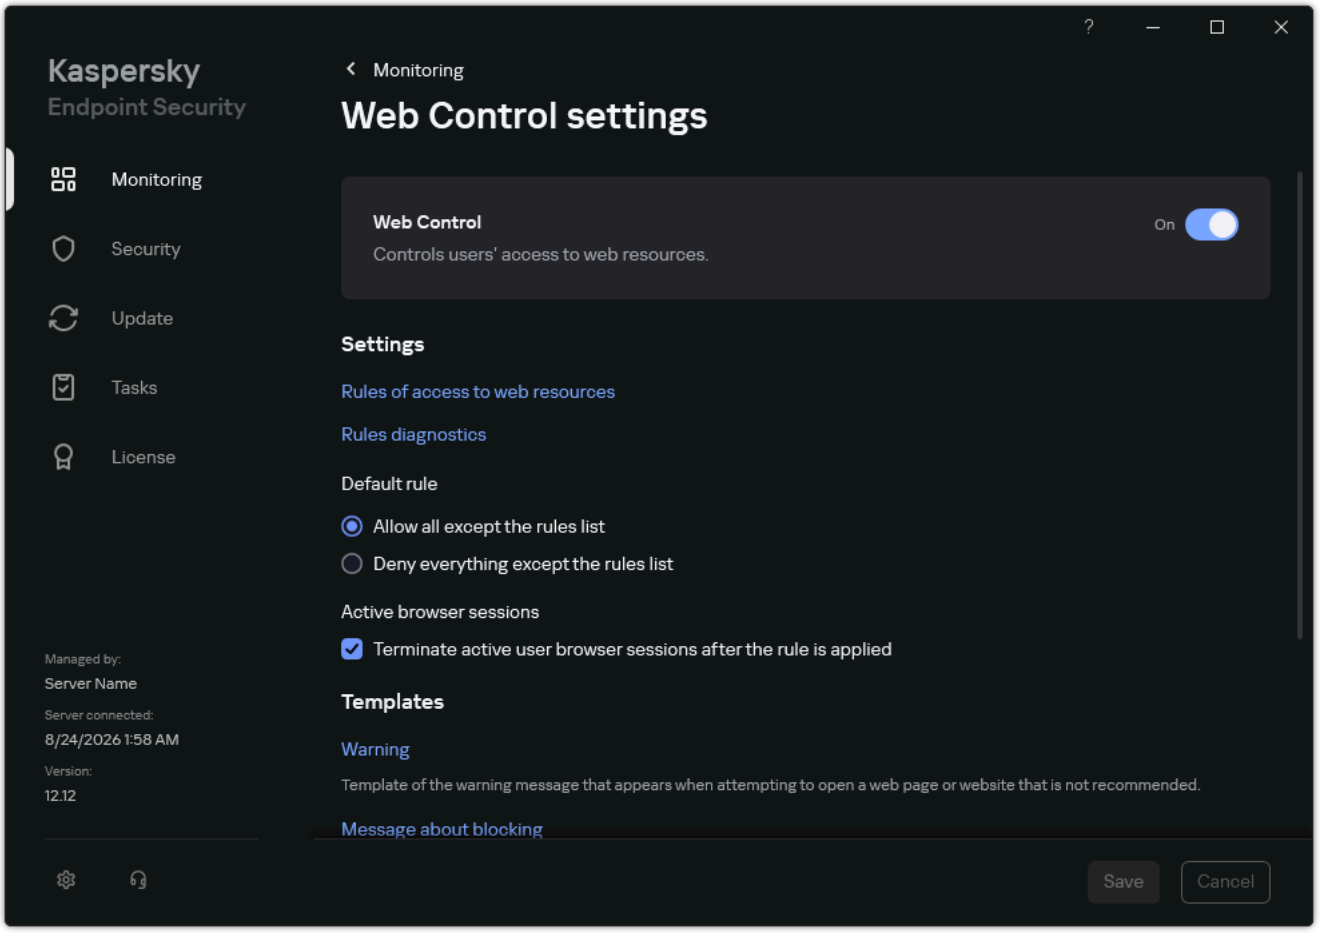

Web Control settings

3. Turn on the **Web Control** toggle.

4. In the **Settings** block, click the **Rules of access to web resources** button.

5. In the window that opens, click the **Add** button.

   The **Rule of access to web resources** window opens.

6. Configure the web resource access rule (see the table below).

7. If you want Web Control to terminate the connection with the prohibited web resource immediately after the policy is applied, select the **Terminate active user browser sessions after the rule is applied** check box.

   > Web Control allows immediately disconnecting web resources only in web browsers. For other applications, Web Control only restricts new connections.

   If the check box is cleared, Web Control restricts only new connections to prohibited web resources. Web Control does not terminate active connections.

8. Save your changes.

As a result, the new Web Control rule is added to the list. If necessary, change the priority of the Web Control rule. You can also use the toggle switch to disable the web resource access rule at any time without removing it from the list.

Web Control rule parameters

Parameter	Description
Rule name	Name of the Web Control rule.
State	• **On**. • **Off**. You can use the toggle to disable the web resource access rule at any time.
Action	• **Allow**. Web Control allows access to web resources that match the parameters of the rule. • **Block**. Web Control blocks access to web resources that match the parameters of the rule and displays a website access denied message. • **Warn**. When the user attempts to gain access to a web resource that matches the rule, Web Control displays a warning that visiting the web resource is inadvisable. By using links from the warning message, the user can obtain access to the requested web resource.
Content of the filter	• **By content categories**. You can control user access to web resources by category (for example, the *Social networks* category). • **By types of data**. You can control user access to web resources based on the specific data type of its published data (for example, *Graphics*).
Addresses	• **To all addresses**. Web Control will not filter web resources by address. • **To individual addresses**. Web Control will filter only web resource addresses from the list. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts. If Encrypted Connections Scan is disabled, for the HTTPS protocol you can only filter by the server name.
Users	• **To all users**. Web Control will not filter web resources for specific users. • **To individual users and / or groups**. Web Control will filter web resources only for specific users. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.
Rule schedule	The rule schedule determines the time span during which Kaspersky Endpoint Security monitors access to web resources covered by the rule. For example, you can restrict Internet access through a browser during working hours only.

Filter by web resource addresses

To control access to individual web resources, you must create a Web Control rule, create a list of web addresses, and select a Web Control action. When creating a web address list, you can enter URL addresses or use masks.

Rules may include a rule schedule and a list of users to which the rule applies. For example, you can restrict access to websites during working hours only, or allow visiting websites to users in certain groups.

How to enable a web resource address filter in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **Web Control**.
4. Select the **Web Control** check box.
5. In the **Web Control settings** block, click the **Add** button.

   The **Rule of access to web resources** window opens.
6. Configure the web resource access rule:

   a. In the **Name** field, enter the name of the rule.

   b. In the **Apply to addresses** drop-down list, select **To individual addresses**.

   c. Create a list of web resource addresses. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file.

   > If Encrypted Connections Scan is disabled, for the HTTPS protocol you can only filter by the server name.

   d. In the **Apply to users** drop-down list, select the relevant filter for users:

   - **To all users**. Web Control will not filter web resources by address.
   - **To individual users or groups**. Web Control will filter only web resource addresses from the list. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

e. In the **Action** drop-down list, select an option:

- **Allow**. Web Control allows access to web resources that match the parameters of the rule.
- **Block**. Web Control blocks access to web resources that match the parameters of the rule and displays a website access denied message.
- **Warn**. When the user attempts to gain access to a web resource that matches the rule, Web Control displays a warning that visiting the web resource is inadvisable. By using links from the warning message, the user can obtain access to the requested web resource.

f. In the **Rule schedule** drop-down list, select a schedule or create a new schedule.

7. If you want Web Control to terminate the connection with the prohibited web resource immediately after the policy is applied, select the **Terminate active user browser sessions after the rule is applied** check box.

   Web Control allows immediately disconnecting web resources only in web browsers. For other applications, Web Control only restricts new connections.

   If the check box is cleared, Web Control restricts only new connections to prohibited web resources. Web Control does not terminate active connections.

8. Save your changes.

How to enable a web resource address filter in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Security Controls** → **Web Control**.
5. Turn on the **Web Control ENABLED** toggle.
6. In the **Rules list** block, click the **Add** button.
7. Configure the web resource access rule:

   a. In the **Rule name** field, enter the name of the rule.

   b. Select the **Enabled** status for the web resource access rule.

   You can use the toggle switch to disable the web resource access rule at any time without removing it from the list.

c. In the **Action** block, select the relevant option:

- **Allow**. Web Control allows access to web resources that match the parameters of the rule.
- **Block**. Web Control blocks access to web resources that match the parameters of the rule and displays a website access denied message.
- **Inform**. When the user attempts to gain access to a web resource that matches the rule, Web Control displays a warning that visiting the web resource is inadvisable. By using links from the warning message, the user can obtain access to the requested web resource.

d. Under **Scope**, select **Individual websites**.

e. Configure the content filter:

- **Individual address**. Create a list of web resource addresses. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file.

  If Encrypted Connections Scan is disabled, for the HTTPS protocol you can only filter by the server name.

- **Data type**. You can control user access to web resources based on the specific data type of its published data (for example, *Graphics*).

f. Under **User or group**, select users to which you want Web Control to apply the rule.

Web Control will filter only web resource addresses from the list. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

g. In the **Access schedule** block, select a schedule or create a new schedule.

8. Save your changes.

How to enable a web resource address filter in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Web Control**.

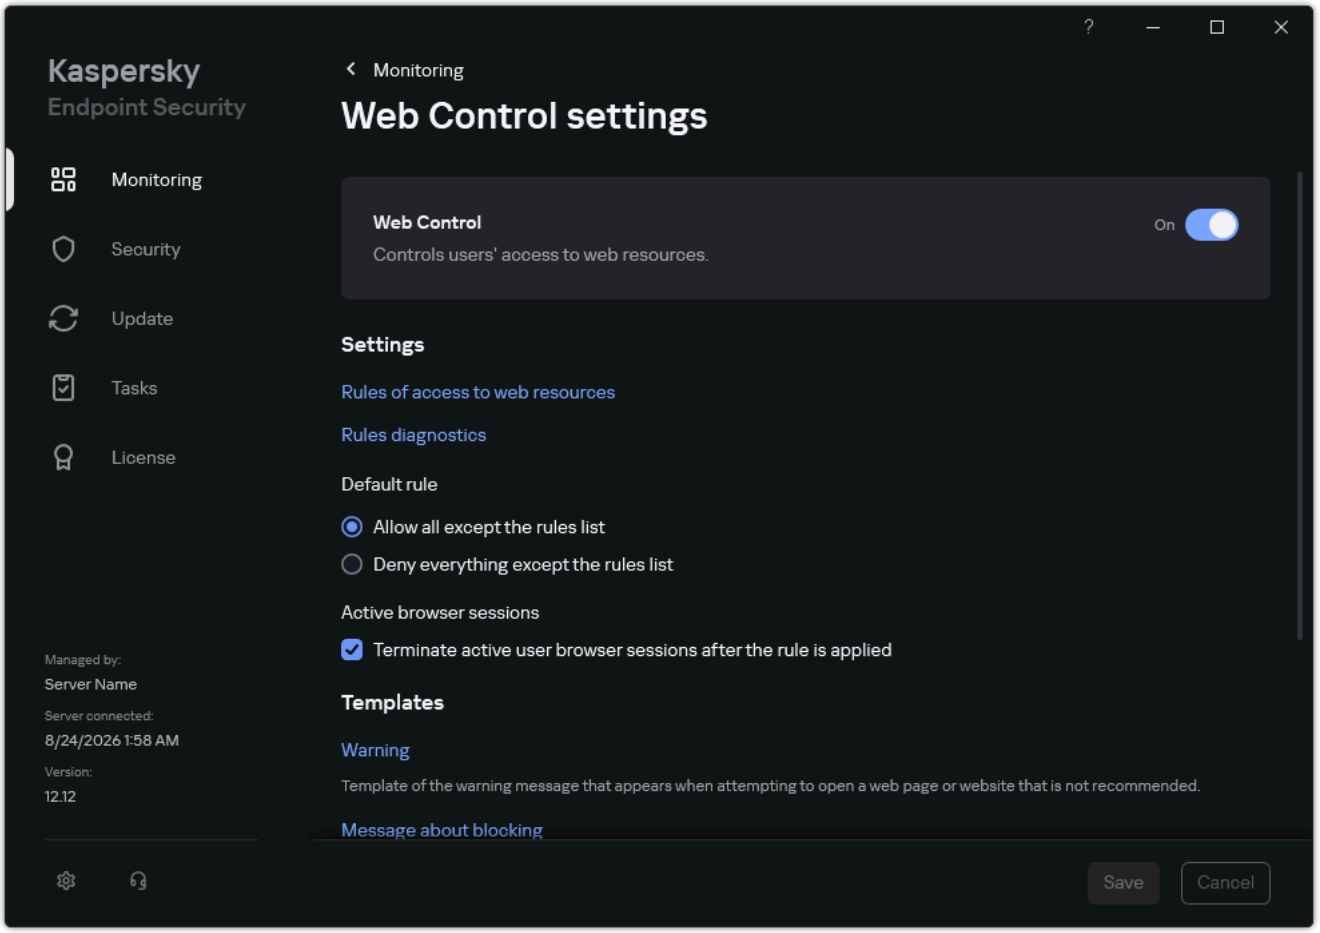

Web Control settings

3. In the **Settings** block, click the **Rules of access to web resources** button.

4. In the window that opens, click the **Add** button.

   The **Rule of access to web resources** window opens.

5. In the **Rule name** field, enter the name of the rule.

6. Select the **On** status for the web resource access rule.

   You can use the toggle to disable the web resource access rule at any time.

7. In the **Action** block, select the relevant option:

   - **Allow**. Web Control allows access to web resources that match the parameters of the rule.

   - **Block**. Web Control blocks access to web resources that match the parameters of the rule and displays a website access denied message.

   - **Warn**. When the user attempts to gain access to a web resource that matches the rule, Web Control displays a warning that visiting the web resource is inadvisable. By using links from the warning message, the user can obtain access to the requested web resource.

8. Under **Addresses**, select **To individual addresses**.

Create a list of web resource addresses. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file.

> If Encrypted Connections Scan is disabled, for the HTTPS protocol you can only filter by the server name.

9. In the **Users** block, select the relevant filter for users:

   - **To all users**. Web Control will not filter web resources for specific users.

   - **To individual users and / or groups**. Web Control will filter only web resource addresses from the list. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

10. In the **Rule schedule** drop-down list, select a schedule or create a new schedule.

11. If you want Web Control to terminate the connection with the prohibited web resource immediately after the policy is applied, select the **Terminate active user browser sessions after the rule is applied** check box.

    > Web Control allows immediately disconnecting web resources only in web browsers. For other applications, Web Control only restricts new connections.

    If the check box is cleared, Web Control restricts only new connections to prohibited web resources. Web Control does not terminate active connections.

12. Save your changes.

As a result, the new Web Control rule is added to the list. If necessary, change the priority of the Web Control rule. You can also use the toggle switch to disable the web resource access rule at any time without removing it from the list.

Filter by web resource content

To control access by web resource content, Web Control provides a category filter and a data type filter.

Websites are categorized according to the Kaspersky Security Network cloud service, heuristic analysis, and the database of known websites (included in application databases). For example, you can restrict user access to the *Social networks* category or to other categories.

You can restrict user access to a website based on data type, for example, to hide images. Kaspersky Endpoint Security determines the data type based on the file format and not based on its extension. Web Control distinguishes the following data types:

- Video
- Sound
- Office applications files
- Executable files

- Archives
- Graphics
- Scripts

> Kaspersky Endpoint Security does not scan files within archives. For example, if image files were placed in an archive, Kaspersky Endpoint Security identifies the *Archives* data type and not *Graphics*.

Rules may include a rule schedule and a list of users to which the rule applies. For example, you can restrict access to websites during working hours only, or allow visiting websites to users in certain groups.

How to enable a web resource content filter in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **Web Control**.
4. Select the **Web Control** check box.
5. In the **Web Control settings** block, click the **Add** button.

   The **Rule of access to web resources** window opens.
6. Configure the web resource access rule:

   a. In the **Name** field, enter the name of the rule.

   b. In the **Filter content** drop-down list, select the relevant content filter:

   - **By content categories**. You can control user access to web resources by category (for example, the *Social networks* category).
   - **By types of data**. You can control user access to web resources based on the specific data type of its published data (for example, *Graphics*).
   - **By content categories and types of data**. Filters by content categories and types of data are enabled.

   After selecting the filters, configure filter parameters.

   c. In the **Apply to users** drop-down list, select the relevant filter for users:

   - **To all users**. Web Control will not filter web resources by address.
   - **To individual users or groups**. Web Control will filter only web resource addresses from the list. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

d. In the **Action** drop-down list, select an option:

- **Allow**. Web Control allows access to web resources that match the parameters of the rule.
- **Block**. Web Control blocks access to web resources that match the parameters of the rule and displays a website access denied message.
- **Warn**. When the user attempts to gain access to a web resource that matches the rule, Web Control displays a warning that visiting the web resource is inadvisable. By using links from the warning message, the user can obtain access to the requested web resource.

e. In the **Rule schedule** drop-down list, select a schedule or create a new schedule.

7. If you want Web Control to terminate the connection with the prohibited web resource immediately after the policy is applied, select the **Terminate active user browser sessions after the rule is applied** check box.

   Web Control allows immediately disconnecting web resources only in web browsers. For other applications, Web Control only restricts new connections.

   If the check box is cleared, Web Control restricts only new connections to prohibited web resources. Web Control does not terminate active connections.

8. Save your changes.

How to enable a web resource content filter in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Security Controls** → **Web Control**.
5. Turn on the **Web Control ENABLED** toggle.
6. In the **Rules list** block, click the **Add** button.
7. Configure the web resource access rule:

   a. In the **Rule name** field, enter the name of the rule.

   b. Select the **Enabled** status for the web resource access rule.

   You can use the toggle to disable the web resource access rule at any time.

c. In the **Action** block, select the relevant option:

- **Allow**. Web Control allows access to web resources that match the parameters of the rule.
- **Block**. Web Control blocks access to web resources that match the parameters of the rule and displays a website access denied message.
- **Inform**. When the user attempts to gain access to a web resource that matches the rule, Web Control displays a warning that visiting the web resource is inadvisable. By using links from the warning message, the user can obtain access to the requested web resource.

d. Under **Scope**, select **Content category**.

e. Configure the content filter:

- **Content category**. You can control user access to web resources by category (for example, the *Social networks* category).
- **Data type**. You can control user access to web resources based on the specific data type of its published data (for example, *Graphics*).

f. Under **User or group**, select users to which you want Web Control to apply the rule.

Web Control will filter only web resource addresses from the list. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

g. In the **Access schedule** block, select a schedule or create a new schedule.

8. Save your changes.

How to enable a web resource content filter in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Web Control**.

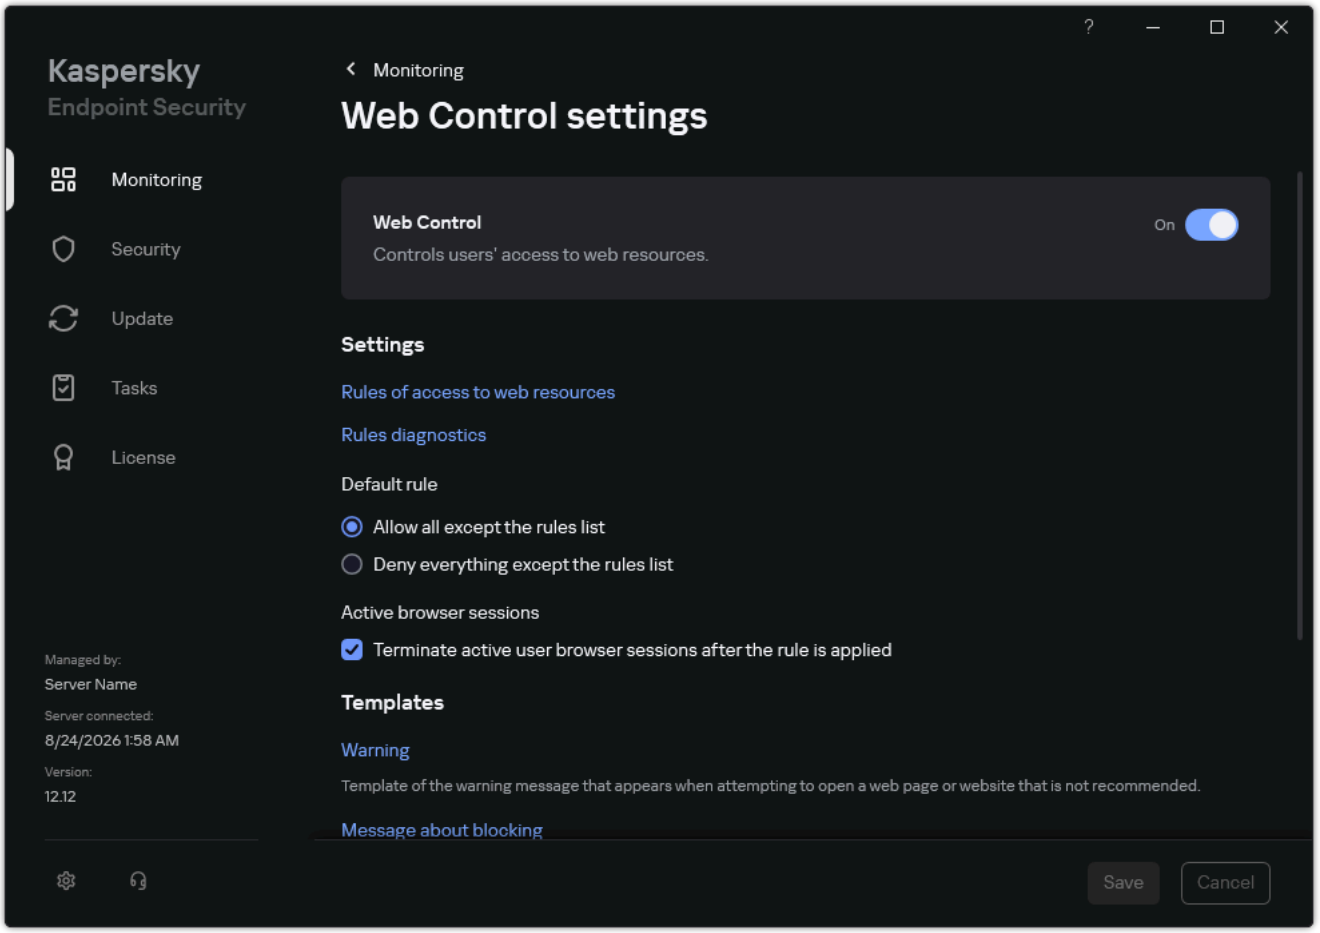

Web Control settings

3. In the **Settings** block, click the **Rules of access to web resources** button.

4. In the window that opens, click the **Add** button.

   The **Rule of access to web resources** window opens.

5. In the **Rule name** field, enter the name of the rule.

6. Select the **On** status for the web resource access rule.

   You can use the toggle to disable the web resource access rule at any time.

7. In the **Action** block, select the relevant option:

   - **Allow**. Web Control allows access to web resources that match the parameters of the rule.

   - **Block**. Web Control blocks access to web resources that match the parameters of the rule and displays a website access denied message.

   - **Warn**. When the user attempts to gain access to a web resource that matches the rule, Web Control displays a warning that visiting the web resource is inadvisable. By using links from the warning message, the user can obtain access to the requested web resource.

8. In the **Content of the filter** block, select the relevant content filter:

   - **By content categories**. You can control user access to web resources by category (for example, the *Social networks* category).

   - **By types of data**. You can control user access to web resources based on the specific data type of its published data (for example, *Graphics*).

   To configure the content filter:

   a. Click the **Settings** link.

   b. Select the check boxes next to the names of the required categories of content and/or data types.

   Selecting the check box next to the name of a content category and/or data type means that Kaspersky Endpoint Security applies the rule to control access to web resources that belong to the selected categories of content and/or data types.

   c. Return to the window for configuring the web resource access rule.

9. In the **Users** block, select the relevant filter for users:

   - **To all users**. Web Control will not filter web resources by address.

   - **To individual users and / or groups**. Web Control will filter only web resource addresses from the list. You can enter a web address or use masks. You can also export a list of web resource addresses from a TXT file. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts. To create a list of users to whom you want to apply the rule:

     a. Click **Add**.

     b. In the window that opens, select the users or groups of users to which you want to apply the web resource access rule.

     c. Return to the window for configuring the web resource access rule.

10. In the **Rule schedule** drop-down list, select the name of the necessary schedule or generate a new schedule based on the selected rule schedule. To do so:

    a. Click **Edit or add new**.

    b. In the window that opens, click the **Add** button.

    c. In the window that opens, enter the rule schedule name.

    d. Configure the web resource access schedule for users.

    e. Return to the window for configuring the web resource access rule.

11. If you want Web Control to terminate the connection with the prohibited web resource immediately after the policy is applied, select the **Terminate active user browser sessions after the rule is applied** check box.

    Web Control allows immediately disconnecting web resources only in web browsers. For other applications, Web Control only restricts new connections.

If the check box is cleared, Web Control restricts only new connections to prohibited web resources. Web Control does not terminate active connections.

12. Save your changes.

As a result, the new Web Control rule is added to the list. If necessary, change the priority of the Web Control rule. You can also use the toggle switch to disable the web resource access rule at any time without removing it from the list.

Testing web resource access rules

When configuring Web Control, you might inadvertently block access to web resources that users need for their work. To find out which Web Control rule is blocking access to web resources, you can use the *Web Control Rules diagnostics* tool. Web Control Rules diagnostics is only available in the interface of Kaspersky Endpoint Security. In the Kaspersky Security Center console, you cannot find out which Web Control rule includes a given resource.

If the user believes that the web resource is blocked by mistake, the user may click the link in the web resource block notification message to send a pre-generated message to the local corporate network administrator.

To test the web resource access rules:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Web Control**.

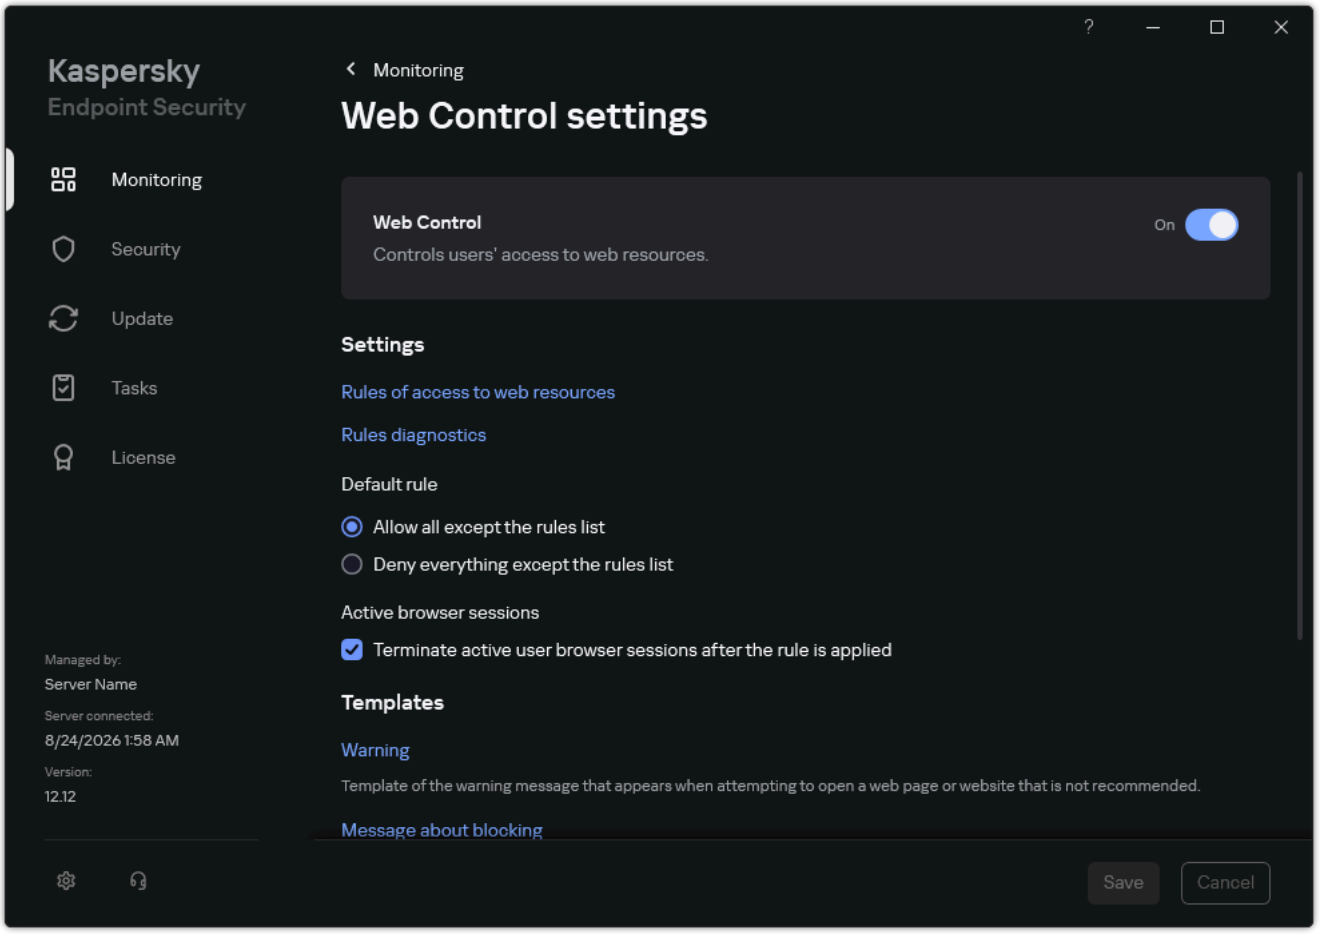

Web Control settings

3. In the **Settings** block, click the **Rules diagnostics** link.

   The **Rules diagnostics** window opens.

4. If you want to test the rules that Kaspersky Endpoint Security uses to control access to a specific web resource, select the **Specify address** check box. Enter the address of the web resource in the field below.

5. If you want to test the rules that Kaspersky Endpoint Security uses to control access to web resources for specified users and / or groups of users, specify a list of users and / or groups of users.

6. If you want to test the rules that Kaspersky Endpoint Security uses to control access to web resources of certain content categories and/or data type categories, select the **Filter content** check box and choose the relevant option from the drop-down list (**By content categories**, **By types of data**, or **By content categories and types of data**).

7. If you want to test the rules with account of the time and day of the week when an attempt is made to access the web resources that are specified in the rule diagnostics conditions, select the **Include time of access attempt** check box. Then specify the day of the week and the time.

8. Click **Scan**.

Test completion is followed by a message with information about the action that is taken by Kaspersky Endpoint Security, according to the first rule that is triggered on the attempt to access the specified web resource (allow, block, or warning). The first rule to be triggered is the one with a rank on the list of Web Control rules which is higher than that of other rules meeting the diagnostics conditions. The message is displayed on the right of the **Scan** button. The following table lists the remaining triggered rules, specifying the action taken by Kaspersky Endpoint Security. The rules are listed in the order of declining priority.

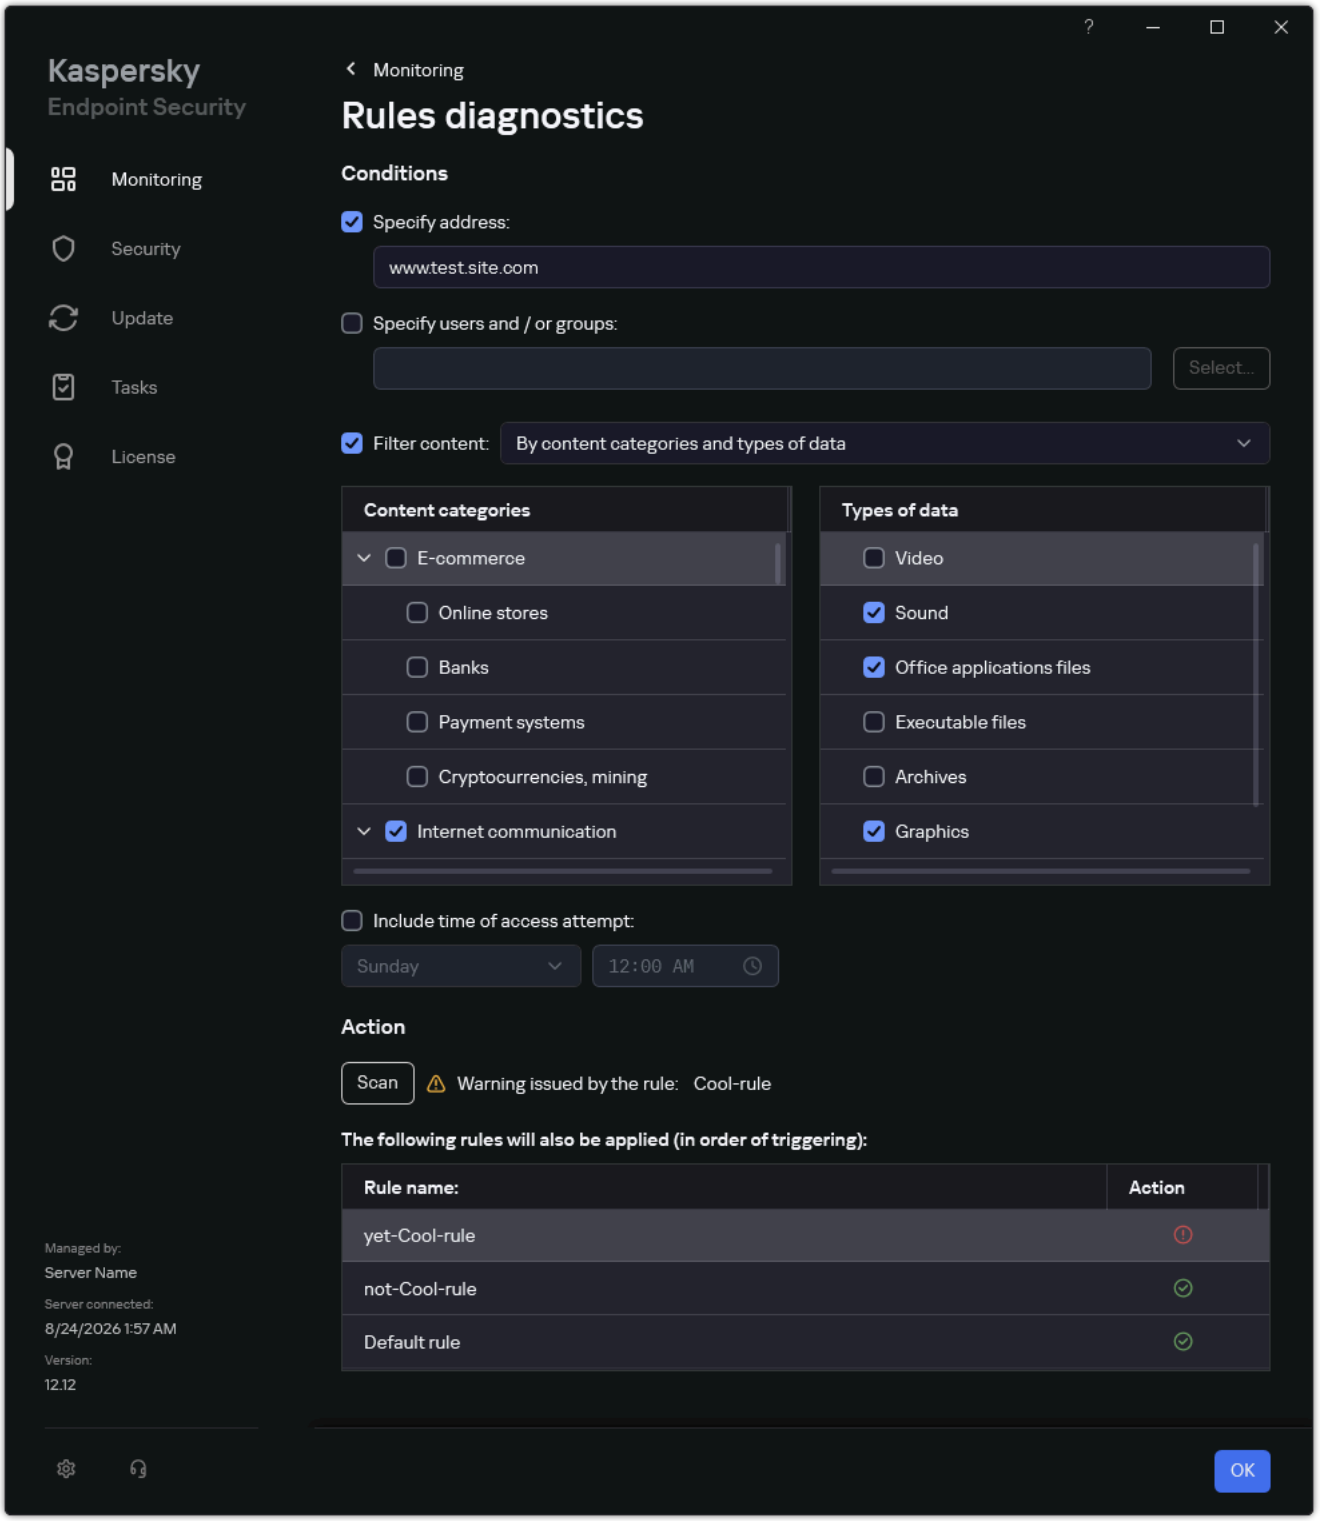

Web resource access test result

Exporting and importing Web Control rules

You can export the list of Web Control rules to an XML or JSON file. Then you can modify the file to, for example, add a large number of addresses of the same type. You can use the export/import function to back up the list of Web Control rules or to migrate the list to a different server.

How to export and import a list of Web Control rules in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **Web Control**.
4. To export the list of Web Control rules:
   a. Select the rules that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.
      If you did not select any rule, Kaspersky Endpoint Security will export all rules.
   b. Click the **Export** link.
   c. In the window that opens, specify the name of the XML file to which you want to export the list of rules, and select the folder in which you want to save this file.
   d. Save the file.
      Kaspersky Endpoint Security exports the list of rules to the XML file.
5. To import the list of Web Control rules:
   a. Click the **Import** link.
      In the window that opens, select the XML file from which you want to import the list of rules.
   b. Open the file.
      If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.
6. Save your changes.

How to export and import a list of Web Control rules in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Security Controls** → **Web Control**.
5. To export the list of rules, in the **Rules list** block:
   a. Select the rules that you want to export.
   b. Click the → **Export** button.
      Kaspersky Endpoint Security exports the list of rules to a JSON file in the default downloads folder.

6. To import the list of rules, in the **Rules list** block:

   a. Click the → **Import** button.

      In the window that opens, select the JSON file from which you want to import the list of rules.

   b. Open the file.

      If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.

7. Save your changes.

Exporting and importing web resource addresses of the Web Control rule

If you have created a list of web resource addresses in a web resource access rule, you can export it to a file:

- In TXT format in the Administration Console (MMC)
- In JSON format in the Web Console
- In CSV format in the application interface

You can subsequently import the list from this file to avoid creating a new list of web resource addresses manually when configuring an access rule. The option of exporting and importing the list of web resource addresses may be useful if, for example, you create access rules with similar parameters.

You can also export/import all Web Control rules and not just the web resource addresses of an individual rule.

How to export / import web resource addresses of the Web Control rule in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Security Controls** → **Web Control**.
5. In the **Web Control settings** block, select the rule whose list of web resource addresses you want to export or import.

   Web Control rule properties are displayed.

6. To export the list of web resources, do the following in the address list:

   a. Select the addresses that you want to export.

      If you did not select any address, Kaspersky Endpoint Security will export all addresses.

   b. Click the button.

c. In the window that opens, enter the name of the TXT file to which you want to export the list of web resource addresses, and select the folder in which you want to save this file.

d. Save the file.

Kaspersky Endpoint Security exports the list of web resource addresses to a TXT file.

7. To import the list of web resources, do the following in the address list:

a. Click the button.

In the window that opens, select the TXT file from which you want to import the list of web resources.

b. Open the file.

If the computer already has a list of addresses, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the TXT file.

8. To apply the policy to computers, close the padlock icons and save your changes.

How to export / import web resource addresses of the Web Control rule in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Web Control**.

5. In the **Rules list** block, select the rule whose list of web resource addresses you want to export or import.

Web Control rule properties are displayed.

6. In the **Scope** → **Individual websites** block, click the **Edit** button.

7. To export the list of web resources, do the following in the address list:

a. Select the addresses that you want to export.

b. Click the → **Export** button.

Kaspersky Endpoint Security exports the list of web resource addresses to a JSON file in the default downloads folder.

8. To import the list of web resources, do the following in the address list:

a. Click the → **Import** button.

In the window that opens, select the JSON file from which you want to import the list of web resource addresses.

b. Open the file.

If the computer already has a list of addresses, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.

You can export and import groups of websites in the same way.

9. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to export / import web resource addresses of the Web Control rule in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Web Control**.

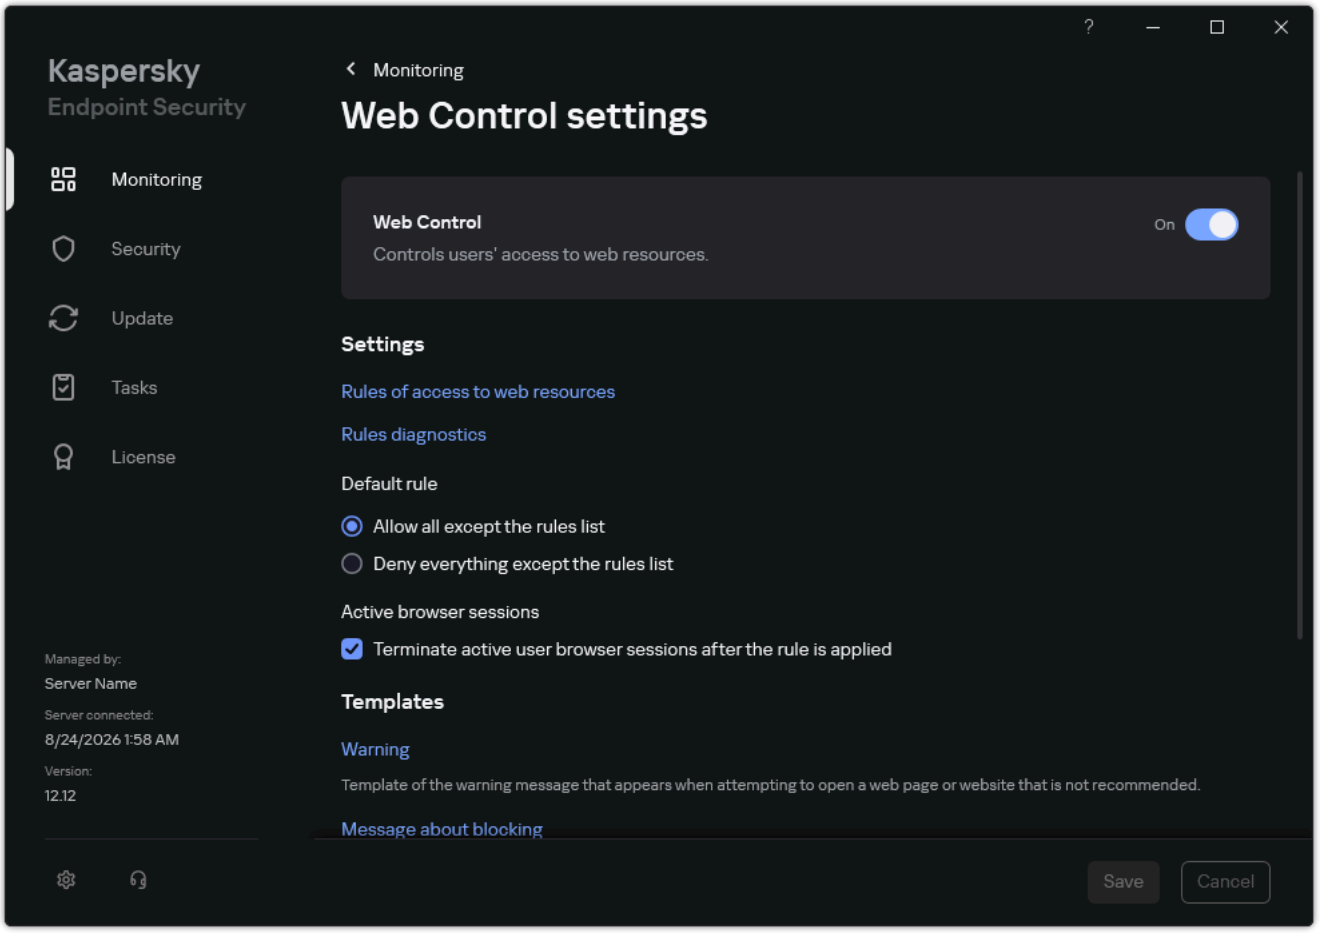

Web Control settings

3. In the **Settings** block, click the **Rules of access to web resources** button.

4. Select the rule whose list of web resource addresses you want to export or import.

5. To export the list of trusted web addresses, do the following in the **Addresses** block:

   a. Select the addresses that you want to export.

   If you did not select any address, Kaspersky Endpoint Security will export all addresses.

   b. Click **Export**.

   c. In the window that opens, enter the name of the CSV file to which you want to export the list of web resource addresses, and select the folder in which you want to save this file.

   d. Save the file.

   Kaspersky Endpoint Security exports the list of web resource addresses to a CSV file.

6. To import the list of web resources, do the following in the **Addresses** block:

   a. Click **Import**.

      In the window that opens, select the CSV file from which you want to import the list of web resources.

   b. Open the file.

      If the computer already has a list of addresses, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the CSV file.

7. Save your changes.

Monitoring user Internet activity

Kaspersky Endpoint Security lets you log data on user visits to all websites, including allowed websites. This enables you to obtain the complete history of browser views. Kaspersky Endpoint Security sends user activity events to Kaspersky Security Center, to the local log of Kaspersky Endpoint Security, and to the Windows Event log. To receive events in Kaspersky Security Center, you need to configure the settings of events in a policy in the Administration Console or Web Console. You can also configure the transmission of Web Control events by email and the display of on-screen notifications on the user's computer.

Browsers that support the monitoring function: Microsoft Edge, Microsoft Internet Explorer, Google Chrome, Yandex Browser, Mozilla Firefox. User activity monitoring does not work in other browsers.

Kaspersky Endpoint Security creates the following user Internet activity events:

- Block the website (*Critical* status).
- Visit to a non-recommended website (*Warning* status).
- Visit to an allowed website (*Info* status).

Prior to enabling user Internet activity monitoring, you must do the following:

- Inject a web page interaction script into web traffic (see the instructions below). The script enables registration of Web Control events.
- For HTTPS traffic monitoring, you need to enable encrypted connections scan.

Injecting a web page interaction script

How to inject a web page interaction script into web traffic in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Network settings**.

4. In the **Encrypted connections scan** block, select the **Inject script into web traffic to interact with web pages** check box.

5. Save your changes.

How to inject a web page interaction script into web traffic in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. In the policy window, select **General Settings** → **Network Settings**.

5. Under **Monitoring of internet connections**, turn on the **Monitoring of internet connections ENABLED** switch.

6. Save your changes.

How to inject a web page interaction script into web traffic in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Network settings**.

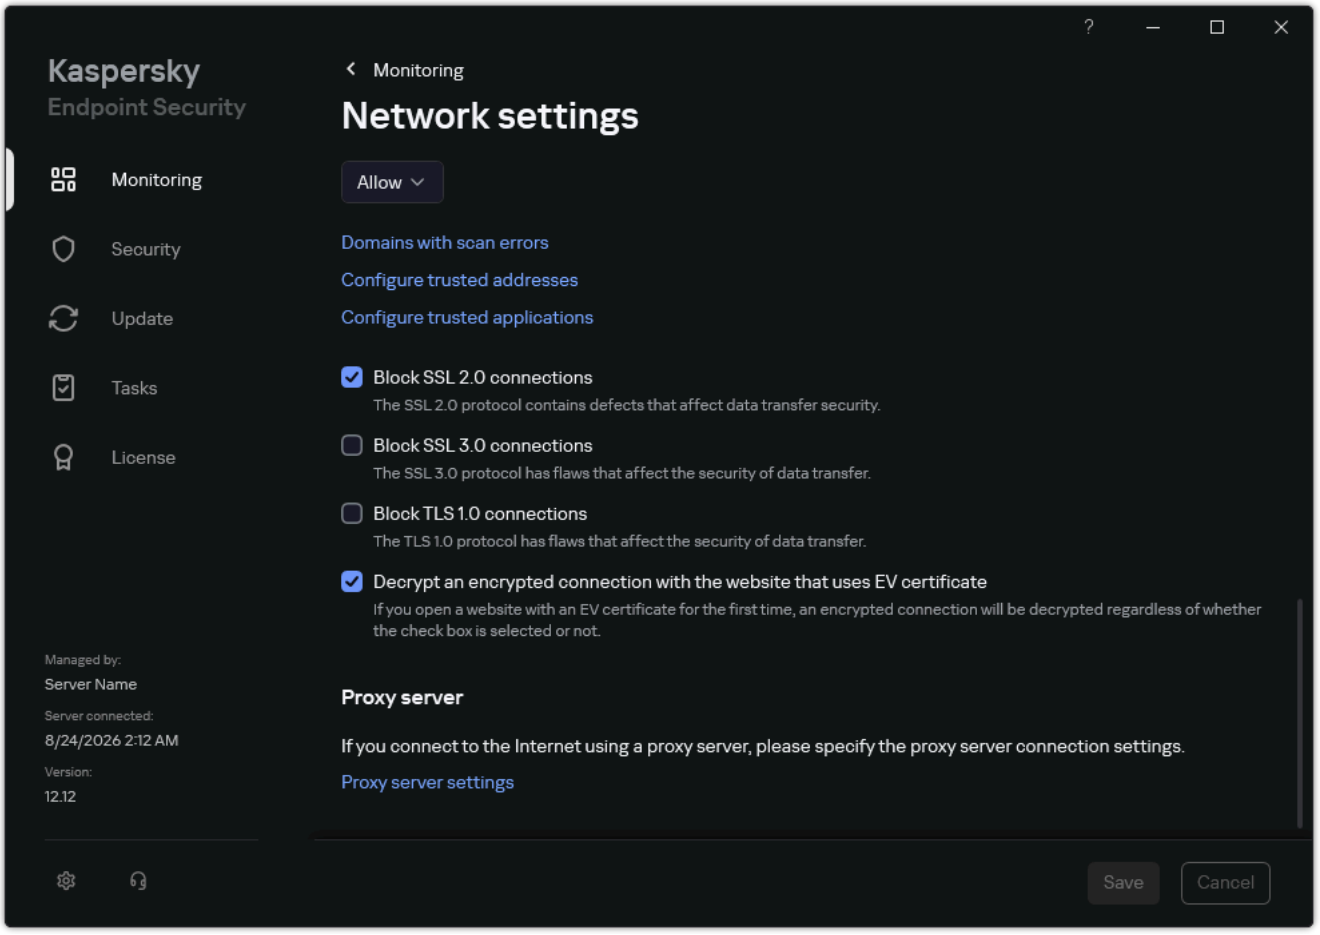

Application network settings

3. In the **Traffic processing** block, select the **Inject script into web traffic to interact with web pages** check box.

4. Save your changes.

As a result, Kaspersky Endpoint Security will inject a web page interaction script into web traffic. This script enables registration of Web Control events for the application event log, OS event log, and reports.

Configuring logging of Web Control events

To configure logging of Web Control events on the user's computer:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Interface**.
3. In the **Notifications** block, click the **Configure notifications** button.
4. In the window that opens, select the **Web Control** section.

   This opens the table of Web Control events and notification methods.
5. Configure the notification method for each event: **Save in local report** or **Save in Windows Event Log**.

   To log allowed website visit events, you need to also configure Web Control (see the instructions below).

   In the events table, you can also enable an on-screen notification and an email notification. To send notifications by email, you need to configure the SMTP server settings. For more details about sending notifications by email, please refer to the Kaspersky Security Center Help.
6. Save your changes.

As a result, Kaspersky Endpoint Security begins logging user Internet activity events.

Web Control sends user activity events to Kaspersky Security Center as follows:

- If you are using Kaspersky Security Center, Web Control sends events for all the objects that make up the web page. For this reason, multiple events may be created when one web page is blocked. For example, when blocking the web page http://www.example.com, Kaspersky Endpoint Security may relay events for the following objects: http://www.example.com, http://www.example.com/icon.ico, http://www.example.com/file.js, etc.
- If you are using the Kaspersky Security Center Cloud Console, Web Control groups events and sends only the protocol and domain of the website. For instance, if a user visits non-recommended web pages http://www.example.com/main, http://www.example.com/contact, http://www.example.com/gallery, Kaspersky Endpoint Security will send only one event with the http://www.example.com object.

Logging events when visiting allowed websites

To enable logging of events when visiting allowed websites:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Web Control**.

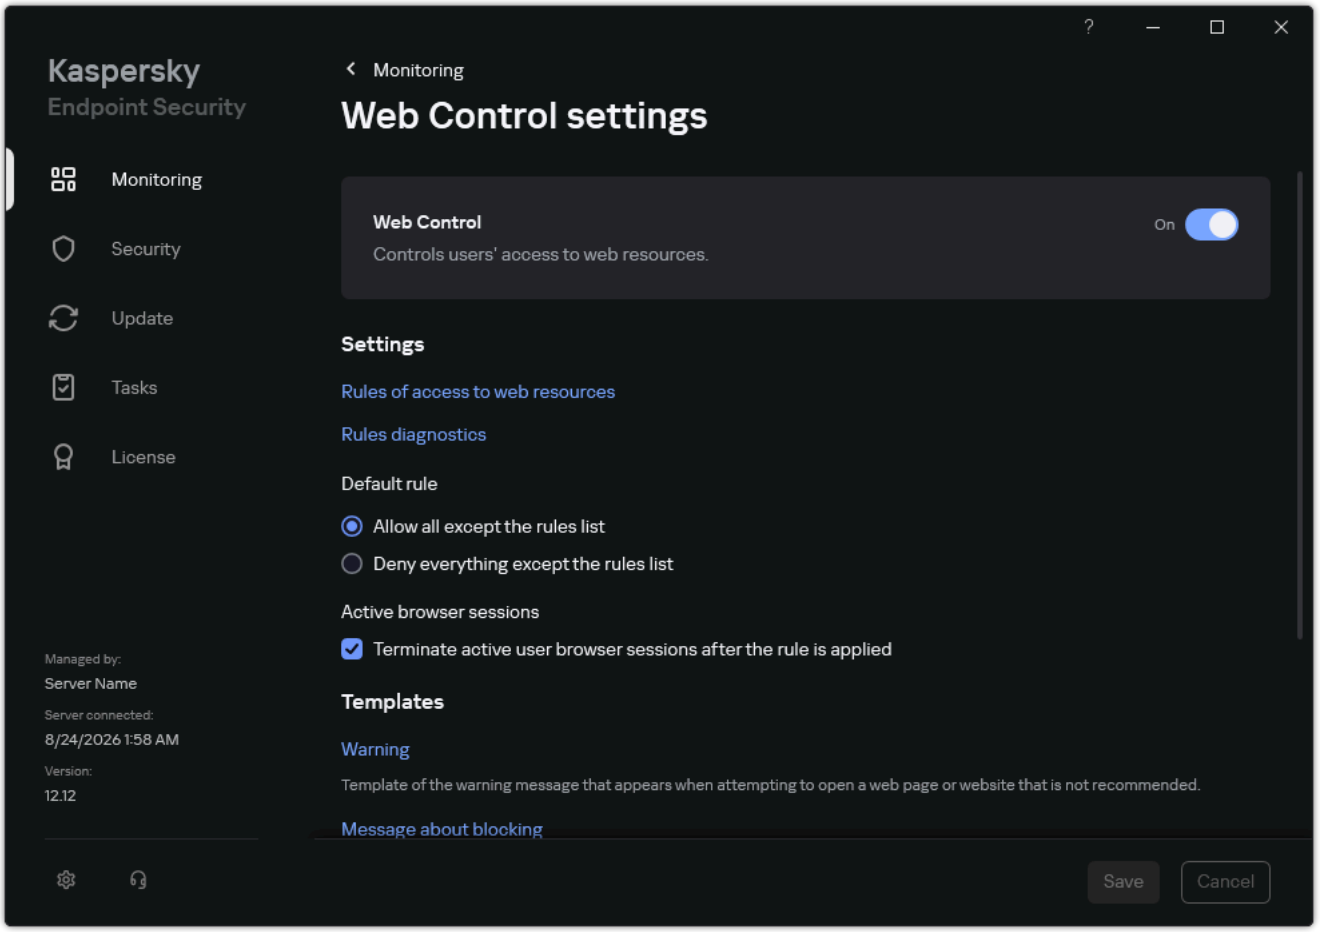

Web Control settings

3. In the **Additional** block, click the **Advanced settings** button.

4. In the window that opens, select the **Log the opening of allowed pages** check box.

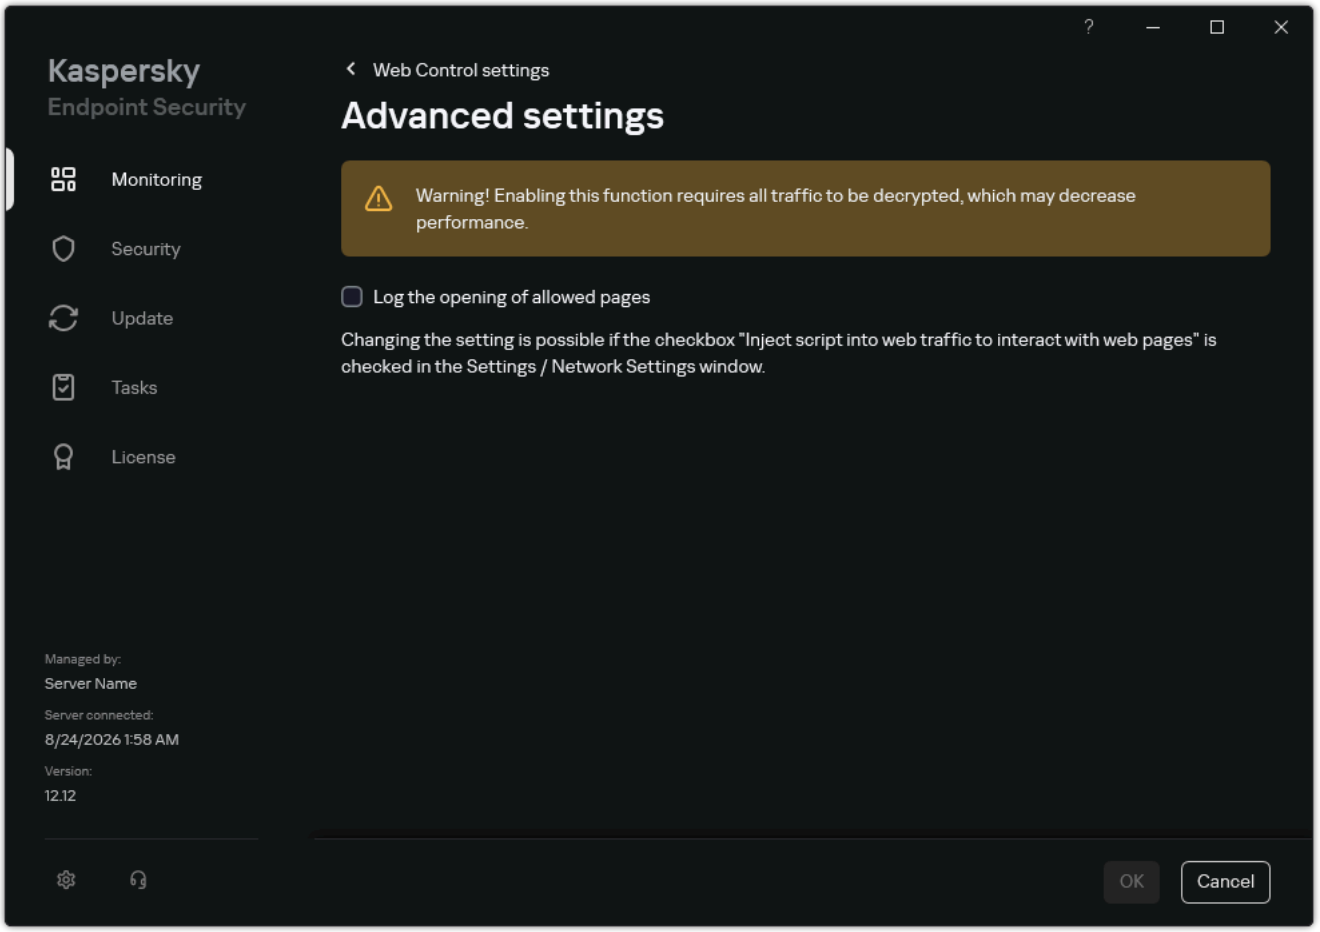

Web Control advanced settings

5. Save your changes.

As a result, you will be able to view the full browser history.

Editing templates of Web Control messages

Depending on the type of action that is specified in the properties of Web Control rules, Kaspersky Endpoint Security displays a message of one of the following types when users attempt to access Internet resources (the application substitutes an HTML page with a message for the HTTP server response):

- Warning message. This message warns the user that visiting the web resource is not recommended and/or violates the corporate security policy. Kaspersky Endpoint Security displays a warning message if the **Warn** option is selected in the settings of the rule that describes this web resource.

  If the user believes that the warning is mistaken, the user may click the link from the warning to send a pre-generated message to the local corporate network administrator.

- Message informing of blocking of a web resource. Kaspersky Endpoint Security displays a message informing that a web resource is blocked (see figure below) if the **Block** option is selected in the settings of the rule that describes this web resource.

If the user believes that the web resource is blocked by mistake, the user may click the link in the web resource block notification message to send a pre-generated message to the local corporate network administrator.

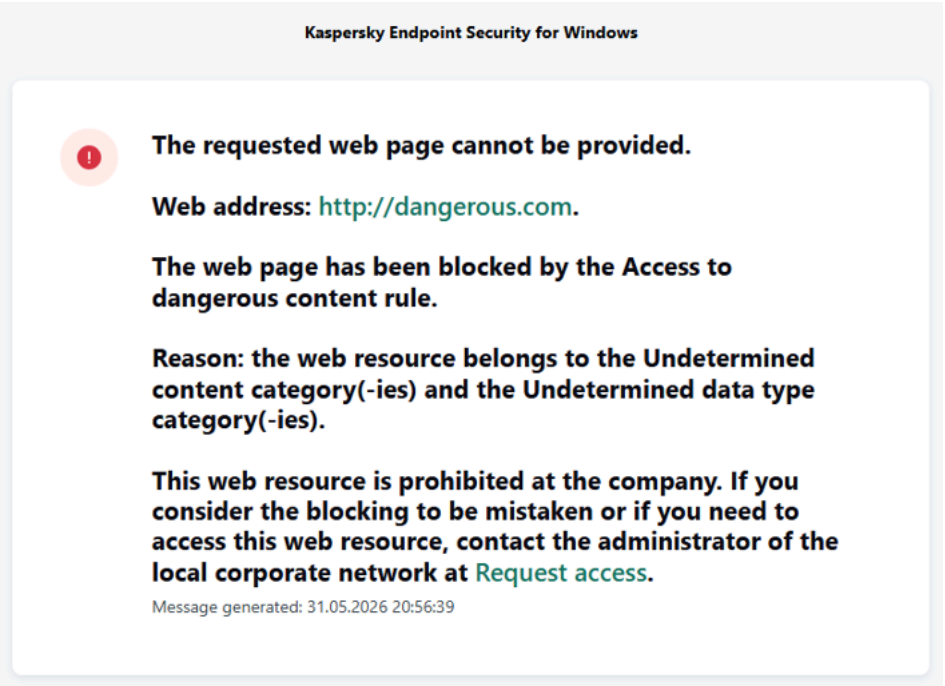

Message about web resource blocking

Special templates are provided for the warning message, the message informing that a web resource is blocked, and the message sent to the LAN administrator. Special variables are provided for managing the message templates (for example, `%USER_NAME%`). Variables allow a single message template to be used for different computers. When generating a message, Kaspersky Endpoint Security retrieves the value of the variable from the operating system settings and inserts it into the message matching the specific computer, user, and event.

How to change the Web Control message template in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **Web Control**.
4. In the **Message template settings** block, click the **Templates** button.
5. Configure the Web Control message templates:
   - **Warning**. The entry field consists of a template of the message that is displayed if a rule for warning about attempts to access an unwanted web resource is triggered.
   - **Message about blocking**. The entry field contains the template of the message that appears if a rule that blocks access to a web resource is triggered.
   - **Message to administrator**. Template of the message to be sent to the LAN administrator if the user considers the block to be a mistake. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Web page access blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address.

To add a variable to the template text, place the cursor in the desired position, click **Variable** and select the required variable from the list of available options.

You can also restore the default template text using the **By default** button.

6. Save your changes.

How to change the Web Control message template in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Web Control**.

5. In the **Message templates** block, click the **Message about website blocking** link and configure templates for Web Control messages:

   - **Warning**. The entry field consists of a template of the message that is displayed if a rule for warning about attempts to access an unwanted web resource is triggered.

   - **Message about blocking**. The entry field contains the template of the message that appears if a rule that blocks access to a web resource is triggered.

   - **Message to administrator**. Template of the message to be sent to the LAN administrator if the user considers the block to be a mistake. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Web page access blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address.

   To add a variable to the template text, place the cursor in the desired position, click **Add variable** and select the required variable from the list of available options.

   You can also restore the default template text using the **Reset to default** button.

6. Save your changes.

How to change the Web Control message template in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Web Control**.

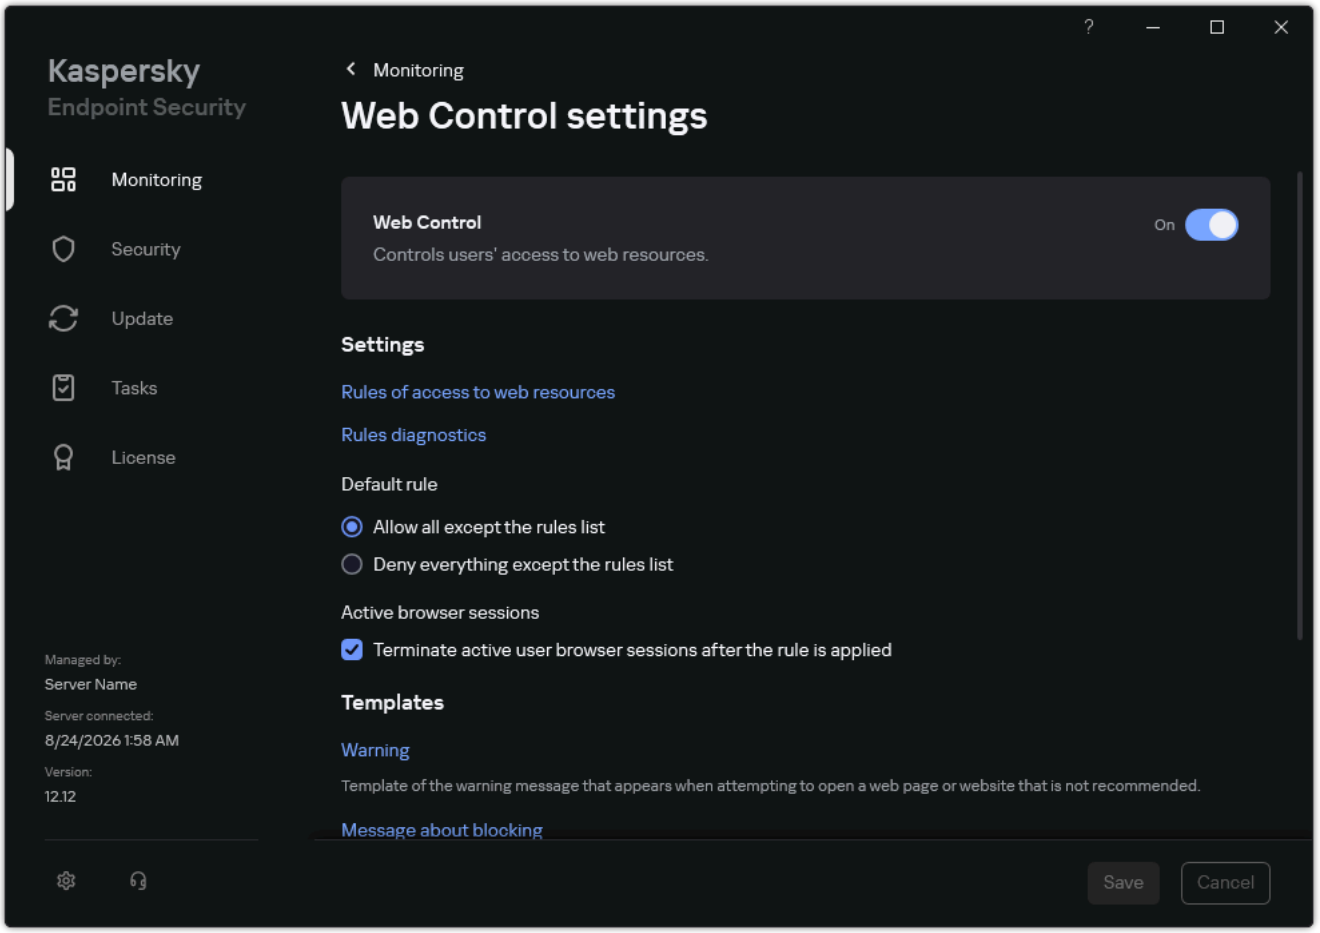

Web Control settings

3. In the **Templates** block, configure the templates for Web Control messages:

   - **Warning**. The entry field consists of a template of the message that is displayed if a rule for warning about attempts to access an unwanted web resource is triggered.

   - **Message about blocking**. The entry field contains the template of the message that appears if a rule that blocks access to a web resource is triggered.

   - **Message to administrator**. Template of the message to be sent to the LAN administrator if the user considers the block to be a mistake. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Web page access blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address.

   To add a variable to the template text, place the cursor in the desired position, click **Add variable** and select the required variable from the list of available options.

   You can also restore the default template text using the **Reset** button.

4. Save your changes.

Editing masks for web resource addresses

Using a *web resource address mask* (also referred to as "address mask") may be useful if you need to enter numerous similar web resource addresses when creating a web resource access rule. If crafted well, one address mask can replace a large number of web resource addresses.

When creating an address mask, follow these rules:

1. The `*` character replaces any sequence that contains zero or more characters.

   For example, if you enter the `*abc*` address mask, the access rule is applied to all web resources that contain the sequence `abc`. Example: `http://www.example.com/page_0-9abcdef.html`.

2. A sequence of `*.` characters (known as a *domain mask*) lets you select all domains of an address. The `*.` domain mask represents any domain name, subdomain name, or a blank line.

   Example: the `*.example.com` mask represents the following addresses:

   - `http://pictures.example.com`. The domain mask `*.` represents `pictures.`.
   - `http://user.pictures.example.com`. The domain mask `*.` represents `pictures.` and `user.`.
   - `http://example.com`. The domain mask `*.` is interpreted as a blank line.

3. The `www.` character sequence at the start of the address mask is interpreted as a `*.` sequence.

   Example: the address mask `www.example.com` is interpreted as `*.example.com`. This mask covers the addresses `www2.example.com` and `www.pictures.example.com`.

4. If an address mask does not start with the `*` character, the content of the address mask is equivalent to the same content with the `*.` prefix.

5. If an address mask ends with a character other than `/` or `*`, the content of the address mask is equivalent to the same content with the `/*` postfix.

   Example: the address mask `http://www.example.com` covers such addresses as `http://www.example.com/abc`, where `a`, `b`, and `c` are any characters.

6. If an address mask ends with the `/` character, the content of the address mask is equivalent to the same content with the `/*` postfix.

7. The character sequence `/*` at the end of an address mask is interpreted as `/*` or an empty string.

8. Web resource addresses are verified against an address mask, taking into account the protocol (http or https):

   - If the address mask contains no network protocol, this address mask covers addresses with any network protocol.

     Example: the address mask `example.com` covers the addresses `http://example.com` and `https://example.com`.

   - If the address mask contains a network protocol, this address mask only covers addresses with the same network protocol as that of the address mask.

     Example: the address mask `http://*.example.com` covers the address `http://www.example.com` but does not cover `https://www.example.com`.

9. An address mask that is in double quotes is treated without considering any additional replacements, except the `*` character if it has been initially included in the address mask. Rules 5 and 7 do not apply to address masks enclosed in double quotation marks (see examples 14 – 18 in the table below).

10. The user name and password, connection port, and character case are not taken into account during comparison with the address mask of a web resource.

Examples of how to use rules for creating address masks

No.	Address mask	Address of web resource to verify	Is the address covered by the address mask	Comment
1	*.example.com	http://www.123example.com	No	See rule 1.
2	*.example.com	http://www.123.example.com	Yes	See rule 2.
3	*example.com	http://www.123example.com	Yes	See rule 1.
4	*example.com	http://www.123.example.com	Yes	See rule 1.
5	http://www.*.example.com	http://www.123example.com	No	See rule 1.
6	www.example.com	http://www.example.com	Yes	See rules 3, 2, 1.
7	www.example.com	https://www.example.com	Yes	See rules 3, 2, 1.
8	http://www.*.example.com	http://123.example.com	Yes	See rules 3, 4, 1.
9	www.example.com	http://www.example.com/abc	Yes	See rules 3, 5, 1.
10	example.com	http://www.example.com	Yes	See rules 3, 1.
11	http://example.com/	http://example.com/abc	Yes	See rule 6.
12	http://example.com/*	http://example.com	Yes	See rule 7.
13	http://example.com	https://example.com	No	See rule 8.
14	"example.com"	http://www.example.com	No	See rule 9.
15	"http://www.example.com"	http://www.example.com/abc	No	See rule 9.
16	"*.example.com"	http://www.example.com	Yes	See rules 1, 9.
17	"http://www.example.com/*"	http://www.example.com/abc	Yes	See rules 1, 9.
18	"www.example.com"	http://www.example.com; https://www.example.com	Yes	See rules 9, 8.
19	www.example.com/abc/123	http://www.example.com/abc	No	An address mask contains more information than the address of a web resource.

Web Control for virtual machines

Web Control controls traffic on the computer as well as on a virtual machine that is locally deployed on the computer. This works without having to install the Kaspersky Endpoint Security application on the local virtual machine. This means that if the user tries to open a website that is blocked by a Web Control rule in a browser on the *virtual machine*, the application installed on the host operating system of the *computer* denies access to that website.

Web Control works differently on different virtual machines.

Oracle VM VirtualBox

Kaspersky Endpoint Security supports Web Control rules on Oracle VM VirtualBox virtual machines without limitations. The application can control all traffic of the virtual machine. If a filter by user is configured in Web Control rules, the application works correctly because all processes of the virtual machines are started by the local user.

VMware Workstation

Kaspersky Endpoint Security supports Web Control rules on VMware Workstation virtual machines with limitations. The application does not support rules with a filter by user configured. Virtual machine processes are running under the system user (SYSTEM). This makes it impossible to identify the user that is trying to open the website on the virtual machine.

Microsoft Hyper-V

Kaspersky Endpoint Security does not support Web Control rules on Microsoft Hyper-V virtual machines.

Variables in Web Control message templates

You can use the following variables in user message templates or administrator message templates:

- **User name** – `%USER_NAME%`.

  Name of the current user account on the computer on which the message was generated, in the `<device name>\<user alias>` format (for example, `DESKTOP-123\John.Smith`).

- **Web resource address** – `%CANONIC_REQUEST_URL%`.

  Address of the blocked web resource.

- **Rule name** – `%RULE%`.

  Name of the rule that blocked the web resource.

- **Email for sending a message** – `%COMPLAIN_EMAIL%`.

  Email address for feedback about web resource blocks. Clicking the email address opens a window in which the user can write a message to the administrator.

- **Name of content category** – `%CONTENT_CATEGORY_LIST%`.

  Website category to which the blocked resource belongs (for example, *Payment systems*).

- **Name of data type category** – `%TYPE_CATEGORY_LIST%`.

  Category of data type on the blocked web resource (for example, *Graphics*).

- **Link to requested web resource** – `%CONTINUE_PAGE%`.

  Link to the requested web page (for example, `http://www.example.com/pagename.html`).

- **Link to website** – `%CONTINUE_SITE%`.

  Link to the website that contains the requested web page (for example, `http://www.example.com/`).

- **Link for access to domains** – `%CONTINUE_DOMAIN%`.

  Link that can be clicked to gain access to all existing web pages of the domain name. For example, if the address of the blocked web page is `http://www.example.com`, the `%CONTINUE_DOMAIN%` variable is replaces with the `http://*.example.com` link. Clicking this link allows access to all web addresses of the base domain name `http://www.example.com/` including subdomains, for example, `http://start.example.com/*` or `http://domain.domain.example.com/*`, where the `*` character stands for any sequence of characters (including an empty string).

Device Control

Device Control manages user access to devices that are installed on or connected to a computer (for example, hard drives, cameras, or Wi-Fi modules). This lets you protect the computer from infection when such devices are connected, and prevent data loss or data leaks.

If Device Control is enabled, the application relays information about connected devices to Kaspersky Security Center. You can view the list of connected devices in Kaspersky Security Center in the **Advanced** → **Repositories** → **Hardware** folder.

Device access levels

Device Control controls access at the following levels:

- **Device type**. For example, printers, removable drives, and CD/DVD drives.

  You can configure device access as follows:

  - Allow – ✓.
  - Block – ⊘.
  - By rules (printers and portable devices only) – .
  - Depends on connection bus (except Wi-Fi) – .
  - Block with exceptions (Wi-Fi only) – .

- **Connection bus**. A *connection bus* is an interface used for connecting devices to the computer (for example, USB or FireWire). If **Depends on connection bus** mode is selected for the device type, the application allows or denies access to the device depending on the connection interface (e.g. USB).

  You can configure device access as follows:

  - Allow – ✓.
  - Block – ⊘.

- **Trusted devices**. *Trusted devices* are devices to which users that are specified in the trusted device settings have full access at all times.

  You can add trusted devices based on the following data:

  - **Devices by ID**. Each device has a unique identifier (Hardware ID, or HWID). You can view the ID in the device properties by using operating system tools. Example of a device ID: `SCSI\CDROM&VEN_NECVMWAR&PROD_VMWARE_SATA_CD00\5&354AE4D7&0&000000`. Adding devices by ID is convenient if you want to add several specific devices.

  - **Devices by model**. Each device has a Vendor ID (VID) and a Product ID (PID). You can view the IDs in the device properties by using operating system tools. Template for entering the VID and PID: `VID_1234&PID_5678`. Adding devices by model is convenient if you use devices of a certain model in your organization. This way, you can add all devices of this model.

  - **Devices by ID mask**. If you are using multiple devices with similar IDs, you can add devices to the trusted list by using masks. The `*` character replaces any set of characters. Kaspersky Endpoint Security does not support the `?` character when entering a mask. For example, `WDC_C*`.

  - **Devices by model mask**. If you are using multiple devices with similar VIDs or PIDs (for example, devices from the same manufacturer), you can add devices to the trusted list by using masks. The `*` character replaces any set of characters. Kaspersky Endpoint Security does not support the `?` character when entering a mask. For example, `VID_05AC&PID_*`.

Device Control regulates user access to devices by using *access rules*. Device Control also lets you save device connection/disconnection events. To save events, you need to configure the registration of events in a policy.

> If access to a device depends on the connection bus (the status), Kaspersky Endpoint Security does not save device connection/disconnection events. To enable Kaspersky Endpoint Security to save device connection/disconnection events, allow access to the corresponding type of device (the ✓ status) or add the device to the trusted list.

When a device that is blocked by Device Control is connected to the computer, Kaspersky Endpoint Security will block access and show a notification (see the figure below).

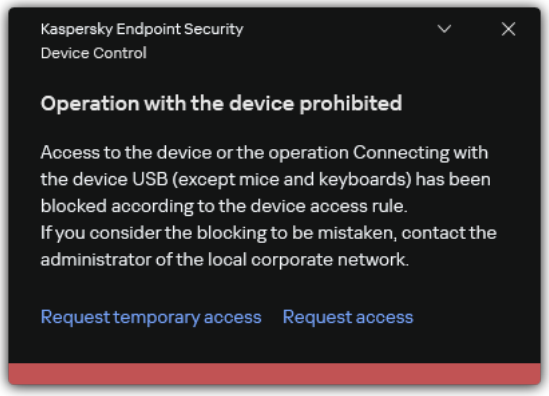

Device Control notification

Device Control operating algorithm

Kaspersky Endpoint Security makes a decision on whether to allow access to a device after the user connects the device to the computer (see the figure below).

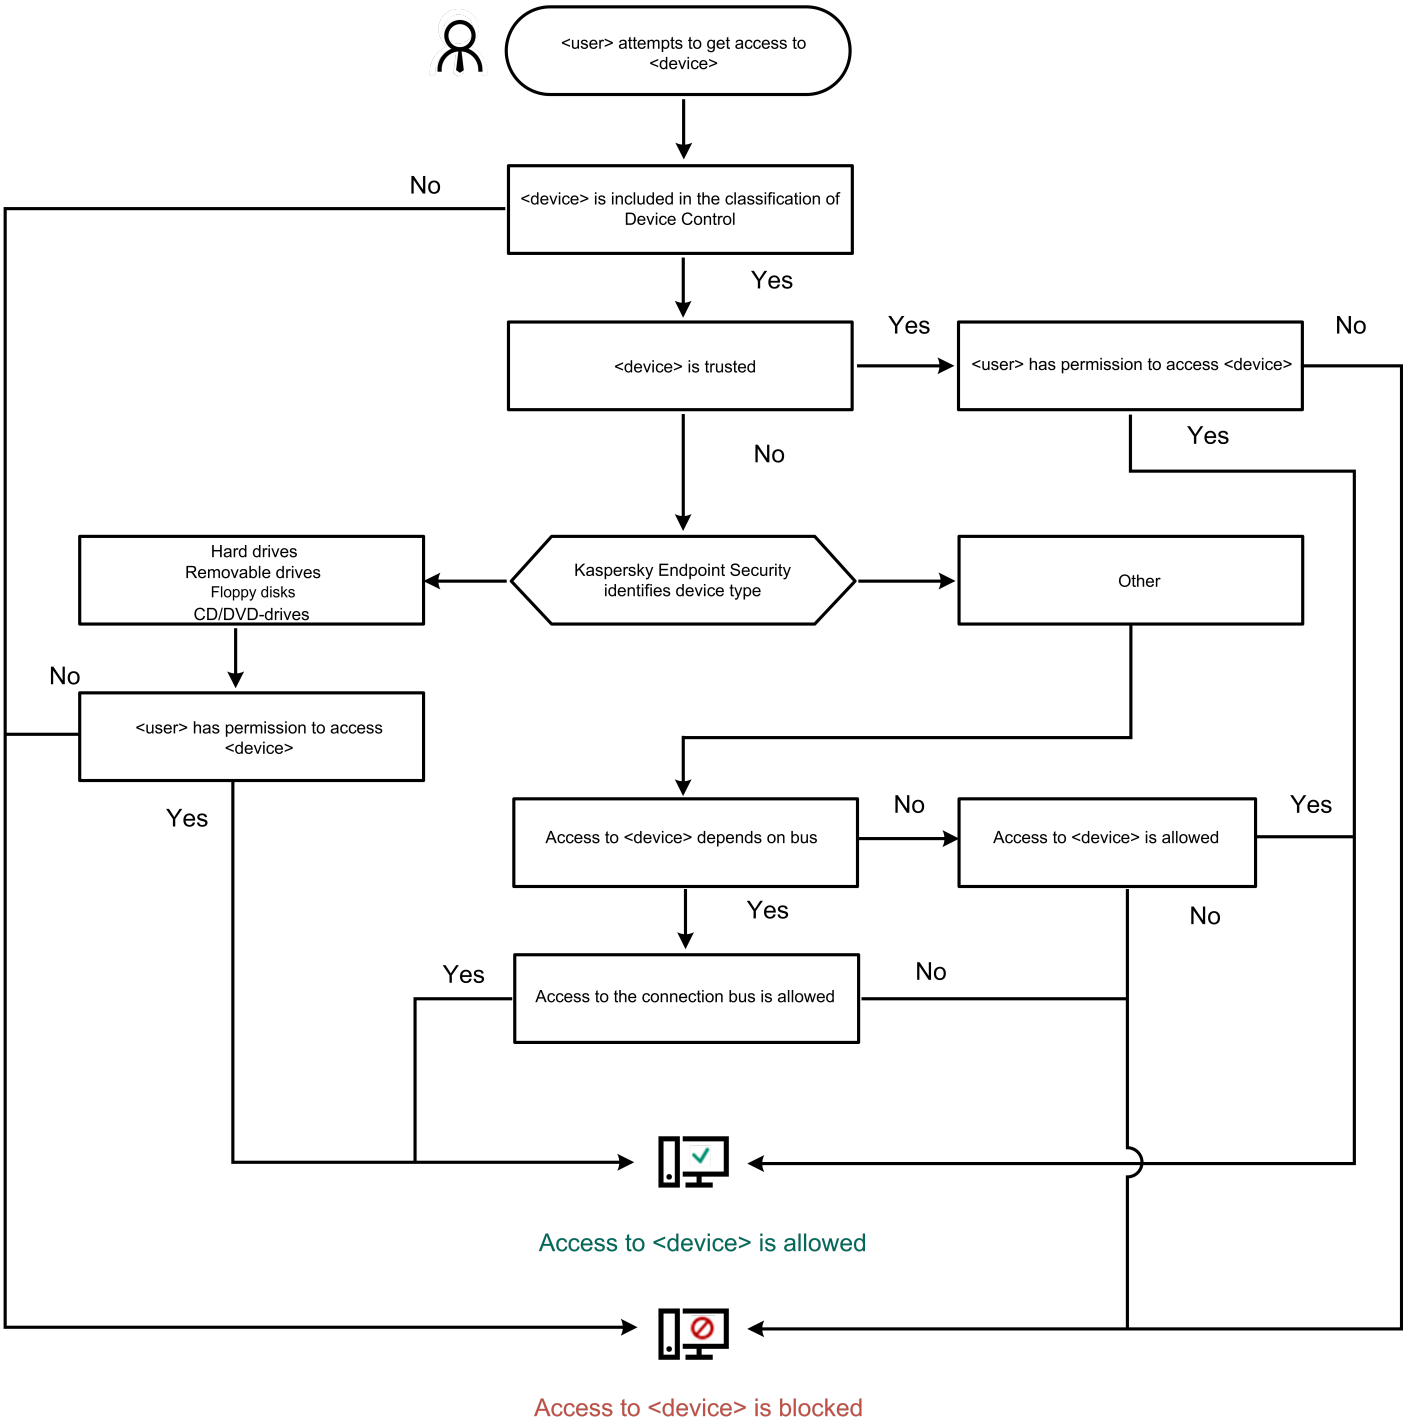

Device Control operating algorithm

If a device is connected and access is allowed, you can edit the access rule and block access. In this case, the next time someone attempts to access the device (such as to view the folder tree, or perform read or write operations), Kaspersky Endpoint Security blocks access. A device without a file system is blocked only the next time that the device is connected.

If a user of the computer with Kaspersky Endpoint Security installed must request access to a device that the user believes was blocked by mistake, send the user the request access instructions.

About access rules

A *device access rule* is a group of settings that determine how users can access devices that are installed or connected to the computer. These settings include access to a specific device, an access schedule, and read or write permissions. You cannot add a device that is outside of Device Control classification. Access to such devices is allowed for all users.

Device Access Rules

The group of settings for an access rule differs depending on the type of device (see the table below).

Access rule settings

Devices	Access control	Schedule for access to a device	Assignment of users and/or a group of users	Priority	Read/write permission
Hard drives	✓	✓	✓	✓	✓
Removable drives (including USB flash drives)	✓	✓	✓	✓	✓
Floppy disks	✓	✓	✓	✓	✓
CD/DVD drives	✓	✓	✓	✓	✓
Portable devices (MTP)	✓	✓	✓	✓	✓
Local printers	✓	–	✓	✓	–
Network printers	✓	–	✓	✓	–
Modems	✓	–	–	–	–
Tape devices	✓	–	–	–	–
Multifunctional devices	✓	–	–	–	–
Smart card readers	✓	–	–	–	–
Windows CE USB ActiveSync devices	✓	–	–	–	–
External network adapters	✓	–	–	–	–
Bluetooth	✓	–	–	–	–
Cameras and scanners	✓	–	–	–	–

Access rules for Wi-Fi networks

A Wi-Fi network access rule determines whether the use of Wi-Fi networks is allowed (the ✓ status) or forbidden (the ⊘ status). You can add a *trusted Wi-Fi network* (the status) to a rule. Use of a trusted Wi-Fi network is allowed without limitations. By default, a Wi-Fi network access rule allows access to any Wi-Fi network.

Connection bus access rules

If **Depends on connection bus** value is selected for the access rule by device type, the application allows or denies access to the device depending on the connection interface. Rules that allow access to buses are created by default for all connection buses that are present in the classification of the Device Control component.

Connection bus access rules determine whether the connection of devices is allowed (the ✓ status) or forbidden (the ⊘ status). The priority of device type access rules is higher than the priority of connection bus access rules.

> Keyboard and mouse cannot be locked using Device Control. If you prohibit access to the USB connection bus, the user will continue to work with a keyboard and mouse connected via USB. The BadUSB Attack Prevention component is designed to prevent infected USB devices imitating keyboards from connecting to the computer.

Getting information about installed devices

Kaspersky Security Center receives information about installed devices from the following providers: Network Agent and Kaspersky Endpoint Security. Information about installed devices is needed for access management and creation of a list of trusted devices.

Information about computer hardware

If Network Agent is installed on a Windows device, it sends the following information about the hardware of the device to the Administration Server:

- RAM
- storage devices (including hard drives)
- motherboard
- CPU
- network adapter
- monitors
- GPU
- sound card

Network Agent provides this information upon each synchronization with Kaspersky Security Center. You can view the hardware of a computer in the properties of the computer (**Hardware registry**).

Hardware information

Kaspersky Endpoint Security provides information about installed hardware: printers, removable drives, portable devices (MTP), and so on. To receive hardware information, you need to apply an active policy that enables transmission of information of installed devices (such transmission is enabled by default).

How to enable data transmission about installed devices in the Management Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Reports and Storage**.
5. In the **Data transfer to Administration Server** block, click the **Settings** button.
6. Select the **Installed devices** check box.
7. To apply the policy to computers, close the padlock icons and save your changes.

How to enable data transmission about installed devices in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **KSC Integration**.
5. In the **Data transfer to Administration Server** block, click the **Advanced settings** button.
6. Select the **About installed devices** check box.
7. To apply the policy to computers, close the padlock icons and save your changes.

As a result, you can view the list of installed devices in the Kaspersky Security Center console (**Repositories** → **Hardware**).

Managing access to devices by type

Device Control allows managing access to devices by type. The type of the device is determined by the operating system when the device is connected. You can look up the device type using the Device Manager tool built into the operating system. To manage access to devices, you must configure rules. A *device access rule* is a group of settings that determine how users can access devices that are installed or connected to the computer. These settings include access to a specific device, an access schedule, and read or write permissions. You cannot add a device that is outside of Device Control classification. Access to such devices is allowed for all users.

By default, Device Control allows access to all devices for all users.

You can configure access to devices as follows:

- **Allow**.

  Kaspersky Endpoint Security grants all users full access to devices.

- **Block**.

  Kaspersky Endpoint Security blocks device connections. The application allows only trusted devices to connect.

- **Depends on connection bus**.

  Kaspersky Endpoint Security determines the connection interface of devices and restricts access to devices in accordance with their bus connection status. The application also allows connecting trusted devices.

- **By rules**.

  For some device types, you can designate individual users or a group of users that are allowed to use devices, set up a schedule for access to devices, and configure read and write permissions. The application also allows connecting trusted devices.

Be careful when configuring access to devices of the **Hard drives** type. If you block access to the system disk, the application may cause a crash (BSOD) when booting the operating system.

If a device does not fit in the Device Control classification scheme, access to such a device cannot be restricted.

How to manage access to devices by type in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Policies**.

3. Select the necessary policy and double-click to open the policy properties.

4. In the policy window, select **Security Controls** → **Device Control**.

5. Under **Device Control settings**, select the **Types of devices** tab.

   The **Types of devices** tab shows access rules for all devices that are included in the Device Control classification.

6. Configure access rules for devices:

   a. Select access mode: **Allow**, **Block**, **Depends on connection bus**, **By rules**.

      To select the **By rules** access mode, you must double-click to open access rule properties.

   b. If you select the **Depends on connection bus** access mode, you must configure access rules for connection interfaces on the **Connection buses** tab.

   c. In the case of storage devices (for example, removable media), you can configure access permissions for individual users. You can also set up a schedule for access to devices and configure read and write permissions.

      You can add devices to the trusted list. *Trusted devices* are devices to which users that are specified in the trusted device settings have full access at all times.

   d. If necessary, configure the printing rules.

e. If necessary, configure Bluetooth device access rules.

f. If necessary, configure computer Wi-Fi connection rules.

7. To apply the policy to computers, close the padlock icons and save your changes.

How to manage access to devices by type in the Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Device Control**.

5. Under **Device access rules**, select the **Devices and Wi-Fi networks** tab.

   The table lists access rules for all devices that are present in the classification of the Device Control component.

6. Configure access rules for devices:

   a. Select access mode: **Allow**, **Block**, **Depends on bus**, **Custom**.

      If the access mode is missing from the drop-down menu, open the access rule properties by double-clicking the device type.

   b. If you select the **Depends on bus** access mode, you must configure access rules for connection interfaces on the **Connection buses** tab.

   c. In the case of storage devices (for example, removable media), you can configure access permissions for individual users. You can also set up a schedule for access to devices and configure read and write permissions.

      You can add devices to the trusted list. *Trusted devices* are devices to which users that are specified in the trusted device settings have full access at all times.

   d. If necessary, configure the printing rules.

   e. If necessary, configure Bluetooth device access rules.

   f. If necessary, configure computer Wi-Fi connection rules.

7. To apply the policy to computers, close the padlock icons and save your changes.

How to manage access to devices in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **Security Controls** → **Device Control**.

3. In the **Access settings** block, click the **Devices and Wi-Fi networks** link.

   The table lists access rules for all devices that are present in the classification of the Device Control component.

4. Configure access rules for devices:

   a. Select access mode: **Allow**, **Block**, **Depends on connection bus**, **By rules**.

      If the access mode is missing from the drop-down menu, open the access rule properties by double-clicking the device type.

   b. If you select the **Depends on connection bus** access mode, you must configure access rules for connection interfaces on the **Connection buses** tab.

   c. In the case of storage devices (for example, removable media), you can configure access permissions for individual users. You can also set up a schedule for access to devices and configure read and write permissions.

      You can add devices to the trusted list. *Trusted devices* are devices to which users that are specified in the trusted device settings have full access at all times.

   d. If necessary, configure the printing rules.

   e. If necessary, configure Bluetooth device access rules.

   f. If necessary, configure computer Wi-Fi connection rules.

5. Save your changes.

As a result, when a user attempts to gain access to a device, the application blocks access in accordance with the rules. Kaspersky Endpoint Security also logs a corresponding event. If you want to grant access to individual devices, you can add these devices to the list of trusted devices.

Managing access to devices by connection bus

To edit a connection bus access rule:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Device Control**.

3. In the **Access settings** block, click the **Connection buses** button.

   The opened window shows access rules for all connection buses that are included in the Device Control component classification.

4. Select the access rule that you want to edit.

5. In the **Access** column, select whether or not to allow access to the connection bus: **Allow** or **Block**.

   If you have changed access to the connection bus **Serial Port** (COM) or **Parallel Port** (LPT), you must restart the computer to activate the access rule.

6. Save your changes.

Differentiation of user access rights to devices

You can configure user access rights by device type or to trusted devices.

Differentiation of user access rights by device type

Device Control allows configuring user access rights to data on *storage devices*. For such devices, you can configure write and read permissions. Device Control supports the following types of *storage devices*:

- Hard drives
- Removable drives (including USB flash drives)
- Floppy disks
- CD/DVD drives
- Portable devices (MTP) Portable devices (MTP) include, for example, mobile devices, photo cameras, media players, and so on.

In this way you can, for example, allow using removable media only to the group of administrators. For other device types, you can deny or allow access for all users. You can also configure user access rights to use printers.

How to configure user access rights to data on storage devices in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Security Controls** → **Device Control**.
5. Under **Device Control settings**, select the **Types of devices** tab.

   The **Types of devices** tab shows access rules for all devices that are included in the Device Control classification.
6. To configure storage device access rules, double-click to open the list of rules.
7. Configure the storage device access rule:

   a. In the **Access rules** block, click the **Add** button.

      This opens a window for adding a new storage device access rule.

   b. In the **Rule priority** field, set the *rule write* priority. A rule includes the following attributes: user account, schedule, permissions (read/write), and priority.

A rule has a specific priority. If a user has been added to multiple groups, Kaspersky Endpoint Security regulates device access based on the rule with the highest priority. Kaspersky Endpoint Security allows you to assign priority from 0 to 10,000. The higher the value, the higher the priority. In other words, an entry with the value of 0 has the lowest priority.

For example, you can grant read-only permissions to the Everyone group and grant read/write permissions to the administrators group. To do so, assign a priority of 1 for the administrators group and assign a priority of 0 for the Everyone group.

The priority of a block rule is higher than the priority of an allow rule. In other words, if a user has been added to multiple groups and the priority of all rules are the same, Kaspersky Endpoint Security regulates device access based on any existing block rule.

c. Under **Rule for users and groups**, select users or groups of users. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

d. Click **OK**.

8. Under **Schedules for the selected access rule**, configure a storage device access schedule for users.

   For example, you can allow users to use storage devices only during working hours.

9. Configure users' access permissions to storage devices in the file manager (**Read** / **Write**).

10. To apply the policy to computers, close the padlock icons and save your changes.

How to configure user access rights to data on storage devices in the Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Device Control**.

5. In the **Device access rules** block, in the access rules table, open the properties of the access rules for storage devices.

6. In the **Device access rules** block, select **Custom**.

7. Configure the storage device access rule:

   a. In the **Users and their rights** block, click the **Add** button.

      This opens a window for adding a new storage device access rule.

   b. In the **Priority** field, set the *rule write* priority. A rule includes the following attributes: user account, schedule, permissions (read/write), and priority.

      A rule has a specific priority. If a user has been added to multiple groups, Kaspersky Endpoint Security regulates device access based on the rule with the highest priority. Kaspersky Endpoint Security allows you to assign priority from 0 to 10,000. The higher the value, the higher the priority. In other words, an entry with the value of 0 has the lowest priority.

For example, you can grant read-only permissions to the Everyone group and grant read/write permissions to the administrators group. To do so, assign a priority of 1 for the administrators group and assign a priority of 0 for the Everyone group.

The priority of a block rule is higher than the priority of an allow rule. In other words, if a user has been added to multiple groups and the priority of all rules are the same, Kaspersky Endpoint Security regulates device access based on any existing block rule.

c. Under **User or group**, select users or groups of users. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

d. Under **Access schedule**, configure a storage device access schedule for users.

For example, you can allow users to use storage devices only during working hours.

e. Configure users' access permissions to storage devices in the file manager (**Read** / **Write**).

f. Click **Save**.

8. To apply the policy to computers, close the padlock icons and save your changes.

How to configure user access rights to data on storage devices in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **Security Controls** → **Device Control**.

3. In the **Access settings** block, click the **Devices and Wi-Fi networks** link.

The table lists access rules for all devices that are present in the classification of the Device Control component.

4. To configure storage device access rules, right-click to open the list of rules.

5. Configure the storage device access rule:

a. In the **Users' rights** block, click the **Add** button.

This opens a window for adding a new storage device access rule.

b. In the **Priority** field, set the *rule write* priority. A rule includes the following attributes: user account, schedule, permissions (read/write), and priority.

A rule has a specific priority. If a user has been added to multiple groups, Kaspersky Endpoint Security regulates device access based on the rule with the highest priority. Kaspersky Endpoint Security allows you to assign priority from 0 to 10,000. The higher the value, the higher the priority. In other words, an entry with the value of 0 has the lowest priority.

For example, you can grant read-only permissions to the Everyone group and grant read/write permissions to the administrators group. To do so, assign a priority of 1 for the administrators group and assign a priority of 0 for the Everyone group.

The priority of a block rule is higher than the priority of an allow rule. In other words, if a user has been added to multiple groups and the priority of all rules are the same, Kaspersky Endpoint Security regulates device access based on any existing block rule.

c. Under **Users**, select users or groups of users. You can select users in Active Directory or enter a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

d. Click **OK**.

6. Under **Schedule for access to devices**, configure a storage device access schedule for users.

   For example, you can allow users to use storage devices only during working hours.

7. Configure users' access permissions to storage devices in the file manager (**Read** / **Write**).

8. Save your changes.

Differentiation of user access rights to trusted devices

Trusted devices are devices to which users that are specified in the trusted device settings have full access at all times. To work with trusted devices, you can grant access to an individual user, to a group of users, or to all users of the organization. You can configure user access rights in the properties of the trusted device.

Managing access to mobile devices

Kaspersky Endpoint Security allows you to control access to data on mobile devices running Android and iOS. Mobile devices belong to the category of portable devices (MTP). Therefore, to configure data access on mobile devices, you need to edit the access settings for portable devices (MTP).

When a mobile device is connected to the computer, the operating system determines the device type. If Android Debug Bridge (ADB), iTunes or their equivalent applications are installed on the computer, the operating system identifies mobile devices as ADB or iTunes devices. In all other cases, the operating system may identify the mobile device type as a portable device (MTP) for file transfer, a PTP device (camera) for image transfer, or another device. The device type depends on the model of the mobile device and the selected USB connection mode. Kaspersky Endpoint Security lets you configure individual access permissions for data on mobile devices in ADB applications, iTunes, or the file manager. In all other cases, Device Control allows access to mobile devices in accordance with portable devices (MTP) access rules.

Access to mobile devices

Mobile devices belong to the category of portable devices (MTP), therefore the settings for them are the same. You can select one of the following modes of access to mobile devices:

- **Allow** ✓. Kaspersky Endpoint Security allows full access to mobile devices. You can open, create, modify, copy, or delete files on mobile devices using the file manager or ADB and iTunes applications. You can also charge the battery of the device by connecting the mobile device to a USB port of the computer.

- **Block** ⊘. Kaspersky Endpoint Security restricts access to mobile devices in the file manager and ADB and iTunes applications. The application allows access only to trusted mobile devices. You can also charge the battery of the device by connecting the mobile device to a USB port of the computer.

- **Depends on connection bus**. Kaspersky Endpoint Security allows connecting to mobile devices in accordance with the USB connection status (**Allow** or **Block**).

- **By rules**. Kaspersky Endpoint Security restricts access to mobile devices in accordance with rules. In the rules, you can configure access rights (read / write), select users or a group of users that can have access to mobile devices, and configure an access schedule for mobile devices. You can also restrict access to data on mobile devices through the ADB and iTunes applications.

Configuring mobile device access rules

Access rules for portable devices (MTP), ADB devices, and iTunes devices are configured differently. For portable devices (MTP) and ADB devices, you can configure rules for individual users or groups of users and create a schedule for when the rules will apply. For iTunes devices, you cannot do that. You can only allow or deny access to data through the iTunes application for all users.

How to configure mobile device access rules in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **Device Control**.

4. Under **Device Control settings**, select the **Types of devices** tab.

   The table lists access rules for all devices that are present in the classification of the Device Control component.

5. In the context menu for the **Portable devices (MTP)** device type, configure the mobile device access mode: **Allow**, **Block**, or **Depends on connection bus**.

6. To configure mobile device access rules, double-click to open the list of rules.

7. Configure the mobile device access rule:

   a. In the **Access rules** block, click the **Add** button.

      This opens a window for adding a new mobile device access rule.

   b. In the **Priority** field, set the rule write priority. A rule includes the following attributes: user account, schedule, permissions (read / write / ADB access), and priority.

      A rule has a specific priority. If a user has been added to multiple groups, Kaspersky Endpoint Security regulates device access based on the rule with the highest priority. Kaspersky Endpoint Security allows you to assign priority from 0 to 10,000. The higher the value, the higher the priority. In other words, an entry with the value of 0 has the lowest priority.

      For example, you can grant read-only permissions to the Everyone group and grant read/write permissions to the administrators group. To do so, assign a priority of 1 for the administrators group and assign a priority of 0 for the Everyone group.

      The priority of a block rule is higher than the priority of an allow rule. In other words, if a user has been added to multiple groups and the priority of all rules are the same, Kaspersky Endpoint Security regulates device access based on any existing block rule.

c. Under **Rule for users and groups**, select users or groups of users. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

d. Click **OK**.

8. Under **Schedules for the selected access rule**, configure a mobile device access schedule for users.

> Configuring a separate access schedule for ADB devices is not possible. You can configure a common access schedule for ADB devices and portable devices (MTP).

9. Configure users' access permissions to mobile devices in the file manager (**Read** / **Write**).

10. Configure the access to data on a mobile device through the ADB application using the **Access via ADB** check box.

    If the check box is cleared, when the mobile device is connected, the ADB application is prevented from detecting the device.

11. Under **Access via iTunes**, configure access to data on the mobile device through the iTunes application.

> Kaspersky Endpoint Security applies the settings for mobile device access through the iTunes application for all users. Configuring a separate access schedule for iTunes devices is not possible.

12. Save your changes.

How to configure mobile device access rules in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Device Control**.

5. In the **Device access rules** block, click the **Devices and Wi-Fi networks** link.

   The table lists access rules for all devices that are present in the classification of the Device Control component.

6. Select the **Portable devices (MTP)** device type.

   This opens portable devices (MTP) access rights.

7. Configure the mobile devices access mode: **Allow**, **Block**, **Depends on bus**, or **Custom**.

8. Using the **Access via iTunes for all users ENABLED** toggle switch, configure access to data on the mobile device through the iTunes application.

   Kaspersky Endpoint Security applies the settings for mobile device access through the iTunes application for all users. Configuring a separate access schedule for iTunes devices is not possible.

9. If you select the **Custom** mode, you must add access rules for devices. To do so, under **Users and their rights**, click the **Add** button and configure the mobile device access rule:

   a. In the **Priority** field, set the rule write priority. A rule includes the following attributes: user account, schedule, permissions (read / write / ADB access), and priority.

      A rule has a specific priority. If a user has been added to multiple groups, Kaspersky Endpoint Security regulates device access based on the rule with the highest priority. Kaspersky Endpoint Security allows you to assign priority from 0 to 10,000. The higher the value, the higher the priority. In other words, an entry with the value of 0 has the lowest priority.

      For example, you can grant read-only permissions to the Everyone group and grant read/write permissions to the administrators group. To do so, assign a priority of 1 for the administrators group and assign a priority of 0 for the Everyone group.

      The priority of a block rule is higher than the priority of an allow rule. In other words, if a user has been added to multiple groups and the priority of all rules are the same, Kaspersky Endpoint Security regulates device access based on any existing block rule.

   b. Under **User or group**, select users or groups of users for access to mobile devices. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

   c. Under **Access schedule**, configure a mobile device access schedule for users.

      Configuring a separate access schedule for ADB devices is not possible. You can configure a common access schedule for ADB devices and portable devices (MTP).

   d. Configure users' access permissions to mobile devices in the file manager (**Read** / **Write**).

   e. Configure the access to data on a mobile device through the ADB application using the **Access via ADB** check box.

      If the check box is cleared, when the mobile device is connected, the ADB application is prevented from detecting the device.

10. Save your changes.

How to configure mobile device access rules in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Device Control**.

3. In the **Access settings** block, click the **Devices and Wi-Fi networks** button.

The opened window shows access rules for all devices that are included in the Device Control component classification.

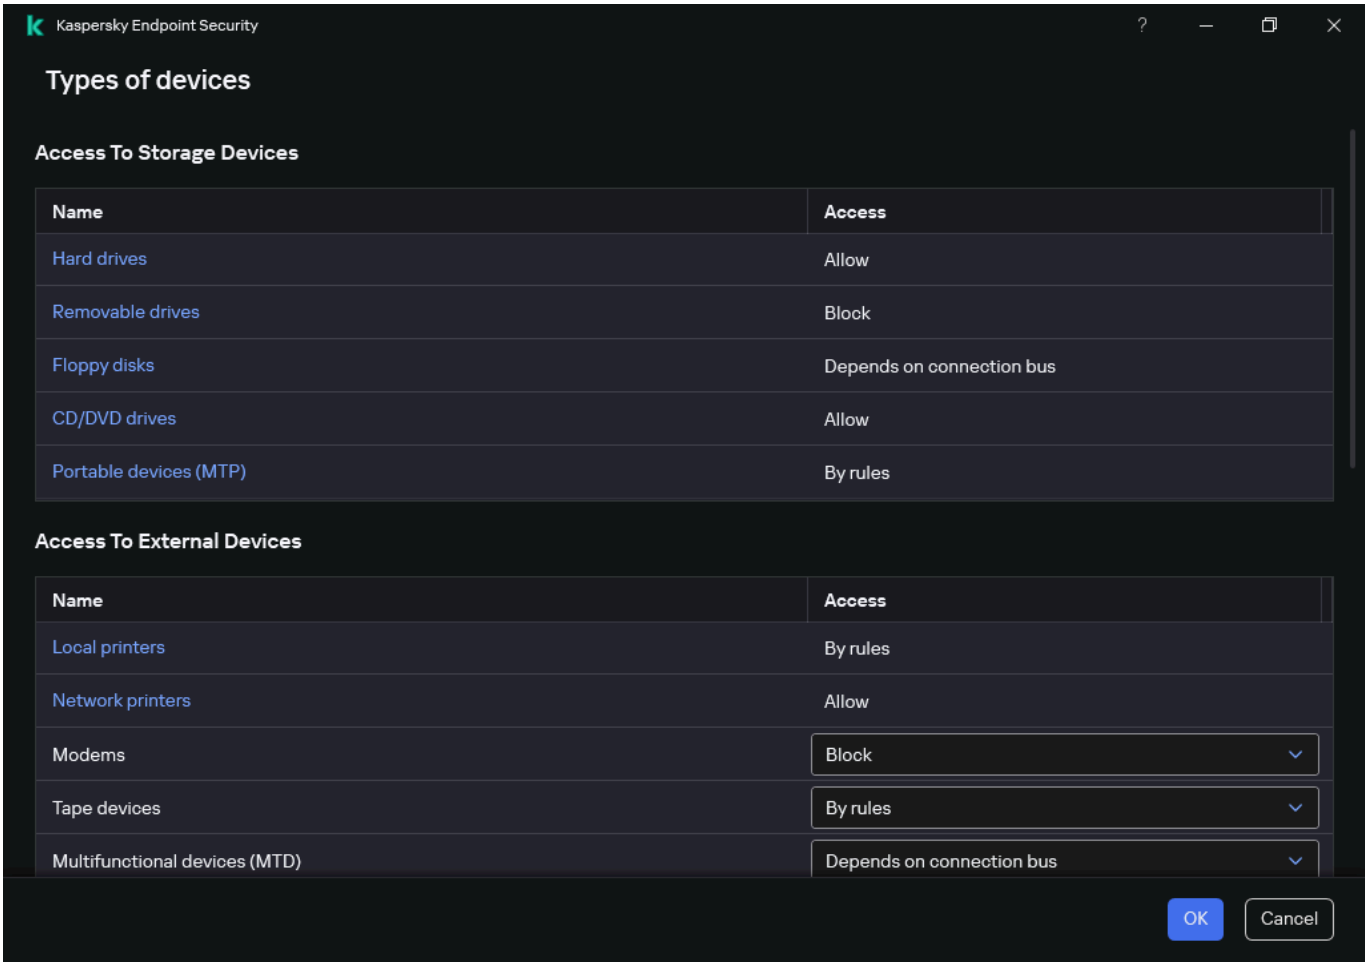

Types of devices in the Device Control component

4. In the **Access To Storage Devices** block, click the **Portable devices (MTP)** link.

   This opens a window containing the portable devices (MTP) access rules.

5. Under **Access**, configure the mobile devices access mode: **Allow**, **Block**, **Depends on connection bus**, or **By rules**.

6. If you select the **By rules** mode, you must add access rules for devices:

   a. In the **Users' rights** block, click the **Add** button.

      This opens a window for adding a new mobile device access rule.

   b. In the **Priority** field, set the rule write priority. A rule includes the following attributes: user account, schedule, permissions (read / write / ADB access), and priority.

      A rule has a specific priority. If a user has been added to multiple groups, Kaspersky Endpoint Security regulates device access based on the rule with the highest priority. Kaspersky Endpoint Security allows you to assign priority from 0 to 10,000. The higher the value, the higher the priority. In other words, an entry with the value of 0 has the lowest priority.

      For example, you can grant read-only permissions to the Everyone group and grant read/write permissions to the administrators group. To do so, assign a priority of 1 for the administrators group and assign a priority of 0 for the Everyone group.

      The priority of a block rule is higher than the priority of an allow rule. In other words, if a user has been added to multiple groups and the priority of all rules are the same, Kaspersky Endpoint Security regulates device access based on any existing block rule.

c. Under **State**, turn on the mobile device access rule.

d. Under **Access rules**, configure mobile device access permissions for users.

- Configure users' access permissions to mobile devices in the file manager (**Read** / **Write**).
- Configure the access to data on a mobile device through the ADB application using the **Access via ADB** check box.

  If the check box is cleared, when the mobile device is connected, the ADB application is prevented from detecting the device.

e. Under **Users**, select users or groups of users for access to mobile devices. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

f. Under **Schedule for access to devices**, configure a device access schedule for users.

> Configuring a separate access schedule for ADB devices is not possible. You can configure a common access schedule for ADB devices and portable devices (MTP).

g. Under **Access via iTunes**, configure access to data on the mobile device through the iTunes application.

> Kaspersky Endpoint Security applies the settings for mobile device access through the iTunes application for all users. Configuring a separate access schedule for iTunes devices is not possible.

7. Save your changes.

As a result, user access to mobile devices is restricted in accordance with rules. If you have prohibited access to mobile devices in the ADB and iTunes applications, when you connect a mobile devices, the ADB and iTunes applications are prevented from detecting the mobile device.

Trusted mobile devices

Trusted devices are devices to which users that are specified in the trusted device settings have full access at all times.

The procedure for adding a trusted mobile device is exactly the same as for other types of trusted devices. You can add a mobile device by ID or by device model.

To add a trusted mobile device by ID, you will need a unique ID (Hardware ID – HWID). You can find the ID in device properties by using operating system tools (see figure below). The Device Manager tool lets you do this. IDs of portable devices (MTP) and ADB, iTunes devices are different even for the same mobile device. The ID of a portable device (MTP) may look like this: `15131JECB07440`. The ID of an ADB device may look like this: `6&370DEC2A&0&0001`. Adding devices by ID is convenient if you want to add several specific devices. You can also use masks.

> If you installed the ADB or iTunes applications after connecting a device to the computer, the unique ID of the device may be reset. This means that Kaspersky Endpoint Security will identify this device as a new device. If a device is trusted, add the device to the trusted list again.

To add a trusted mobile device by device model, you will need its Vendor ID (VID) and Product ID (PID). You can find the IDs in device properties by using operating system tools (see figure below). Template for entering the VID and PID: `VID_18D1&PID_4EE5`. Adding devices by model is convenient if you use devices of a certain model in your organization. This way, you can add all devices of this model.

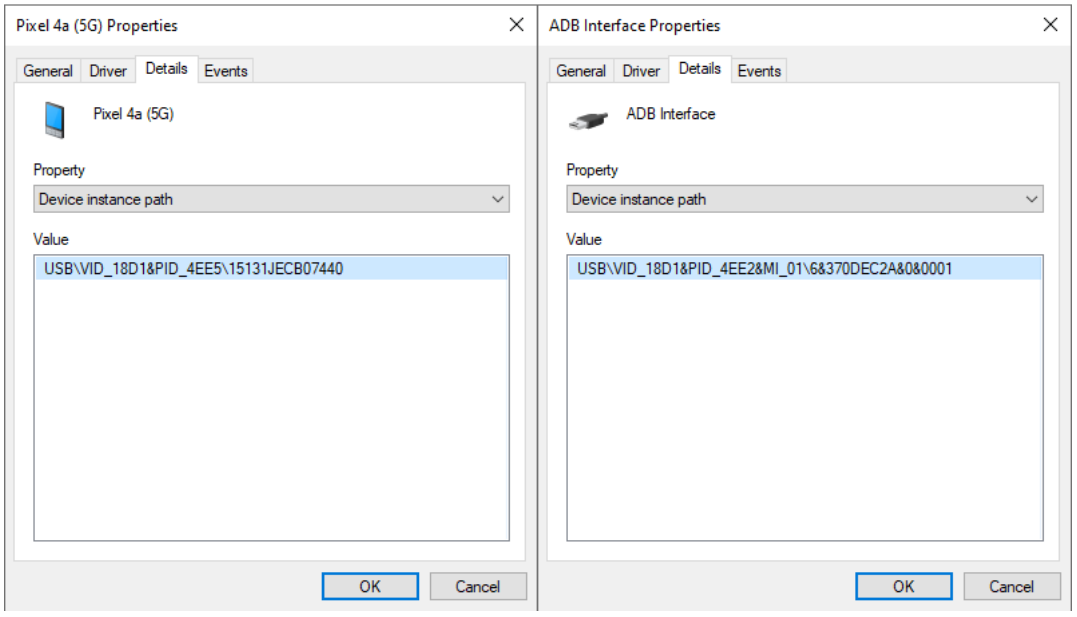

Device ID in Device Manager

Managing access to Bluetooth devices

Kaspersky Endpoint Security allows managing access to Bluetooth devices. Bluetooth devices include wireless keyboards, mice, headsets, printers, etc. You can also uses Bluetooth for communication e.g. with a mobile device.

> When Bluetooth devices are connected or disconnected, the application may create multiple events about the device. The reason is that the operating system may detect a Bluetooth device as multiple devices of different types. Kaspersky Endpoint Security also manages the Bluetooth adapter through which the device is connected as a separate device. That is why the application creates an event for each of the detected devices.

You can select one of the following modes of access to Bluetooth devices:

- **Allow and do not log** . Kaspersky Endpoint Security allows connecting any Bluetooth devices and does not save information about the connection in the event log. You can connect Bluetooth input devices (keyboards, mice, etc), send data over Bluetooth, manage other Bluetooth devices (headset, headphones, etc).
- **Allow** . Kaspersky Endpoint Security allows connecting any Bluetooth devices. You can connect Bluetooth input devices (keyboards, mice, etc), send data over Bluetooth, manage other Bluetooth devices (headset, headphones, etc).
- **Block** . Kaspersky Endpoint Security restricts access to Bluetooth devices. You can allow connecting only Bluetooth input devices (the Human Interface Devices class). These devices include keyboards, mouse devices, joysticks, etc.

It is not possible to create a list of trusted Bluetooth devices. If you have restricted access to Bluetooth devices, you can only connection of Bluetooth input devices.

How to configure Bluetooth device access rules in Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Security Controls** → **Device Control**.
5. Under **Device Control settings**, select the **Types of devices** tab.

   The table lists access rules for all devices that are present in the classification of the Device Control component.
6. In the context menu for the **Bluetooth** device type, configure the Bluetooth device access mode: **Allow** , **Block** , **Allow and do not log** .
7. If you select the **Block** mode, you can allow connecting only Bluetooth input devices (keyboards, mice, etc). To do so, under **Exclusions**, select the **Input devices (mice and keyboards)** check box.
8. To apply the policy to computers, close the padlock icons and save your changes.

How to configure Bluetooth device access rules in Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Security Controls** → **Device Control**.
5. In the **Device access rules** block, click the **Devices and Wi-Fi networks** link.

   The table lists access rules for all devices that are present in the classification of the Device Control component.

6. Select the **Bluetooth devices** device type.

   This opens the Bluetooth device access settings.

7. Configure the Bluetooth device access mode: **Allow**, **Block**, **Allow and do not log**.

8. If you select the **Block** mode, you can allow connecting only Bluetooth input devices (keyboards, mice, etc). To do so, under **Exclusions**, select the **Input devices (mice and keyboards)** check box.

9. To apply the policy to computers, close the padlock icons and save your changes.

How to configure Bluetooth device access rules in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **Security Controls** → **Device Control**.

3. In the **Access settings** block, click the **Devices and Wi-Fi networks** button.

   The opened window shows access rules for all devices that are included in the Device Control component classification.

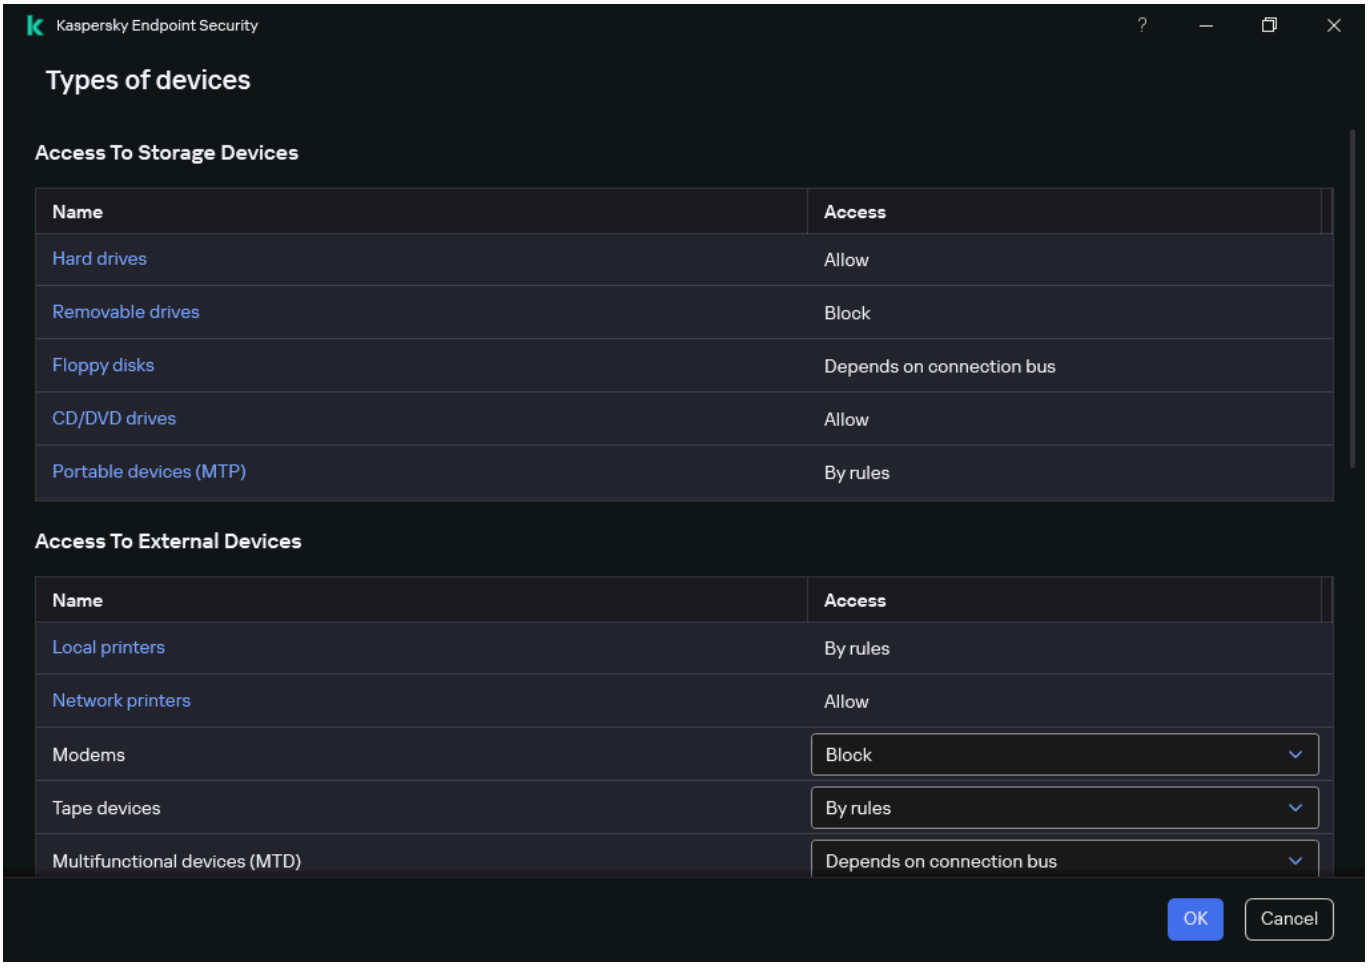

Types of devices in the Device Control component

4. In the **Access To External Devices** block, click the **Bluetooth** link.

   This opens the Bluetooth device access settings.

5. Under **Access**, configure the Bluetooth device access mode: **Allow**, **Block**, **Allow and do not log**.

6. If you select the **Block** mode, you can allow connecting only Bluetooth input devices (keyboards, mice, etc). To do so, under **Exclusions**, select the **Input devices (mice and keyboards)** check box.

7. Save your changes.

Control of printing

Printing control is not supported on Arm-based computers.

You can use Control of printing to configure user access to local and network printers.

Local printer control

Kaspersky Endpoint Security allows configuring access to local printers on two levels: *connecting* and *printing*.

Kaspersky Endpoint Security controls local printer connection over the following buses: USB, Serial Port (COM), Parallel Port (LPT).

Kaspersky Endpoint Security controls the connection of local printers to COM and LPT ports only on the level of the bus. Thus, to prevent printer connections via COM and LPT ports, you need to select the Depends on connection bus access mode for local printers and prohibit connections to COM and LPT buses.

For printers connected to USB, the application exercises control on two levels: device type (local printers) and connection bus (USB).

You can select one of the following access modes to local printers via USB:

- **Allow**. Kaspersky Endpoint Security grants full access to local printers to all users. Users can connect printers and print documents using the means that the operating system provides.
- **Block**. Kaspersky Endpoint Security blocks the connection of local printers. The application allows connecting only trusted printers.
- **Depends on connection bus**. Kaspersky Endpoint Security allows connecting to local printers in accordance with the USB bus connection status (**Allow** or **Block**).
- **By rules**. To control printing, you must add *printing rules*. In the rules, you can select users or a group of users for which you want to allow or block access to printing documents on local printers.

Network printer control

Kaspersky Endpoint Security allows configuring access to printing on network printers. You can select one of the following access modes to network printers:

- **Allow and do not log** . Kaspersky Endpoint Security does not control printing on network printers. The application grants access to printing to all users and does not save information about printing to the event log.
- **Allow** . Kaspersky Endpoint Security grants access to printing on network printers to all users.
- **Block** . Kaspersky Endpoint Security restricts access to network printers for all users. The application allows access only to trusted printers.
- **By rules** . Kaspersky Endpoint Security grants access to printing in accordance with printing rules. In the rules, you can select users or a group of users that will be allowed or prevented from printing documents on network printer.

Adding printing rules for printers

How to add printing rules in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **Device Control**.
4. Under **Device Control settings**, select the **Types of devices** tab.

   The table lists access rules for all devices that are present in the classification of the Device Control component.
5. In the context menu for the **Local printers** and **Network printers** device types, configure the access mode for the relevant printers: **Allow** , **Block** , **Allow and do not log** (for network printers only), or **Depends on connection bus** (for local printers only).
6. To configure printing rules on local and network printers, double-click the rule lists to open them.
7. Select **By rules** as the printer access mode.
8. Select the users or groups of users to which you want to apply the printing rule.

   a. Click **Add**.

      This opens a window for adding a new printing rule.

   b. Assign a priority to the rule entry. A rule entry includes the following attributes: user account, action (allow/block), and priority.

      A rule has a specific priority. If a user has been added to multiple groups, Kaspersky Endpoint Security regulates device access based on the rule with the highest priority. Kaspersky Endpoint Security allows you to assign priority from 0 to 10,000. The higher the value, the higher the priority. In other words, an entry with the value of 0 has the lowest priority.

For example, you can grant read-only permissions to the Everyone group and grant read/write permissions to the administrators group. To do so, assign a priority of 1 for the administrators group and assign a priority of 0 for the Everyone group.

The priority of a block rule is higher than the priority of an allow rule. In other words, if a user has been added to multiple groups and the priority of all rules are the same, Kaspersky Endpoint Security regulates device access based on any existing block rule.

c. Under **Action**, configure user access to printing on the printer.

d. Click **Users and groups** and select users or groups of users for access to printing. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

e. Click **OK**.

9. Save your changes.

How to add printing rules in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Device Control**.

5. In the **Device access rules** block, click the **Devices and Wi-Fi networks** link.

   The table lists access rules for all devices that are present in the classification of the Device Control component.

6. Select the **Local printers** or **Network printers** device type.

   This opens the printer access rules.

7. Configure the access mode for the relevant printers: **Allow**, **Block**, **Allow and do not log** (for network printers only), **Depends on bus** (for local printers only), or **Custom**.

8. If you select the **Custom** mode, you must add printing rules for local or network printers. To do so, click the **Add** button in the printing rules table.

   This opens the settings of the new printing rule.

9. Assign a priority to the rule entry. A rule entry includes the following attributes: user account, action (allow/block), and priority.

   A rule has a specific priority. If a user has been added to multiple groups, Kaspersky Endpoint Security regulates device access based on the rule with the highest priority. Kaspersky Endpoint Security allows you to assign priority from 0 to 10,000. The higher the value, the higher the priority. In other words, an entry with the value of 0 has the lowest priority.

   For example, you can grant read-only permissions to the Everyone group and grant read/write permissions to the administrators group. To do so, assign a priority of 1 for the administrators group and assign a priority of 0 for the Everyone group.

The priority of a block rule is higher than the priority of an allow rule. In other words, if a user has been added to multiple groups and the priority of all rules are the same, Kaspersky Endpoint Security regulates device access based on any existing block rule.

10. Under **Action**, configure user access to printing on the printer.

11. Under **User or group**, select users or groups of users for access to printing. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

12. Save your changes.

How to add printing rules in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Device Control**.

3. In the **Access settings** block, click the **Devices and Wi-Fi networks** button.

   The opened window shows access rules for all devices that are included in the Device Control component classification.

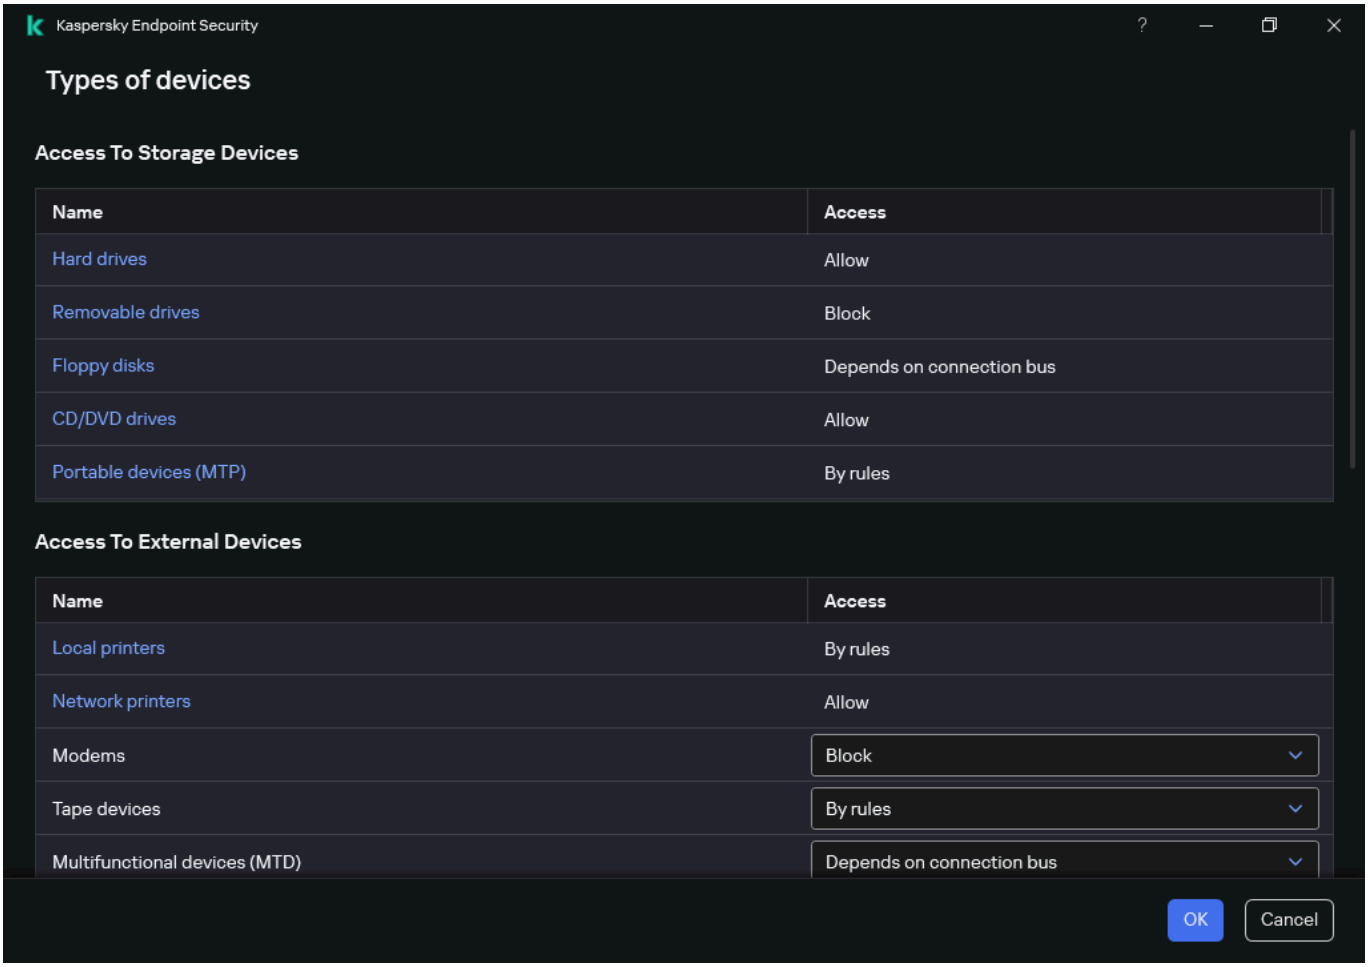

Types of devices in the Device Control component

4. Under **Access To External Devices**, click **Local printers** or **Network printers**.

   This opens a window with printer access rules.

5. Under **Access to local printers** or **Access to network printers**, configure the access mode for printers: **Allow**, **Block**, **Allow and do not log** (for network printers only), **Depends on connection bus** (for local printers only), or **By rules**.

6. If you select the **By rules** mode, you must add printing rules for printers. Select the users or groups of users to which you want to apply the printing rule.

   a. Click **Add**.

      This opens a window for adding a new printing rule.

   b. Assign a priority to the rule entry. A rule entry includes the following attributes: user account, permissions (allow/block), and priority.

      A rule has a specific priority. If a user has been added to multiple groups, Kaspersky Endpoint Security regulates device access based on the rule with the highest priority. Kaspersky Endpoint Security allows you to assign priority from 0 to 10,000. The higher the value, the higher the priority. In other words, an entry with the value of 0 has the lowest priority.

      For example, you can grant read-only permissions to the Everyone group and grant read/write permissions to the administrators group. To do so, assign a priority of 1 for the administrators group and assign a priority of 0 for the Everyone group.

      The priority of a block rule is higher than the priority of an allow rule. In other words, if a user has been added to multiple groups and the priority of all rules are the same, Kaspersky Endpoint Security regulates device access based on any existing block rule.

   c. Under **Action**, configure user permissions for access to printing.

   d. Under **Users and groups**, select users or groups of users for access to printing. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

7. Save your changes.

Trusted printers

Trusted devices are devices to which users that are specified in the trusted device settings have full access at all times.

The procedure for adding trusted printers is exactly the same as for other types of trusted devices. You can add local printers by ID or device model. You can only add network printers by device ID.

To add a trusted local printer by ID, you will need a unique ID (Hardware ID – HWID). You can find the ID in device properties by using operating system tools (see figure below). The Device Manager tool lets you do this. The ID of a local printer may look like this: `6&2D09F5AF&1&C000`. Adding devices by ID is convenient if you want to add several specific devices. You can also use masks.

To add a trusted local printer by device model, you will need its Vendor ID (VID) and Product ID (PID). You can find the IDs in device properties by using operating system tools (see figure below). Template for entering the VID and PID: `VID_04A9&PID_27FD`. Adding devices by model is convenient if you use devices of a certain model in your organization. This way, you can add all devices of this model.

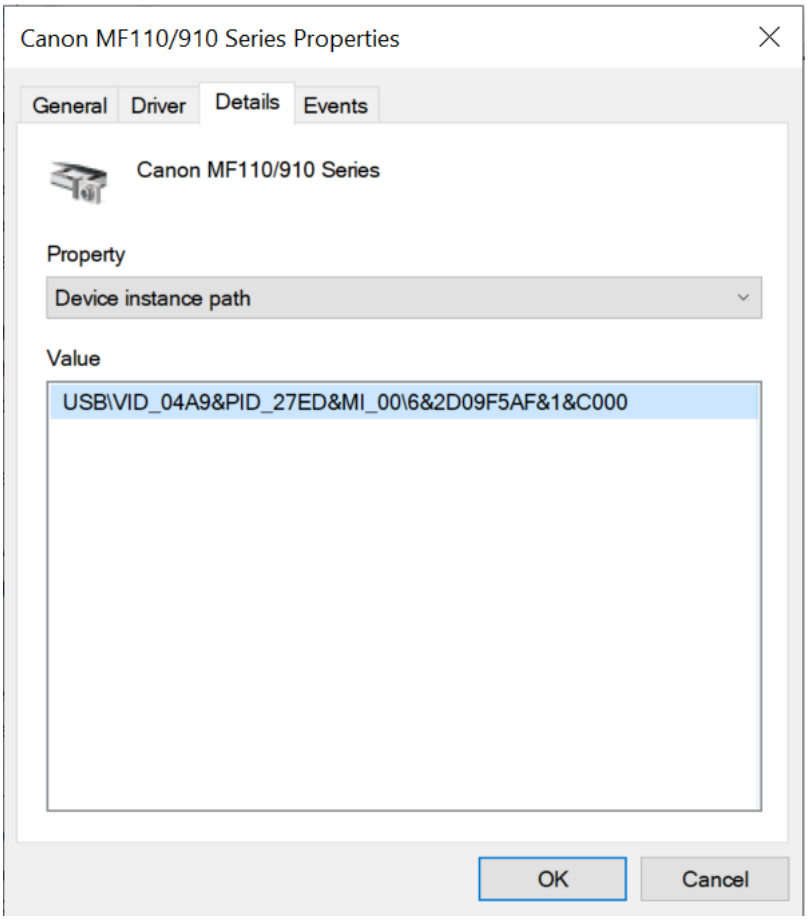

Device ID in Device Manager

To add a trusted network printer, you will need its device ID. For network printers, the device ID can be the network name of the printer (name of the shared printer), the IP address of the printer, or the URL of the printer.

Control of Wi-Fi connections

Device Control allows managing the Wi-Fi connection of the computer (laptop). Public Wi-Fi networks may be insecure, and using such networks can result in data loss. Device Control lets you block a user from connecting to Wi-Fi or allow connecting only to trusted networks. For example, you can allow connecting only to the corporate Wi-Fi network that is sufficiently secure. Device Control will block access to all Wi-Fi networks except those specified in the trusted list.

On computers running Windows 11, you need to enable Location services in order to control Wi-Fi connections. To do this, you need to enable the **Location services** switch in the operating system settings (**Settings** → **Privacy & security** → **Location**). If Location services are disabled, Kaspersky Endpoint Security does not control connections to Wi-Fi networks.

How to restrict Wi-Fi connections in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **Device Control**.

4. Under **Device Control settings**, select the **Types of devices** tab.

   The table lists access rules for all devices that are present in the classification of the Device Control component.

5. In the context menu for the **Wi-Fi** device type, select the Device Control action that is taken when connecting to Wi-Fi: **Allow** ( ), **Block** ( ), or **Block with exceptions** ( ).

6. If you selected the **Block with exceptions** option, create a list of trusted Wi-Fi networks:

   a. Double-click to open the list of trusted Wi-Fi networks.

   b. In the **Trusted Wi-Fi networks** block, click the **Add** button.

   c. This opens a window; in that window, configure the trusted Wi-Fi network (see figure below):

   - **Network name**. Name or SSID (Service Set Identifier) of the Wi-Fi network.
   - **Authentication type**. Authentication type used when connecting to the Wi-Fi network.

     > Starting with Kaspersky Endpoint Security for Windows version 12.0, the WPA3 protocol support has been added to the application. If a Kaspersky Endpoint Security version 12.2 policy is applied on a computer, the WPA2 protocol is selected on computers with Kaspersky Endpoint Security version 11.11.0 and earlier; WPA2 / WPA3 is selected for versions 12.0 to 12.1; WPA3 is selected for versions 12.2 and later.

   - **Encryption type**. Encryption type used to protect the Wi-Fi traffic.
   - **Comment**. Further info about the added Wi-Fi network.

   You can view the settings of the trusted Wi-Fi network in router settings.

   > A Wi-Fi network is considered trusted if its settings match all settings specified in the rule.

7. Save your changes.

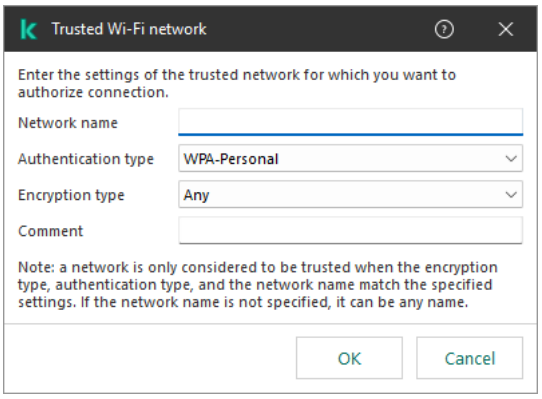

Trusted Wi-Fi network settings

How to restrict Wi-Fi connections in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Device Control**.

5. Under **Device access rules**, select the **Devices and Wi-Fi networks** tab.

   The table lists access rules for all devices that are present in the classification of the Device Control component.

6. In the **Wi-Fi networks** block, click the **Wi-Fi** link.

7. In the window that opens, select the Device Control action taken when connecting to Wi-Fi: **Allow**, **Block**, or **Block with exclusions**.

8. If you selected the **Block with exclusions** option, create a list of trusted Wi-Fi networks:

   a. Double-click to open the list of trusted Wi-Fi networks.

   b. In the **Trusted Wi-Fi networks** block, click the **Add** button.

   c. This opens a window; in that window, configure the trusted Wi-Fi network (see figure below):

   - **Name**. Name or SSID (Service Set Identifier) of the Wi-Fi network.

   - **Authentication type**. Authentication type used when connecting to the Wi-Fi network.

     Starting with Kaspersky Endpoint Security for Windows version 12.0, the WPA3 protocol support has been added to the application. If a Kaspersky Endpoint Security version 12.2 policy is applied on a computer, the WPA2 protocol is selected on computers with Kaspersky Endpoint Security version 11.11.0 and earlier; WPA2 / WPA3 is selected for versions 12.0 to 12.1; WPA3 is selected for versions 12.2 and later.

- **Encryption type**. Encryption type used to protect the Wi-Fi traffic.
- **Comment**. Further info about the added Wi-Fi network.

You can view the settings of the trusted Wi-Fi network in router settings.

> A Wi-Fi network is considered trusted if its settings match all settings specified in the rule.

9. Save your changes.

How to restrict Wi-Fi connections in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Device Control**.
3. In the **Access settings** block, click the **Devices and Wi-Fi networks** button.

   The opened window shows access rules for all devices that are included in the Device Control component classification.
4. In the **Access to Wi-Fi networks** block, click the **Wi-Fi** link.

   The opened window shows the Wi-Fi network access rules.

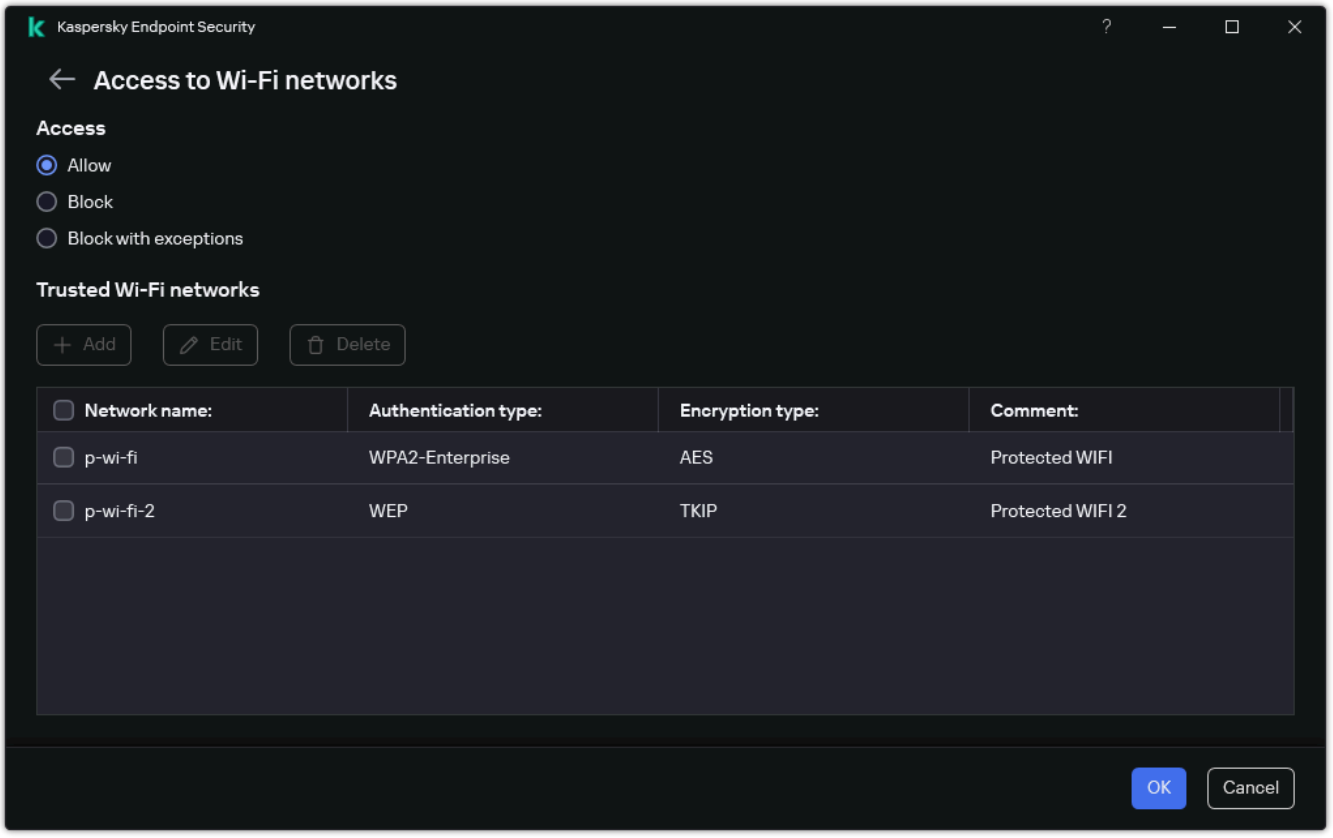

Wi-Fi access settings

5. Under **Access**, select the Device Control action taken when connecting to Wi-Fi: **Allow**, **Block**, or **Block with exceptions**.

6. If you selected the **Block with exceptions** option, create a list of trusted Wi-Fi networks:

   a. In the **Trusted Wi-Fi networks** block, click the **Add** button.

   b. This opens a window; in that window, configure the trusted Wi-Fi network (see figure below):

   - **Network name**. Name or SSID (Service Set Identifier) of the Wi-Fi network.
   - **Authentication type**. Authentication type used when connecting to the Wi-Fi network.

     > Starting with Kaspersky Endpoint Security for Windows version 12.0, the WPA3 protocol support has been added to the application. If a Kaspersky Endpoint Security version 12.2 policy is applied on a computer, the WPA2 protocol is selected on computers with Kaspersky Endpoint Security version 11.11.0 and earlier; WPA2 / WPA3 is selected for versions 12.0 to 12.1; WPA3 is selected for versions 12.2 and later.

   - **Encryption type**. Encryption type used to protect the Wi-Fi traffic.
   - **Comment**. Further info about the added Wi-Fi network.

   You can view the settings of the trusted Wi-Fi network in router settings.

   > A Wi-Fi network is considered trusted if its settings match all settings specified in the rule.

7. Save your changes.

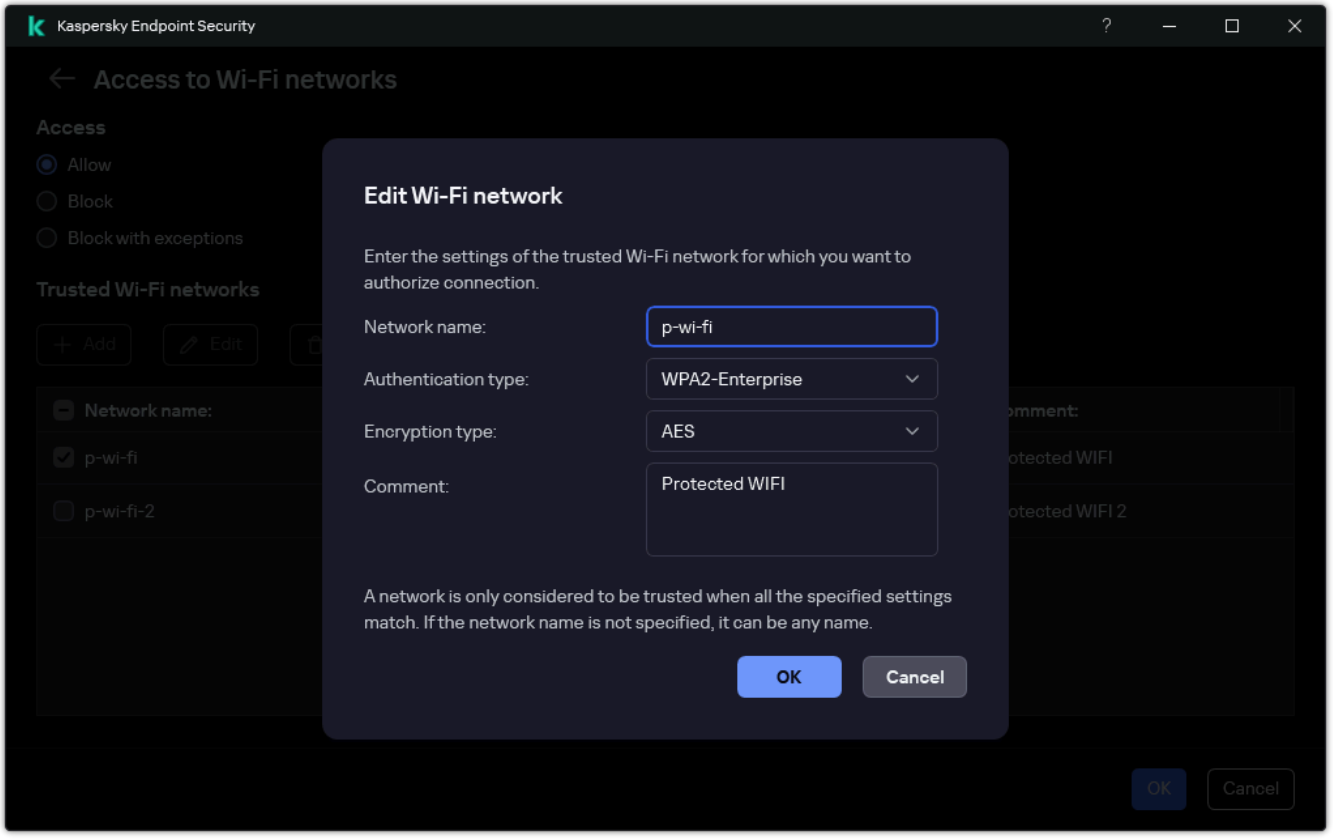

Trusted Wi-Fi network settings

As a result, when a user tries connecting to a Wi-Fi network that is not listed as trusted, the application blocks the connection and displays a notification (see figure below).

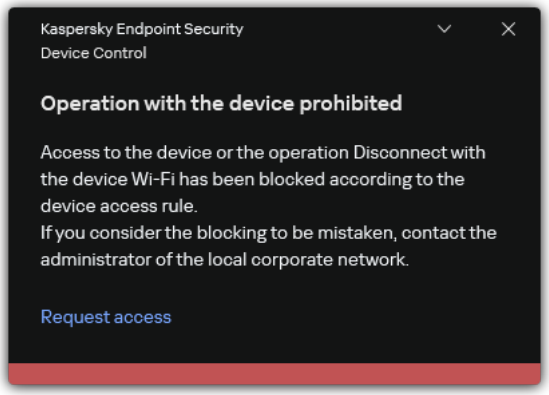

Device Control notification

Monitoring usage of removable drives

Monitoring usage of removable drives includes:

- Monitoring operations on files on removable drives.
- Monitoring connection and disconnection of trusted removable drives.

  Kaspersky Endpoint Security allows monitoring connection and disconnection of all trusted devices and not only removable drives. You can turn on event logging in notification settings for the Device Control component. Events have the *Informational message* severity level.

To enable monitoring of removable drive usage:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Device Control**.
3. In the **Access settings** block, click the **Devices and Wi-Fi networks** button.

The opened window shows access rules for all devices that are included in the Device Control component classification.

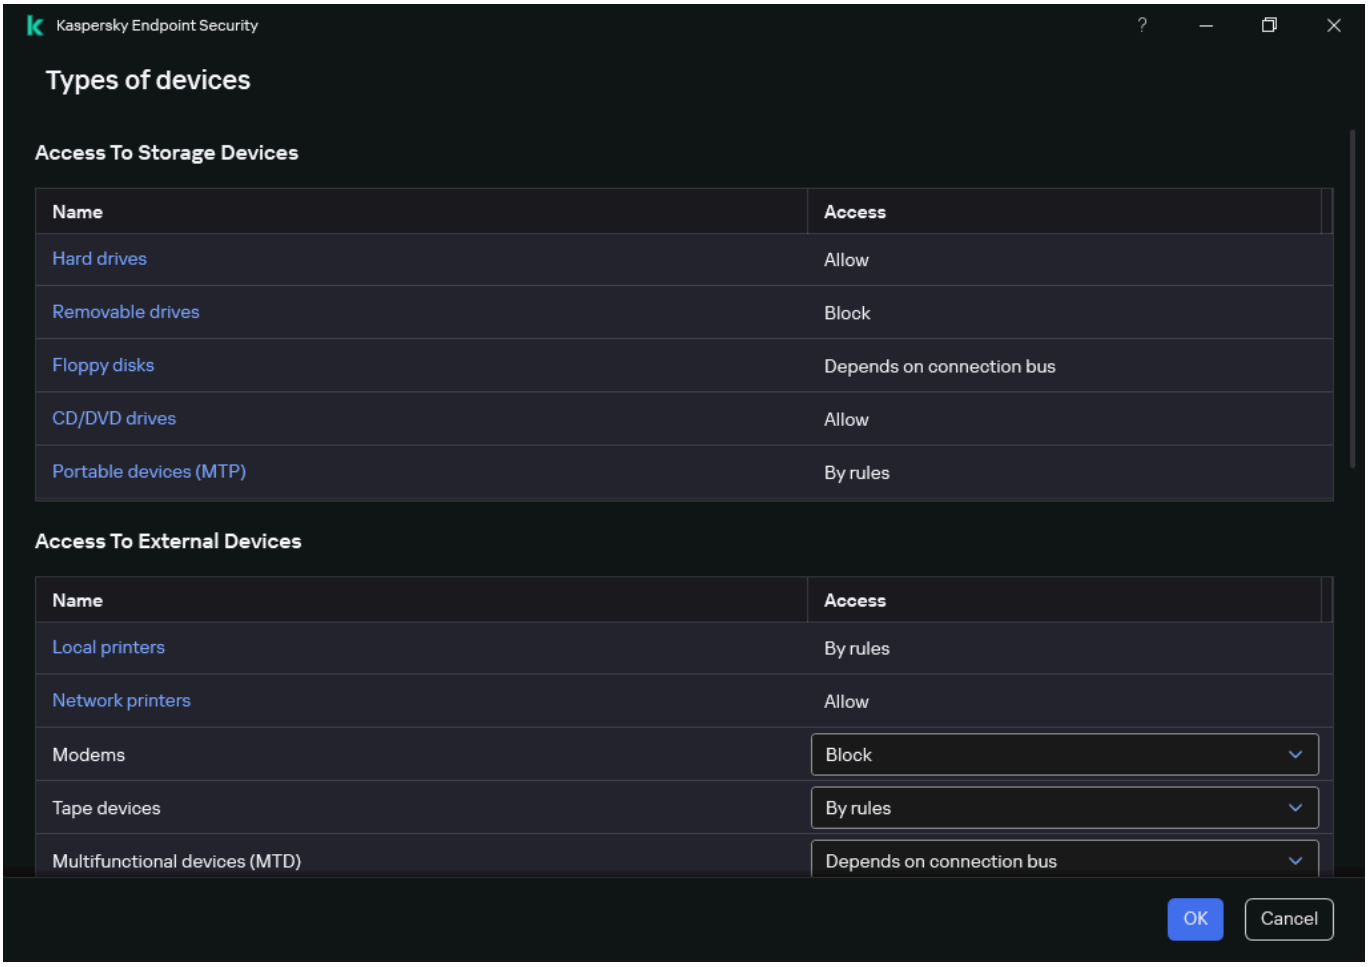

Types of devices in the Device Control component

4. In the **Access To Storage Devices** block, select **Removable drives**.

5. In the window that opens, select the **Logging** tab.

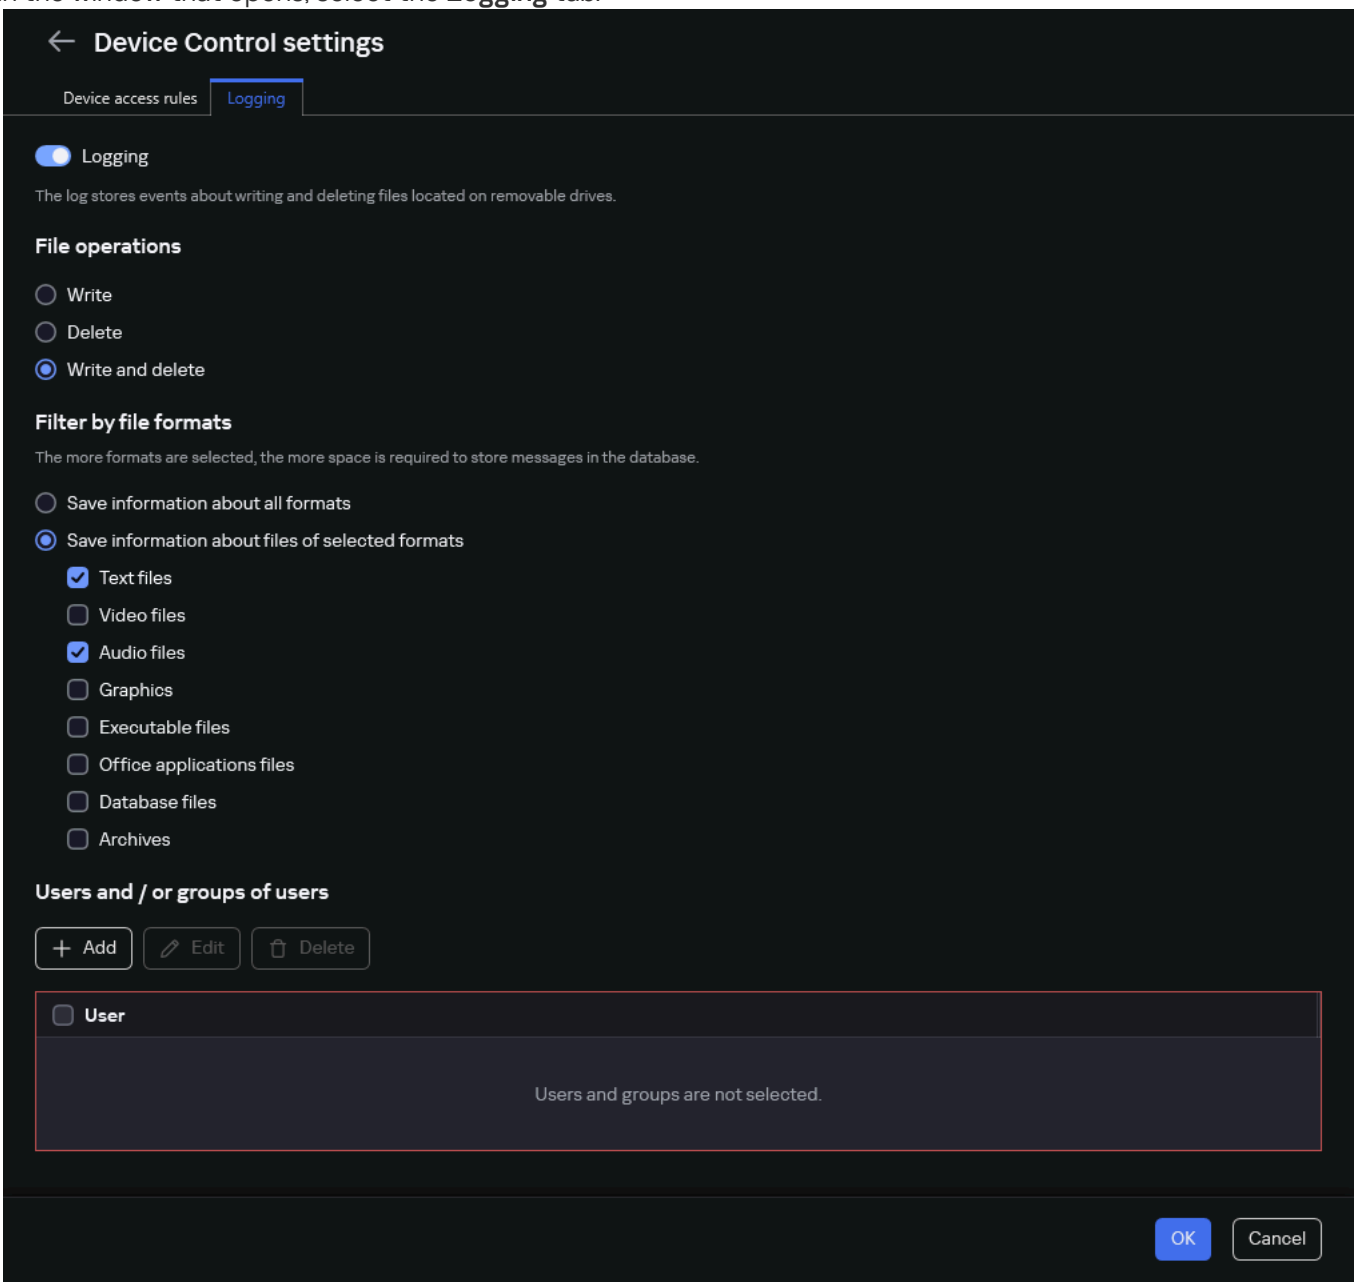

The settings of removable drive usage monitoring

6. Turn on the **Logging** toggle.

7. In the **File operations** block, select the operations that you want to monitor: **Write**, **Delete**.

8. In the **Filter by file formats** block, select the formats of files whose associated operations should be logged by Device Control.

9. Select the users or group of users whose use of removable drives you want to monitor.

10. Save your changes.

As a result, when users write to files located on removable drives or delete files from removable drives, Kaspersky Endpoint Security will save information about such operations to the event log and send events to Kaspersky Security Center. You can view events associated with files on removable drives in the Kaspersky Security Center Administration Console in the workspace of the **Administration Server** node on the **Events** tab. For events to be displayed in the local Kaspersky Endpoint Security event log, you must select the **File operation performed** check box in the notifications settings for the Device Control component.

Changing the caching duration

The Device Control component registers events related to monitored devices, such as connection and disconnection of a device, reading a file from a device, writing a file to a device, and other events. Device Control then either allows or blocks the action according to the Kaspersky Endpoint Security settings.

Device Control saves information about events for a specific period of time called the *caching period*. If information about an event is cached and this event is repeated, there is no need to notify Kaspersky Endpoint Security about it or to show another prompt for granting access to the corresponding action, such as connecting a device. This makes it more convenient to work with a device.

An event is considered a duplicate event if all of the following event settings match the record in the cache:

- device ID
- SID of the user account attempting access
- Device category
- Action taken with the device
- Application permission for this action: allowed or denied
- Path to the process used to take the action
- File that is being accessed

Prior to changing the caching period, disable Kaspersky Endpoint Security Self-Defense. After changing the caching period, enable Self-Defense.

To change the caching period:

1. Open the registry editor on the computer.
2. In the registry editor, go to the following section:
   - For 64-bit operating systems:
     `[HKEY_LOCAL_MACHINE\SOFTWARE\WOW6432Node\KasperskyLab\protected\KES.14.2\environment`
   - For 32-bit operating systems:
     `[HKEY_LOCAL_MACHINE\SOFTWARE\KasperskyLab\protected\KES.14.2\environment]`
3. Open `DeviceControlEventsCachePeriod` for editing.
4. Define the number of minutes that Device Control must save information about an event before this information is deleted.

Actions with trusted devices

Trusted devices are devices to which users that are specified in the trusted device settings have full access at all times.

To work with trusted devices, you can grant access to an individual user, to a group of users, or to all users of the organization.

For example, if your organization does not allow the use of removable drives but administrators use removable drives in their work, you can allow removable drives only for a group of administrators. To do so, add removable drives to the trusted list and configure user access permissions.

It is not recommended to add more than 5000 trusted devices, as this can cause system instability.

Kaspersky Endpoint Security allows you to add a device to the trusted list in the following ways:

- If Kaspersky Security Center is not deployed in your organization, you can connect the device to the computer and add it to the trusted list in the application settings. To distribute the list of trusted devices to all computers in your organization, you can enable merging the lists of trusted devices in a policy or use the export / import procedure.

- If Kaspersky Security Center is deployed in your organization, you can detect all connected devices remotely and create a list of trusted devices in the policy. The list of trusted devices will be available on all computers to which the policy is applied.

Kaspersky Endpoint Security allows controlling the use of trusted devices (connection and disconnection). You can turn on event logging in notification settings for the Device Control component. Events have the *Informational messages* severity level.

Adding a device to the trusted list

Kaspersky Security Center receives information about devices if Kaspersky Endpoint Security is installed on the computers, Device Control is enabled, and device data transmission is enabled. It is not possible to add a device to the trusted list unless information about that device is available in Kaspersky Security Center.

By default, when a device is added to the list of trusted devices, access to the device is granted to all users (the Everyone group of users).

You can add a device to the trusted list according to the following data:

- **Devices by ID**. Each device has a unique identifier (Hardware ID, or HWID). You can view the ID in the device properties by using operating system tools. Example of a device ID: `SCSI\CDROM&VEN_NECVMWAR&PROD_VMWARE_SATA_CD00\5&354AE4D7&0&000000`. Adding devices by ID is convenient if you want to add several specific devices.

- **Devices by model**. Each device has a Vendor ID (VID) and a Product ID (PID). You can view the IDs in the device properties by using operating system tools. Template for entering the VID and PID: `VID_1234&PID_5678`. Adding devices by model is convenient if you use devices of a certain model in your organization. This way, you can add all devices of this model.

- **Devices by ID mask**. If you are using multiple devices with similar IDs, you can add devices to the trusted list by using masks. The `*` character replaces any set of characters. Kaspersky Endpoint Security does not support the `?` character when entering a mask. For example, `WDC_C*`.

- **Devices by model mask**. If you are using multiple devices with similar VIDs or PIDs (for example, devices from the same manufacturer), you can add devices to the trusted list by using masks. The `*` character replaces any set of characters. Kaspersky Endpoint Security does not support the `?` character when entering a mask. For example, `VID_05AC&PID_*`.

How to add a device to the trusted list in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Policies**.

3. Select the necessary policy and double-click to open the policy properties.

4. In the policy window, select **Security Controls** → **Device Control**.

5. In the right part of the window, select the **Trusted devices** tab.

6. Select the **Merge values when inheriting** check box if you want to create a consolidated list of trusted devices for all computers in the company.

   The lists of trusted devices in the parent and child policies will be merged. The lists will be merged provided that merging values when inheriting is enabled. Trusted devices from the parent policy are displayed in child policies in a read-only view. Changing or deleting trusted devices of the parent policy is not possible.

7. Click the **Add** button and select a method for adding a device to the trusted list.

8. To filter devices, select a device type from the **Device type** drop-down list (for example, **Removable drives**).

   > Kaspersky Endpoint Security does not support adding devices of the **Floppy disks** type to the trusted list.

9. In the **Name / Model** field, enter the device ID, model (VID and PID) or mask, depending on the selected addition method.

   > Adding devices by model mask (VID and PID) works as follows: if you enter a model mask that does not match any model, Kaspersky Endpoint Security checks if the device ID (HWID) matches the mask. Kaspersky Endpoint Security checks only the part of the device ID that determines the manufacturer and the type of the device (`SCSI\CDROM&VEN_NECVMWAR&PROD_VMWARE_SATA_CD00\5&354AE4D7&0&000000`). If the model mask matches this part of the device ID, the devices that match the mask will be added to the list of trusted devices on the computer. At the same time, the list of devices in Kaspersky Security Center remains empty when you click the **Upgrade** button. To display the list of devices correctly, you can add devices by device ID mask.

10. To filter devices, in the **Computer** field, enter the computer name or a mask for the name of the computer to which the device is connected.

    The `*` character replaces any set of characters. The `?` character replaces any single character.

11. Click **Upgrade**.

    The table displays a list of devices that satisfy the defined filtering criteria.

12. Select the check boxes next to the names of devices that you want to add to the trusted list.

13. In the **Comment** field, enter a description of the reason for adding devices to the trusted list.

14. Click the **Select** button to the right of the **Allow to users and / or groups of users** field.

    You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

    By default, access to trusted devices is allowed for the Everyone group.

15. To apply the policy to computers, close the padlock icons and save your changes.

How to add a device to the trusted list in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to the **Trusted Zone** section.

5. In the window that opens, click the **Devices** link.

   This opens a window containing a list of trusted devices.

6. In the right part of the window, select the **Trusted devices** tab.

7. Select the **Merge values when inheriting** check box if you want to create a consolidated list of trusted devices for all computers in the company.

   The lists of trusted devices in the parent and child policies will be merged. The lists will be merged provided that merging values when inheriting is enabled. Trusted devices from the parent policy are displayed in child policies in a read-only view. Changing or deleting trusted devices of the parent policy is not possible.

8. Click **Add**.

   This opens the form for adding a trusted device.

9. Under **User or group**, select users to which you want to allow access to trusted devices.

   You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

   By default, access to trusted devices is allowed for the Everyone group.

10. To filter devices, select a device type from the **Device type** drop-down list (for example, **Removable drives**).

    Kaspersky Endpoint Security does not support adding devices of the **Floppy disks** type to the trusted list.

11. If you do not know the exact device ID or device model, select the **Use mask** check box.

12. Select how you want to add the device: by device ID or model (VID and PID).

> Adding devices by model mask (VID and PID) works as follows: if you enter a model mask that does not match any model, Kaspersky Endpoint Security checks if the device ID (HWID) matches the mask. Kaspersky Endpoint Security checks only the part of the device ID that determines the manufacturer and the type of the device (`SCSI\CDROM&VEN_NECVMWAR&PROD_VMWARE_SATA_CD00\5&354AE4D7&0&000000`). If the model mask matches this part of the device ID, the devices that match the mask will be added to the list of trusted devices on the computer. At the same time, the empty list of devices will be displayed in Kaspersky Security Center. To display the list of devices correctly, you can add devices by device ID mask.

13. To filter devices, in the **Search for trusted devices** field, enter the computer name or a mask for the name of the computer to which the device is connected.

    The `*` character replaces any set of characters. The `?` character replaces any single character.

    The table displays a list of devices that satisfy the defined filtering criteria.

14. Select the check boxes next to the names of devices that you want to add to the trusted list.

15. In the **Comment** field, enter a description of the reason for adding devices to the trusted list.

16. To apply the policy to computers, close the padlock icons and save your changes.

How to add a device to the trusted list in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **Security Controls** → **Device Control**.

3. In the **Access settings** block, click the **Trusted devices** button.

   This opens the list of trusted devices.

4. Click **Select**.

   This opens the list of connected devices. The list of devices depends on the value that is selected in the **Display connected devices** drop-down list.

5. In the list of devices, select the device that you want to add to the trusted list.

   > Kaspersky Endpoint Security does not support adding devices of the **Floppy disks** type to the trusted list.

6. In the **Comment** field, you can provide any relevant information about the trusted device.

7. Select the users or groups of users to which you want to allow access to trusted devices.

   You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

8. Save your changes.

When a device is connected, Kaspersky Endpoint Security checks the list of trusted devices for an authorized user. If the device is trusted, Kaspersky Endpoint Security allows access to the device with all permissions, even if access to the device type or connection bus is denied. If the device is untrusted and access is denied, you can request access to the locked device.

Exporting and importing the list of trusted devices

To distribute the list of trusted devices to all computers in your organization, you can use the export/import procedure.

For example, if you need to distribute a list of trusted removable drives, you need to do the following:

1. Sequentially connect removable drives to your computer.
2. In the Kaspersky Endpoint Security settings, add the removable drives to the trusted list. If required, configure user access permissions. For example, allow only administrators to access removable drives.
3. Export the list of trusted devices in the Kaspersky Endpoint Security settings (see the instructions below).
4. Distribute the trusted device list file to other computers in your organization. For example, place the file in a shared folder.
5. Import the list of trusted devices in the Kaspersky Endpoint Security settings on other computers in the organization (see the instructions below).

To import or export the list of trusted devices:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Device Control**.
3. In the **Access settings** block, click the **Trusted devices** button.

   This opens the list of trusted devices.
4. To export the list of trusted devices:

   a. Select the trusted devices that you want to export.

   b. Click **Export**.

   c. In the window that opens, specify the name of the XML file to which you want to export the list of trusted devices, and select the folder in which you want to save this file.

   d. Save the file.

   Kaspersky Endpoint Security exports the entire list of trusted devices to the XML file.

5. To import the list of trusted devices:

   a. In the **Import** drop-down list, select the relevant action: **Import and add to existing** or **Import and replace existing**.

   b. In the window that opens, select the XML file from which you want to import the list of trusted devices.

   c. Open the file.

6. Save your changes.

When a device is connected, Kaspersky Endpoint Security checks the list of trusted devices for an authorized user. If the device is trusted, Kaspersky Endpoint Security allows access to the device with all permissions, even if access to the device type or connection bus is denied.

Obtaining access to a blocked device

When configuring Device Control, you can accidentally block access to a device that is necessary for work.

If Kaspersky Security Center is not deployed in your organization, you can provide access to a device in the settings of Kaspersky Endpoint Security. For example, you can add the device to the trusted list or temporarily disable Device Control.

If Kaspersky Security Center is deployed in your organization and a policy has been applied to computers, you can provide access to a device in the Administration Console.

Online mode for granting access

You can grant access to a blocked device in online mode only if Kaspersky Security Center is deployed in the organization and a policy has been applied to the computer. The computer must have the capability to establish a connection with the Administration Server.

Granting access in online mode consists of the following steps:

1. The user sends the administrator a message containing an access request.

2. The administrator receives a message with the request in the Kaspersky Security Center console.

   The Kaspersky Security Center console has a preset event selection *User requests* for easy tracking of messages from users.

3. The administrator adds the device to the trusted list.

   You can add a trusted device in a policy for the administration group or in the local application settings for an individual computer.

4. The administrator updates the settings of Kaspersky Endpoint Security on the user's computer.

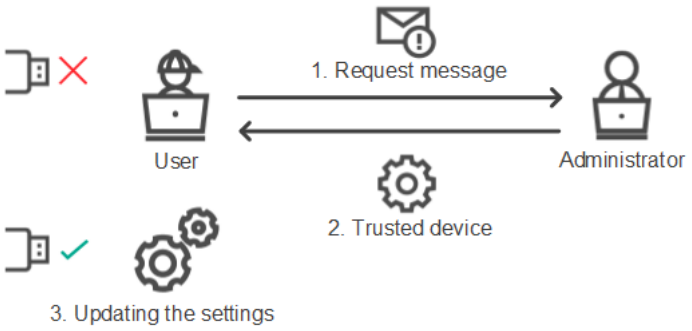

Schematic for granting access to a device in online mode

Offline mode for granting access

You can grant access to a blocked device in offline mode only if Kaspersky Security Center is deployed in the organization and a policy has been applied to the computer. In the policy settings, in the **Device Control** section, the **Allow requests for temporary access** check box must be selected.

If you need to grant temporary access to a blocked device but you cannot add the device to the trusted list, you can grant access to the device in offline mode. This way, you can grant access to a blocked device even if the computer does not have network access or if the computer is outside of the corporate network.

Granting access in offline mode consists of the following steps:

1. The user creates a request access file and sends it to the administrator.
2. The administrator creates an access key from the request access file and sends it to the user.
3. The user activates the access key.

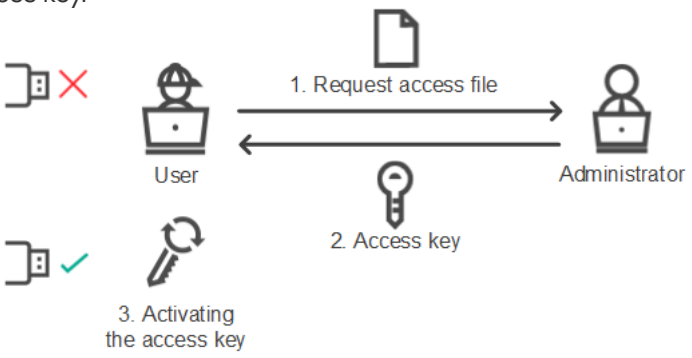

Schematic for granting access to a device in offline mode

Online mode for granting access

You can grant access to a blocked device in online mode only if Kaspersky Security Center is deployed in the organization and a policy has been applied to the computer. The computer must have the capability to establish a connection with the Administration Server.

A user requests access to a blocked device as follows:

1. Connect the device to the computer.

   Kaspersky Endpoint Security will show a notification stating that access to the device is blocked (see the figure below).

2. Click the **Request access** link.

   This opens a window with a message for the administrator. This message contains information about the blocked device.

3. Click **Send**.

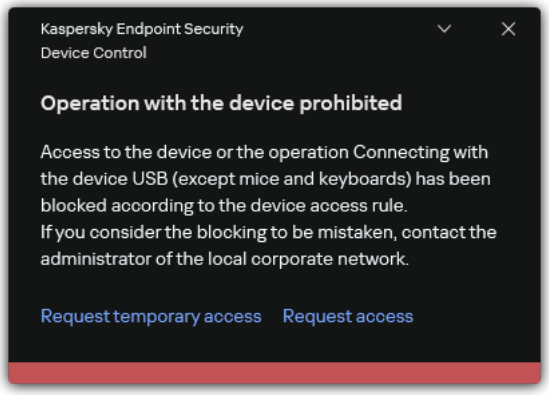

Device Control notification

Next, the administrator in the Kaspersky Security Center console receives the *Device access blockage message to administrator* event. The event includes the user name, computer name, details of the device to which the user is trying to gain access, and other information. You can configure how the administrator is notified about such events and, for example, select email notifications. The Kaspersky Security Center console has a preset event selection *User requests* for easy tracking of messages from users.

To allow access, you must add the device to the trusted list. After you update Kaspersky Endpoint Security settings on the computer, the user can gain access to the device.

Offline mode for granting access

You can grant access to a blocked device in offline mode only if Kaspersky Security Center is deployed in the organization and a policy has been applied to the computer. In the policy settings, in the **Device Control** section, the **Allow requests for temporary access** check box must be selected.

A user requests access to a blocked device as follows:

1. Connect the device to the computer.

   Kaspersky Endpoint Security will show a notification stating that access to the device is blocked (see the figure below).

2. Click the **Request temporary access** link.

   This opens a window containing a list of connected devices.

3. In the list of connected devices, select the device to which you want to gain access.

4. Click **Generate request access file**.

5. In the **Access duration** field, specify the period of time for which you want to have access to the device.

6. Save the file to computer memory.

   As a result, a request access file with the *.akey extension will be downloaded to computer memory. Use any available method to send the device request access file to the corporate LAN administrator.

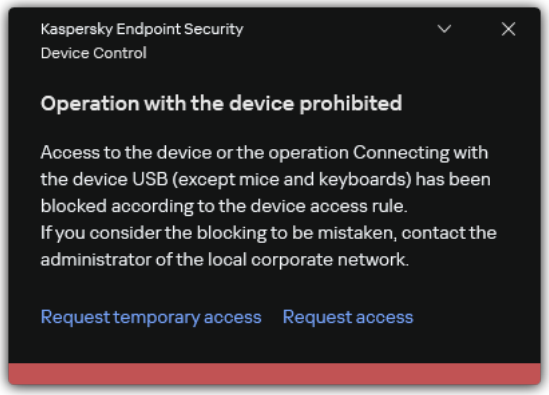

Device Control notification

How the administrator can create an access key for the blocked device in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the **Managed devices** folder of the Administration Console tree, open the folder with the name of the administration group to which the relevant client computer belongs.

3. In the workspace, select the **Devices** tab.

4. In the list of client computers, select the computer whose user needs to be granted temporary access to the blocked device.

5. In the context menu of the computer, select the **Grant access in offline mode** item.

6. This opens a window; in that window, select the **Device Control** tab.

7. Click the **Browse** button and download the request access file received from the user.

   You will see information about the blocked device to which the user has requested access.

8. If necessary, change the value of the **Access duration** setting.

   By default, the **Access duration** setting takes the value that was indicated by the user when creating the access request file.

9. Specify the value of the **Activate by** setting.

   This setting defines the time period during which the user can activate access to the blocked device by using the provided access key.

10. Save the access key file to computer memory.

How the administrator can create an access key for the blocked device in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. In the list of client computers, select the computer whose user needs to be granted temporary access to the blocked device.
3. Click the ellipsis button (...) above the list of computers and then click the **Grant access to the device in offline mode** button.
4. In the window that opens, select the **Device Control** section.
5. Click the **Overview** button and download the request access file received from the user.

   You will see information about the blocked device to which the user has requested access.
6. If necessary, change the value of the **Access duration (hours)** setting.

   By default, the **Access duration (hours)** setting takes the value that was indicated by the user when creating the access request file.
7. Specify the time period during which the access key can be activated on the device.

   This setting defines the time period during which the user can activate access to the blocked device by using the provided access key.
8. Save the access key file to computer memory.

As a result, the blocked device access key will be downloaded to computer memory. An access key file has the *.acode extension. Use any available method to send the blocked device access key to the user.

The user activates the access key as follows:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Device Control**.
3. In the **Access request** block, click the **Request access to device** button.
4. In the window that opens, click the **Activate access key** button.
5. In the window that opens, select the file with the device access key received from the corporate LAN administrator.

   This opens a window containing information about access provision.
6. Click **OK**.

As a result, the user receives access to the device for the time period set by the administrator. The user receives the full set of rights for accessing the device (read and write). When the key expires, access to the device will be blocked. If the user requires permanent access to the device, add the device to the trusted list.

Editing templates of Device Control messages

When the user attempts to access a blocked device, Kaspersky Endpoint Security displays a message stating that access to the device is blocked or that an operation with the device contents is forbidden. Kaspersky experts provide a template of a message to the user describing the reasons why access to the device was blocked (see the figure below).

Special variables are provided for managing the message templates (for example, `%USER_NAME%`). Variables allow a single message template to be used for different computers. When generating a message, Kaspersky Endpoint Security retrieves the value of the variable from the operating system settings and inserts it into the message matching the specific computer, user, and event.

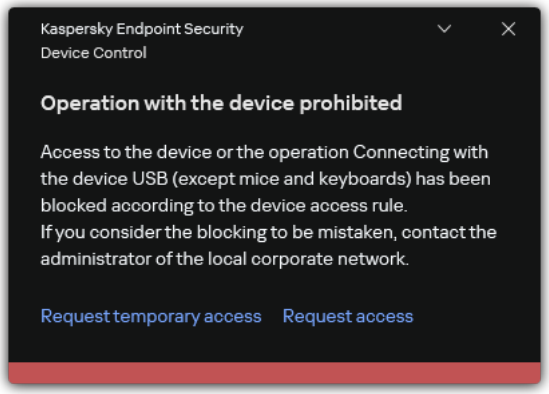

Device Control notification

If the user believes that access to the device was mistakenly blocked or that an operation with device contents was forbidden by mistake, the user can send a message to the local corporate network administrator by clicking the link in the displayed message about the blocked action. To do so, the user must click **Request access** or **Request temporary access** buttons and send a message to the administrator describing the situation. You can also prepare a template of the message to the administrator, adding to it data that may inform your decision to allow or block access to the device. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Device access blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address.

How to change the Device Control message templates in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **Device Control**.

4. In the **Message template settings** block, click the **Templates** button.

5. This opens a window; in that window, configure Application Control templates:

   - **Message about blocking**. Template of the message that appears when a user attempts to access a blocked device. This message also appears when a user attempts to perform an operation on the device contents that was blocked for this user.

   - **Message to administrator**. A template of the message that is sent to the LAN administrator when the user believes that access to the device is blocked or an operation with device content is forbidden by mistake.

   To add a variable to the template text, place the cursor in the desired position, click **Variable** and select the required variable from the list of available options.

   You can also restore the default template text.

6. Save your changes.

How to change the Device Control message templates in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Device Control**.

5. In the **Message templates** block, configure templates for Application Control messages:

   - **Message to user**. Template of the message that appears when a user attempts to access a blocked device. This message also appears when a user attempts to perform an operation on the device contents that was blocked for this user.

   - **Message to administrator**. A template of the message that is sent to the LAN administrator when the user believes that access to the device is blocked or an operation with device content is forbidden by mistake.

   To add a variable to the template text, place the cursor in the desired position, click **Add variable** and select the required variable from the list of available options.

   You can also restore the default template text.

6. Save your changes.

How to change the Device Control message templates in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Application Control**.

3. In the **Message templates** block, configure templates for Application Control messages:

   - **Message about blocking**. Template of the message that appears when a user attempts to access a blocked device. This message also appears when a user attempts to perform an operation on the device contents that was blocked for this user.

   - **Message to administrator**. A template of the message that is sent to the LAN administrator when the user believes that access to the device is blocked or an operation with device content is forbidden by mistake.

To add a variable to the template text, place the cursor in the desired position, click **Add variable** and select the required variable from the list of available options.

You can also restore the default template text.

4. Save your changes.

Anti-Bridging

Anti-Bridging inhibits the creation of network bridges by preventing the simultaneous establishment of multiple network connections for a computer. This lets you protect a corporate network from attacks over unprotected, unauthorized networks.

Anti-Bridging regulates the establishment of network connections by using *connection rules*.

Connection rules are created for the following predefined types of devices:

- Network adapters;
- Wi-Fi adapters;
- Modems.

If a connection rule is enabled, Kaspersky Endpoint Security:

- Blocks the active connection when establishing a new connection, if the device type specified in the rule is used for both connections;
- Blocks connections that are established using the types of devices for which lower-priority rules are used.

Enabling Anti-Bridging

Anti-Bridging is disabled by default.

To enable Anti-Bridging:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Device Control**.
3. In the **Access settings** block, click the **Anti-Bridging** button.
4. Use the **Enable Anti-Bridging** toggle to enable or disable this feature.
5. Save your changes.

After Anti-Bridging is enabled, Kaspersky Endpoint Security blocks already established connections according to the connection rules.

Changing the status of a connection rule

To change the status of a connection rule:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Device Control**.
3. In the **Access settings** block, click the **Anti-Bridging** button.
4. In the **Rules for devices** block, select the rule whose status you want to change.
5. Use the toggles in the **Control** column to enable or disable the rule.
6. Save your changes.

Change the priority of a connection rule

To change the priority of a connection rule:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Device Control**.
3. In the **Access settings** block, click the **Anti-Bridging** button.
4. In the **Rules for devices** block, select the rule whose priority you want to change.
5. Use the **Up** / **Down** buttons to set the priority of the connection rule.

   The higher a rule is positioned in the table of rules, the higher its priority. Anti-Bridging blocks all connections except one connection established using the type of device for which the highest-priority rule is used.
6. Save your changes.

Adaptive Anomaly Control

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers.

The Adaptive Anomaly Control component monitors and blocks actions that are not typical of the computers in a company's network. Adaptive Anomaly Control uses a set of rules to track non-typical behavior (for example, the *Start of Microsoft PowerShell from office application* rule). Rules are created by Kaspersky specialists based on typical scenarios of malicious activity. You can configure how Adaptive Anomaly Control handles each rule and, for example, allow the execution of PowerShell scripts that automate certain workflow tasks. Kaspersky Endpoint Security updates the set of rules along with the application databases. Updates to the sets of rules must be confirmed manually.

Adaptive Anomaly Control settings

Configuring Adaptive Anomaly Control consists of the following steps:

1. Training Adaptive Anomaly Control.

   After you enable Adaptive Anomaly Control, its rules work in *training mode*. During the training, Adaptive Anomaly Control monitors rule triggering and sends triggering events to Kaspersky Security Center. Each rule has its own duration of the training mode. The duration of the training mode is set by Kaspersky experts. Normally, the training mode is active for two weeks.

   If a rule is not triggered at all during the training, Adaptive Anomaly Control will consider the actions associated with this rule as non-typical. Kaspersky Endpoint Security will block all actions associated with that rule.

   If a rule was triggered during training, Kaspersky Endpoint Security logs events in the rule triggering report and the **Rule triggers in Smart Training state** repository.

2. Analyzing the rule triggering report.

   The administrator analyzes the rule triggering report or the contents of the **Rule triggers in Smart Training state** repository. Then the administrator can select the behavior of Adaptive Anomaly Control when the rule is triggered: either block or allow. The administrator can also continue to monitor how the rule works and extend the duration of the training mode. If the administrator does not take any action, the application will also continue to work in training mode. The training mode term is restarted.

Adaptive Anomaly Control is configured in real time via the following channels:

- Adaptive Anomaly Control automatically starts to block actions associated with the rules that were never triggered in training mode.
- Kaspersky Endpoint Security adds new rules or removes obsolete ones.
- The administrator configures the operation of the Adaptive Anomaly Control after reviewing the rule triggering report and the contents of the **Rule triggers in Smart Training state** repository. We recommend checking the report about rules triggering and the contents of the **Rule triggers in Smart Training state** storage.

When a malicious application attempts to perform an action, Kaspersky Endpoint Security will block the action and display a notification (see figure below).

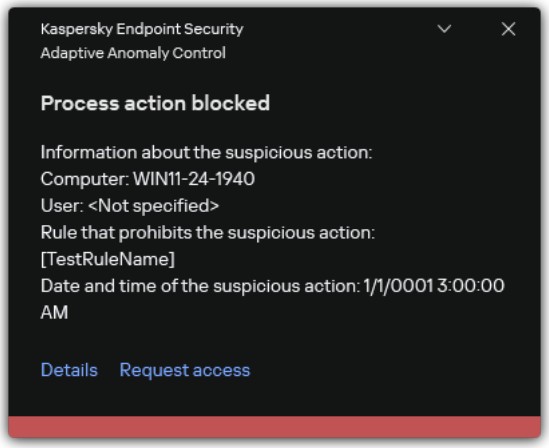

Adaptive Anomaly Control notification

Adaptive Anomaly Control operating algorithm

Kaspersky Endpoint Security decides whether to allow or block an action that is associated with a rule based on the following algorithm (see the figure below).

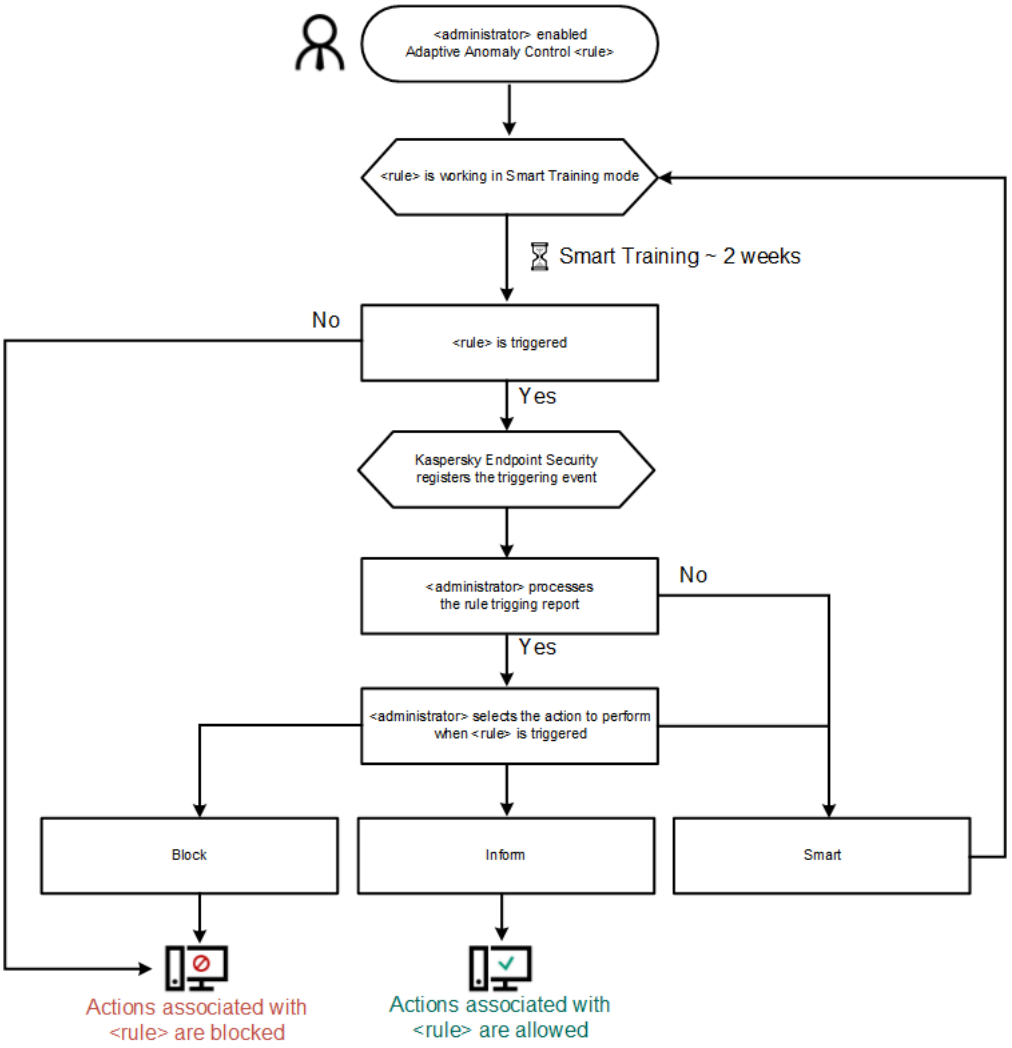

Adaptive Anomaly Control operating algorithm

Training Adaptive Anomaly Control

Adaptive Anomaly Control includes a set of rules (behavior patterns). After you enable Adaptive Anomaly Control, its rules work in *training mode*. During the training, Adaptive Anomaly Control monitors rule triggering and sends triggering events to Kaspersky Security Center. Adaptive Anomaly Control does not block application activity on the computer, but only informs the administrator. You can also manually select the action that is performed when an Adaptive Anomaly Control rule is triggered.

How to view the list of Adaptive Anomaly Control rules in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Policies**.

3. Select the necessary policy and double-click to open the policy properties.

4. In the policy window, select **Security Controls** → **Adaptive Anomaly Control**.

5. Select the **Adaptive Anomaly Control** check box.

6. Under **Adaptive Anomaly Control rule settings**, look at the list of rules.

   By default, all rules work in the **Smart** mode.

7. If necessary, confirm the update of the Adaptive Anomaly Control rule.

8. If necessary, select an action when an Adaptive Anomaly Control rule is triggered:

   - **Block**. If this action is selected, when an Adaptive Anomaly Control rule is triggered Kaspersky Endpoint Security blocks the activity covered by the rule and logs an entry containing information about the activity.

   - **Inform**. If this action is selected, when an Adaptive Anomaly Control rule is triggered Kaspersky Endpoint Security allows the activity covered by the rule and logs an entry containing information about the activity.

9. If necessary, disable the rules that you do not want to use.

10. To apply the policy to computers, close the padlock icons and save your changes.

How to view Adaptive Anomaly Control rules in the Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Adaptive Anomaly Control**.

5. Turn on the **Adaptive Anomaly Control ENABLED** toggle.

6. Under **Rules**, look at the list of rules.

   By default, all rules work in the **Smart** mode.

7. If necessary, confirm the update of the Adaptive Anomaly Control rule.

8. If necessary, select an action when an Adaptive Anomaly Control rule is triggered:

   - **Block**. If this action is selected, when an Adaptive Anomaly Control rule is triggered Kaspersky Endpoint Security blocks the activity covered by the rule and logs an entry containing information about the activity.

   - **Inform**. If this action is selected, when an Adaptive Anomaly Control rule is triggered Kaspersky Endpoint Security allows the activity covered by the rule and logs an entry containing information about the activity.

9. If necessary, disable the rules that you do not want to use.

10. To apply the policy to computers, close the padlock icons and save your changes.

How to view the list of Adaptive Anomaly Control rules in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Adaptive Anomaly Control**.
3. Turn on the **Adaptive Anomaly Control** toggle.
4. In the **Rules** block, click the **Edit rules** link.

   The Adaptive Anomaly Control rule list opens. By default, all rules work in the **Smart** mode.
5. If necessary, confirm the update of the Adaptive Anomaly Control rule.
6. If necessary, select an action when an Adaptive Anomaly Control rule is triggered:
   - **Block**. If this action is selected, when an Adaptive Anomaly Control rule is triggered Kaspersky Endpoint Security blocks the activity covered by the rule and logs an entry containing information about the activity.
   - **Inform**. If this action is selected, when an Adaptive Anomaly Control rule is triggered Kaspersky Endpoint Security allows the activity covered by the rule and logs an entry containing information about the activity.
7. If necessary, disable the rules that you do not want to use.
8. Save your changes.

Each rule has its own duration of the training mode. The duration of the training mode is set by Kaspersky experts. Normally, the training mode is active for two weeks.

If, during training, a rule never triggered, Adaptive Anomaly Control considers such behavior atypical and changes the status of the rule to **Smart blocking**. Subsequently, the application blocks any activity that matches this rule.

If a rule triggers during training, you need to manually configure the action that the application applies to detected activity that matches this rule. If you do not select the action when rule is triggered, Adaptive Anomaly Control continues in training mode.

Enabling and disabling an Adaptive Anomaly Control rule

To enable or disable an Adaptive Anomaly Control rule:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Adaptive Anomaly Control**.
3. In the **Rules** block, click the **Edit rules** button.

   The Adaptive Anomaly Control rule list opens.
4. In the table, select a set of rules (for example, *Activity of office applications*) and expand the set.
5. Select a rule (for example, *Start of Microsoft PowerShell from office application*).
6. Use the toggle switch in the **State** column to enable or disable the Adaptive Anomaly Control rule.
7. Save your changes.

Modifying the action taken when an Adaptive Anomaly Control rule is triggered

To edit the action that is taken when an Adaptive Anomaly Control rule is triggered:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Adaptive Anomaly Control**.
3. In the **Rules** block, click the **Edit rules** button.

   The Adaptive Anomaly Control rule list opens.
4. Select a rule in the table.
5. Click **Edit**.

   The Adaptive Anomaly Control rule properties window opens.
6. In the **Action** block, select one of the following options:

   - **Smart**. If this option is selected, the Adaptive Anomaly Control rule works in the Smart training state for a period of time defined by Kaspersky experts. In this mode, when an Adaptive Anomaly Control rule is triggered, Kaspersky Endpoint Security allows the activity covered by the rule and logs an entry in the **Rule triggers in Smart Training state** storage of the Kaspersky Security Center Administration Server. When the time period set for working in Smart Training state ends, Kaspersky Endpoint Security blocks the activity covered by an Adaptive Anomaly Control rule and logs an entry containing information about the activity.
   - **Block**. If this action is selected, when an Adaptive Anomaly Control rule is triggered Kaspersky Endpoint Security blocks the activity covered by the rule and logs an entry containing information about the activity.
   - **Inform**. If this action is selected, when an Adaptive Anomaly Control rule is triggered Kaspersky Endpoint Security allows the activity covered by the rule and logs an entry containing information about the activity.
7. Save your changes.

Creating an exclusion for an Adaptive Anomaly Control rule

> You cannot create more than 1,000 exclusions for Adaptive Anomaly Control rules. It is not recommended to create more than 200 exclusions. To reduce the number of exclusions used, it is recommended to use masks in the settings of exclusions.

An exclusion for an Adaptive Anomaly Control rule includes a description of the source and target objects. The *source object* is the object performing the actions. The *target object* is the object on which the actions are being performed. For example, you have opened a file named `file.xlsx`. As a result, a library file with the DLL extension is loaded into the computer memory. This library is used by a browser (executable file named `browser.exe`). In this example, `file.xlsx` is the source object, Excel is the source process, `browser.exe` is the target object, and Browser is the target process.

To create an exclusion for an Adaptive Anomaly Control rule:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Adaptive Anomaly Control**.
3. In the **Rules** block, click the **Edit rules** button.

   The Adaptive Anomaly Control rule list opens.
4. Select a rule in the table.
5. Click **Edit**.

   The Adaptive Anomaly Control rule properties window opens.
6. In the **Exclusions** block, click the **Add** button.

   The exclusion properties window opens.
7. Select the user for which you want to configure an exclusion.

   You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

   > Adaptive Anomaly Control does not support exclusions for user groups. If you select a user group, Kaspersky Endpoint Security does not apply the exclusion.
8. In the **Description** field, enter a description of the exclusion.
9. Define the settings of the source object or source process started by the object:

   - **Source process**. Path or mask of the path to the file or folder containing files (for example, `C:\Dir\File.exe` or `Dir\*.exe`).
   - **Source process hash**. SHA256 hash of the file.
   - **Source object**. Path or mask of the path to the file or folder containing files (for example, `C:\Dir\File.exe` or `Dir\*.exe`). For example, file path `document.docm`, which uses a script or macro to start the target processes.

     You can also specify other objects to exclude, such as a web address, macro, command in the command line, registry path, or others. Specify the object according to the following template: `object://<object>`, where `<object>` refers to the name of the object, for example, `object://web.site.example.com`, `object://VBA`, `object://ipconfig`, `object://HKEY_USERS`. You can also use masks, for example, `object://*C:\Windows\temp\*`.
   - **Source object hash**. SHA256 hash of the file.

   The Adaptive Anomaly Control rule is not applied to actions performed by the object, or to processes started by the object.

10. Specify the settings of the target object or target processes started on the object.

    - **Target process**. Path or mask of the path to the file or folder containing files (for example, `C:\Dir\File.exe` or `Dir\*.exe`).

    - **Target process hash**. SHA256 hash of the file.

    - **Target object**. The command to start the target process. Specify the command using the following pattern `object://<command>`, for example, `object://cmdline:powershell -Command "$result = 'C:\Windows\temp\result_local_users_pwdage.txt'"`. You can also use masks, for example, `object://*C:\Windows\temp\*`.

    - **Target object hash**. SHA256 hash of the file.

    The Adaptive Anomaly Control rule is not applied to actions taken on the object, or to processes started on the object.

11. Save your changes.

Exporting and importing exclusions for Adaptive Anomaly Control rules

To export or import the list of exclusions for selected rules:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Adaptive Anomaly Control**.

3. In the **Rules** block, click the **Edit rules** button.

   The Adaptive Anomaly Control rule list opens.

4. To export the list of rules:

   a. Select the rules whose exceptions you want to export.

   b. Click **Export**.

   c. In the window that opens, specify the name of the XML file to which you want to export the list of exclusions, and select the folder in which you want to save this file.

   d. Confirm that you want to export only the selected exclusions, or export the entire list of exclusions.

   e. Save the file.

5. To import the list of exclusions:

   a. Click **Import**.

   b. In the window that opens, select the XML file from which you want to import the list of exclusions.

c. Open the file.

If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

6. Save your changes.

Applying updates for Adaptive Anomaly Control rules

New Adaptive Anomaly Control rules may be added to the table of rules and existing Adaptive Anomaly Control rules may be deleted from the table of rules when anti-virus databases are updated. Kaspersky Endpoint Security distinguishes Adaptive Anomaly Control rules that are to be deleted or added to the table, if an update for these rules has not been applied.

Until the update is applied, Kaspersky Endpoint Security displays the Adaptive Anomaly Control rules set to be deleted by the update in the table of rules and assigns the *Disabled* status to them. It is not possible to change the settings of these rules.

To apply updates for Adaptive Anomaly Control rules:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Adaptive Anomaly Control**.

3. In the **Rules** block, click the **Edit rules** button.

   The Adaptive Anomaly Control rule list opens.

4. In the window that opens, click the **Approve updates** button.

   The **Approve updates** button is available if an update for Adaptive Anomaly Control rules is available.

5. Save your changes.

Editing Adaptive Anomaly Control message templates

When a user tries to do an action, blocked by Adaptive Anomaly Control rules, Kaspersky Endpoint Security displays a message that potentially harmful actions are blocked. If the user believes that an action was mistakenly blocked, the user can use the link in the message text to send a message to the local corporate network administrator.

Special templates are available for messages to the administrator about blocking potentially harmful actions. Special variables are provided for managing the message templates (for example, `%USER_NAME%`). Variables allow a single message template to be used for different computers. When generating a message, Kaspersky Endpoint Security retrieves the value of the variable from the operating system settings and inserts it into the message matching the specific computer, user, and event.

To edit a message template:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Adaptive Anomaly Control**.

3. In the **Templates** block, configure the templates for Adaptive Anomaly Control messages:

   - **Message about blocking**. Template of the message that is displayed to a user when an Adaptive Anomaly Control rule that blocks a non-typical action is triggered.

   - **Message to administrator**. Template of the message that a user can be sent to the local corporate network administrator if the user considers the blocking to be a mistake. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Application activity blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address.

   To add a variable to the template text, place the cursor in the desired position, click **Add variable** and select the required variable from the list of available options.

   You can also restore the default template text using the **Reset** button.

4. Save your changes.

Monitoring Adaptive Anomaly Control operations

Adaptive Anomaly Control includes several monitoring tools. The main purpose of monitoring Adaptive Anomaly Control is to configure the component while training.

Adaptive Anomaly Control reports

Adaptive Anomaly Control uses the following reports:

- **Report on Adaptive Anomaly Control rules state**. The report contains information about the status of Adaptive Anomaly Control rules (*Off*, *Smart Training*, *Smart Block*, *Notify*, *Block*). This report allows analyzing the level of training of Adaptive Anomaly Control and evaluating the number of rules that have switched from *Smart Training* mode to normal operating mode (for example, *Smart Block*).

- **Report on triggered Adaptive Anomaly Control rules**. The report contains information about rule triggers. The report also shows the rule triggering mode: *Block* (including *Smart Block*) or *Notify*. This reports allows evaluating the activity of Adaptive Anomaly Control on user computers.

How to view Adaptive Anomaly Control reports in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **Adaptive Anomaly Control**.

4. Do one of the following:

   - If you want to view the report on Adaptive Anomaly Control rules state, click the **Report on Adaptive Anomaly Control rules state** link.

   - If you want to view the report on triggered Adaptive Anomaly Control rules, click the **Report on triggered Adaptive Anomaly Control rules** link.

5. The report generation process starts.

   The report is displayed in a new window.

How to view Adaptive Anomaly Control reports in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Adaptive Anomaly Control**.

5. In the **Rules** block, do one of the following:

   - If you want to view the report on Adaptive Anomaly Control rules state, select **View report** → **Rules state**.

   - If you want to view the report on triggered Adaptive Anomaly Control rules, click **View report** → **Detections**.

6. The report generation process starts.

   The report is displayed in a new window.

To generate reports in the Kaspersky Security Center console, you must enable data transfer to Administration Server. Data transfer is enabled by default.

How to enable data transfer for Adaptive Anomaly Control in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **General settings** → **Reports and Storage**.

4. In the **Data transfer to Administration Server** block, click the **Settings** button.

5. Check the following boxes:

   - **Report on Adaptive Anomaly Control rules state**.

   - **Report on triggered Adaptive Anomaly Control rules**.

6. Save your changes.

How to enable data transfer for Adaptive Anomaly Control in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **KSC Integration**.
5. Under **Data transfer to Administration Server**, select the following check boxes:
   - **Report on Adaptive Anomaly Control rules state**.
   - **Report on triggered Adaptive Anomaly Control rules**.
6. Save your changes.

Rule triggers in Smart Training state storage

In training mode, Adaptive Anomaly Control sends information about triggered rules to a separate storage, **Rule triggers in Smart Training state**. Information about triggered rules is represented in the storage as a list of events. To tune Adaptive Anomaly Control, you can either confirm the atypical behavior on the computer or add an exclusion from the rule.

Adaptive Anomaly Control events

Adaptive Anomaly Control logs rule trigger events in the *Block* (including *Smart Block*) and *Notify* modes. The following events are provided for this purpose:

Process action blocked

Process action skipped

Events contain information about the suspicious activity including file checksums, the users involved, the rule triggering time, and the computer name. After analyzing the event, you can immediately add exclusions from the rule if you find the activity to be legitimate.

Application Control

Application Control manages the startup of applications on users' computers. This allows you to implement a corporate security policy when using applications. Application Control also reduces the risk of computer infection by restricting access to applications.

Configuring Application Control consists of the following steps:

1. Creating application categories.

   The administrator creates categories of applications that the administrator wants to manage. Categories of applications are intended for all computers in the corporate network, regardless of administration groups. To create a category, you can use the following criteria: KL category (for example, *Browsers* or another category), file hash, application vendor, and other criteria.

2. Creating Application Control rules.

   The administrator creates Application Control rules in the policy for the administration group. The rule includes the categories of applications and the startup status of applications from these categories: blocked or allowed. The administrator can create many rules. One application may match the criteria of multiple rules. The priority of a block rule is higher than the priority of an allow rule. Kaspersky Endpoint Security checks if an application matches a rule each time it is started. Kaspersky Endpoint Security sequentially matches the application against all Application Control rules.

3. Selecting the Application Control mode.

   The administrator chooses the mode for working with applications that are not included in any of the rules (application denylist and allowlist).

When a user attempts to start a prohibited application, Kaspersky Endpoint Security will block the application from starting and will display a notification (see the figure below).

A *test mode* is provided to check the configuration of Application Control. In this mode, Kaspersky Endpoint Security does the following:

- Allows the startup of applications, including prohibited ones.
- Shows a notification about the startup of a prohibited application and adds information to the report on the user's computer.
- Sends data about the startup of prohibited applications to Kaspersky Security Center.

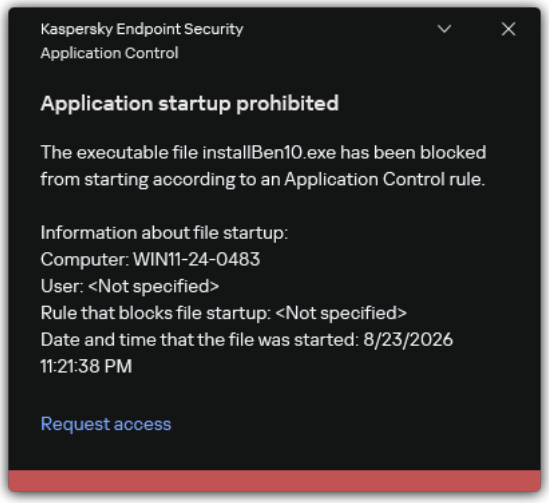

Application Control notification

Application Control operating modes

The Application Control component operates in two modes:

- **Denylist**. In this mode, Application Control allows users to start all applications except for applications that are prohibited in Application Control rules.

  This mode of Application Control is enabled by default.

- **Allowlist**. In this mode, Application Control blocks users from starting any applications except for applications that are allowed and not prohibited in Application Control rules.

  If the allow rules of Application Control are fully configured, the component blocks the startup of all new applications that have not been verified by the LAN administrator, while allowing the operation of the operating system and of trusted applications that users rely on in their work.

  You can read the recommendations on configuring Application Control rules in allowlist mode.

Application Control can be configured to operate in these modes both by using the Kaspersky Endpoint Security local interface and by using Kaspersky Security Center.

However, Kaspersky Security Center offers tools that are not available in the Kaspersky Endpoint Security local interface, such as the tools that are needed for the following tasks:

- Creating application categories.

  Application Control rules created in the Kaspersky Security Center Administration Console are based on your custom application categories and not on inclusion and exclusion conditions as is the case in the Kaspersky Endpoint Security local interface.

- Receiving information about applications that are installed on corporate LAN computers.

This is why it is recommended to use Kaspersky Security Center to configure the operation of the Application Control component.

Application Control operating algorithm

Kaspersky Endpoint Security uses an algorithm to make a decision about starting an application (see the figure below).

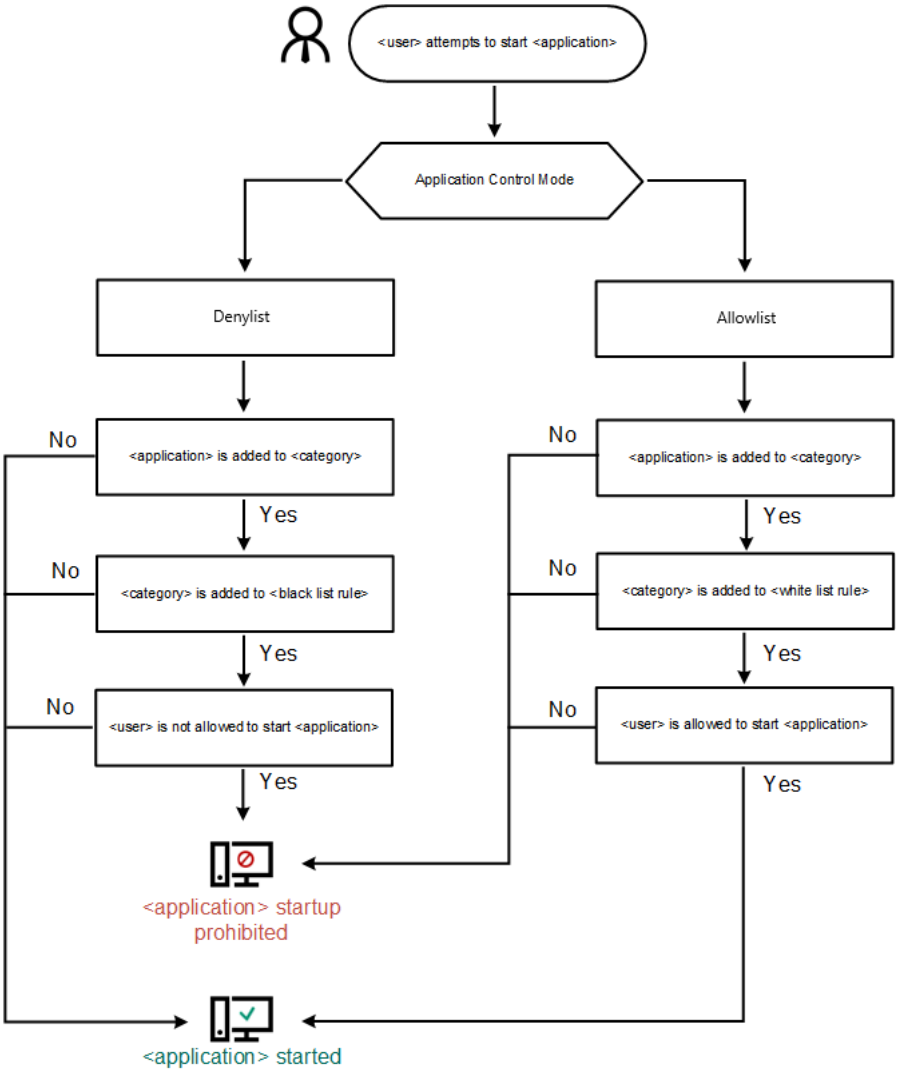

Application Control operating algorithm

Application Control functionality limitations

Operation of the Application Control component is limited in the following cases:

- When the application version is upgraded, importing Application Control component settings is not supported.
- If there is no connection with KSN servers, Kaspersky Endpoint Security receives information about the reputation of applications and their modules only from local databases.

> The list of applications that Kaspersky Endpoint Security designates as KL category **Other Software\Applications, trusted according to reputation in KSN** may differ depending on whether or not a connection to KSN servers is available.

- At the Kaspersky Security Center database, information on 150,000 processed files may be stored. Once this number of records has been achieved, new files will not be processed. To resume inventory operations, you must delete the files that were previously inventoried in the Kaspersky Security Center database from the computer on which Kaspersky Endpoint Security is installed.

- The component does not control the startup of scripts unless the script is sent to the interpreter via the command line.

  If the startup of an interpreter is allowed by Application Control rules, the component will not block a script started from this interpreter.

  If at least one of the scripts specified in the interpreter command line is blocked from start by Application control rules, the component blocks all the scripts, specified in the interpreter command line.

- The component does not control the startup of scripts from interpreters that are not supported by Kaspersky Endpoint Security.

  Kaspersky Endpoint Security supports the following interpreters:

  - Java
  - PowerShell

  The following types of interpreters are supported:

  - %ComSpec%
  - %SystemRoot%\system32\regedit.exe
  - %SystemRoot%\regedit.exe
  - %SystemRoot%\system32\regedt32.exe
  - %SystemRoot%\system32\cscript.exe
  - %SystemRoot%\system32\wscript.exe
  - %SystemRoot%\system32\msiexec.exe
  - %SystemRoot%\system32\mshta.exe
  - %SystemRoot%\system32\rundll32.exe
  - %SystemRoot%\system32\wwahost.exe
  - %SystemRoot%\syswow64\cmd.exe
  - %SystemRoot%\syswow64\regedit.exe
  - %SystemRoot%\syswow64\regedt32.exe
  - %SystemRoot%\syswow64\cscript.exe

- %SystemRoot%\syswow64\wscript.exe
- %SystemRoot%\syswow64\msiexec.exe
- %SystemRoot%\syswow64\mshta.exe
- %SystemRoot%\syswow64\rundll32.exe
- %SystemRoot%\syswow64\wwahost.exe

Getting information about installed applications

To create optimal Application Control rules, it is recommended to first get a picture of the applications that are used on computers on the corporate LAN. To do this, you can obtain the following information:

- Vendors, versions, and localizations of applications used on the corporate LAN.
- Frequency of application updates.
- Application usage policies adopted in the company (this may be security policies or administrative policies).
- Storage location of application distribution packages.

Viewing application information

Information about installed applications is provided by Kaspersky Security Center Network Agent. Information about installed applications is available in Kaspersky Security Center console in the **Applications registry** folder. Network Agent updates the information upon each synchronization with Kaspersky Security Center. For details about information sent by the Network Agent, please refer to the Kaspersky Security Center Help.

To open the application properties window in the Applications registry folder:

1. Open the Kaspersky Security Center Administration Console.
2. In the Administration Console tree, select **Advanced** → **Application management** → **Applications registry**.
3. Select an application.
4. In the context menu of the application, select **Properties**.

Viewing information about executable files

You can reduce the load on the database when querying information about executable files. To achieve this, we recommend running the *Inventory* task on several reference computers that have your standard set of software installed.

Information about executable files is provided by Kaspersky Endpoint Security. To receive hardware information, you need to apply an active policy that enables transmission of information of installed applications (such transmission is enabled by default).

How to enable the submission of application information in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Reports and Storage**.
4. In the **Data transfer to Administration Server** block, click the **Settings** button.
5. Select the **Started applications** check box.
6. Save your changes.

How to enable the submission of application information in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **KSC Integration**.
5. In the **Data transfer to Administration Server** block, click the **Advanced settings** button.
6. In the window that opens, select the **About started applications** check box.
7. Save your changes.

You can get a list of executable files using the *Inventory* task of Kaspersky Endpoint Security. You can view the list of executable files in the Kaspersky Security Center console, in the **Executable files** folder.

Before running the *Inventory* task, make sure that the database satisfies the recommendations of Kaspersky Security Center. For details on database limitations, please refer to the Kaspersky Security Center Help.

How to run the Inventory task in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.
   The list of tasks opens.
2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Inventory**.

Step 2. Inventory scope

Create a list of folders in which you want Kaspersky Endpoint Security to look for executable files. Configure the inventory settings (see the table below).

Step 3. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 4. Selecting the account to run the task

Select an account to run the *Inventory* task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account. If the inventory scope includes network drives or other objects with restricted access, select a user account with the sufficient access rights.

Step 5. Configuring a task start schedule

Configure the task schedule, for example, manually.

Step 6. Defining the task name

Enter a name for the task, for example *Baseline inventory*.

Step 7. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties. As a result, a search of executable files is performed on the users' computers in accordance with the configured schedule.

How to run an Inventory task in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Inventory**.

   c. In the **Task name** field, enter a brief description, for example, *Baseline inventory*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Select an account to run the task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.

6. Finish the wizard.

   A new task will be displayed in the list of tasks.

7. To configure the task, go to task properties (see the table below).

8. Select the check box next to the task.

9. Click **Start**.

   You can monitor the status of the task, and the number of devices on which the task was completed successfully or completed with an error. As a result, executable files will be searched on the user computers in accordance to the specified schedule.

To open the properties window for an executable file in the Executable files folder:

1. Open the Kaspersky Security Center Administration Console.

2. In the Administration Console tree, select **Advanced** → **Application management** → **Executable files**.

3. Select an executable file.

4. In the context menu of the executable file, select **Properties**.

To view general information about the application and its executable files, and the list of computers on which an application is installed, open the properties window of an application that is selected in the **Applications registry** folder or in the **Executable files** folder.

Updating the information about installed applications and executable files

The operation of Application Control component with the database of executable files has been optimized in Kaspersky Endpoint Security. Kaspersky Endpoint Security automatically updates the database after the file is deleted from the computer. This allows keeping the database up to date and saving Kaspersky Security Center resources. To keep the database of installed applications up to date, the sending of application information to the Administration Server must be enabled (it is enabled by default).

Inventory settings

Parameter	Description
Inventory scopes	List of objects that will form the inventory scope.
DLL modules inventory	Kaspersky Endpoint Security looks for DLL modules in the inventory scope and sends information to Kaspersky Security Center. Enabling DLL modules inventory significantly increases the time it takes to complete the Inventory task and the size of the database.
Script files inventory	Kaspersky Endpoint Security looks for scripts in the inventory scope and sends the information to Kaspersky Security Center. Enabling script files inventory significantly increases the time it takes to complete the Inventory task and the size of the database.
Run only when the computer is idle	Postponed start of the task when computer resources are busy. Kaspersky Endpoint Security starts the scan task if the computer is locked or if the screen saver is on. If you have interrupted the execution of the task, for example by unlocking the computer, Kaspersky Endpoint Security automatically runs the task, continuing from the point where it was interrupted. This schedule option lets you conserve computer resources when the computer is being used.
Scan only new and modified files	Scans only new files and those files that have been modified since the last time they were scanned. This helps reduce the duration of a scan. This mode applies both to simple and to compound files.
Skip file that is scanned for longer than (sec) N sec	Limiting the task execution time. After the specified amount of time, Kaspersky Endpoint Security stops the task. The task is not marked as completed. Next time Kaspersky Endpoint Security runs the task, it will be run from the beginning and on schedule.
Scan archives	Scanning ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR, ICE, and other archives. The application scans archives not only by extension, but also by format. When checking archives, the application performs a recursive unpacking. This allows the detection of threats inside multi-level archives (an archive within an archive).
Scan distribution packages	Scanning distribution packages of third-party applications.
Do not unpack large compound files	If this check box is selected, the application does not scan compound files if their size exceeds the specified value. If this check box is cleared, the application scans compound files of all sizes. The application scans large files that are extracted from archives regardless of whether the check box is selected or not.

How to enable the Blocked applications mode

The *Blocked applications* mode is the mode, when Application Control allows users to start all applications except for applications that are prohibited in Application Control rules. That is, if no deny rule exists, Application Control allows starting the application. This mode of Application Control is enabled by default.

> Before enabling the *Blocked applications* mode, we recommend testing your Application Control rules. For this purpose, you can enable the test mode.

How to enable the Blocked applications mode in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Security Controls** → **Application Control**.
5. Select the **Application Control** check box.
6. In the **Application Control settings** block use the **Control mode** drop-down list to select **Denylist**.
7. In the **Action** drop-down list select the action for Application Control:
   - **Test rules**. Application Control does not block applications that are prevented from running by the rules, but generates events about the running of applications that would otherwise be blocked.
   - **Apply rules**. Application Control blocks the blocked applications and generates corresponding events.
8. Select the status for the Application Control rules:
   - **On**. This status means that the rule is used when the Application Control component is running.
   - **Off**. This status means that the rule is ignored when the Application Control component is running.
   - **Test**. This status means that Kaspersky Endpoint Security always allows the startup of applications to which the rule applies but logs information about the startup of such applications in the report.

   If necessary, add new Application Control rules.
9. Configure the advanced settings of Application Control:
   - **Monitor loading of DLL modules (significantly increases the load on the system)**. If the check box is selected, Kaspersky Endpoint Security controls the loading of DLL modules when users attempt to start applications. Information about the DLL module and the application that loaded this DLL module is logged in the report.

When enabling control over the loading of DLL modules and drivers, make sure that one of the following rules is enabled in the Application Control settings: the default **Golden Image** rule or another rule that contains the "**Golden Image\Trusted Certificates**" KL category and ensures that trusted DLL modules and drivers are loaded before Kaspersky Endpoint Security is started. Enabling control of the loading of DLL modules and drivers when the **Golden Image** rule is disabled may cause instability in the operating system.

Kaspersky Endpoint Security monitors only the DLL modules and drivers that have been loaded since the check box was selected. After selecting the check box, it is recommended to restart the computer to ensure that the application monitors all DLL modules and drivers, including those loaded before Kaspersky Endpoint Security starts.

- **Use strict digital signature verification**. You can select a certificate as a triggering condition for an Application Control rule. If this check box is selected, Kaspersky Endpoint Security applies rules to applications signed with certificates only from the trusted system certificate store. Applications signed with such a certificate are also considered trusted by the protection components, for example, the *Malware Scan* task. However, if you specify a certificate from a different store in an Application Control rule, Kaspersky Endpoint Security does not apply such a rule.

  If the check box is cleared, Kaspersky Endpoint Security applies rules to applications signed by a certificate from the Windows Trusted Root Certificate Store. Such applications are not part of the trusted zone. Protection components monitor the activity of such applications.

- **Message about blocking**. Template of the message that is displayed when an Application Control rule that blocks an application from starting is triggered.

- **Message to administrator**. Template of the message that a user can send to the corporate LAN administrator if the user believes that an application was blocked by mistake.

10. To apply the policy to computers, close the padlock icons and save your changes.

How to enable the Blocked applications mode in the Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **App Control**.

5. Turn on the **Application Control ENABLED** toggle.

6. In the **Operating mode** block, select **Block all except the rules list**.

7. In the **Action** block, select the action for Application Control:

   - **Inform**. Application Control does not block applications that are prevented from running by the rules, but generates events about the running of applications that would otherwise be blocked.

   - **Apply rules**. Application Control blocks the blocked applications and generates corresponding events.

8. Select the status for the Application Control rules:

- **Enabled**. This status means that the rule is used when the Application Control component is running.
- **Disabled**. This status means that the rule is ignored when the Application Control component is running.
- **Test mode**. This status means that Kaspersky Endpoint Security always allows the startup of applications to which the rule applies but logs information about the startup of such applications in the report.

If necessary, add new Application Control rules.

9. Configure the advanced settings of Application Control:

- **Monitor loading of DLL modules**. If the check box is selected, Kaspersky Endpoint Security controls the loading of DLL modules when users attempt to start applications. Information about the DLL module and the application that loaded this DLL module is logged in the report.

  When enabling control over the loading of DLL modules and drivers, make sure that one of the following rules is enabled in the Application Control settings: the default **Golden Image** rule or another rule that contains the "**Golden Image\Trusted Certificates**" KL category and ensures that trusted DLL modules and drivers are loaded before Kaspersky Endpoint Security is started. Enabling control of the loading of DLL modules and drivers when the **Golden Image** rule is disabled may cause instability in the operating system.

  Kaspersky Endpoint Security monitors only the DLL modules and drivers that have been loaded since the check box was selected. After selecting the check box, it is recommended to restart the computer to ensure that the application monitors all DLL modules and drivers, including those loaded before Kaspersky Endpoint Security starts.

- **Use strict digital signature verification**. You can select a certificate as a triggering condition for an Application Control rule. If this check box is selected, Kaspersky Endpoint Security applies rules to applications signed with certificates only from the trusted system certificate store. Applications signed with such a certificate are also considered trusted by the protection components, for example, the *Malware Scan* task. However, if you specify a certificate from a different store in an Application Control rule, Kaspersky Endpoint Security does not apply such a rule.

  If the check box is cleared, Kaspersky Endpoint Security applies rules to applications signed by a certificate from the Windows Trusted Root Certificate Store. Such applications are not part of the trusted zone. Protection components monitor the activity of such applications.

- **Message to user**. Template of the message that is displayed when an Application Control rule that blocks an application from starting is triggered.
- **Message to administrator**. Template of the message that a user can send to the corporate LAN administrator if the user believes that an application was blocked by mistake.

10. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to enable the Blocked applications mode in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Application Control**.

3. Turn on the **Application Control** toggle.

4. In the **Application Startup Control mode** block, select **Denylist. All applications, except for the ones in the rules list, are allowed**.

5. In the **Action on starting applications blocked by rules** block, select the action for Application Control:

   - **Inform (Test mode) and log events in report**. Application Control does not block applications that are prevented from running by the rules, but generates events about the running of applications that would otherwise be blocked.

   - **Block**. Application Control blocks the blocked applications and generates corresponding events.

6. Select the status for the Application Control rules:

   - **Enabled**. This status means that the rule is used when the Application Control component is running.

   - **Disabled**. This status means that the rule is ignored when the Application Control component is running.

   - **Test mode**. This status means that Kaspersky Endpoint Security always allows the startup of applications to which the rule applies but logs information about the startup of such applications in the report.

   If necessary, add new Application Control rules.

7. Configure the advanced settings of Application Control:

   - **Monitor loading of DLL modules**. If the check box is selected, Kaspersky Endpoint Security controls the loading of DLL modules when users attempt to start applications. Information about the DLL module and the application that loaded this DLL module is logged in the report.

     When enabling control over the loading of DLL modules and drivers, make sure that one of the following rules is enabled in the Application Control settings: the default **Golden Image** rule or another rule that contains the "**Golden Image\Trusted Certificates**" KL category and ensures that trusted DLL modules and drivers are loaded before Kaspersky Endpoint Security is started. Enabling control of the loading of DLL modules and drivers when the **Golden Image** rule is disabled may cause instability in the operating system.

     Kaspersky Endpoint Security monitors only the DLL modules and drivers that have been loaded since the check box was selected. After selecting the check box, it is recommended to restart the computer to ensure that the application monitors all DLL modules and drivers, including those loaded before Kaspersky Endpoint Security starts.

   - **Use strict digital signature verification**. You can select a certificate as a triggering condition for an Application Control rule. If this check box is selected, Kaspersky Endpoint Security applies rules to applications signed with certificates only from the trusted system certificate store. Applications signed with such a certificate are also considered trusted by the protection components, for example, the *Malware Scan* task. However, if you specify a certificate from a different store in an Application Control rule, Kaspersky Endpoint Security does not apply such a rule.

     If the check box is cleared, Kaspersky Endpoint Security applies rules to applications signed by a certificate from the Windows Trusted Root Certificate Store. Such applications are not part of the trusted zone. Protection components monitor the activity of such applications.

- **Templates of messages about application blocking**. Template of the message that is displayed when an Application Control rule that blocks an application from starting is triggered.

- **Template message text that is displayed when an application is blocked from starting**. Template of the message that a user can send to the corporate LAN administrator if the user believes that an application was blocked by mistake.

8. Save your changes.

As a result, Application Control blocks the blocked applications. Kaspersky Endpoint Security also generates *Application startup prohibited* events. You can use these events to generate the *Report on prohibited applications* report in the Kaspersky Security Center console. In the summary of the report, you can view the list of applications and computers on which the Application Control rule triggered.

Application Control based on a baseline computer

You can use a baseline computer to create an image with a set of applications that you need. You can then use this image to deploy the operating system and applications on other computers. It is not always feasible to keep the image up to date. Application Control lets you maintain a list of allowed applications based on a baseline computer. Application Control automatically determines which applications are installed on the baseline computer and updates the category. In this way, the computers get an up-to-date list of allowed applications.

Configuring Application Control based on a baseline computer involves the following steps:

1. Creating an automatically update category. When creating the new category, select the **Category that includes executable files from a specific folder** category and select your baseline computer.

   How to create an automatically updated category in the Administration Console (MMC)

   1. Open the Kaspersky Security Center Administration Console.

   2. In the Administration Console tree, select **Advanced** → **Application management** → **Application categories**.

   3. Click the **New category** button in the workspace.

      This starts the application category creation wizard.

   4. Follow the instructions of the application category creation wizard.

Step 1. Selecting the category type

Select **Category that includes executable files from selected devices** as the category type.

Step 2. Entering a user category name

At this step, specify a name for the application category.

Step 3. Settings

This step is available if you selected the **Category that includes executable files from selected devices** category type.

At this step, click the **Add** button and specify the computers whose executable files will be added to the application category by Kaspersky Security Center. All executable files from the specified computers presented in the **Executable files** folder will be added to the application category by Kaspersky Security Center.

At this step, you can also configure the following settings:

- Algorithm for hash function calculation. To select an algorithm, you must select at least one of the following check boxes:
  - **Calculate SHA256 for files in this category (supported by Kaspersky Endpoint Security 10 Service Pack 2 for Windows and later versions)**.
  - **Calculate MD5 for files in this category (supported by versions earlier than Kaspersky Endpoint Security 10 Service Pack 2 for Windows)**.
- The **Synchronize data with Administration Server repository** check box. Select this check box if you want Kaspersky Security Center to periodically clear the application category and add to it all executable files from the specified computers presented in the **Executable files** folder.

  If the **Synchronize data with Administration Server repository** check box is cleared, Kaspersky Security Center will not make any modifications to an application category after it is created.

Step 4. Filter

At this step, configure a filter for files.

You can specify the file type that you want to use to create the application category.

- **All files**. The category will match all files. This option is selected by default.
- **Only files outside the application categories**. The category will match only files outside application categories.

You can specify folders of selected computers that contain files that you want to use to create the application category.

- **All folders**. The category will match all folders. This option is selected by default.
- **Specified folder**. The category will match only the specified folder. If you select this option, you need to specify a folder path.

Step 5. Creating a custom category

Finish the wizard.

How to create a category with content added automatically in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Operations** → **Third-party applications** → **Application categories**.

   This opens the list of application categories.

2. Click **Add**.

   This starts the application category creation wizard.

3. Configure the general settings of the application category:

   - Category name.
   - Category creation method. Select **Category that includes executable files from selected devices** as the category type.

   Go to the next step.

4. Configure the advanced settings of the application category:

   - Specify computers from which Kaspersky Security Center will add executable files to the application category. All executable files from the specified computers presented in the **Executable files** folder will be added to the application category by Kaspersky Security Center.
   - Select an algorithm for hash function calculation.
   - Configure an interval for synchronizing data with the Administration Server storage.
   - Configure a filter for files.

5. Finish the wizard.

When creating an automatically updated category, it may be convenient to subdivide the files into multiple categories. For example, operating system files and files from the Program Files folder. To do so, you can use a filter in category settings and select individual folders.

2. Selecting the Application Control mode. You need to prevent the execution of all applications that are not explicitly allowed. To do so, select the *Blocked applications* mode.

3. Creating an Application Control rule. In rule settings, select the category that executable files from the baseline computer belong to.

   How to configure Application Control based on a baseline computer in the Administration Console (MMC)

   1. Open the Kaspersky Security Center Administration Console.
   2. In the console tree, select **Policies**.
   3. Select the necessary policy and double-click to open the policy properties.

4. In the policy window, select **Security Controls** → **Application Control**.

5. Select the **Application Control** check box.

6. In the **Application Control settings** block use the **Control mode** drop-down list to select **Denylist**.

7. In the **Action** drop-down list select the action for Application Control:

   - **Test rules**. Application Control does not block applications that are prevented from running by the rules, but generates events about the running of applications that would otherwise be blocked.

   - **Apply rules**. Application Control blocks the blocked applications and generates corresponding events.

8. In the list of Application Control rules, click the **Add** button.

   This starts the wizard for adding an Application Control rule.

9. In the **Category** drop-down list, select an automatically updated category based on the baseline computer.

10. Select the users or groups of users to which you want to apply the Application Control rule.

11. Configure the advanced settings of the Application Control rule:

    - **Deny for other users**. The application prevents the launch of applications that belong to the selected category for all users that are not on the list.

    - **Trusted Updaters**. Kaspersky Endpoint Security considers applications included in the selected category as trusted updaters allowed to create other executable files that will be subsequently allowed to run.

12. To apply the policy to computers, close the padlock icons and save your changes.

How to configure Application Control based on a baseline computer in the Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **App Control**.

5. Turn on the **Application Control ENABLED** toggle.

6. In the **Operating mode** block, select **Block all except the rules list**.

7. In the **Action** block, select the action for Application Control:

   - **Inform**. Application Control does not block applications that are prevented from running by the rules, but generates events about the running of applications that would otherwise be blocked.

   - **Apply rules**. Application Control blocks the blocked applications and generates corresponding events.

8. In the list of Application Control rules, click the **Add** button.

   This starts the wizard for adding an Application Control rule.

9. Under **Categories/Applications**, select an automatically updated category based on the baseline computer.

10. Select the users or groups of users to which you want to apply the Application Control rule.

11. Configure the advanced settings of the Application Control rule:

    - **Users**. The application prevents the launch of applications that belong to the selected category for all users that are not on the list.

    - **Trusted Updaters**. Kaspersky Endpoint Security considers applications included in the selected category as trusted updaters allowed to create other executable files that will be subsequently allowed to run.

12. To apply the policy to computers, close the padlock icons and save your changes.

How to configure Application Control based on a baseline computer in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **Security Controls** → **Application Control**.

3. Turn on the **Application Control** toggle.

4. In the **Application Startup Control mode** block, select **Denylist. All applications, except for the ones in the rules list, are allowed**.

5. In the **Action on starting applications blocked by rules** block, select the action for Application Control:

    - **Inform (Test mode) and log events in report**. Application Control does not block applications that are prevented from running by the rules, but generates events about the running of applications that would otherwise be blocked.

    - **Block**. Application Control blocks the blocked applications and generates corresponding events.

6. In the list of Application Control rules, click the **Add** button.

   This starts the wizard for adding an Application Control rule.

7. Under **Category**, select an automatically updated category based on the baseline computer.

8. Select the users or groups of users to which you want to apply the Application Control rule.

9. Configure the advanced settings of the Application Control rule:

    - **Deny for other users**. The application prevents the launch of applications that belong to the selected category for all users that are not on the list.

    - **Trusted Updaters**. Kaspersky Endpoint Security considers applications included in the selected category as trusted updaters allowed to create other executable files that will be subsequently allowed to run.

10. Save your changes.

Managing Application Control rules

Kaspersky Endpoint Security controls the startup of applications by users by using rules. An Application Control rule specifies the triggering conditions and actions performed by Application Control when the rule is triggered (allowing or blocking application startup by users).

Rule-triggering conditions

A rule-triggering condition has the following correlation: "condition type - condition criterion - condition value". Based on the rule-triggering conditions, Kaspersky Endpoint Security applies (or does not apply) a rule to an application.

The following types of conditions are used in rules:

- *Inclusion conditions*. Kaspersky Endpoint Security applies the rule to the application if the application matches at least one of the inclusion conditions.
- *Exclusion conditions*. Kaspersky Endpoint Security does not apply the rule to the application if the application matches at least one of the exclusion conditions and does not match any of the inclusion conditions.

Rule-triggering conditions are created using criteria. The following criteria are used to create rules in Kaspersky Endpoint Security:

- Path to the folder containing the executable file of the application or path to the executable file of the application.
- Metadata: application executable file name, application executable file version, application name, application version, application vendor.
- Hash of the executable file of the application.
- Certificate: issuer, subject, thumbprint.
- Inclusion of the application in a KL category.
- Location of the application executable file on a removable drive.

The criterion value must be specified for each criterion used in the condition. If the parameters of the application being started match the values of criteria specified in the inclusion condition, the rule is triggered. In this case, Application Control performs the action prescribed in the rule. If application parameters match the values of criteria specified in the exclusion condition, Application Control does not control startup of the application.

If you have selected a certificate as a rule-triggering condition, you need to ensure that this certificate is added to the trusted system storage on the computer, and check the trusted system storage usage settings in the application.

Decisions made by the Application Control component when a rule is triggered

When a rule is triggered, Application Control allows users (or user groups) to start applications or blocks startup according to the rule. You can select individual users or groups of users that are allowed or not allowed to start applications that trigger a rule.

If a rule does not specify those users allowed to start applications satisfying the rule, this rule is called a *block* rule.

If a rule that does not specify any users who are not allowed to start applications that match the rule, this rule is called an *allow* rule.

The priority of a block rule is higher than the priority of an allow rule. For example, if an Application Control allow rule has been assigned for a user group while an Application Control block rule has been assigned for one user in this user group, this user will be blocked from starting the application.

Operating status of a rule

Application Control rules can have one of the following operating statuses:

- **Enabled**. This status means that the rule is used when the Application Control component is running.
- **Disabled**. This status means that the rule is ignored when the Application Control component is running.
- **Test mode**. This status signifies that Kaspersky Endpoint Security allows the startup of applications to which the rules apply but logs information about the startup of such applications in the report.

Adding a trigger condition for the Application Control rule

For more convenience when creating Application Control rules, you can create application categories.

It is recommended to create a "Work applications" category that covers the standard set of applications that are used at the company. If different user groups use different sets of applications in their work, a separate application category can be created for each user group.

To create an application category in the Administration Console:

1. Open the Kaspersky Security Center Administration Console.
2. In the Administration Console tree, select **Advanced** → **Application management** → **Application categories**.
3. Click the **New category** button in the workspace.

   The user category creation wizard starts.
4. Follow the instructions of the new category creation wizard.

Step 1. Selecting the category type

At this step, select one of the following types of application categories:

- Category with content added manually. Data of executable files is manually added to the category If you selected this type of category, at the *Configuring conditions for inclusion of applications in categories* step and the *Configuring conditions for exclusion of applications from categories* step, you will be able to define the criteria whereby executable files will be included into the category.

- Category that includes executable files from selected devices. These executable files are processed automatically and their metrics are added to the category If you selected this type of category, at the *Settings* step you will be able to specify a computer whose executable files will be automatically included in the category.

- Category that includes executable files from a specific folder. Executable files of applications copied to the specified folder are automatically processed and their metrics are added to the category If you selected this type of category, at the *Repository folder* step you will be able to specify a folder from which executable files will be automatically included in the category.

When creating a category with content added automatically, Kaspersky Security Center performs inventory on files with the following formats: EXE, COM, DLL, SYS, BAT, PS1, CMD, JS, VBS, REG, MSI, MSC, CPL, HTML, HTM, DRV, OCX, and SCR.

Step 2. Entering a user category name

At this step, specify a name for the application category.

Step 3. Configuring the conditions for including applications in a category

When adding a large number of conditions to Application Control rules (for example, file hashes), consumption of computer resources increases. When the total number of conditions reaches 50,000, performance issues may occur. To optimize performance, it is recommended to review and reduce the number of conditions.

This step is available if you selected the **Category with content added manually** category type.

At this step, in the **Add** drop-down list, select the conditions for including applications into the category:

- **From the list of executable files**. Add applications from the list of executable files on the client device to the custom category.

- **From file properties**. Specify detailed data of executable files as a condition for adding applications to the custom category.

- **Metadata from files in folder**. Select a folder on the client device that contains executable files. Kaspersky Security Center will indicate the metadata of these executable files as a condition for adding applications to the custom category.

- **Checksums of the files in the folder**. Select a folder on the client device that contains executable files. Kaspersky Security Center will indicate the hashes of these executable files as a condition for adding applications to the custom category.

- **Certificates for the files from the folder**. Select a folder on the client device that contains executable files signed with certificates. Kaspersky Security Center will indicate the certificates of these executable files as a condition for adding applications to the custom category.

  It is not recommended to use conditions whose properties do not have the **Certificate fingerprint** parameter specified.

- **MSI installer files metadata**. Select the MSI package. Kaspersky Security Center will indicate the metadata of executable files packed in this MSI package as a condition for adding applications to the custom category.

- **Checksums of the files from the MSI installer of the application**. Select the MSI package. Kaspersky Security Center will indicate the hashes of executable files packed in this MSI package as a condition for adding applications to the custom category.

- **From KL category**. Specify a KL category as a condition for adding applications to the custom category. A *KL category* is a list of applications that have shared theme attributes. The list is maintained by Kaspersky experts. For example, the KL category known as *Office Applications* includes applications from the Microsoft Office suite, Adobe Acrobat, and others.

  You can select all KL categories to generate an extended list of trusted applications.

- **Specify path to application (masks supported)**. Select a folder on the client device. Kaspersky Security Center will add executable files from this folder to the custom category.

- **Select certificate from repository**. Select certificates that were used to sign executable files as a condition for adding applications to the custom category.

  It is not recommended to use conditions whose properties do not have the **Certificate fingerprint** parameter specified.

  You can choose the certificate store. By default, Application Control applies rules only for applications signed with a certificate from the trusted system certificate store. This is enabled by the **Use strict digital signature verification** check box.

- **Drive type**. Specify the type of storage device (all hard drives and removable drives, or only removable drives) as a condition for adding applications to the custom category.

Step 4. Configuring the conditions for excluding applications from a category

This step is available if you selected the **Category with content added manually** category type.

Applications specified at this step are excluded from the category even if these applications were specified at the "Configuring the conditions for including applications in a category" step.

At this step, in the **Add** drop-down list, select conditions for excluding applications from the category:

- **From the list of executable files**. Add applications from the list of executable files on the client device to the custom category.
- **From file properties**. Specify detailed data of executable files as a condition for adding applications to the custom category.
- **Metadata from files in folder**. Select a folder on the client device that contains executable files. Kaspersky Security Center will indicate the metadata of these executable files as a condition for adding applications to the custom category.
- **Checksums of the files in the folder**. Select a folder on the client device that contains executable files. Kaspersky Security Center will indicate the hashes of these executable files as a condition for adding applications to the custom category.
- **Certificates for the files from the folder**. Select a folder on the client device that contains executable files signed with certificates. Kaspersky Security Center will indicate the certificates of these executable files as a condition for adding applications to the custom category.
- **MSI installer files metadata**. Select the MSI package. Kaspersky Security Center will indicate the metadata of executable files packed in this MSI package as a condition for adding applications to the custom category.
- **Checksums of the files from the MSI installer of the application**. Select the MSI package. Kaspersky Security Center will indicate the hashes of executable files packed in this MSI package as a condition for adding applications to the custom category.
- **From KL category**. Specify a KL category as a condition for adding applications to the custom category. A *KL category* is a list of applications that have shared theme attributes. The list is maintained by Kaspersky experts. For example, the KL category known as *Office Applications* includes applications from the Microsoft Office suite, Adobe Acrobat, and others.

  You can select all KL categories to generate an extended list of trusted applications.
- **Specify path to application (masks supported)**. Select a folder on the client device. Kaspersky Security Center will add executable files from this folder to the custom category.
- **Select certificate from repository**. Select certificates that were used to sign executable files as a condition for adding applications to the custom category.
- **Drive type**. Specify the type of storage device (all hard drives and removable drives, or only removable drives) as a condition for adding applications to the custom category.

Step 5. Settings

This step is available if you selected the **Category that includes executable files from selected devices** category type.

At this step, click the **Add** button and specify the computers whose executable files will be added to the application category by Kaspersky Security Center. All executable files from the specified computers presented in the **Executable files** folder will be added to the application category by Kaspersky Security Center.

At this step, you can also configure the following settings:

- Algorithm for hash function calculation. To select an algorithm, you must select at least one of the following check boxes:
  - **Calculate SHA256 for files in this category (supported by Kaspersky Endpoint Security 10 Service Pack 2 for Windows and later versions)**.
  - **Calculate MD5 for files in this category (supported by versions earlier than Kaspersky Endpoint Security 10 Service Pack 2 for Windows)**.
- The **Synchronize data with Administration Server repository** check box. Select this check box if you want Kaspersky Security Center to periodically clear the application category and add to it all executable files from the specified computers presented in the **Executable files** folder.

  If the **Synchronize data with Administration Server repository** check box is cleared, Kaspersky Security Center will not make any modifications to an application category after it is created.

Step 6. Repository folder

This step is available if you selected the **Category that includes executable files from a specific folder** category type.

At this step, specify the folder in which Kaspersky Security Center will search for executable files to automatically add applications to the application category.

At this step, you can also configure the following settings:

- The **Include dynamic-link libraries (DLL) in this category** check box. Select this check box if you want dynamic-link libraries (DLL files) to be included in the application category.

  Including DLL files in the application category may reduce the performance of Kaspersky Security Center.

- The **Include script data in this category** check box. Select this check box if you want scripts to be included in the application category.

  Including scripts in the application category may reduce the performance of Kaspersky Security Center.

- Algorithm for hash function calculation. To select an algorithm, you must select at least one of the following check boxes:
  - **Calculate SHA256 for files in this category (supported by Kaspersky Endpoint Security 10 Service Pack 2 for Windows and later versions)**.
  - **Calculate MD5 for files in this category (supported by versions earlier than Kaspersky Endpoint Security 10 Service Pack 2 for Windows)**.
- The **Force folder scan for changes** check box. Select this check box if you want Kaspersky Security Center to periodically search for executable files in the folder used for automatically adding to the application category.

  If the **Force folder scan for changes** check box is cleared, Kaspersky Security Center searches for executable files in the folder used for automatically adding to the application category only if changes have been made in the folder, files have been added to it or deleted from it.
- The **Scan interval (1–168 hours)** field. In this field, you can specify the time interval (in hours) after which Kaspersky Security Center will search for executable files in the folder used for automatically adding to the application category.

  The field is available if the **Force folder scan for changes** check box is selected.

Step 7. Creating a custom category

Finish the wizard.

To add a new trigger condition for an Application Control rule in the application interface:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Application Control**.
3. Click the **Blocked applications** or **Allowed applications** button.

   This opens the list of Application Control rules.
4. Select the rule for which you want to configure a trigger condition.

   The Application Control rule properties open.
5. Select the **Conditions: N** tab or **Exclusions: N** tab and click the **Add** button.
6. Select the trigger conditions for the Application Control rule:
   - **Conditions from properties of started applications**. In the list of running applications, you can select the applications to which the Application Control rule will be applied. Kaspersky Endpoint Security also lists applications that were previously running on the computer. You need to select the criterion that you want to use to create one or multiple rule trigger conditions: **File hash**, **Certificate**, **KL category**, **Metadata** or **Path to file or folder**.
   - **Conditions "KL category"**. A *KL category* is a list of applications that have shared theme attributes. The list is maintained by Kaspersky experts. For example, the KL category known as "Office applications" includes applications from the Microsoft Office suite, Adobe® Acrobat®, and others.
   - **Custom condition**. You can select the application file and select one of the rule trigger conditions: **File hash**, **Certificate**, **Metadata** or **Path to file or folder**.

- **Condition by file drive (removable drive)**. The Application Control rule is applied only to files that are run on a removable drive.

- **Conditions from properties of files in the specified folder**. The Application Control rule is applied only to files in the specified folder. You can also include or exclude files from subfolders. You need to select the criterion that you want to use to create one or multiple rule trigger conditions: **File hash**, **Certificate**, **KL category**, **Metadata** or **Path to file or folder**.

7. Save your changes.

When adding conditions, please take into account the following special considerations for Application Control:

- Kaspersky Endpoint Security supports `*` and `?` characters for entering a mask in metadata: **File name**, **Application name**, **Vendor**.

- Kaspersky Endpoint Security does not support an MD5 file hash and does not control startup of applications based on an MD5 hash. An SHA256 hash is used as a rule trigger condition.

- It is not recommended to use only the **Issuer** and **Certificate subject** criteria as rule trigger conditions. Use of these criteria is unreliable.

- If you are using a symbolic link in the **Path to file or folder** field, you are advised to resolve the symbolic link for correct operation of the Application Control rule. To do so, click the **Resolve symbolic link** button.

Adding executable files from the Executable files folder to the application category

In the **Executable files** folder the list of executable files detected on computers is displayed. Kaspersky Endpoint Security generates a list of executable files after executing the Inventory task.

To add executable files from the Executable files folder to the application category:

1. Open the Kaspersky Security Center Administration Console.

2. In the Administration Console tree, select **Advanced** → **Application management** → **Executable files**.

3. In the workspace, select the executable files that you want to add to the application category.

4. Right-click to open the context menu for the selected executable files and select **Add to category**.

5. In the window that opens, do the following:

   - In the upper part of the window, choose one of the following options:

     - **Add to a new application category**. Choose this option if you want to create a new application category and add executable files to it.

     - **Add to an existing application category**. Choose this option if you want to select an existing application category and add executable files to it.

- In the **Rule type** block, select one of the following options:
  - **Rules for adding to inclusions**. Select this option if you want to create a condition that adds executable files to the application category.
  - **Rules for adding to exclusions**. Select this option if you want to create a condition that excludes executable files from the application category.
- In the **Parameter used as a condition** block, select one of the following options:
  - **Certificate details (or SHA256 hashes for files without a certificate)**.
  - **Certificate details (files without a certificate will be skipped)**.
  - **Only SHA256 (files without a hash will be skipped)**.
  - **Only MD5 (discontinued mode, only for Kaspersky Endpoint Security 10 Service Pack 1 version)**.

6. Save your changes.

Adding event-related executable files to the application category

To add executable files related to Application Control events to the application category:

1. Open the Kaspersky Security Center Administration Console.
2. In the **Administration Server** node of the Administration Console tree, select the **Events** tab.
3. Choose a selection of events related to operation of the Application Control component (Viewing events resulting from operation of the Application Control component, Viewing events resulting from test operation of the Application Control component) in the **Event selections** drop-down list.
4. Click the **Run selection** button.
5. Select the events whose associated executable files you want to add to the application category.
6. Right-click to open the context menu for the selected events and select **Add to category**.
7. In the window that opens, configure the settings of the application category:
   - In the upper part of the window, choose one of the following options:
     - **Add to a new application category**. Choose this option if you want to create a new application category and add executable files to it.
     - **Add to an existing application category**. Choose this option if you want to select an existing application category and add executable files to it.

- In the **Rule type** block, select one of the following options:
  - **Rules for adding to inclusions**. Select this option if you want to create a condition that adds executable files to the application category.
  - **Rules for adding to exclusions**. Select this option if you want to create a condition that excludes executable files from the application category.
- In the **Parameter used as a condition** block, select one of the following options:
  - **Certificate details (or SHA-256 hashes for files without a certificate)**.
  - **Certificate details (files without a certificate will be skipped)**.
  - **Only SHA-256 (files without a hash will be skipped)**.
  - **Only MD5 (discontinued mode, only for Kaspersky Endpoint Security 10 Service Pack 1 version)**.

8. Save your changes.

Adding an Application Control rule

To add an Application Control rule using Kaspersky Security Center:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **Application Control**.
   In the right part of the window, the settings of the Application Control component are displayed.
4. Click **Add**.
   The **Application Control rule** window opens.
5. Do one of the following:
   - If you want to create a new category:
     a. Click **Create a category**.
     The user category creation wizard starts.
     b. Follow the instructions of the new category creation wizard.
     c. In the **Category** drop-down list, select the created application category.
   - If you want to edit an existing category:
     a. In the **Category** drop-down list, select the created application category that you want to edit.
     b. Click **Properties**.
     c. Modify the settings of the selected application category.

d. Save your changes.

e. In the **Category** drop-down list, select the created application category based on which you want to create a rule.

6. In the **Users and their rights** table, click the **Add** button.

   You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

7. In the **Users and their rights** table, do the following:

   - If you want to allow users and/or groups of users to start applications that belong to the selected category, select the **Allow** check box in the relevant rows.
   - If you want to block users and/or groups of users from starting applications that belong to the selected category, select the **Block** check box in the relevant rows.

8. Select the **Deny for other users** check box if you want all users that do not appear in the **User or group** column and that are not part of the group of users specified in the **User or group** column to be blocked from starting applications that belong to the selected category.

9. If you want Kaspersky Endpoint Security to consider applications included in the selected application category as trusted updaters allowed to create other executable files that will be subsequently allowed to run, select the **Trusted Updaters** check box.

   When Kaspersky Endpoint Security settings are migrated, the list of executable files created by trusted updaters is migrated as well.

10. Save your changes.

To add an Application Control rule:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Application Control**.

3. Click the **Blocked applications** or **Allowed applications** button.

   This opens the list of Application Control rules.

4. Click **Add**.

   This opens the Application Control rule settings window.

5. On the **General settings** tab, define the main settings of the rule:

   a. In the **Rule name** field, enter the name of the rule.

   b. In the **Description** field, enter a description of the rule.

   c. In the **Users and their rights** table, click the **Add** button.

      You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.

The rule applies to all users by default.

> If there is no user specified in the table, the rule cannot be saved.

d. In the **Users and their rights** table, use the toggle to define the right of users to start applications.

e. Select the **Deny for other users** check box if you want the application to prevent applications that satisfy rule triggering conditions from running for all users that are not listed in the **Users and their rights** table and are not members of user groups listed in the **Users and their rights** table.

> If the **Deny for other users** check box is cleared, Kaspersky Endpoint Security does not control the startup of applications by users that are not specified in the **Users and their rights** table and that do not belong to the groups of users specified in the **Users and their rights** table.

f. Select the **Trusted Updaters** check box if you want Kaspersky Endpoint Security to consider applications matching the rule trigger conditions as trusted updaters. *Trusted Updaters* are applications that are allowed to create other executable files that will be allowed to run subsequently.

If an application triggers multiple rules, Kaspersky Endpoint Security sets the *Trusted Updaters* flag if the following conditions are satisfied:

- All rules allow the application to run.
- At least one rule has the **Trusted Updaters** check box selected.

6. On the **Conditions: N** tab, create or edit the list of inclusion conditions for triggering the rule.

7. On the **Exclusions: N** tab, create or edit the list of exclusion conditions for triggering the rule.

When Kaspersky Endpoint Security settings are migrated, the list of executable files created by trusted updaters is migrated as well.

8. Save your changes.

Changing the status of an Application Control rule via Kaspersky Security Center

To change the status of an Application Control rule in the Administration Console:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **Application Control**.

In the right part of the window, the settings of the Application Control component are displayed.

4. In the **Status** column, left-click to display the context menu and select one of the following:

   - **On**. This status means that the rule is used when the Application Control component is running.
   - **Off**. This status means that the rule is ignored when the Application Control component is running.
   - **Test**. This status means that Kaspersky Endpoint Security always allows the startup of applications to which the rule applies but logs information about the startup of such applications in the report.

5. Save your changes.

To change the status of an Application Control rule in the application interface:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Application Control**.
3. Click the **Blocked applications** or **Allowed applications** button.

   This opens the list of Application Control rules.

4. In the **Status** column, open the context menu and select one of the following:

   - **Enabled**. This status means that the rule is used when the Application Control component is running.
   - **Disabled**. This status means that the rule is ignored when the Application Control component is running.
   - **Test mode**. This status means that Kaspersky Endpoint Security always allows the startup of applications to which this rule applies but logs information about the startup of such applications in the report.

5. Save your changes.

Exporting and importing Application Control rules

You can export the list of Application Control rules to an XML file. You can use the export/import function to back up the list of Application Control rules or to migrate the list to a different server.

When exporting and importing Application Control rules, please keep in mind the following special considerations:

- Kaspersky Endpoint Security exports the list of rules only for the active Application Control mode. In other words, if Application Control is operating in denylist mode, Kaspersky Endpoint Security exports rules only for this mode. To export the list of rules for allowlist mode, you need to switch the mode and run the export operation again.
- Kaspersky Endpoint Security uses application categories for Application Control rules to work. When migrating the list of Application Control rules to a different server, you also need to migrate the list of application categories. For more details on exporting or importing application categories, please refer to Kaspersky Security Center Help.

How to export and import a list of Application Control rules in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **Application Control**.

4. To export the list of Application Control rules:

   a. Select the rules that you want to export. To select multiple ports, use the **`CTRL`** or **`SHIFT`** keys.

      If you did not select any rule, Kaspersky Endpoint Security will export all rules.

   b. Click the **Export** link.

   c. In the window that opens, specify the name of the XML file to which you want to export the list of rules, and select the folder in which you want to save this file.

   d. Save the file.

      Kaspersky Endpoint Security exports the list of rules to the XML file.

5. To import a list of Application Control rules:

   a. Click the **Import** link.

      In the window that opens, select the XML file from which you want to import the list of rules.

   b. Open the file.

      If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

6. Save your changes.

How to export and import a list of Application Control rules in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **App Control**.

5. Under **Operating mode**, select a list of rules: application denylist or allowlist.

6. To export the list of rules:

   a. Select the rules that you want to export.

   b. Click the → **Export** button.

      Kaspersky Endpoint Security exports the list of rules to a JSON file in the default downloads folder.

7. To import the list of rules:

   a. Click the → **Import** button.

      In the window that opens, select the JSON file from which you want to import the list of rules.

b. Open the file.

If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.

8. Save your changes.

Viewing events resulting from operation of the Application Control component

To view events resulting from the operation of the Application Control component received by Kaspersky Security Center:

1. Open the Kaspersky Security Center Administration Console.
2. In the **Administration Server** node of the Administration Console tree, select the **Events** tab.
3. Click the **Create a selection** button.
4. In the window that opens, go to the **Events** section.
5. Click the **Clear all** button.
6. In the **Events** table, select the **Application startup prohibited** check box.
7. Save your changes.
8. In the **Event selections** drop-down list, select the created selection.
9. Click the **Run selection** button.

Viewing a report on blocked applications

To view the report on blocked applications:

1. Open the Kaspersky Security Center Administration Console.
2. In the **Administration Server** node of the Administration Console tree, select the **Reports** tab.
3. Click **New report template**.

   The New Report Template Wizard starts.
4. Follow the instructions of the Report Template Wizard. At the **Selecting the report template type** step select **Other** → **Report on prohibited applications**.

   After you have finished with the New Report Template Wizard, the new report template appears in the table on the **Reports** tab.
5. Open the report by double-clicking it.

The report generation process starts. The report is displayed in a new window.

Testing Application Control rules

To ensure that Application Control rules do not block applications required for work, it is recommended to enable testing of Application Control rules and analyze their operation after creating new rules. When testing of Application Control rules is enabled, Kaspersky Endpoint Security will not block applications whose startup is forbidden by Application Control, but will instead send notifications about their startup to the Administration Server.

An analysis of the operation of Application Control rules requires a review of the resultant Application Control events that are reported to Kaspersky Security Center. If test mode results in no blocked startup events for all applications required for the work of the computer user, this means that the correct rules were created. Otherwise, you are advised to update the settings of the rules you have created, create additional rules, or delete the existing rules.

By default, Kaspersky Endpoint Security allows the startup of all applications except for applications prohibited by the rules.

Enabling and disabling Application Control rule testing

To enable or disable testing of Application Control rules in Kaspersky Security Center:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **Application Control**.

   In the right part of the window, the settings of the Application Control component are displayed.
4. In the **Control mode** drop-down list, select one of the following items:
   - **Denylist**. If this option is selected, Application Control allows all users to start any application, except in cases that satisfy the conditions of Application Control block rules.
   - **Allowlist**. If this option is selected, Application Control blocks all users from starting any application, except in cases that satisfy the conditions of Application Control allow rules.
5. Do one of the following:
   - If you want to enable testing of Application Control rules, select the **Test rules** option in the **Action** drop-down list.
   - If you want to enable Application Control to manage the startup of applications on user computers, in the drop-down list, select **Apply rules**.
6. Save your changes.

To enable testing of Application Control rules or to select a blocking action for Application Control:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **Application Control**.

3. Click the **Blocked applications** or **Allowed applications** button.

   This opens the list of Application Control rules.

4. In the **Status** column, select **Test mode**.

   This status means that Kaspersky Endpoint Security always allows the startup of applications to which this rule applies but logs information about the startup of such applications in the report.

5. Save your changes.

Kaspersky Endpoint Security will not block applications whose startup is forbidden by the Application Control component, but will send notifications about their startup to the Administration Server. You can also configure the display of notifications about rule testing on the user's computer (see figure below).

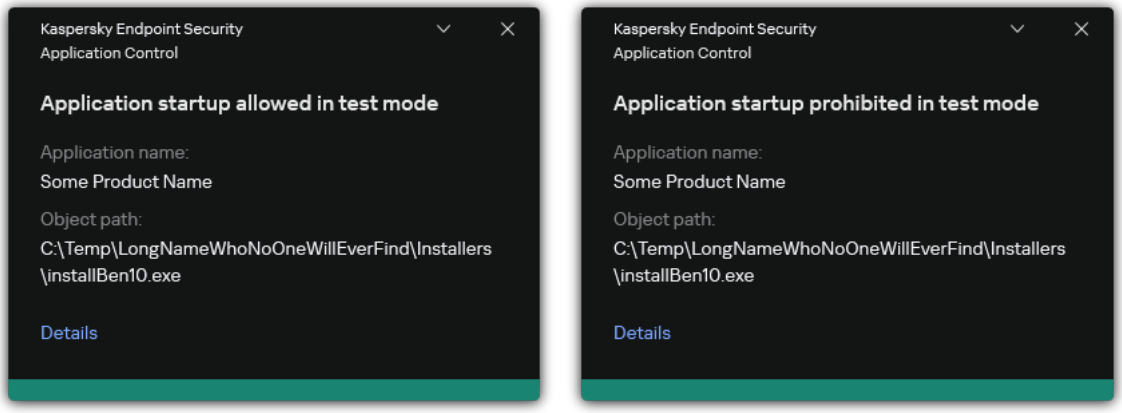

Application Control notifications in test mode

Viewing a report on blocked applications in test mode

To view the report on blocked applications in test mode:

1. Open the Kaspersky Security Center Administration Console.

2. In the **Administration Server** node of the Administration Console tree, select the **Reports** tab.

3. Click **New report template**.

   The New Report Template Wizard starts.

4. Follow the instructions of the Report Template Wizard. At the **Selecting the report template type** step, select **Other** → **Report on prohibited applications in test mode**.

   After you have finished with the New Report Template Wizard, the new report template appears in the table on the **Reports** tab.

5. Open the report by double-clicking it.

The report generation process starts. The report is displayed in a new window.

Viewing events resulting from test operation of the Application Control component

To view Application Control testing events received by Kaspersky Security Center:

1. Open the Kaspersky Security Center Administration Console.
2. In the **Administration Server** node of the Administration Console tree, select the **Events** tab.
3. Click the **Create a selection** button.
4. In the window that opens, go to the **Events** section.
5. Click the **Clear all** button.
6. In the **Events** table, select the **Application startup prohibited in test mode** and **Application startup allowed in test mode** check boxes.
7. Save your changes.
8. In the **Event selections** drop-down list, select the created selection.
9. Click the **Run selection** button.

Application activity monitor

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers.

Application Activity Monitor is a tool designed for viewing information about the activity of applications on a user's computer in real time.

Using the Application Activity Monitor requires installing the Application Control and Host Intrusion Prevention components. If these components are not installed, the Application Activity Monitor section in the main application window is hidden.

To start Application Activity Monitor:

In the main application window, in the **Monitoring** section, click the **Application Activity Monitor** tile.

In this window, information about the activity of applications on the user's computer is presented on three tabs:

- The **All applications** tab displays information about all applications installed on the computer.
- The **Running** tab displays information about the computer resource consumption by each application in real time. From this tab, you can also proceed to configure permissions for an individual application.
- The **Run at startup** tab displays the list of applications that are started when the operating system starts.

If you want to hide application activity information on a user's computer, you can restrict user access to the Application Activity Monitor tool.

How to hide Application Activity Monitor in the application interface using the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Interface**.
4. Use the **Hide Application Activity Monitor section** check box to grant or revoke access to the tool.
5. Save your changes.

How to hide Application Activity Monitor in the application interface using the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **User Interaction**.
5. Use the **Hide Application Activity Monitor section** check box to grant or revoke access to the tool.
6. Save your changes.

Rules for creating name masks for files or folders

A *mask of a file or folder name* is a representation of the name of a folder or name and extension of a file using common characters.

You can use the following common characters to create a file or folder name mask:

- The `*` (asterisk) character, which takes the place of any set of characters (including an empty set). For example, the `C:\*.txt` mask will include all paths to files with the `txt` extension located in folders and subfolders on the (C:) drive.

- The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

Editing Application Control message templates

When a user attempts to start an application that is blocked by an Application Control rule, Kaspersky Endpoint Security displays a message stating that the application is blocked from starting. Kaspersky experts provide a template of a message to the user describing the reasons why the application was blocked (see the figure below). Special variables are provided for managing the message templates (for example, `%USER_NAME%`). Variables allow a single message template to be used for different computers. When generating a message, Kaspersky Endpoint Security retrieves the value of the variable from the operating system settings and inserts it into the message matching the specific computer, user, and event.

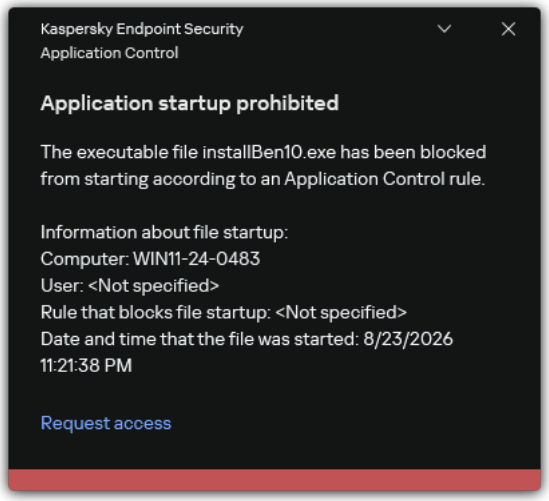

Application Control notification

If the user believes that an application was mistakenly blocked from starting, the user can use the link in the message text to send a message to the local corporate network administrator. To do so, the user must click the **Request access** button and send a message to the administrator describing the situation. You can also prepare a template of the message to the administrator, adding to it data that may inform your decision to allow or block access to the application. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Application startup blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address.

How to edit the Application Control message template in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **Application Control**.

4. In the **Message template settings** block, click the **Templates** button.

5. This opens a window; in that window, configure Application Control templates:

   - **Message about blocking**. Template of the message that is displayed when an Application Control rule that blocks an application from starting is triggered.

     You cannot configure message templates for Application Control in test mode. Application Control in test mode displays preset notifications.

   - **Message to administrator**. Template of the message that a user can send to the corporate LAN administrator if the user believes that an application was blocked by mistake.

   To add a variable to the template text, place the cursor in the desired position, click **Variable** and select the required variable from the list of available options.

   You can also restore the default template text using the **By default** button.

6. Save your changes.

How to edit the Application Control message template in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **App Control**.

5. In the **Message templates** block, click the **Messages about application startup block** link and configure templates for Application Control messages:

   - **Message to user**. Template of the message that is displayed when an Application Control rule that blocks an application from starting is triggered.

     You cannot configure message templates for Application Control in test mode. Application Control in test mode displays preset notifications.

   - **Message to administrator**. Template of the message that a user can send to the corporate LAN administrator if the user believes that an application was blocked by mistake.

   To add a variable to the template text, place the cursor in the desired position, click **Add variable** and select the required variable from the list of available options.

   You can also restore the default template text using the **Reset to default** button.

6. Save your changes.

How to edit the Application Control message template in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Application Control**.

3. In the **Templates of messages about application blocking** block, configure templates for Application Control messages:

   - **Message about blocking**. Template of the message that is displayed when an Application Control rule that blocks an application from starting is triggered.

     You cannot configure message templates for Application Control in test mode. Application Control in test mode displays preset notifications.

   - **Message to administrator**. Template of the message that a user can send to the corporate LAN administrator if the user believes that an application was blocked by mistake.

   To add a variable to the template text, place the cursor in the desired position, click **Add variable** and select the required variable from the list of available options.

   You can also restore the default template text using the **Reset** button.

4. Save your changes.

Variables in Application Control message templates

You can use the following variables in user message templates or administrator message templates:

- **Name of the rule that was triggered** – `%RULE%`.

  Name of the rule that blocked the execution of a file.

- **Current date** – `%DATE%`.

  Date when the execution of the file was blocked in the DD.MM.YYYY format.

- **Current time** – `%TIME%`.

  Time when file execution was blocked in the HH:MM format.

- **User name** – `%USER_NAME%`.

  Name of the current user account on the computer on which file execution was blocked, in the `<device name>\<user alias>` format (for example, `DESKTOP-123\John.Smith`).

- **Computer name** – `%COMPUTER_NAME%`.

  Name of the computer on which file execution was blocked.

- **Executable file name** – `%FILE_NAME%`.

  Name of the executable file of the blocked application.

- **KL category of the executable file** – `%KL_CAT%`.

  KL category to which the blocked application belongs (for example, *Browsers* or another category).

- **Path to executable file** – `%FILE_PATH%`.

  Full path to the executable file of the blocked application.

- **Executable file version** – `%FILE_VERSION%`.

  Version of the executable file of the blocked application.

- **Original name of the executable file** – `%ORIGINAL_FILE_NAME%`.

  Original name of the executable file of the blocked application. The file name is specified in the properties of the executable file of the application.

- **Vendor** – `%FILE_PUBLISHER%`.

  Vendor of the blocked application.

- **Application name** – `%FILE_PRODUCT_NAME%`.

  Name of the blocked application.

- **Application version** – `%PRODUCT_VERSION%`.

  Version of the blocked application.

- **Executable file hash** – `%FILE_HASH%`.

  Hash of the executable file of the blocked application.

- **Certificate issuer** – `%CERT_ISSUER%`.

  Issuer of the certificate that the executable file is signed with.

- **Certificate subject** – `%CERT_SUBJECT%`.

  Subject of the certificate that the executable file is signed with.

- **Certificate thumbprint** – `%CERT_THUMBPRINT%`.

  Thumbprint of the certificate that the executable file is signed with.

Best practices for taking an inventory of executable files

The *Inventory* task gets information about executable files (for example, EXE, BAT, CMD), DLL modules and scripts (PowerShell, JS, and others). This information is needed for configuring Application Control categories and application permissions for the Host Intrusion Prevention component. The *Inventory* task should be run periodically to keep the information up to date. The *Inventory* task, just like the *Malware Scan* task, is resource-intensive. Therefore, we recommend that you configure the task to run at night or on weekends.

Steps of executable file inventory

1. Select the group of reference computers on which your typical set of software is installed. We recommend keeping the number of computers to a minimum for the executable file inventory procedure. The fewer *Inventory* tasks, the lower the load on the Kaspersky Security Center Administration Server.

2. Move the reference computers to a separate administration group in the Kaspersky Security Center console. You can name the group, for example, *Reference computers*.

3. Create an *Inventory* task for the *Reference computers* administration group. We recommend keeping the default task settings.

Example of an executable file inventory in an organization

For example, your organization has 100 computers running Windows 11 25H2. All computers have the same release and localization of the operating system. The set of updates installed on the computers is also the same.

In such an organization, you do not need to run the *Inventory* task on all computers. Most of the executable files on these computers are identical. It is sufficient to create a task for one reference computer. You can create additional *Inventory* tasks for computers with a configuration that deviates from the reference.

Best practices for implementing a list of allowed applications

When planning implementation of a list of allowed applications, it is recommended to perform the following actions:

1. Form the following types of groups:
   - User groups. Groups of users for whom you need to allow use of various sets of applications.
   - Administration groups. One or multiple groups of computers to which Kaspersky Security Center will apply the list of allowed applications. It is necessary to create multiple groups of computers if different allowlist settings are used for those groups.
2. Create a list of applications that must be allowed to start.

   Prior to creating a list, you are advised to do the following:

   a. Run the inventory task.

      Information about the creation, reconfiguration, and startup of an inventory task is available in the Task management section.

   b. View the list of executable files.

Configuring allowlist mode for applications

When configuring the allowlist mode, it is recommended to perform the following actions:

1. Create application categories containing the applications that must be allowed to start.

You can select one of the following methods for creating application categories:

- **Category with content added manually**. You can manually add to this category by using the following conditions:
  - File metadata. Kaspersky Security Center adds all executable files accompanied by the specified metadata to the application category.
  - File hash code. Kaspersky Security Center adds all executable files with the specified hash to the application category.

    Use of this condition excludes the capability to automatically install updates because different versions of files will have a different hash.

  - File certificate. Kaspersky Security Center adds all executable files signed with the specified certificate to the application category.
  - KL category. Kaspersky Security Center adds all applications that are in the specified KL category to the application category.
  - Application folder. Kaspersky Security Center adds all executable files from this folder to the application category.

    Use of the **Application folder** condition may be unsafe because any application from the specified folder will be allowed to start. It is recommended to apply rules that use the application categories with the **Application folder** condition only to those users for whom the automatic installation of updates must be allowed.

- **Category that includes executable files from a specific folder**. You can specify a folder from which executable files will be automatically assigned to the created application category.
- **Category that includes executable files from selected devices**. You can specify a computer for which all executable files will be automatically assigned to the created application category.

  When using this method of creating application categories, Kaspersky Security Center receives information about applications on the computer from the **Executable files** folder.

2. Select the allowlist mode for the Application Control component.
3. Create Application Control rules using the created application categories.

   The **Golden Image** rule and **Trusted Updaters** rule are initially defined for Allowlist mode. These Application Control rules correspond to KL categories. The *Golden Image* KL category includes programs that ensure normal operation of the operating system. The *Trusted Updaters* KL category includes updaters for the most reputable software vendors. You cannot delete these rules. The settings of these rules cannot be edited. By default, the **Golden Image** rule is enabled and the **Trusted Updaters** rule is disabled. All users are allowed to start applications that match the trigger conditions of these rules.

4. Determine the applications for which automatic installation of updates must be allowed.

You can allow automatic installation of updates in one of the following ways:

- Specify an extended list of allowed applications by allowing the startup of all applications that belong to any KL category.

- Specify an extended list of allowed applications by allowing the startup of all applications that are signed with certificates.

  To allow the startup of all applications signed with certificates, you can create a category with a certificate-based condition that uses only the **Subject** parameter with the value `*`.

- For the Application control rule, select the **Trusted Updaters** parameter. If this check box is selected, Kaspersky Endpoint Security considers the applications included in the rule as Trusted Updaters. Kaspersky Endpoint Security allows the startup of applications that have been installed or updated by applications included in the rule, provided that no blocking rules are applied to those applications.

  > When Kaspersky Endpoint Security settings are migrated, the list of executable files created by trusted updaters is migrated as well.

- Create a folder and place within it the executable files of applications for which you want to allow automatic installation of updates. Then create an application category with the **Application folder** condition and specify the path to that folder. Then create an allow rule and select this category.

  > Use of the **Application folder** condition may be unsafe because any application from the specified folder will be allowed to start. It is recommended to apply rules that use the application categories with the **Application folder** condition only to those users for whom the automatic installation of updates must be allowed.

Testing the allowlist mode

To ensure that Application Control rules do not block applications required for work, it is recommended to enable testing of Application Control rules and analyze their operation after creating new rules. When testing is enabled, Kaspersky Endpoint Security will not block applications whose startup is forbidden by Application Control rules, but will instead send notifications about their startup to the Administration Server.

When testing the allowlist mode, it is recommended to perform the following actions:

1. Determine the testing period (ranging from several days to two months).

2. Enable testing of Application Control rules.

3. Examine the events resulting from testing the operation of Application Control and reports on blocked applications in test mode to analyze the testing results.

4. Based on the analysis results, make changes to the allowlist mode settings.

   In particular, based on the test results, you can add executable files related to events to an application category.

Support for allowlist mode

After selecting a blocking action for Application Control, it is recommended to continue supporting allowlist mode by performing the following actions:

- Examine the events resulting from the operation of Application Control and reports on blocked runs to analyze the effectiveness of Application Control.
- Analyze users' requests to access applications.
- Analyze unfamiliar executable files by checking their reputation in Kaspersky Security Network.
- Prior to installing updates for the operating system or for software, install those updates on a test group of computers to check how they will be processed by Application Control rules.
- Add the necessary applications to categories used in Application Control rules.

Network ports monitoring

During the operation of Kaspersky Endpoint Security, the Web Control, Mail Threat Protection, Web Threat Protection, Behavior Detection, and Exploit Prevention components monitor data streams that are transmitted via specific protocols and that pass through specific open TCP and UDP ports on user computer. For example, the Mail Threat Protection component analyzes information transmitted via SMTP, while the Web Threat Protection component analyzes information transmitted via HTTP and FTP.

Kaspersky Endpoint Security divides TCP and UDP ports of the user's computer into several groups, depending on the likelihood of their being compromised. Some network ports are reserved for vulnerable services. You are advised to monitor these ports more thoroughly because they have a greater likelihood of being targeted by a network attack. If you use non-standard services that rely on non-standard network ports, these network ports may also be targeted by an attacking computer. You can specify a list of network ports and a list of applications that request network access. These ports and applications then receive special attention from the Mail Threat Protection and Web Threat Protection components during network traffic monitoring.

To help ensure the security of the computer, the Behavior Detection and Exploit Prevention components also monitor data streams passing through network ports. The components continuously monitor network traffic for individual processes that may be threatening.

Enabling monitoring of all network ports

To enable monitoring of all network ports:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Network settings**.

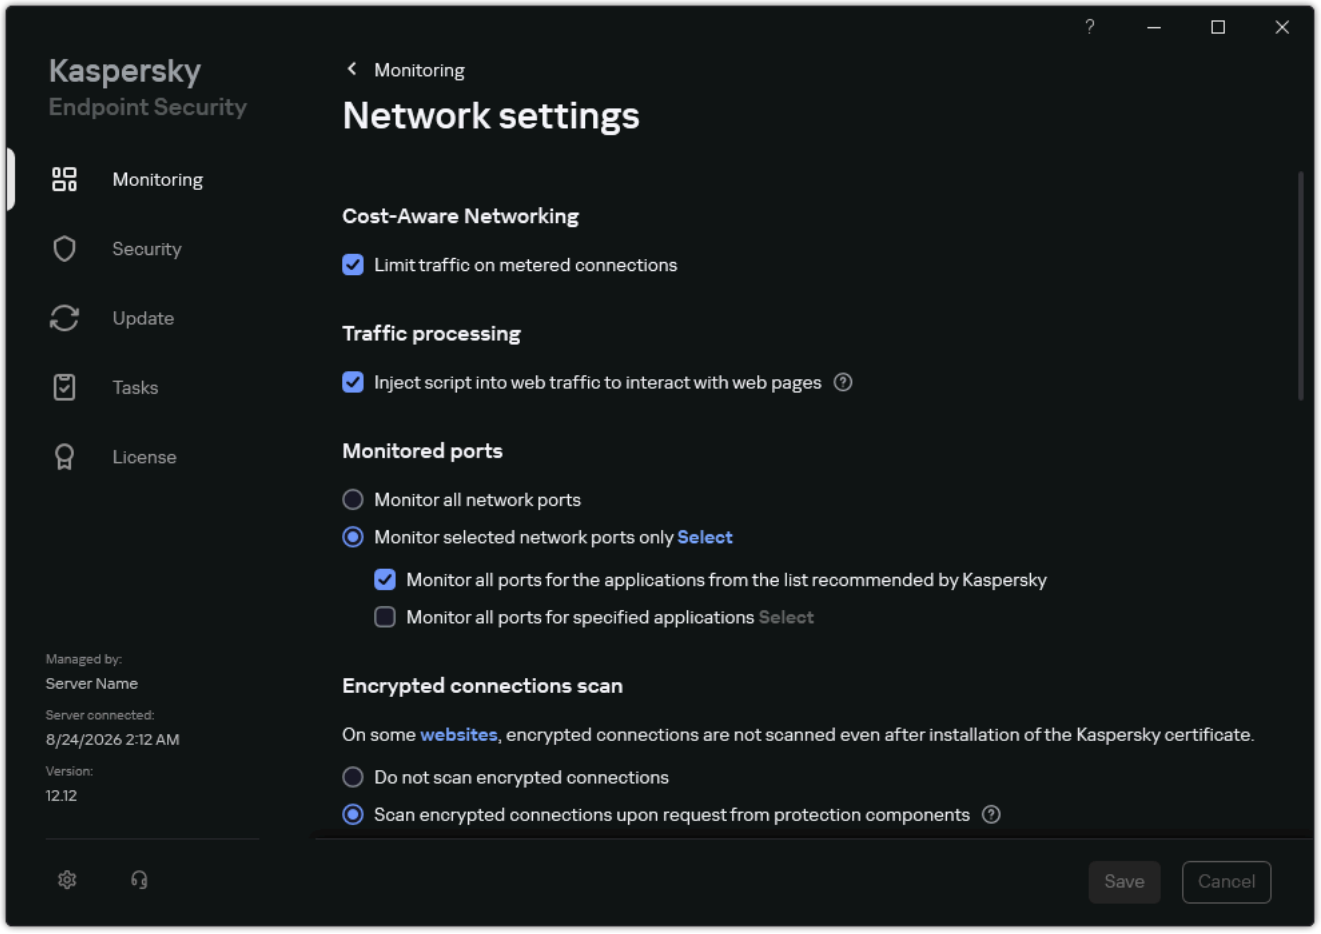

Network ports monitoring settings

3. In the **Monitored ports** block, select **Monitor all network ports**.
4. Save your changes.

Creating a list of monitored network ports

To create a list of monitored network ports:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Network settings**.
3. In the **Monitored ports** block, select **Monitor selected network ports only**.

4. Click **Select**.

   This opens a list of network ports that are normally used for transmission of email and network traffic. This list of network ports is included in the Kaspersky Endpoint Security package.

5. Use the toggle in the **Status** column to enable or disable network port monitoring.

6. If a network port is not shown in the list of network ports, add it by doing the following:

   a. Click **Add**.

   b. In the window that opens, enter the network port number and brief description.

   c. Set the **Active** or **Inactive** status for the network port monitoring.

7. Save your changes.

When the FTP protocol runs in passive mode, the connection can be established via a random network port that is not added to the list of monitored network ports. To protect such connections, enable monitoring of all network ports or configure control of network ports for applications that establish FTP connections.

Creating a list of applications for which all network ports are monitored

You can create a list of applications for which Kaspersky Endpoint Security monitors all network ports.

We recommend including applications that receive or transmit data via the FTP protocol in the list of applications for which Kaspersky Endpoint Security monitors all network ports.

To create a list of applications for which all network ports are monitored:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Network settings**.

3. In the **Monitored ports** block, select **Monitor selected network ports only**.

4. Select the **Monitor all ports for the applications from the list recommended by Kaspersky** check box.

   If this check box is selected, Kaspersky Endpoint Security monitors all ports for the following applications:

   - Adobe Acrobat Reader.
   - Apple Application Support.
   - Google Chrome.
   - Microsoft Edge.
   - Mozilla Firefox.

- Internet Explorer.
- Java.
- mIRC.
- Opera.
- Pidgin.
- Safari.
- Mail.ru Agent.
- Yandex Browser.

5. Select the **Monitor all ports for specified applications** check box.
6. Click **Select**.
   This opens a list of applications for which Kaspersky Endpoint Security monitors network ports.
7. Use the toggle in the **Status** column to enable or disable network port monitoring.
8. If an application is not included in the list of applications, add it as follows:
   a. Click **Add**.
   b. In the window that opens, enter the path to the executable file of the application and a brief description.
   c. Set the **Active** or **Inactive** status for network ports monitoring.
9. Save your changes.

Exporting and importing lists of monitored ports

Kaspersky Endpoint Security uses the following lists to monitor network ports: list of network ports and list of applications whose ports are monitored by Kaspersky Endpoint Security. You can export lists of monitored ports to an XML file. Then you can modify the file to, for example, add a large number of ports with the same description. You can also use the export/import function to back up the lists of monitored ports or to migrate the lists to a different server.

How to export and import lists of monitored ports in the Administration Console (MMC)

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Network Settings**.

5. To export the list of network ports:

   a. In the **Monitored ports** block, select **Monitor selected network ports only**.

   b. Click the **selected N ports** link.

      The **Network ports** window opens. The **Network ports** window displays a list of network ports that are normally used for transmission of email and network traffic. This list of network ports is included in the Kaspersky Endpoint Security package.

   c. In the list of network ports, select the ports that you want to export.

   d. Click **Export**.

   e. In the window that opens, enter the name of the XML file to which you want to export the list of network ports, and select the folder in which you want to save this file.

   f. Save the file.

      Kaspersky Endpoint Security exports the entire list of network ports to the XML file.

6. To export the list of applications whose ports are monitored by Kaspersky Endpoint Security:

   a. In the **Monitored ports** block, select the **Monitor all ports for specified applications** check box.

   b. Click the **selected N applications** link.

   c. In the list of applications, select the applications that you want to export.

   d. Click **Export**.

   e. In the window that opens, specify the name of the XML file to which you want to export the list of applications, and select the folder in which you want to save this file.

   f. Save the file.

      Kaspersky Endpoint Security exports the entire list of applications to the XML file.

7. To import the list of network ports:

   a. In the list of network ports, click the **Import** button.

      In the window that opens, select the XML file from which you want to import the list of network ports.

   b. Open the file.

      If the computer already has a list of network ports, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

8. To import a list of applications whose ports are monitored by Kaspersky Endpoint Security:

   a. In the list of applications, click the **Import** button.

      In the window that opens, select the XML file from which you want to import the list of applications.

b. Open the file.

If the computer already has a list of applications, Kaspersky Endpoint Security will prompt you to delete the existing list or to add new entries to it from the XML file.

9. Save your changes.

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **General settings** → **Network settings**.

4. In the **Monitored ports** block, select **Monitor selected network ports only**.

5. Click **Settings**.

The **Network ports** window opens. The **Network ports** window displays a list of network ports that are normally used for transmission of email and network traffic. This list of network ports is included in the Kaspersky Endpoint Security package.

6. To export the list of network ports:

a. In the list of network ports, select the ports that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.

If you did not select any port, Kaspersky Endpoint Security will export all ports.

b. Click **Export**.

c. In the window that opens, enter the name of the XML file to which you want to export the list of network ports, and select the folder in which you want to save this file.

d. Save the file.

Kaspersky Endpoint Security exports the entire list of network ports to the XML file.

7. To export the list of applications whose ports are monitored by Kaspersky Endpoint Security:

a. Select the **Monitor all ports for specified applications** check box.

b. In the list of applications, select the applications that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.

If you did not select any application, Kaspersky Endpoint Security will export all applications.

c. Click **Export**.

d. In the window that opens, specify the name of the XML file to which you want to export the list of applications, and select the folder in which you want to save this file.

e. Save the file.

Kaspersky Endpoint Security exports the entire list of applications to the XML file.

8. To import the list of network ports:

a. In the list of network ports, click the **Import** button.

In the window that opens, select the XML file from which you want to import the list of network ports.

b. Open the file.

If the computer already has a list of network ports, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

9. To import a list of applications whose ports are monitored by Kaspersky Endpoint Security:

a. In the list of applications, click the **Import** button.

In the window that opens, select the XML file from which you want to import the list of applications.

b. Open the file.

If the computer already has a list of applications, Kaspersky Endpoint Security will prompt you to delete the existing list or to add new entries to it from the XML file.

10. Save your changes.

Log Inspection

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations.

Log Inspection monitors the integrity of the protected environment based on the Windows event log analysis. When the application detects signs of atypical behavior in the system, it informs the administrator, as this behavior may indicate an attempted cyber attack.

Kaspersky Endpoint Security analyzes Windows event logs and detects violation in accordance with rules. The component includes predefined rules. Predefined rules are powered by heuristic analysis. You can also add your own rules (custom rules). When a rule triggers, the application creates an event with the *Critical* status (see figure below).

If you want to use Log Inspection, make sure the audit policy security settings are configured and the system is logging the relevant events (for details, see the Microsoft technical support website).

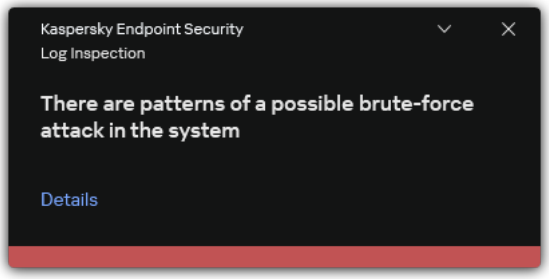

Log Inspection notification

Configuring predefined rules

Predefined rules include templates of abnormal activity on the protected computer. Abnormal activity can signify an attempted attack. Predefined rules are powered by heuristic analysis. Seven predefined rules are available for Log Inspection. You can enable or disable any of the rules. Predefined rules cannot be deleted.

You can configure the triggering criteria for rules that monitor events for the following operations:

- Password brute-force detection
- Network login detection

How to configure predefined rules in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **Log Inspection**.
4. Make sure the **Log Inspection** check box is selected.
5. In the **Predefined rules** block, click the **Settings** button.
6. Select or clear check boxes to configure predefined rules:
   - **There are patterns of a possible brute-force attack in the system**.
   - **There is an atypical activity detected during a network logon session**.
   - **There are patterns of a possible Windows Event Log abuse**.
   - **Atypical actions detected on behalf of a new service installed**.
   - **Atypical logon that uses explicit credentials detected**.
   - **There are patterns of a possible Kerberos forged PAC (MS14-068) attack in the system**.
   - **Suspicious changes detected in the privileged built-in Administrators group**.
7. If necessary, configure the **There are patterns of a possible brute-force attack in the system** rule:
   a. Click the **Settings** button below the rule.
   b. In the window that opens, specify the number of attempts and a time period within which attempts to enter a password must be performed for the rule to trigger.
   c. Click **OK**.

8. If you selected the **There is an atypical activity detected during a network logon session** rule, you need to configure its settings:

   a. Click the **Settings** button below the rule.

   b. In the **Network logon detection** block, specify the start and the end of the time interval.

      Kaspersky Endpoint Security considers logon attempts performed during the defined interval as abnormal activity.

      By default, the interval is not set and the application does not monitor logon attempts. For the application to continuously monitor logon attempts, set the interval to 12:00 AM – 11:59 PM. The start and the end of the interval must not coincide. If they are the same, the application does not monitor logon attempts.

   c. Create the list of trusted users and trusted IP addresses (IPv4 and IPv6).

      You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts. Kaspersky Endpoint Security does not monitor logon attempts for these users and computers.

   d. Click **OK**.

9. Save your changes.

How to configure predefined rules in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **Log Inspection**.

5. Make sure the **Log Inspection ENABLED** toggle switch is turned on.

6. In the **Predefined rules** block, enable or disable the predefined rules using the toggles:

   - **There are patterns of a possible brute-force attack in the system**.
   - **There is an atypical activity detected during a network logon session**.
   - **There are patterns of a possible Windows Event Log abuse**.
   - **Atypical actions detected on behalf of a new service installed**.
   - **Atypical logon that uses explicit credentials detected**.
   - **There are patterns of a possible Kerberos forged PAC (MS14-068) attack in the system**.

   a. **Suspicious changes detected in the privileged built-in Administrators group**.

7. If necessary, configure the **There are patterns of a possible brute-force attack in the system** rule:

   a. Click **Settings** under the rule.

   b. In the window that opens, specify the number of attempts and a time period within which attempts to enter a password must be performed for the rule to trigger.

   c. Click **OK**.

8. If you selected the **There is an atypical activity detected during a network logon session** rule, you need to configure its settings:

   a. Click **Settings** under the rule.

   b. In the **Network logon detection** block, specify the start and the end of the time interval.

      Kaspersky Endpoint Security considers logon attempts performed during the defined interval as abnormal activity.

      By default, the interval is not set and the application does not monitor logon attempts. For the application to continuously monitor logon attempts, set the interval to 12:00 AM – 11:59 PM. The start and the end of the interval must not coincide. If they are the same, the application does not monitor logon attempts.

   c. In the **Exclusions** block, add trusted users and trusted IP addresses (IPv4 and IPv6).

      You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts. Kaspersky Endpoint Security does not monitor logon attempts for these users and computers.

   d. Click **OK**.

9. Save your changes.

How to configure predefined rules in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Log Inspection**.

3. Make sure the **Log Inspection** toggle switch is turned on.

4. In the **Predefined rules** block, click the **Configure** button.

5. Select or clear check boxes to configure predefined rules:

   - **There are patterns of a possible brute-force attack in the system**.
   - **There is an atypical activity detected during a network logon session**.
   - **There are patterns of a possible Windows Event Log abuse**.
   - **Atypical actions detected on behalf of a new service installed**.

- **Atypical logon that uses explicit credentials detected**.
- **There are patterns of a possible Kerberos forged PAC (MS14-068) attack in the system**.

a. **Suspicious changes detected in the privileged built-in Administrators group**.

6. If necessary, configure the **There are patterns of a possible brute-force attack in the system** rule:

   a. Click **Settings** under the rule.

   b. In the window that opens, specify the number of attempts and a time period within which attempts to enter a password must be performed for the rule to trigger.

7. If you selected the **There is an atypical activity detected during a network logon session** rule, you need to configure its settings:

   a. Click **Settings** under the rule.

   b. In the **Network logon detection** block, specify the start and the end of the time interval.

      Kaspersky Endpoint Security considers logon attempts performed during the defined interval as abnormal activity.

      By default, the interval is not set and the application does not monitor logon attempts. For the application to continuously monitor logon attempts, set the interval to 12:00 AM – 11:59 PM. The start and the end of the interval must not coincide. If they are the same, the application does not monitor logon attempts.

   c. In the **Exclusions** block, add trusted users and trusted IP addresses (IPv4 and IPv6).

      You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts. Kaspersky Endpoint Security does not monitor logon attempts for these users and computers.

8. Save your changes.

As a result, when the rule triggers, Kaspersky Endpoint Security creates a *Critical event*.

Adding custom rules

You can set your own Log Inspection rule triggering criteria. To do so, you must enter an event ID and select an event source. You can look up the event ID on the Microsoft technical support website. You can select an event source from among the standard logs: *Application*, *Security* or *System*. You can also specify the log of a third-party application. You can find out the name of the third-party application log using the Event Viewer tool. Third-party application logs are kept in the Application and Services Logs folder (for example, the *Windows PowerShell* log).

> The application does not check if the specified log is actually present in the Windows event log. If there is a mistake in the name of the log, the application does not monitor events from that log.

The list of custom rules already includes three rules created by Kaspersky experts.

How to add a custom rule in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **Log Inspection**.
4. Make sure the **Log Inspection** check box is selected.
5. In the **Custom rules** block, click the **Settings** button.
6. In the window that opens, select the check boxes next to the custom rules that you want to enable.
7. If necessary, click **Add** to create your own custom rules.
8. This opens a window; in that window, configure the custom rule:
   - **Rule name**.
   - **Log name**. Windows Event Logs. The following logs are available: *Application*, *Security*, *System*.
   - **Source**. Third-party application logs. You can find out the name of the third-party application log using the Event Viewer tool. Third-party application logs are kept in the Application and Services Logs folder (for example, the *Windows PowerShell* log).
   - **Event identifiers**. Event IDs in the Windows Event Log. You can look up the event ID in the Microsoft technical documentation.
9. Save your changes.

How to add a custom rule in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Security Controls** → **Log Inspection**.
5. Make sure the **Log Inspection ENABLED** toggle switch is turned on.
6. In the **Custom rules** block, select custom rules that you want to enable.
7. If necessary, click **Add** to create your own custom rules.
8. This opens a window; in that window, configure the custom rule:
   - **Rule name**.
   - **Custom log name**. Windows Event Logs. The following logs are available: *Application*, *Security*, *System*.

- **Origin**. Third-party application logs. You can find out the name of the third-party application log using the Event Viewer tool. Third-party application logs are kept in the Application and Services Logs folder (for example, the *Windows PowerShell* log).

- **Event Identifiers**. Event IDs in the Windows Event Log. You can look up the event ID in the Microsoft technical documentation.

9. Save your changes.

How to add a custom rule in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **Log Inspection**.

3. Make sure the **Log Inspection** toggle switch is turned on.

4. In the **Custom rules** block, click the **Configure** button.

5. In the window that opens, select the check boxes next to the custom rules that you want to enable.

6. If necessary, click **Add** to create your own custom rules.

7. This opens a window; in that window, configure the custom rule:

   - **Rule name**.

   - **Log name**. Windows Event Logs. The following logs are available: *Application*, *Security*, *System*.

   - **Source**. Third-party application logs. You can find out the name of the third-party application log using the Event Viewer tool. Third-party application logs are kept in the Application and Services Logs folder (for example, the *Windows PowerShell* log).

   - **Event identifier**. Event IDs in the Windows Event Log. You can look up the event ID in the Microsoft technical documentation.

8. Save your changes.

As a result, when the rule triggers, Kaspersky Endpoint Security creates a *Critical* event.

System Integrity Monitoring

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations.

Starting with version 12.6, Kaspersky Endpoint Security for Windows includes the System Integrity Monitoring component instead of the File Integrity Monitor component. System Integrity Monitoring component includes all functionality of File Integrity Monitor and additionally allows to monitor registry changes and connection of external devices.

The System Integrity Monitoring component monitors changes in the operating system that may indicate computer security breaches. When such changes are detected, Kaspersky Endpoint Security generates corresponding events and alerts the administrator. System Integrity Monitoring can operate in real-time mode and can also perform system integrity checks on demand.

Real-Time System Integrity Monitoring

In real-time mode, System Integrity Monitoring tracks changes in objects that you included in the component's scope (the *monitoring scope*). System Integrity Monitoring also allows blocking unauthorized access to such objects in real time.

On-Demand System Integrity Check

On-Demand System Integrity Check is a task that you can run manually or on a schedule. To run the *System Integrity Check* task, you must configure the scope of the component (the *monitoring scope*) and create a baseline. A *baseline* is a recorded state of objects in the system, which the application uses as reference when comparing to the current state.

Migrating File Integrity Monitor settings

When you update Kaspersky Endpoint Security to version 12.6, File Integrity Monitor settings are migrated automatically. As part of the migration, the application moves the monitoring rules to System Integrity Monitoring. File Integrity Monitor rules are also migrated to System Integrity Monitoring when migrating from KSWS to KES.

> To ensure correct operation of System Integrity Monitoring, Kaspersky Endpoint Security application and management plug-in should be updated to version 12.6. If you have an earlier version of the management plug-in installed, you cannot configure System Integrity Monitoring because the management plug-in lacks the **System Integrity Monitoring** section.

About System Integrity Monitoring rules

For System Integrity Monitoring to work, you must add at least one rule. A *System Integrity Monitoring rule* is a set of criteria that define the access of users to files and the registry. System Integrity Monitoring detects changes in the files and the registry within the specified *monitoring scope*. The monitoring scope is one of the criteria of a System Integrity Monitoring rule.

System Integrity Monitoring allows monitoring the following objects:

- Files
- Registry
- External devices

Special considerations involved in file monitoring

System Integrity Monitoring monitors changes in files and folders as well as files being added to the monitoring scope or removed from it. These changes may indicate a computer security breach. We recommend adding rarely modified objects or objects that only the administrator has access to. This helps reduce the number of System Integrity Monitoring events.

> System Integrity Monitoring doesn't monitor changes to files in the server shared folders. System Integrity Monitoring can only be used locally.

Kaspersky Endpoint Security monitors the changes of files and folders only on those disks that were connected when Real-Time System Integrity Monitoring began operating. If a disk was not connected when Real-Time System Integrity Monitoring began operating, the application does not monitor the changes of files and folders on that disk even if the files and folders are added to the monitoring scope.

Special considerations involved in registry monitoring

System Integrity Monitoring monitors the registry. These changes may indicate a computer security breach.

System Integrity Monitoring monitors the following root keys of the registry:

- `HKCR`
- `HKLM`
- `HKU`
- `HKCC`
- `HKEY_CLASSES_ROOT`
- `HKEY_LOCAL_MACHINE`
- `HKEY_USERS`
- `HKEY_CURRENT_CONFIG` (available only in Real-Time System Integrity Monitoring)
- `HKEY_CURRENT_USER` (available only in Real-Time System Integrity Monitoring)

> The *System Integrity Check* task does not support the `HKEY_CURRENT_USER` key. You can specify a key under `HKEY_USERS` as `HKEY_USERS\<user profile ID>\<key>`.

Special considerations involved in external device monitoring

System Integrity Monitoring monitors connection and disconnection of external devices. This is necessary to protect the computer from security threats that can result from file exchange with such devices. System Integrity Monitoring does not monitor access to external devices and does not block file exchange. You can configure access to devices using a different application component, Device Control.

> When running the *Baseline System Integrity Monitor* task, the application ignores the reconnection of external devices if the devices have the same drive letter in the operating system. To be logged, the reconnected devices must have different drive letters.

System Integrity Monitoring monitors the connection of the following types of external devices:

- Removable drive (including USB flash drives)
- Hard drive
- External network adapter
- CD/DVD/Blu-ray drive
- Scanner / camera

Real-Time System Integrity Monitoring

System Integrity Monitoring allows tracking changes in the operating system in real time. You can track changes that may indicate security breaches on the computer. The component allows blocking these changes or merely logging change events.

For System Integrity Monitoring to work, you must add at least one rule. A *System Integrity Monitoring rule* is a set of criteria that define the access of users to files and the registry. System Integrity Monitoring detects changes in the files and the registry within the specified *monitoring scope*. The monitoring scope is one of the criteria of a System Integrity Monitoring rule.

Real-Time System Integrity Monitoring modes

To make sure that System Integrity Monitoring rules do not block any actions with resources that are critical for the functioning of the operating system or other services, we recommend enabling Test mode and analyzing how the component affects the system. With Test mode on, Kaspersky Endpoint Security does not block user activity that is forbidden by the rules, instead generating *Warning* ⚠ events.

The Real-Time System Integrity Monitoring component has two modes:

- Block

  In this mode, System Integrity Monitoring tracks changes in the system and performs an action in accordance with the rules: **Allow** or **Block**. System Integrity Monitoring also generates a corresponding event and changes the status of the device in the Kaspersky Security Center console.

- Inform

  In this mode, System Integrity Monitoring allows actions with files and registry keys from the monitoring scope. If the action with files or the registry is prohibited, the application generates an event: *The prohibited operation was allowed in test mode*. To analyze how rules affect the system, you can look at reports.

Enabling Real-Time System Integrity Monitoring

How to enable Real-Time System Integrity Monitoring in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Security Controls** → **System Integrity Monitoring**.
4. Select the **System Integrity Monitoring** check box.
5. Under **Operating mode for blocking rules**, select a mode for Real-Time System Integrity Monitoring:
   - **Block**. In this mode, System Integrity Monitoring blocks actions with files and registry keys from the monitoring scope, and generates a corresponding event.
   - **Inform**. In this mode, System Integrity Monitoring allows actions with files and registry keys from the monitoring scope, and generates a corresponding event.
6. In the **Real-Time System Integrity Monitoring** block, select the **Real-Time System Integrity Monitoring** check box.
7. Configure external device monitoring:
   a. Select the **Monitor devices** check box.
   b. In the **Event severity level** drop-down list, select the importance level of external device monitoring events: *Informational* ⓘ, *Warning* ⚠, *Critical* ⓘ.

   System Integrity Monitoring records the current connection of external devices. The application begins to monitor connection and disconnection of external devices after the component is enabled in the application settings. Subsequently, when an external device is connected or disconnected, the application generates a corresponding event.
8. Configure file and registry monitoring:
   a. Select the **Monitor files and the registry** check box.
   b. Click **Settings**.

   This opens the list of System Integrity Monitoring rules.

c. Click **Add**.

You can also import rules from another source.

d. Configure the System Integrity Monitoring rule (see the table below).

9. To apply the policy to computers, close the padlock icons and save your changes.

How to enable Real-Time System Integrity Monitoring in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Security Controls** → **System Integrity Monitoring**.
5. Turn on the **System Integrity Monitoring ENABLED** toggle.
6. Select the **Windows** tab.
7. Under **Real-Time System Integrity Monitoring**, select a mode for Real-Time System Integrity Monitoring:
   - **Apply rules**. In this mode, System Integrity Monitoring blocks actions with files and registry keys from the monitoring scope, and generates a corresponding event.
   - **Test rules (Inform)**. In this mode, System Integrity Monitoring allows actions with files and registry keys from the monitoring scope, and generates a corresponding event.
8. Configure file and registry monitoring:

   a. Select the **Monitor files and the registry** check box.

   b. Click **Rules**.

   This opens the list of System Integrity Monitoring rules.

   c. Click **Add**.

   You can also import rules from another source.

   d. Configure the System Integrity Monitoring rule (see the table below).
9. Configure external device monitoring:

   a. Select the **Monitor devices** check box.

   b. In the **Event severity level** drop-down list, select the importance level of external device monitoring events: *Informational*, *Warning*, *Critical*.

   System Integrity Monitoring records the current connection of external devices. The application begins to monitor connection and disconnection of external devices after the component is enabled in the application settings. Subsequently, when an external device is connected or disconnected, the application generates a corresponding event.
10. To apply the policy to computers, close the padlock icons and save your changes.

How to enable Real-Time System Integrity Monitoring in the interface of the application

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **Security Controls** → **System Integrity Monitoring**.
3. Turn on the **System Integrity Monitoring** toggle switch.
4. Under **Operating mode for blocking rules**, select a mode for Real-Time System Integrity Monitoring:
   - **Block**. In this mode, System Integrity Monitoring blocks actions with files and registry keys from the monitoring scope, and generates a corresponding event.
   - **Inform**. In this mode, System Integrity Monitoring allows actions with files and registry keys from the monitoring scope, and generates a corresponding event.
5. In the **Real-Time System Integrity Monitoring** block, select the **Real-Time System Integrity Monitoring** check box.
6. Configure external device monitoring:
   a. Select the **Monitor devices** check box.
   b. In the **Event severity level** drop-down list, select the importance level of external device monitoring events: *Informational* ⓘ, *Warning* ⚠, *Critical* ⓘ.

   System Integrity Monitoring records the current connection of external devices. The application begins to monitor connection and disconnection of external devices after the component is enabled in the application settings. Subsequently, when an external device is connected or disconnected, the application generates a corresponding event.
7. Configure file and registry monitoring:
   a. Select the **Monitor files and the registry** check box.
   b. Click **Set up**.
      This opens the list of System Integrity Monitoring rules.
   c. Click **Add**.
      You can also import rules from another source.
8. Configure the System Integrity Monitoring rule (see the table below).
9. Save your changes.

Real-Time System Integrity Monitoring rule settings

Parameter	Description
Rule name	Name of the Real-Time System Integrity Monitoring rule
Operations with files and registry	• **Allow**. System Integrity Monitoring allows actions with files and registry keys from the monitoring scope. • **Block**. System Integrity Monitoring behavior depends on the selected mode. If you selected the *System protection mode*, System Integrity Monitoring blocks actions with files and registry keys from the monitoring scope, generates a corresponding event, and changes the status of the device in the Kaspersky Security Center console. If you selected the *Test mode*, System Integrity Monitoring allows actions with files and registry keys from the monitoring scope.

Parameter	Description
Event severity level	Kaspersky Endpoint Security logs file modification events whenever a file or registry key in the monitoring scope is modified. The following event severity levels are available: *Informational* ⓘ, *Warning* ⚠, *Critical* ⓘ.

Monitoring scope	• **File**. List of files and folders monitored by the component. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.
	Use masks:
	  • The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.
	  • Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.
	  • The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.
	• **Registry**. List of registry keys and values monitored by the component. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask.

Exclusions	• **File**. List of exclusions from the monitoring scope. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. For example, `C:\Folder\Application\*.log`. Exclusion entries have a higher priority than monitoring scope entries.
	Use masks:
	  • The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.
	  • Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.
	  • The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.
	• **Registry**. List of exclusions from the monitoring scope. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask. Exclusion entries have a higher priority than monitoring scope entries.

Trusted users and / or user groups	A *trusted user* is a user that is allowed to perform actions with files and registry keys in the monitoring scope. If Kaspersky Endpoint Security detects an action performed by a trusted user, System Integrity Monitoring generates an *Informational* ⓘ event. You can select users in Active Directory, in the list of accounts in Kaspersky Security Center, or by entering a local user name manually. Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts.
File operation markers / Monitored operations	Markers characterizing the action with files or registry keys that the application will monitor.
Hashing	Calculating a file hash on modification. Kaspersky Endpoint Security adds information about the hash of the file when an event is generated.

On-Demand System Integrity Check

On-Demand System Integrity Check is a task that you can run manually or on a schedule. When running the *System Integrity Check* task, the application compares the current state of the objects included in the monitoring scope with their *baseline* state. In contrast to Real-Time System Integrity Monitoring, the *System Integrity Check* task helps limit the number of events and lets you generate an overall report of changes in the operating system.

For System Integrity Monitoring to work, you must add at least one rule. A *System Integrity Monitoring rule* is a set of criteria that define the access of users to files and the registry. System Integrity Monitoring detects changes in the files and the registry within the specified *monitoring scope*. The monitoring scope is one of the criteria of a System Integrity Monitoring rule. You can configure rules to be shared by Real-Time System Integrity Monitoring and the *System Integrity Check* task or create separate rules for the task. To create a baseline, Kaspersky Endpoint Security applies the monitoring scope from the *System Integrity Check* task to the *Baseline update* task.

Creating and updating a baseline

The *System Integrity Check* task needs a baseline to work. A *baseline* is a recorded state of objects in the system, which the application uses as reference when comparing to the current state. If the current state of the system is different from the state of the system as recorded in the baseline, Kaspersky Endpoint Security generates the corresponding event. You can create or update a baseline using the *Baseline update* task.

You can update the baseline in the following modes:

- Full update.

  The application updates all objects in the monitoring scope.

- Incremental update.

  The application detects and updates only modified or new objects.

How to create or update a baseline in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Baseline update**.

Step 2. Selecting the baseline update mode

Select a baseline update mode:

- **Full update**. The application updates all objects in the monitoring scope.

- **Incremental update**. The application detects and updates only modified or new objects.

Step 3. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 4. Defining the task name

Enter the name of the task, for example *Baseline 2024*.

Step 5. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

How to create or update a baseline in the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Baseline update**.

   c. In the **Task name** field, enter a brief description, for example, *Baseline 2024*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Select an account to run the task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.

6. Finish the wizard.

   A new task will be displayed in the list of tasks.

7. Click the new task.

   The task properties window opens.

8. Select the **Application settings** tab.

9. Select a baseline update mode:

   - **Full update**. The application updates all objects in the monitoring scope.
   - **Incremental update**. The application detects and updates only modified or new objects.

10. Save your changes.

11. Select the check box next to the task.

12. Click **Start**.

Configuring the monitoring scope for the System Integrity Check task

By default, the monitoring scope of the *System Integrity Check* task is the same as the monitoring scope of Real-Time System Integrity Monitoring. You can configure a different monitoring scope for the task.

> System Integrity Monitoring does not support the import of `HKEY_CURRENT_USER` and `HKEY_CURRENT_CONFIG` keys for the *System Integrity Check* task. If the monitoring scope of the task contains these keys, the application generates the *Monitoring scope includes incorrect objects* event.

How to configure a different monitoring scope for the System Integrity Check task in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **System Integrity Monitoring**.

4. Select the **System Integrity Monitoring** check box.

5. Under **System Integrity Check**, select the task configuration mode: **Custom settings**.

6. Configure external device monitoring:

   a. Select the **Monitor devices** check box.

   b. In the **Event severity level** drop-down list, select the importance level of external device monitoring events: *Informational* ⓘ, *Warning* ⚠, *Critical* ⓘ.

   System Integrity Monitoring records information about connected external devices at the time when the baseline is created. Subsequently, when an external device is connected, the application generates a corresponding event. When running the *System Integrity Check* task, the application does not monitor the disconnection of external devices.

7. Configure file and registry monitoring:

   a. Select the **Monitor files and the registry** check box.

   b. Click **Settings**.

      This opens the list of System Integrity Monitoring rules.

   c. Click **Add**.

      You can also import rules from another source.

   d. Configure the System Integrity Monitoring rule (see the table below).

8. Save your changes.

How to configure a different monitoring scope for the System Integrity Check task in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Security Controls** → **System Integrity Monitoring**.

5. Select the **Windows** tab.

6. Turn on the **System Integrity Monitoring ENABLED** toggle.

7. Under **System Integrity Check**, select the task configuration mode: **Custom settings**.

8. Configure external device monitoring:

   a. Select the **Monitor devices** check box.

   b. In the **Event severity level** drop-down list, select the importance level of external device monitoring events: *Informational* ⓘ, *Warning* ⚠, *Critical* ⓘ.

   System Integrity Monitoring records information about connected external devices at the time when the baseline is created. Subsequently, when an external device is connected, the application generates a corresponding event. When running the *System Integrity Check* task, the application does not monitor the disconnection of external devices.

9. Configure file and registry monitoring:

   a. Select the **Monitor files and the registry** check box.

   b. Click **Rules**.

      This opens the list of System Integrity Monitoring rules.

c. Click **Add**.

You can also import rules from another source.

d. Configure the System Integrity Monitoring rule (see the table below).

10. Save your changes.

How to configure a different monitoring scope for the System Integrity Check task in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **Security Controls** → **System Integrity Monitoring**.

3. Turn on the **System Integrity Monitoring** toggle switch.

4. Under **System Integrity Check**, select the task configuration mode: **Custom settings**.

5. Configure external device monitoring:

   a. Select the **Monitor devices** check box.

   b. In the **Event severity level** drop-down list, select the importance level of external device monitoring events: *Informational* ⓘ, *Warning* ⚠, *Critical* ⓘ.

   System Integrity Monitoring records information about connected external devices at the time when the baseline is created. Subsequently, when an external device is connected, the application generates a corresponding event. When running the *System Integrity Check* task, the application does not monitor the disconnection of external devices.

6. Configure file and registry monitoring:

   a. Select the **Monitor files and the registry** check box.

   b. Click **Set up**.

   This opens the list of System Integrity Monitoring rules.

   c. Click **Add**.

   You can also import rules from another source.

   d. Configure the System Integrity Monitoring rule (see the table below).

7. Save your changes.

Settings of a System Integrity Check task rule

Parameter	Description
Rule name	Name of the *System Integrity Check* task rule.
Event severity level	Kaspersky Endpoint Security logs file modification events whenever a file or registry key in the monitoring scope is modified. The following event severity levels are available: *Informational*, *Warning*, *Critical*.

Monitoring scope	• **File**. List of files and folders monitored by the component. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.
	Use masks:
	  • The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.
	  • Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.
	  • The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.
	• **Registry**. List of registry keys and values monitored by the component. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask.

Exclusions	• **File**. List of exclusions from the monitoring scope. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. For example, `C:\Folder\Application\*.log`. Exclusion entries have a higher priority than monitoring scope entries.
	Use masks:
	  • The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.
	  • Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.
	  • The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.
	• **Registry**. List of exclusions from the monitoring scope. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask. Exclusion entries have a higher priority than monitoring scope entries.

Running the System Integrity Check task

The *System Integrity Check* task allows checking files or registry keys for changes and also checking the connection of external devices. To check files for changes, you can run the *System Integrity Check* task in the following modes:

- Quick Scan.

  When checking files for changes, the applications checks only file attributes. The application does not check the content of files.

- Full Scan.

  When checking files for changes, the applications checks all file attributes and the content of files.

The mode the task runs in does not affect the checking of the registry or external devices.

How to run the System Integrity Check task in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Tasks**.

   The list of tasks opens.
3. Click **New task**.

   The Task Wizard starts. Follow the instructions of the Wizard.
4. Select **Kaspersky Endpoint Security** → **Baseline System Integrity Monitor**. Select a System Integrity Monitor mode:

   - **Full Scan**. In this mode, the application checks all attributes and hashes of files.
   - **Quick Scan**. In this mode, the application checks only attributes of files.
5. Select the computers on which the task will be performed. The following options are available:

   - Select computers detected by the Administration Server in the network: unassigned devices. The specific devices can include devices in administration groups as well as unassigned devices.
   - Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.
   - Specify the selection of devices for which you want to run the task.
   - Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
6. Select an account to run the task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.
7. Configure a schedule for starting a task, for example, manually or on a specific day of the week.
8. Enter a name for the task.
9. Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

How to run a System Integrity Check task in the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.
2. Click **Add**.

   The Task Wizard starts.
3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **System Integrity Check**.

c. In the **Task name** field, enter a brief description, for example, *Weekly System Integrity Check*.

d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Select an account to run the task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.

6. Finish the wizard.

   A new task will be displayed in the list of tasks.

7. Click the new task.

   The task properties window opens.

8. Select the **Application settings** tab.

9. Select a System Integrity Check mode:

   - **Quick Scan**. The application checks only file attributes. The application does not check the content of files.

   - **Full Scan**. The application checks all attributes of files as well as their content.

10. Save your changes.

11. Select the check box next to the task.

12. Click **Start**.

For the *System Integrity Check* task to finish successfully, the monitoring scope of the *System Integrity Check* task must completely match the baseline. If the monitoring scope is different, the task finishes with an error. To synchronize monitoring scopes, run the *Baseline update* task with a new monitoring scope.

Exporting and importing System Integrity Monitoring rules

You can export the list of System Integrity Monitoring rules to an XML file. Then you can modify the file to, for example, add a large number of records of the same type. You can use the export/import function to back up the list of System Integrity Monitoring rules or to migrate the list to a different server.

> System Integrity Monitoring does not support the import of `HKEY_CURRENT_USER` and `HKEY_CURRENT_CONFIG` keys for the *System Integrity Check* task. If the monitoring scope of the task contains these keys, the application generates the *Monitoring scope includes incorrect objects* event.

How to export and import a list of System Integrity Monitoring rules in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Security Controls** → **System Integrity Monitoring**.

4. To export or import *Real-Time System Integrity Monitoring* rules:

   a. In the **Real-Time System Integrity Monitoring** block, click the **Settings** button.

   b. To export a list of Real-Time System Integrity Monitoring rules:

      1. Select the rules that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.

         If you did not select any rule, Kaspersky Endpoint Security will export all rules.

      2. Click the **Export** link.

      3. In the window that opens, specify the name of the XML file to which you want to export the list of rules, and select the folder in which you want to save this file.

      4. Save the file.

         Kaspersky Endpoint Security exports the list of rules to the XML file.

   c. To import a list of Real-Time System Integrity Monitoring rules:

      1. Click the **Import** link.

         In the window that opens, select the XML file from which you want to import the list of rules.

      2. Open the file.

         If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

5. To export or import *System Integrity Check* rules:

   a. In the **System Integrity Check** block, select **Custom settings**.

   b. Click **Settings**.

   c. To export the list of System Integrity Check rules:

      1. Select the rules that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.

         If you did not select any rule, Kaspersky Endpoint Security will export all rules.

      2. Click the **Export** link.

      3. In the window that opens, specify the name of the XML file to which you want to export the list of rules, and select the folder in which you want to save this file.

      4. Save the file.

      Kaspersky Endpoint Security exports the list of rules to the XML file.

   d. To import a list of System Integrity Check rules:

      1. Click the **Import** link.

         In the window that opens, select the XML file from which you want to import the list of rules.

      2. Open the file.

If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

6. Save your changes.

How to export and import a list of System Integrity Monitoring rules in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Security Controls** → **System Integrity Monitoring**.
5. Select the **Windows** tab.
6. To export or import *Real-Time System Integrity Monitoring* rules:

   a. In the **Real-Time System Integrity Monitoring** block, click the **Rules** link.

   b. To export a list of Real-Time System Integrity Monitoring rules:

      1. Select the rules that you want to export.
      2. Click the → **Export** button.

         Kaspersky Endpoint Security exports the list of rules to a JSON file in the default downloads folder.

   c. To import a list of Real-Time System Integrity Monitoring rules:

      1. Click the → **Import** button.

         In the window that opens, select the JSON file from which you want to import the list of trusted addresses.
      2. Open the file.

         If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.
7. To export or import *System Integrity Check* rules:

   a. In the **On-Demand System Integrity Check** block, select **Custom settings**.

   b. Click the **Rules** link.

   c. To export the list of System Integrity Check rules:

      1. Select the rules that you want to export.
      2. Click the → **Export** button.

         Kaspersky Endpoint Security exports the list of rules to a JSON file in the default downloads folder.

d. To import a list of System Integrity Check rules:

1. Click the → **Import** button.

   In the window that opens, select the JSON file from which you want to import the list of trusted addresses.

2. Open the file.

   If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.

8. Save your changes.

Viewing System Integrity Monitoring reports

To analyze the performance of System Integrity Monitoring rules, you can look at reports and events generated by the application. Kaspersky Endpoint Security generates the following reports regarding the component:

- In the application interface:
  - The System Integrity Monitoring report
  - The System Integrity Check report
  - The Baseline update report

  The reports contain System Integrity Monitoring events.

- In the Kaspersky Security Center Console:
  - Report on computers on which monitoring rules were triggered the greatest number of times
  - Report on most frequently triggered monitoring rules

  By default, a report is created for the previous 30 days, including the date when the report is created.

  How to view System Integrity Monitoring reports in the Administration Console (MMC)

  1. Open the Kaspersky Security Center Administration Console.
  2. In the **Administration Server** node of the Administration Console tree, select the **Reports** tab.
  3. Click **New report template**.

     The New Report Template Wizard starts.
  4. Follow the instructions of the Report Template Wizard. At the **Selecting the report template type** step, select the a System Integrity Monitoring report (the **Other** section):
     - **Top 10 devices with File Integrity Monitor / System Integrity Monitoring rules most frequently triggered**.
     - **Top 10 rules of File Integrity Monitor / System Integrity Monitoring that were triggered on devices most frequently**.

After you have finished with the New Report Template Wizard, the new report template appears in the table on the **Reports** tab.

5. Open the report by double-clicking it.

The report generation process starts. The report is displayed in a new window.

How to view System Integrity Monitoring reports in the Web Console

1. In the main window of the Web Console, select **Monitoring** → **Reports**.

2. Click **Add**.

   The New Report Template Wizard starts.

3. Under **Template type**, in the **Other** section, select a System Integrity Monitoring report:

   - **Top 10 devices with File Integrity Monitor / System Integrity monitoring rules most frequently triggered**.

   - **Top 10 rules of File Integrity Monitor / System Integrity Monitoring that were triggered on devices most frequently**.

   After you have finished with the New Report Template Wizard, the new report template appears in the table.

4. Select and run the report.

The report generation process starts. The report is displayed in a new window.

To view events generated by the application, you can also use event selections in the Kaspersky Security Center console.

System integrity status reset

Computers in the Kaspersky Security Center console have one of the following statuses: *OK*, *Warning*, or *Critical*. If System Integrity Monitoring detects modification of files or registry keys in the monitoring scope, the status of the computer changes to *Warning* or *Critical*. The status assigned by System Integrity Monitoring is called the *system integrity status*. You can reset the system integrity status, for example, if analysis convinced you that the detected modification of objects does not affect the security of the computer.

How to reset the system integrity status in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **System integrity status reset**.

Step 2. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 3. Configuring a task start schedule

Configure the task schedule, for example, manually.

Step 4. Defining the task name

Enter the name of the task, for example, *Resetting the status after modifying the monitoring scope*.

Step 5. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

How to reset the system integrity status in the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **System integrity status reset**.

   c. In the **Task name** field, enter a brief description, for example, *Resetting the status after modifying the monitoring scope*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Select an account to run the task. By default, Kaspersky Endpoint Security starts the task with the rights of a local user account.

6. Finish the wizard.

   A new task will be displayed in the list of tasks.

7. Select the check box next to the task.

8. Click **Start**.

As a result, if the status of the computer was changed to *Warning* or *Critical* because of System Integrity Monitoring events, the status of the computer is reset to *OK*. If the status of the computer was also changed because of other events, the status of the computer remains unchanged.

Cloud Discovery

Cloud Discovery manages user access to cloud services. Cloud services include, for example, Microsoft Teams, Salesforce, and Microsoft Office 365. Cloud services are grouped in categories, for example, *File sharing*, *Messengers*, *Email*. Kaspersky experts regularly update the Cloud Discovery categories and cloud services classified in the categories. Kaspersky Endpoint Security updates the set of categories and cloud services with the application databases. This means that Cloud Discovery does not use the Kaspersky Security Network for categorizing cloud services.

Cloud Discovery provides the following functionality:

- Monitoring cloud service usage

- Blocking user access to cloud services

System requirements

Cloud Discovery is available if the following conditions are satisfied:

- The application is installed on a computer running Windows for workstations.

  The component is not available for servers.

- Kaspersky Security Center version 15.1 or higher.

  The component is not available in the Administration Console (MMC). You can configure Cloud Discovery in Kaspersky Security Center Web Console and Kaspersky Security Center Cloud Console.

- Kaspersky Next license.

Enable application functionality that the Cloud Discovery component requires:

1. **Scan encrypted connections**. This is necessary for HTTPS traffic monitoring. You can manage this functionality in the **Network settings** section.

2. **Inject script into web traffic to interact with web pages**. The script enables registration of Cloud Discovery events. The script also provides full-featured blocking of access to cloud services. Without the script, the application blocks access only by cloud service domains. You can manage this functionality in the **Network settings** section.

You can also enable the **Log the opening of allowed pages** functionality. The functionality includes grouping of events when a user visits web pages that belong to the same domain. In this way, when a user uses a cloud service, Cloud Discovery logs only one event rather than multiple events for each web page. You can manage this functionality in the **Web Control** section.

Monitoring cloud services

When a user begins using a cloud service, Kaspersky Endpoint Security registers that event and creates an entry in the report. Cloud Discovery controls cloud service usage in the browser as well as in corresponding applications. Cloud Discovery controls cloud service usage over HTTP and HTTPS.

How to enable cloud service monitoring in Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Communication & Web Protection** → **Cloud Discovery**.

5. Turn on the **Cloud Discovery ENABLED** toggle.

6. Save your changes.

As a result, the application forwards information about cloud services being used to Kaspersky Security Center. You can view cloud service usage information in reports. If necessary, you can block access to cloud services.

Blocking access to cloud services

Blocking access to cloud services is available only for the Kaspersky Next EDR Optimum and XDR Expert license. This feature is not available for Kaspersky Next EDR Foundations license. Comparison of the application functionality depending on Kaspersky Next license type, see in Kaspersky Next Help.

The administrator can restrict user access to Cloud Discovery categories or individual cloud services. In this way, the administrator can allow only secure cloud services and avoid data leaks. *Risk level information* is displayed for each cloud service in Cloud Discovery. The risk level helps detect services that do not satisfy the security requirements of the organization.

> The risk level is an estimation and does not imply any statements about the quality of the cloud service or its vendor. The risk level is simply a recommendation of Kaspersky experts.

Risk levels of cloud services are displayed in the **Cloud Discovery** section of the policy in the list of all controlled cloud service.

Other Kaspersky Endpoint Security components provide protection from threats and tracking of suspicious user activity when using cloud services.

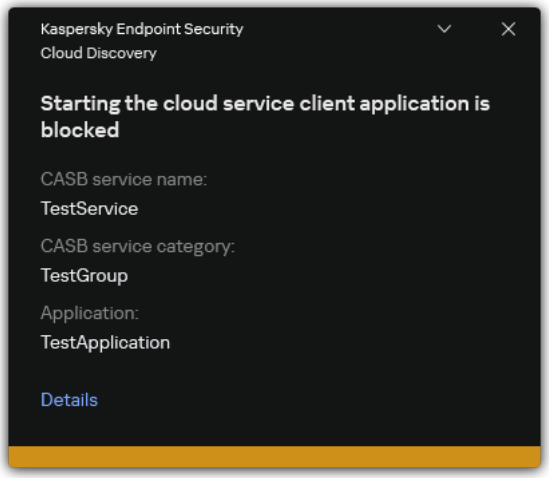

Cloud Discovery notification

> Cloud Discovery does not block cloud applications that were started before Kaspersky Endpoint Security.

How to block access to cloud services in Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Communication & Web Protection** → **Cloud Discovery**.
5. Turn on the **Cloud Discovery ENABLED** toggle.

   A list of all cloud services is displayed. Cloud services are grouped in categories, for example, *File sharing*, *Messengers*, *Email*. Kaspersky experts regularly update the Cloud Discovery categories and cloud services classified in the categories. Kaspersky Endpoint Security updates the set of categories and cloud services with the application databases.
6. Use the toggle switch in the **Access** column to configure access to cloud services.
7. Save your changes.

As a result, the application controls cloud service usage in the browser as well as in corresponding applications.

Trusted zone

A *trusted zone* is a system administrator-configured list of objects and applications that Kaspersky Endpoint Security does not monitor when active.

The administrator forms the trusted zone independently, taking into account the features of the objects that are handled and the applications that are installed on the computer. It may be necessary to include objects and applications in the trusted zone when Kaspersky Endpoint Security blocks access to a certain object or application, if you are sure that the object or application is harmless. An administrator can also allow a user to create their own local trusted zone for a specific computer. This way, users can create their own local lists of exclusions and trusted applications in addition to the general trusted zone in a policy.

Starting with Kaspersky Endpoint Security 12.5 for Windows, you can add EDR telemetry to the trusted zone. This allows optimizing the data that the application sends to the Telemetry collection server for the Kaspersky Anti Targeted Attack Platform (EDR) solution.

Starting with Kaspersky Endpoint Security 12.6 for Windows, scan exclusions and trusted applications are added to the trusted zone. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers.

Starting with Kaspersky Endpoint Security 12.8 for Windows, you can install the application in Light Agent mode for protecting virtual environments. Predefined scan exclusions and trusted applications can help you quickly configure Kaspersky Endpoint Security in Citrix and VMware virtual environments.

Creating a scan exclusion

A *scan exclusion* is a set of conditions that must be fulfilled so that Kaspersky Endpoint Security will not scan a particular object for viruses and other threats. Scan exclusions make it possible for the safe use of legitimate software that can be exploited by criminals to damage a computer or user data. Such applications do not necessarily have a malicious purpose, but can be exploited by hackers. For detailed information about legitimate applications that intruders can use to compromise the computer or user data, please visit the Kaspersky Encyclopedia website.

Such applications may be blocked by Kaspersky Endpoint Security. To prevent them from being blocked, you can configure scan exclusions for the applications in use. To do so, add the name or name mask that is listed in the Kaspersky IT Encyclopedia to the trusted zone. For example, you often use the Radmin application for remote administration of computers. Kaspersky Endpoint Security regards this activity as suspicious and may block it. To prevent the application from being blocked, create a scan exclusion with the name or name mask that is listed in the Kaspersky IT Encyclopedia.

If an application that collects information and sends it to be processed is installed on your computer, Kaspersky Endpoint Security may classify this application as malware. To avoid this, you can exclude the application from scanning by configuring Kaspersky Endpoint Security as described in this document.

Scan exclusions can be used by the following application components and tasks that are configured by the system administrator:

- Behavior Detection.
- Exploit Prevention.

- Host Intrusion Prevention.
- File Threat Protection.
- Web Threat Protection.
- Mail Threat Protection.
- *Malware Scan* task

Kaspersky Endpoint Security does not scan an object if the drive or folder containing this object is included in the scan scope at the start of one of the scan tasks. However, the scan exclusion is not applied when a custom scan task is started for this particular object.

How to create a scan exclusion in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Exclusions and object types**.
5. In the **Scan exclusions and trusted applications** → **Scan exclusions** block, click the **Settings** button.

   This opens a window containing a list of exclusions.
6. Select the **Merge values when inheriting** check box if you want to create a consolidated list of exclusions for all computers in the company. The lists of exclusions in the parent and child policies will be merged. The lists will be merged provided that merging values when inheriting is enabled. Exclusions from the parent policy are displayed in child policies in a read-only view. Changing or deleting exclusions of the parent policy is not possible.
7. Select the **Allow use of local exclusions** check box if you want to enable the user to create a local list of exclusions. This way, a user can create their own local list of exclusions in addition to the general list of exclusions generated in the policy. An administrator can use Kaspersky Security Center to view, add, edit, or delete list items in the computer properties.

   If the check box is cleared, the user can access only the general list of exclusions generated in the policy. Also, if this check box is cleared, Kaspersky Endpoint Security hides the consolidated list of scan exclusions in the user interface of the application.
8. Click **Add** and select an action:
   - **Category**. You can group scan exclusions into separate categories. To create a new category, enter the name of the category and add at least one scan exclusion to the category.
   - **New exclusion**. Kaspersky Endpoint Security adds a new scan exclusion to the root of the list.
   - **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined scan exclusions*. Also predefined scan exclusions have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined scan exclusions depending on the purpose of the protected server.
   - **New exclusion to selected category**. To add a new scan exclusion to a specific category, select a category.

9. To exclude a file or folder from scanning:

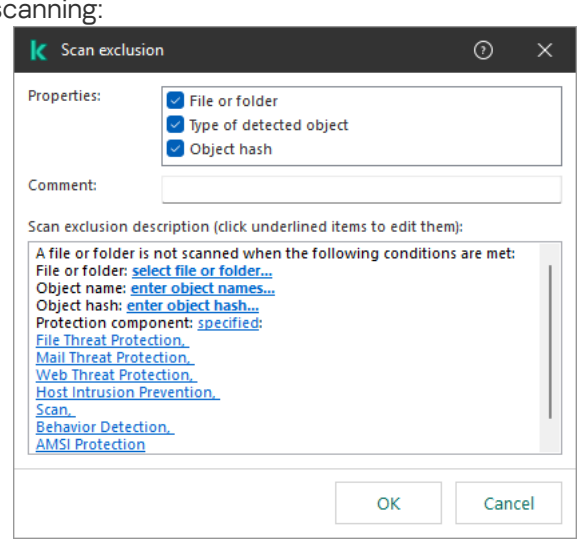

Exclusion settings

a. In the **Properties** block, select the **File or folder** check box.

b. Click the link in the block below to open the **Name of file or folder** window.

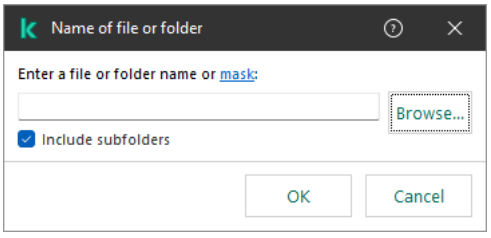

Select file or folder

a. Enter the file or folder name or the mask of the file or folder name, or select the file or folder in the folder tree by clicking **Browse**.

   Use masks:

   - The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

   - Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

   - The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

   You can use masks at the beginning, in the middle or at the end of the file path. For example, if you want to add a folder for all users to exclusions, enter the `?:\Users\*\Folder\` mask.

   Kaspersky Endpoint Security supports environment variables

You can exclude network folders. To do this, enter the path to the network folder manually (for example, `\\Network Share\*`).

> Kaspersky Endpoint Security does not support the `%userprofile%` environment variable when generating a list of exclusions using the Kaspersky Security Center console. To apply the entry to all user accounts, you can use the `*` character (for example, `C:\Users\*\Documents\File.exe`). Whenever you add a new environment variable, you need to restart the application.

b. If necessary, disable the **Include subfolders** functionality. If this functionality is enabled, the application does not scan files in all subfolders. If this functionality is disabled, the application excludes only the selected folder from the scan scope. This option is enabled by default.

c. Save your changes.

10. To exclude objects with a specific name from scanning:

a. In the **Properties** block, select the **Type of detected object** check box.

b. Click the link in the block below to open the **Type of detected object** window.

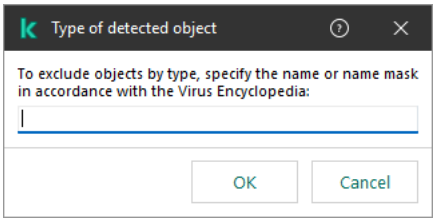

Select object

a. Enter the name of the object type according to the classification of the Kaspersky Encyclopedia (for example, `Email-Worm`, `Rootkit` or `RemoteAdmin`).

You can use masks with the `?` character (replaces any single character) and the `*` character (replaces any number of characters). For example, if the `Client*` mask is specified, Kaspersky Endpoint Security excludes `Client-IRC`, `Client-P2P` and `Client-SMTP` objects from scans.

b. Save your changes.

11. If you want to exclude an individual file from scans:

    a. In the **Properties** block, select the **Object hash** check box.

    b. Click the link in the block below to open the **Object hash** window.

Select file

    a. Enter the file hash or select the file by clicking the **Browse** button.

    If the file is modified, the file hash will also be modified. If this happens, the modified file will not be added to exclusions.

    b. Save your changes.

12. If necessary, in the **Comment** field, enter a brief comment on the scan exclusion that you are creating.

13. Specify the Kaspersky Endpoint Security components that should use the scan exclusion:

    a. Click the link in the block below to open the **Protection components** window.

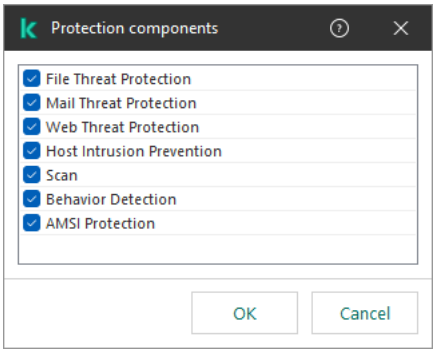

Select protection components

    a. Select the check boxes opposite the components to which the scan exclusion must be applied.

    If the components are specified in the settings of the scan exclusion, this exclusion is applied only during scanning by these components of Kaspersky Endpoint Security.

    If the components are not specified in the settings of the scan exclusion, this exclusion is applied during scanning by all components of Kaspersky Endpoint Security.

14. Click **OK**.

    The new exclusion will be added to the list. You can disable the exclusion at any time using the check box next to the object.

15. To apply the policy to computers, close the padlock icons and save your changes.

How to create a scan exclusion in the Kaspersky Security Center Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to the **Trusted Zone** section.

5. In the window that opens, click the **Malware Scan exclusions** link.

6. Select the **Merge values when inheriting** check box if you want to create a consolidated list of exclusions for all computers in the company. The lists of exclusions in the parent and child policies will be merged. The lists will be merged provided that merging values when inheriting is enabled. Exclusions from the parent policy are displayed in child policies in a read-only view. Changing or deleting exclusions of the parent policy is not possible.

7. Select the **Allow use of local exclusions** check box if you want to enable the user to create a local list of exclusions. This way, a user can create their own local list of exclusions in addition to the general list of exclusions generated in the policy. An administrator can use Kaspersky Security Center to view, add, edit, or delete list items in the computer properties.

   If the check box is cleared, the user can access only the general list of exclusions generated in the policy. Also, if this check box is cleared, Kaspersky Endpoint Security hides the consolidated list of scan exclusions in the user interface of the application.

8. Click **Add** and select an action:

   - **Category**. You can group scan exclusions into separate categories. To create a new category, enter the name of the category and add at least one scan exclusion to the category.

   - **New exclusion**. Kaspersky Endpoint Security adds a new scan exclusion to the root of the list.

   - **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined scan exclusions*. Also predefined scan exclusions have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined scan exclusions depending on the purpose of the protected server.

   To add a new scan exclusion to a specific category, select the check box next to that category and select the **New exclusion** option.

9. Select how you want to add the exclusion: **Path to the file or folder**, **Object type** or **Object hash**.

10. To exclude a file or folder from scan, enter the path manually. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask:

    - The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

    - Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

    - The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

      You can use masks at the beginning, in the middle or at the end of the file path. For example, if you want to add a folder for all users to exclusions, enter the `?:\Users\*\Folder\` mask.

      You can exclude network folders. To do this, enter the path to the network folder manually (for example, `\\Network Share\*`).

11. If you want to exclude a specific type of object from scans, in the **Object type** field enter the name of the object type according to the classification of the Kaspersky Encyclopedia (for example, `Email-Worm`, `Rootkit` or `RemoteAdmin`).

    You can use masks with the `?` character (replaces any single character) and the `*` character (replaces any number of characters). For example, if the `Client*` mask is specified, Kaspersky Endpoint Security excludes `Client-IRC`, `Client-P2P` and `Client-SMTP` objects from scans.

12. If you want to exclude an individual file from scans, enter the file hash in the **Object hash** field.

    If the file is modified, the file hash will also be modified. If this happens, the modified file will not be added to exclusions.

13. In the **Apply exclusion to** block, select the components that you want the scan exclusion to apply to.

14. If necessary, in the **Comment** field, enter a brief comment on the scan exclusion that you are creating.

15. Click **OK**.

    The new exclusion will be added to the list. You can use the toggle to stop an exclusion at any time.

16. To apply the policy to computers, close the padlock icons and save your changes.

How to create a scan exclusion in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.

3. In the **Exclusions** block, click the **Manage exclusions** link.

Kaspersky Endpoint Security hides the list of scan exclusions in the user interface of the application if configuration of scan exclusions is blocked by the administrator in the console ("closed lock" symbol) and local scan exclusions are prohibited (the **Allow use of local exclusions** check box is cleared).

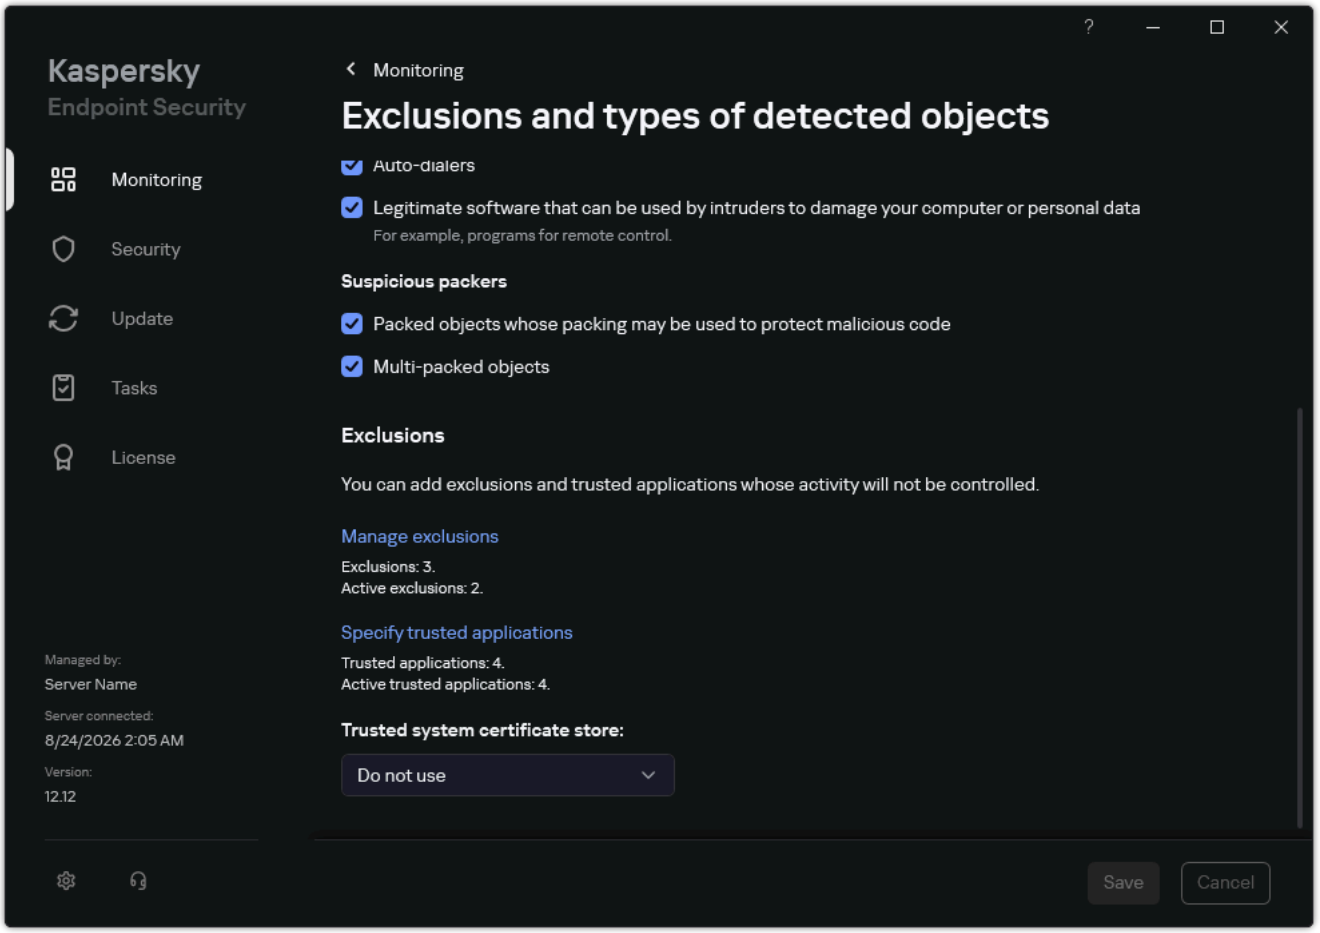

Settings of exclusions

4. Click **Add** and select an action:

- **Category**. You can group scan exclusions into separate categories. To create a new category, enter the name of the category and add at least one scan exclusion to the category.
- **New exclusion**. Kaspersky Endpoint Security adds a new scan exclusion to the root of the list.
- **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined scan exclusions*. Also predefined scan exclusions have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined scan exclusions depending on the purpose of the protected server.

To add a new scan exclusion to a specific category, select the check box next to that category and select the **New exclusion** option.

5. If you want to exclude a file or folder from scans, select the file or folder by clicking the **Browse** button.

You can also enter the path manually. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask:

- The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

- Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

- The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

  You can use masks at the beginning, in the middle or at the end of the file path. For example, if you want to add a folder for all users to exclusions, enter the `?:\Users\*\Folder\` mask.

  You can exclude network folders. To do this, enter the path to the network folder manually (for example, `\\Network Share\*`).

6. If you want to exclude a specific type of object from scans, in the **Type of detected object** field enter the name of the object type according to the classification of the Kaspersky Encyclopedia (for example, `Email-Worm`, `Rootkit` or `RemoteAdmin`).

   You can use masks with the `?` character (replaces any single character) and the `*` character (replaces any number of characters). For example, if the `Client*` mask is specified, Kaspersky Endpoint Security excludes `Client-IRC`, `Client-P2P` and `Client-SMTP` objects from scans.

7. If you want to exclude an individual file from scans, enter the file hash in the **Object hash** field.

   If the file is modified, the file hash will also be modified. If this happens, the modified file will not be added to exclusions.

8. In the **Protection components** block, select the components that you want the scan exclusion to apply to.

9. If necessary, in the **Comment** field, enter a brief comment on the scan exclusion that you are creating.

10. Select the **Active** status for the exclusion.

11. Click **Add**.

    The new exclusion will be added to the list. You can disable the exclusion at any time using the check box in the **Status** column.

12. Save your changes.

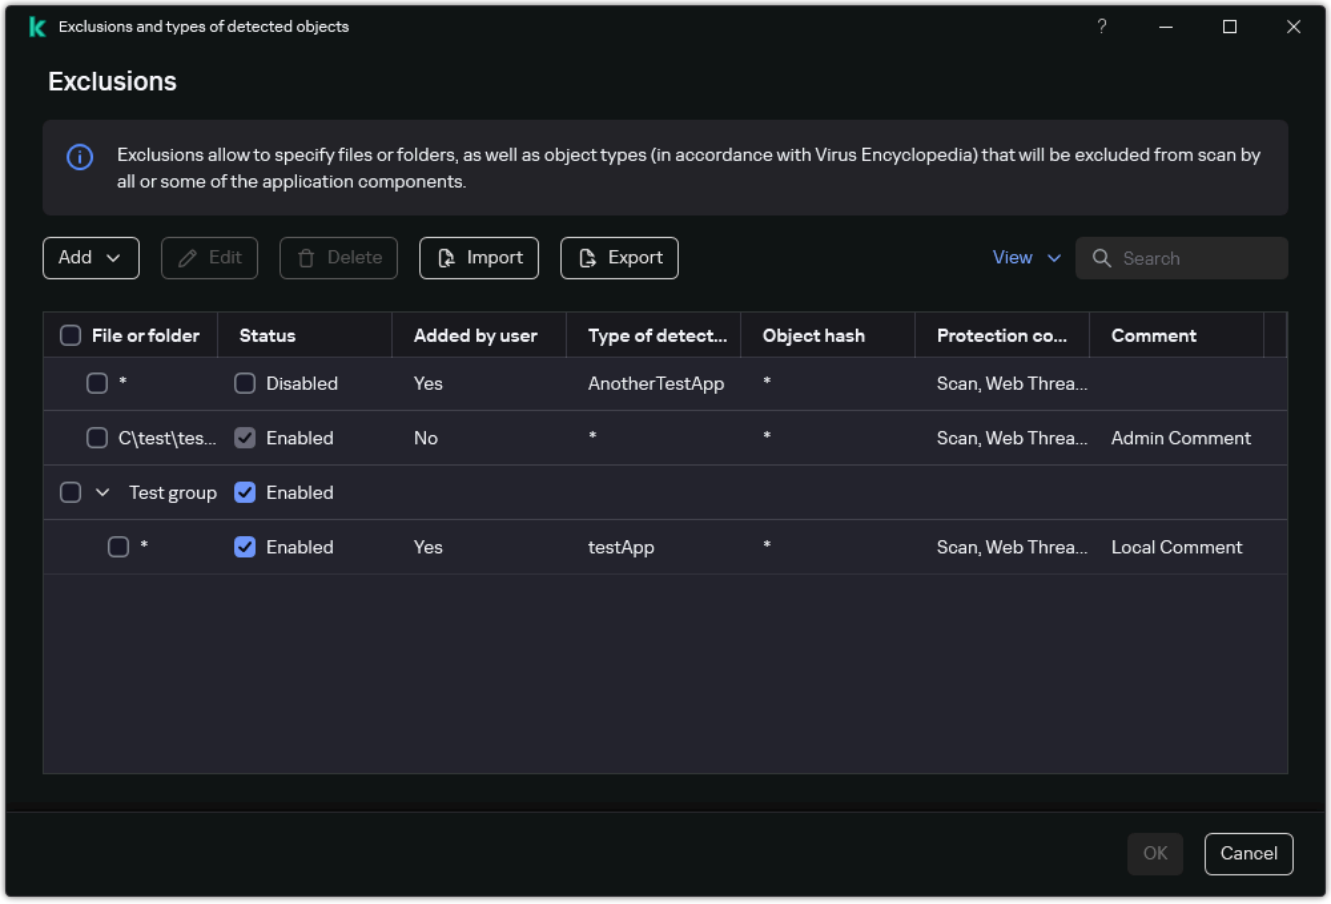

List of exclusions

Path mask examples:

We recommend specifying relative paths instead of absolute paths. This allows excluding not just file system objects, but also fileless objects. For example, `*\Program Files (x86)\Folder\Subfolder`.

Paths to files located in any folder:

- The mask `*.exe` will include all paths to files that have the exe extension.
- The mask `example*` will include all paths to files named EXAMPLE.

Paths to files located in a specified folder:

- The `C:\dir\*.*` mask will include all paths to files located in the `C:\dir\`, but not in the subfolders of `C:\dir\`.
- The mask `C:\dir\*` will include all paths to files located in the `C:\dir\` folder, including subfolders.
- The mask `C:\dir\` will include all paths to files located in the `C:\dir\` folder, including subfolders.
- The mask `C:\dir\*.exe` will include all paths to files with the EXE extension located in the `C:\dir\` folder, but not in the subfolders of `C:\dir\`.
- The mask `C:\dir\test` will include all paths to files named "test" located in the `C:\dir\` folder, but not in the subfolders of `C:\dir\`.
- The mask `C:\dir\*\test` will include all paths to files named "test" located in the `C:\dir\` folder and in the subfolders of `C:\dir\`.
- The mask `C:\dir1\*\dir3\` will include all paths to files in dir3 subfolders one level into the `C:\dir1\` folder.
- The mask `C:\dir1\**\dirN\` will include all paths to files in dirN subfolders in the `C:\dir1\` folder at any level.

Paths to files located in all folders with a specified name:

- The mask `dir\*.*` will include all paths to files in folders named "dir", but not in the subfolders of those folders.
- The mask `dir\*` will include all paths to files in folders named "dir", but not in the subfolders of those folders.
- The mask `dir\` will include all paths to files in folders named "dir", but not in the subfolders of those folders.
- The mask `dir\*.exe` will include all paths to files with the EXE extension in folders named "dir", but not in the subfolders of those folders.
- The mask `dir\test` will include all paths to files named "test" in folders named "dir", but not in the subfolders of those folders.

Creating an exclusion by type of detected objects

Kaspersky Endpoint Security classifies detected objects as follows:

- **Viruses and worms**

  Subcategory: Viruses and worms (Viruses_and_Worms)

  Danger level: High

  Classic viruses and worms perform actions that are not authorized by the user. They can create copies of themselves which are able to self-replicate.

  Classic virus

  When a classic virus infiltrates a computer, it infects a file, activates, performs malicious actions, and adds copies of itself to other files.

A classic virus multiplies only on local resources of the computer; it cannot penetrate other computers on its own. It can be passed to another computer only if it adds a copy of itself to a file that is stored in a shared folder or on an inserted CD, or if the user forwards an email message with an attached infected file.

Classic virus code can penetrate various areas of computers, operating systems, and applications. Depending on the environment, viruses are divided into *file viruses*, *boot viruses*, *script viruses*, and *macro viruses*.

Viruses can infect files by using a variety of techniques. *Overwriting* viruses write their code over the code of the file that is infected, thus erasing the content of the file. The infected file stops functioning and cannot be restored. *Parasitic* viruses modify files, leaving them fully or partially functional. *Companion* do not modify files, but instead create duplicates. When an infected file is opened, a duplicate of it (what is actually a virus) is started. The following types of viruses are also encountered: *Link viruses*, *OBJ viruses*, *LIB viruses*, *source code* viruses, and many others.

Worm

As with a classic virus, the code of a worm is activated and performs malicious actions after it infiltrates a computer. Worms are so named because of their ability to "crawl" from one computer to another and to spread copies via numerous data channels without the user's permission.

The main feature that allows differentiating between various types of worms is the way they spread. The following table provides an overview of various types of worms, which are classified by the way in which they spread.

Ways in which worms spread

Type	Name	Description
Email-Worm	Email-Worm	They spread via email. An infected email message contains an attached file with a copy of a worm, or a link to a file that is uploaded to a website which may have been hacked or created exclusively for that purpose. When you open the attached file, the worm is activated. When you click the link, download, and then open the file, the worm also starts performing its malicious actions. After that, it goes on spreading copies of itself, searching for other email addresses and sending infected messages to them.
IM-Worm	IM client worms	They spread through IM clients. Usually, such worms send messages that contain a link to a file with a copy of the worm on a website, making use of the user's contact lists. When the user downloads and opens the file, the worm activates.
IRC-Worm	Internet chat worms	They spread via Internet Relay Chats, service systems which allow communicating with other people over the Internet in real time. These worms publish a file with a copy of themselves or a link to the file in an Internet chat. When the user downloads and opens the file, the worm activates.
Net-Worm	Network worms	These worms spread over computer networks. Unlike other types of worms, a typical network worm spreads without the user's participation. It scans the local network for computers that contain programs with vulnerabilities. To do this, it sends a specially formed network packet (exploit) which contains the worm code or a part of it. If a "vulnerable" computer is on the network, it receives such a network packet. When the worm completely penetrates the computer, it activates.
P2P-Worm	File sharing network worms	They spread over peer-to-peer file sharing networks. To infiltrate a P2P network, the worm copies itself into a file sharing folder which is usually located on the user's computer. The P2P network displays information about this file so that the user may "find" the infected file on the network like any other file, and then download and open it. More sophisticated worms emulate the network protocol of a specific P2P network: they return positive responses to search queries and offer copies of themselves for download.
Worm	Other types of worms	Other types of worms include: • Worms that spread copies of themselves over network resources. By using the functions of the operating system, they scan available network folders, connect to computers on the Internet, and attempt to obtain full access to their disk drives. Unlike the previously described types of worms, other types of worms activate not on their own, but when the user opens a file that contains a copy of the worm. • Worms that do not use any of the methods described in the previous table to spread (for example, those that spread over cell phones).

- **Trojans (including ransomware)**

  Subcategory: Trojans

  Danger level: High

  Unlike worms and viruses, Trojans do not self-replicate. For example, they penetrate a computer via email or a browser when the user visits an infected web page. Trojans are started with the user's participation. They begin performing their malicious actions right after they are started.

  Different Trojans behave differently on infected computers. The main functions of Trojans consist in blocking, modifying, or destroying information, and disabling computers or networks. Trojans can also receive or send files, run them, display messages on the screen, request web pages, download and install programs, and restart the computer.

  Hackers often use "sets" of various Trojans.

  Types of Trojan behavior are described in the following table.

Types of Trojan behavior on an infected computer

Type	Name	Description
Trojan-ArcBomb	Trojans – "archive bombs"	When unpacked, these archives grow in size to such an extent that the computer's operation is impacted. When the user attempts to unpack such an archive, the computer may slow down or freeze; the hard disk may become filled with "empty" data. "Archive bombs" are especially dangerous to file and mail servers. If the server uses an automatic system to process incoming information, an "archive bomb" may halt the server.
Backdoor	Trojans for remote administration	They are considered the most dangerous type of Trojan. In their functions, they are similar to remote administration applications that are installed on computers. These programs install themselves on the computer without being noticed by the user, allowing the intruder to manage the computer remotely.
Trojan	Trojans	They include the following malicious applications: • **Classic Trojans**. These programs perform only the main functions of Trojans: blocking, modifying or destroying information, and disabling computers or networks. They do not have any advanced features, unlike the other types of Trojans that are described in the table. • **Versatile Trojans**. These programs have advanced features typical of several types of Trojans.
Trojan-Ransom	Ransom Trojans	They take the user's information "hostage", modifying or blocking it, or impact the computer's operation so that the user loses the ability to use information. The intruder demands a ransom from the user, promising to send an application to restore the computer's performance and the data that had been stored on it.
Trojan-Clicker	Trojan clickers	They access web pages from the user's computer, either by sending commands to a browser on their own or by changing the web addresses that are specified in operating system files. By using these programs, intruders perpetrate network attacks and increase website visits, increasing the number of displays of banner ads.
Trojan-Downloader	Trojan downloaders	They access the intruder's web page, download other malicious applications from it, and install them on the user's computer. They can contain the file name of the malicious application to download, or receive it from the web page that is accessed.
Trojan-Dropper	Trojan droppers	They contain other Trojans which they install on the hard drive and then install. Intruders may use Trojan Dropper–type programs for the following goals: • Install a malicious application without being noticed by the user: Trojan Dropper–type programs display no messages, or display fake messages which inform, for example, of an error in an archive or an incompatible version of the operating system. • Protect another known malicious application from detection: not all anti-virus software can detect a malicious application within a Trojan Dropper–type application.
Trojan-Notifier	Trojan notifiers	They inform an intruder that the infected computer is accessible, sending the intruder information about the computer: IP address, number of opened port, or email address. They connect with the intruder via email, FTP, accessing the intruder's web page, or in another way. Trojan Notifier–type programs are often used in sets that are made of several Trojans. They notify the intruder that other Trojans have been successfully installed on the user's computer.

Type	Name	Description
Trojan-Proxy	Trojan proxies	They allow the intruder to anonymously access web pages by using the user's computer; they are often used for sending spam.
Trojan-PSW	Password-stealing-ware	Password-stealing-ware is a kind of Trojan that steals user accounts, such as software registration data. These Trojans find confidential data in system files and in the registry and send it to the "attacker" by email, via FTP, by accessing the intruder's web page, or in another way. Some of these Trojans are categorized into separate types that are described in this table. These are Trojans that steal bank accounts (Trojan-Banker), steal data from users of IM clients (Trojan-IM), and steal information from users of online games (Trojan-GameThief).
Trojan-Spy	Trojan spies	They spy on the user, collecting information about the actions that the user makes while working at the computer. They may intercept the data that the user enters at the keyboard, take screenshots, or collect lists of active applications. After they receive the information, they transfer it to the intruder by email, via FTP, by accessing the intruder's web page, or in another way.
Trojan-DDoS	Trojan network attackers	They send numerous requests from the user's computer to a remote server. The server lacks resources to process all requests, so it stops functioning (Denial of Service, or simply DoS). Hackers often infect many computers with these programs so that they can use the computers to attack a single server simultaneously. DoS programs perpetrate an attack from a single computer with the user's knowledge. DDoS (Distributed DoS) programs perpetrate distributed attacks from several computers without being noticed by the user of the infected computer.
Trojan-IM	Trojans that steal information from users of IM clients	They steal account numbers and passwords of IM client users. They transfer the data to the intruder by email, via FTP, by accessing the intruder's web page, or in another way.
Rootkit	Rootkits	They mask other malicious applications and their activity, thus prolonging the applications' persistence in the operating system. They can also conceal files, processes in an infected computer's memory, or registry keys which run malicious applications. The rootkits can mask data exchange between applications on the user's computer and other computers on the network.
Trojan-SMS	Trojans in the form of SMS messages	They infect cell phones, sending SMS messages to premium-rate phone numbers.
Trojan-GameThief	Trojans that steal information from users of online games	They steal account credentials from users of online games, after which they send the data to the intruder by email, via FTP, by accessing the intruder's web page, or in another way.
Trojan-Banker	Trojans that steal bank accounts	They steal bank account data or e-money system data; send the data to the hacker by email, via FTP, by accessing the hacker's web page, or by using another method.
Trojan-Mailfinder	Trojans that collect email addresses	They collect email addresses that stored on a computer and send them to the intruder by email, via FTP, by accessing the intruder's web page, or in another way. Intruders may send spam to the addresses they have collected.

- **Malicious tools**

  Subcategory: Malicious tools

  Danger level: Medium

  Unlike other types of malware, malicious tools do not perform their actions right after they are started. They can be safely stored and started on the user's computer. Intruders often use the features of these programs to create viruses, worms, and Trojans, perpetrate network attacks on remote servers, hack computers, or perform other malicious actions.

  Various features of malicious tools are grouped by the types that are described in the following table.

Features of malicious tools

Type	Name	Description
Constructor	Constructors	They allow creating new viruses, worms, and Trojans. Some constructors boast a standard window-based interface in which the user can select the type of malicious application to create, the way of counteracting debuggers, and other features.
Dos	Network attacks	They send numerous requests from the user's computer to a remote server. The server lacks resources to process all requests, so it stops functioning (Denial of Service, or simply DoS).

Type	Name	Description
Exploit	Exploits	An *exploit* is a set of data or a program code that uses vulnerabilities of the application in which it is processed, performing a malicious action on a computer. For example, an exploit can write or read files, or request "infected" web pages. Different exploits use vulnerabilities in different applications or network services. Disguised as a network packet, an exploit is transmitted over the network to numerous computers, searching for computers with vulnerable network services. An exploit in a DOC file uses the vulnerabilities of a text editor. It may start performing the actions that are preprogrammed by the hacker when the user opens the infected file. An exploit that is embedded in an email message searches for vulnerabilities in any email client. It may start performing a malicious action as soon as the user opens the infected message in this email client. Net-Worms spread over networks by using exploits. Nuker exploits are network packets that disable computers.
FileCryptor	Encryptors	They encrypt other malicious applications to conceal them from the anti-virus application.
Flooder	Programs for "contaminating" networks	They send numerous messages over network channels. This type of tools includes, for example, programs that contaminate Internet Relay Chats. Flooder-type tools do not include programs that "contaminate" channels that are used by email, IM clients, and mobile communication systems. These programs are distinguished as separate types that are described in the table (Email-Flooder, IM-Flooder, and SMS-Flooder).
HackTool	Hacking tools	They make it possible to hack the computer on which they are installed or attack another computer (for example, by adding new system accounts without the user's permission or by erasing system logs to conceal traces of their presence in the operating system). This type of tools includes some sniffers which feature malicious functions, such as password interception. Sniffers are programs that allow viewing network traffic.
Hoax	Hoaxes	They alarm the user with virus-like messages: they may "detect a virus" in an uninfected file or notify the user that the disk has been formatted, although this has not happened in reality.
Spoofer	Spoofing tools	They send messages and network requests with a fake address of the sender. Intruders use Spoofer-type tools to pass themselves off as the true senders of messages, for example.
VirTool	Tools that modify malicious applications	They allow modifying other malware programs, concealing them from anti-virus applications.
Email-Flooder	Programs that "contaminate" email addresses	They send numerous messages to various email addresses, thus "contaminating" them. A large volume of incoming messages prevents users from viewing useful messages in their inboxes.
IM-Flooder	Programs that "contaminate" traffic of IM clients	They flood users of IM clients with messages. A large volume of messages prevents users from viewing useful incoming messages.
SMS-Flooder	Programs that "contaminate" traffic with SMS messages	They send numerous SMS messages to cell phones.

- **Adware**

  Subcategory: Advertising software (Adware)

  Danger level: Medium

  Adware displays advertising information to the user. Adware programs display banner ads in the interfaces of other programs and redirect search queries to advertising web pages. Some of them collect marketing information about the user and send it to the developer: this information may include the names of the websites that are visited by the user or the content of the user's search queries. Unlike Trojan-Spy–type programs, adware sends this information to the developer with the user's permission.

- **Auto-dialers**

  Subcategory: Auto-dialers (Dialer).

  Danger level: Medium

Auto-dialers can surreptitiously establish phone connections using a modem.

- **Legitimate software that can be used by intruders to damage your computer or personal data**

  Subcategory: Legitimate software that can be used by intruders to damage your computer or personal data.

  Danger level: Medium

  Most of these applications are useful, so many users run them. These applications include IRC clients, auto-dialers, file download programs, computer system activity monitors, password utilities, and internet servers for FTP, HTTP, and Telnet.

  However, if intruders gain access to these programs, or if they plant them on the user's computer, some of the application's features may be used to violate security.

  These applications differ by function; their types are described in the following table.

Type	Name	Description
Client-IRC	Internet chat clients	Users install these programs to talk to people in Internet Relay Chats. Intruders use them to spread malware.
Downloader	Programs for downloading	They can download files from web pages in hidden mode.
Monitor	Programs for monitoring	They allow monitoring activity on the computer on which they are installed (seeing which applications are active and how they exchange data with applications that are installed on other computers).
PSWTool	Password restorers	They allow viewing and restoring forgotten passwords. Intruders secretly implant them on users' computers with the same purpose.
RemoteAdmin	Remote administration programs	They are widely used by system administrators. These programs allow obtaining access to the interface of a remote computer to monitor and manage it. Intruders secretly implant them on users' computers with the same purpose: to monitor and manage remote computers. Legal remote administration programs differ from backdoor-type Trojans for remote administration. Trojans have the ability to penetrate the operating system independently and install themselves; legal programs are unable to do so.
Server-FTP	FTP servers	They function as FTP servers. Intruders implant them on the user's computer to open remote access to it via FTP.
Server-Proxy	Proxy servers	They function as proxy servers. Intruders implant them on the user's computer to send spam under the user's name.
Server-Telnet	Telnet servers	They function as Telnet servers. Intruders implant them on the user's computer to open remote access to it via Telnet.
Server-Web	Web servers	They function as web servers. Intruders implant them on the user's computer to open remote access to it via HTTP.
RiskTool	Tools for working at a local computer	They provide the user with additional options when working at the user's own computer. The tools allow the user to hide files or windows of active applications and terminate active processes.
NetTool	Network tools	They provide the user with additional options when working with other computers on the network. These tools allow restarting them, detecting open ports, and starting applications that are installed on the computers.
Client-P2P	P2P network clients	They allow working on peer-to-peer networks. They can be used by intruders for spreading malware.
Client-SMTP	SMTP clients	They send email messages without the user's knowledge. Intruders implant them on the user's computer to send spam under the user's name.
WebToolbar	Web toolbars	They add toolbars to the interfaces of other applications to use search engines.
FraudTool	Pseudo-programs	They pass themselves off as other programs. For example, there are pseudo-anti-virus programs that display messages about malware detection. However, in reality, they do not find or disinfect anything.

- **Packed objects whose packing may be used to protect malicious code**

  Subcategory: Packed files that may cause harm.

  Danger level: Medium.

  The file is packed using a special packer that is used for packing malware: viruses, worms, Trojans. Kaspersky Endpoint Security scans the unpacker module within SFX (self-extracting) archives.

  To hide malware from detection by an anti-virus, hackers pack it using special packers. Kaspersky experts have identified packers that are the most popular amongst hackers.

- **Multi-packed objects**

  Subcategory: Multi-packed files.

  Danger level: Medium.

  The file is packed with one or more packers three or more times.

  To hide malware from detection by an anti-virus, hackers may pack a file multiple times. Kaspersky Endpoint Security scans packed files.

By default, Kaspersky Endpoint Security detects all types of objects. We recommend leaving the detection of all types of objects enabled to improve the security of the computer. If you are using in-house utilities that the application detects as malicious, add these utilities to an exclusion list, but do not disable the detection of the whole type of objects.

How to select types of detectable objects in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Exclusions and object types**.
5. In the **Types of detected objects** block, click the **Settings** button.
6. In the window that opens, select check boxes opposite the types of objects that you want Kaspersky Endpoint Security to detect.
7. To apply the policy to computers, close the padlock icons and save your changes.

How to select types of detectable objects in the Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Detection Settings**.

5. In the **Detection of other types of objects** block, select check boxes opposite the types of objects that you want Kaspersky Endpoint Security to detect.

6. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to select types of detectable objects in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.

3. In the **Types of detected objects** block, select check boxes opposite the types of objects that you want Kaspersky Endpoint Security to detect.

4. Save your changes.

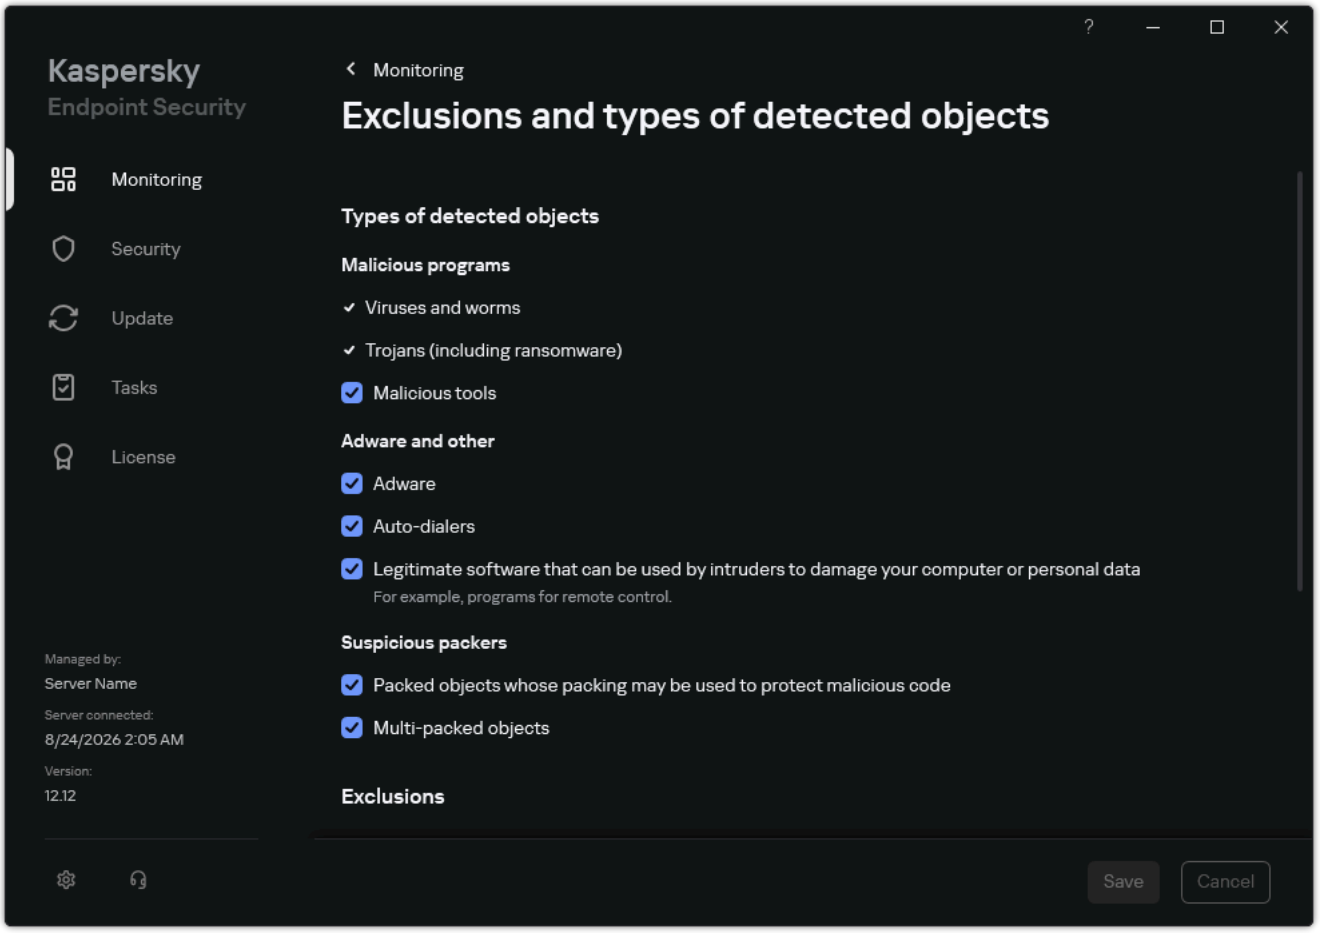

Types of detectable objects

Editing the list of trusted applications

The *list of trusted applications* is a list of applications whose file and network activity (including malicious activity) and access to the system registry are not monitored by Kaspersky Endpoint Security. By default, Kaspersky Endpoint Security monitors objects that are opened, executed, or saved by any application process, and controls the activity of all applications and network traffic that is generated by them. After an application is added to the list of trusted applications, Kaspersky Endpoint Security stops monitoring the application's activity.

The difference between scan exclusions and trusted applications is that for exclusions Kaspersky Endpoint Security does not scan files, while for trusted applications it does not control the initiated processes. If a trusted application creates a malicious file in a folder which is not included in scan exclusions, Kaspersky Endpoint Security will detect the file and eliminate the threat. If the folder is added to exclusions, Kaspersky Endpoint Security will skip this file.

For example, if you consider objects that are used by the standard Microsoft Windows Notepad application to be safe, meaning that you trust this application, you can add Microsoft Windows Notepad to the list of trusted applications so that the objects used by this application are not monitored. This will increase computer performance, which is especially important when using server applications.

In addition, certain actions that are classified by Kaspersky Endpoint Security as suspicious may be safe within the context of the functionality of a number of applications. For example, the interception of text that is typed from the keyboard is a routine process for automatic keyboard layout switchers (such as Punto Switcher). To take account of the specifics of such applications and exclude their activity from monitoring, we recommend that you add such applications to the trusted applications list.

Trusted applications help to avoid compatibility issues between Kaspersky Endpoint Security and other applications (for example, the problem of double-scanning of the network traffic of a third-party computer by Kaspersky Endpoint Security and by another anti-virus application).

At the same time, the executable file and process of the trusted application are still scanned for viruses and other malware. An application can be fully excluded from Kaspersky Endpoint Security scanning by means of scan exclusions.

How to add an application to the trusted list in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Exclusions and object types**.
5. In the **Scan exclusions and trusted applications** → **Trusted applications** block, click the **Settings** button.

   This opens a window containing a list of trusted applications.
6. Select the **Merge values when inheriting** check box if you want to create a consolidated list of trusted applications for all computers in the company. The lists of trusted applications in the parent and child policies will be merged. The lists will be merged provided that merging values when inheriting is enabled. Trusted applications from the parent policy are displayed in child policies in a read-only view. Changing or deleting trusted applications of the parent policy is not possible.
7. Select the **Allow use of local trusted applications** check box if you want to enable the user to create a local list of trusted applications. This way, a user can create their own local list of trusted applications in addition to the general list of trusted applications generated in the policy. An administrator can use Kaspersky Security Center to view, add, edit, or delete list items in the computer properties.

   If the check box is cleared, the user can access only the general list of trusted applications generated in the policy. Also, if this check box is cleared, Kaspersky Endpoint Security hides the consolidated list of trusted applications in the user interface of the application.

8. Click **Add** and select an action:

- **Category**. You can group trusted applications into separate categories. To create a new category, enter the name of the category and add at least one trusted application to the category.

- **New exclusion**. Kaspersky Endpoint Security adds a new trusted application to the root of the list.

- **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined trusted applications*. Also predefined trusted applications have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined trusted applications depending on the purpose of the protected server.

- **New exclusion to selected category**. To add a new trusted application to a specific category, select a category.

9. Select the trusting criteria:

- **Use full process path on disk to consider it trusted**. Enter the path to the executable file of the trusted application.

  Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

  Kaspersky Endpoint Security treats the file name of a trusted application as case-sensitive. If the file name you enter has the wrong case, Kaspersky Endpoint Security will not recognize the trusted application.

- **Use process file hash to consider it trusted**.

Kaspersky Endpoint Security does not support the `%userprofile%` environment variable when generating a list of trusted applications in the Kaspersky Security Center console. To apply the entry to all user accounts, you can use the * character (for example, `C:\Users\*\Documents\File.exe`). Whenever you add a new environment variable, you need to restart the application.

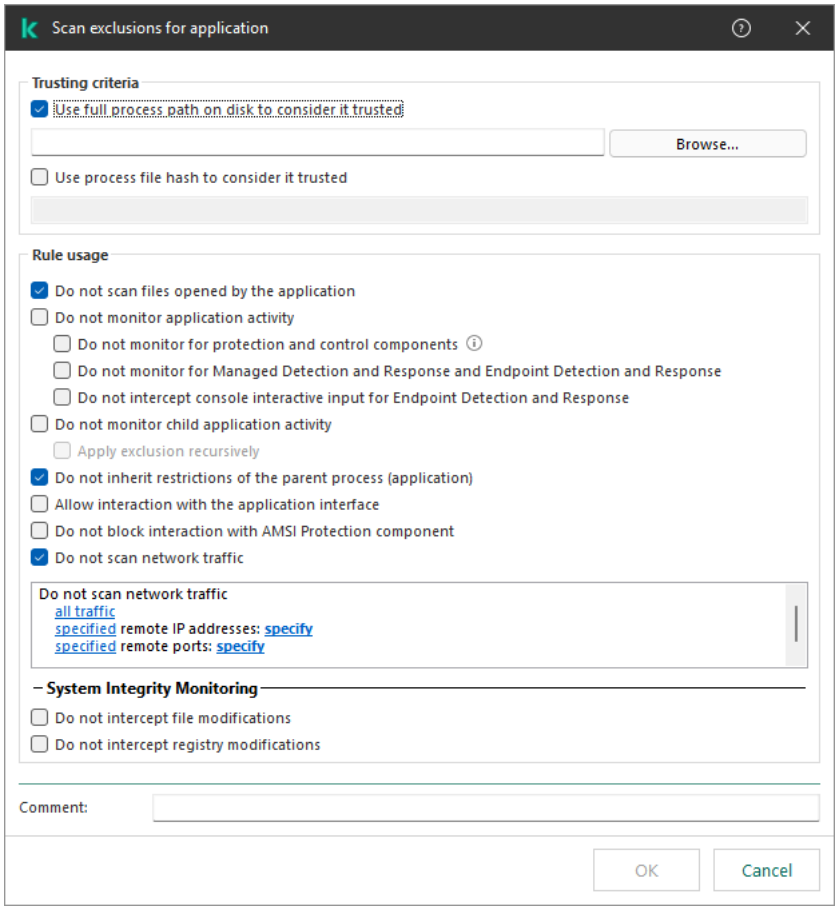

Trusted application settings

10. Configure the advanced settings for the trusted application (see the table below).

11. Click **OK**.

    The new trusted application will be added to the list. You can exclude an application from the trusted zone at any time using the check box next to the object.

12. To apply the policy to computers, close the padlock icons and save your changes.

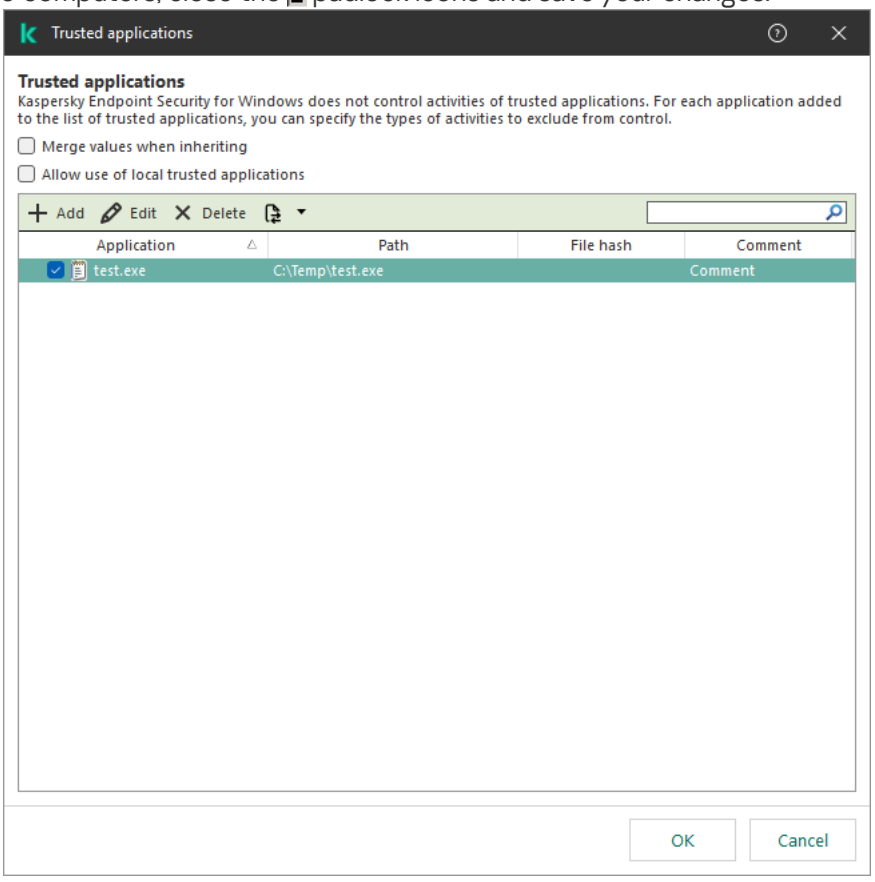

List of trusted applications

How to add an application to the trusted list in the Kaspersky Security Center Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to the **Trusted Zone** section.

5. In the window that opens, click the **Applications** link.

   This opens a window containing a list of trusted applications.

6. Select the **Merge values when inheriting** check box if you want to create a consolidated list of trusted applications for all computers in the company. The lists of trusted applications in the parent and child policies will be merged. The lists will be merged provided that merging values when inheriting is enabled. Trusted applications from the parent policy are displayed in child policies in a read-only view. Changing or deleting trusted applications of the parent policy is not possible.

7. Select the **Allow use of local exclusions** check box if you want to enable the user to create a local list of trusted applications. This way, a user can create their own local list of trusted applications in addition to the general list of trusted applications generated in the policy. An administrator can use Kaspersky Security Center to view, add, edit, or delete list items in the computer properties.

   If the check box is cleared, the user can access only the general list of trusted applications generated in the policy. Also, if this check box is cleared, Kaspersky Endpoint Security hides the consolidated list of trusted applications in the user interface of the application.

8. Click **Add** and select an action:

   - **Category**. You can group trusted applications into separate categories. To create a new category, enter the name of the category and add at least one trusted application to the category.

   - **New exclusion**. Kaspersky Endpoint Security adds a new trusted application to the root of the list.

   - **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined trusted applications*. Also predefined trusted applications have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined trusted applications depending on the purpose of the protected server.

   To add a new trusted application to a specific category, select the check box next to that category and select the **New exclusion** option.

9. Select the trusting criteria:

   - **Path to the file or folder**. Enter the path to the executable file of the trusted application.

     Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

     Kaspersky Endpoint Security treats the file name of a trusted application as case-sensitive. If the file name you enter has the wrong case, Kaspersky Endpoint Security will not recognize the trusted application.

   - **Application hash**.

   > Kaspersky Endpoint Security does not support the %userprofile% environment variable when generating a list of trusted applications in the Kaspersky Security Center console. To apply the entry to all user accounts, you can use the `*` character (for example, `C:\Users\*\Documents\File.exe`). Whenever you add a new environment variable, you need to restart the application.

10. Configure the advanced settings for the trusted application (see the table below).

11. Click **OK**.

    The new trusted application will be added to the list. You can exclude an application from the trusted zone at any time using the check box in the **Status** column.

12. To apply the policy to computers, close the padlock icons and save your changes.

How to add an application to the trusted list in the application interface

1. In the main application window, click the button.

2. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.

3. In the **Exclusions** block, click the **Specify trusted applications** link.

Kaspersky Endpoint Security hides the consolidated list of trusted applications in the user interface of the application if configuration of trusted applications is blocked by the administrator in the console ("closed lock" symbol) and local trusted applications are prohibited (the **Allow use of local trusted applications** check box is cleared).

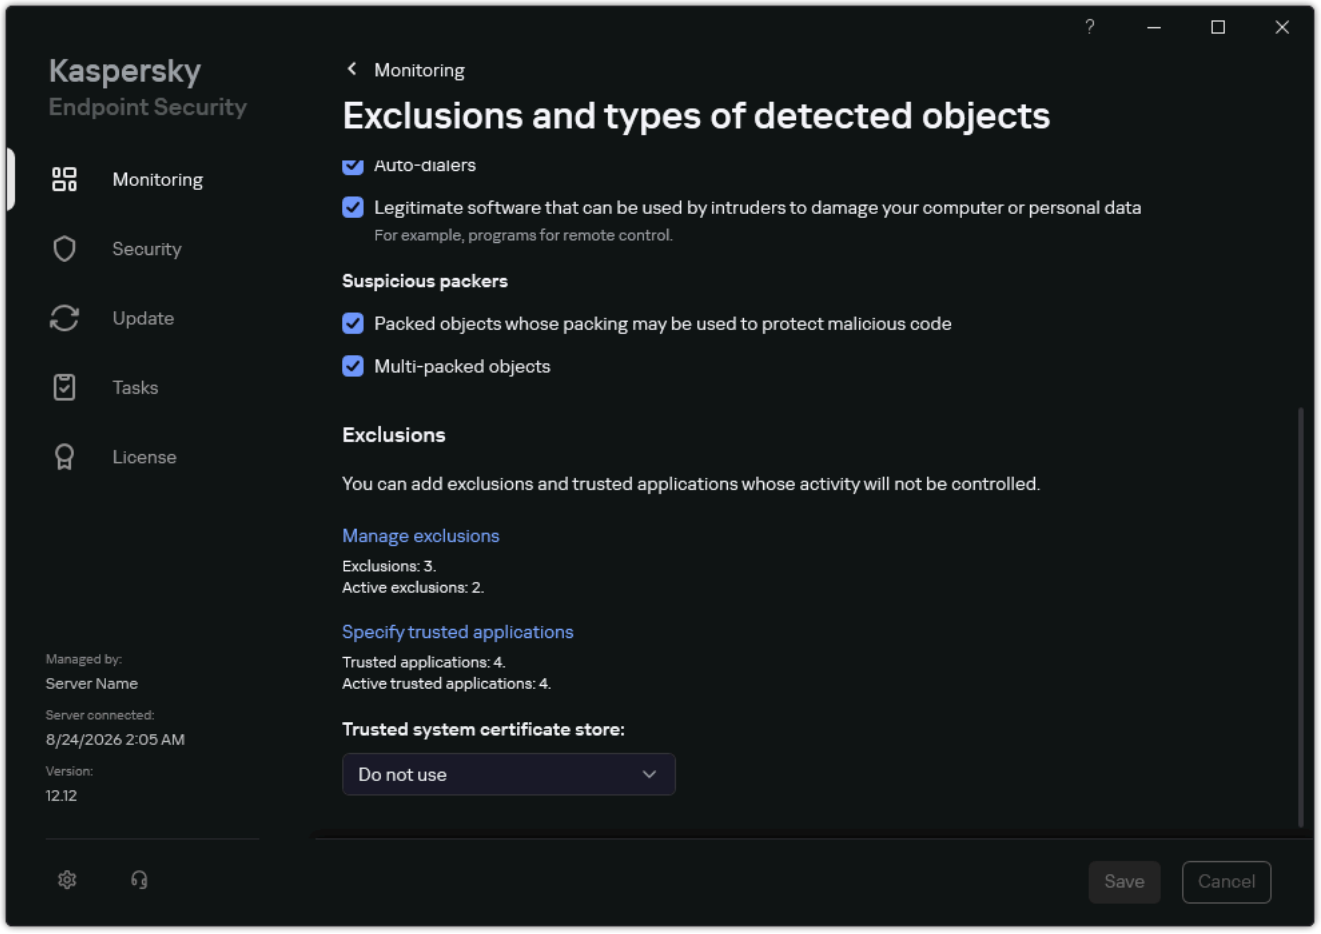

Settings of exclusions

4. Click **Add** and select an action:

- **Category**. You can group trusted applications into separate categories. To create a new category, enter the name of the category and add at least one trusted application to the category.
- **New exclusion**. Kaspersky Endpoint Security adds a new trusted application to the root of the list.
- **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined trusted applications*. Also predefined trusted applications have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined trusted applications depending on the purpose of the protected server.

To add a new trusted application to a specific category, select the check box next to that category and select the **New exclusion** option.

5. Select the trusting criteria:

- **Use full process path on disk to consider it trusted**. Enter the path to the executable file of the trusted application.

  Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

Kaspersky Endpoint Security treats the file name of a trusted application as case-sensitive. If the file name you enter has the wrong case, Kaspersky Endpoint Security will not recognize the trusted application.

- **Use process file hash to consider it trusted**.

> Kaspersky Endpoint Security supports environment variables and converts the path in the local interface of the application. In other words, if you enter the file path `%userprofile%\Documents\File.exe`, a `C:\Users\Fred123\Documents\File.exe` record is added in local interface of the application for user Fred123. Accordingly, Kaspersky Endpoint Security ignores the `File.exe` trusted program for other users. To apply the entry to all user accounts, you can use the `*` character (for example, `C:\Users\*\Documents\File.exe`). Whenever you add a new environment variable, you need to restart the application.

6. In the trusted application properties window, configure the advanced settings.

7. Click **OK**.

   The new trusted application will be added to the list. You can exclude an application from the trusted zone at any time using the check box in the **Status** column.

8. Save your changes.

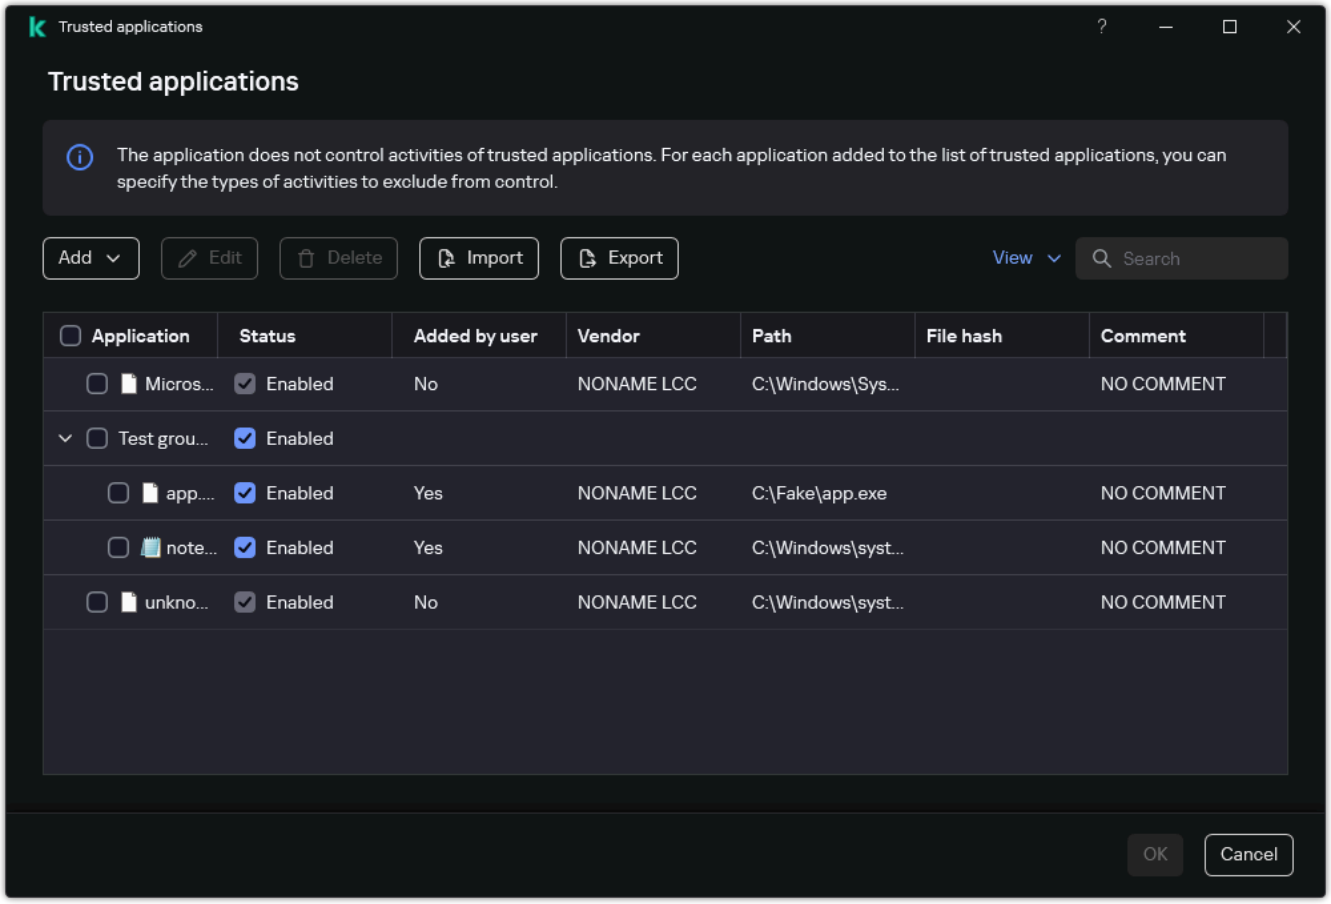

List of trusted applications

Parameter	Description
Do not scan files opened by the application	All files that are opened by the application are excluded from scans by Kaspersky Endpoint Security. For example, if you are using applications to back up files, this feature helps reduce the consumption of resources by Kaspersky Endpoint Security.
Do not monitor application activity	Kaspersky Endpoint Security will not monitor the application's file- and network activity in the operating system. You can configure application activity monitoring for different components of Kaspersky Endpoint Security: • **Do not monitor for protection and control components**. Application activity is monitored by the following components: Behavior Detection, Exploit Prevention, Host Intrusion Prevention, Remediation Engine and Firewall. • **Do not monitor for Managed Detection and Response and Endpoint Detection and Response**. Application activity is monitored by built-in MDR agent and built-in EDR (KATA) agent. • **Do not intercept console interactive input for Endpoint Detection and Response**. Kaspersky Endpoint Security does not send telemetry data about managing the application on the console. Telemetry data is used by Kaspersky Anti Targeted Attack Platform (EDR).
Do not monitor child application activity	Kaspersky Endpoint Security will not monitor the file activity or network activity of applications that are started by this application. You can apply the exclusion recursively. So that the application does not monitor the activity of the entire chain of child applications.
Do not inherit restrictions from the parent process (application)	The restrictions configured for the parent process will not be applied by Kaspersky Endpoint Security to a child process. The parent process is started by an application for which application rights (Host Intrusion Prevention) and application network rules (Firewall) are configured.
Do not monitor child application activity	Kaspersky Endpoint Security will not monitor the file activity or network activity of applications that are started by this application. You can apply the exclusion recursively. So that the application does not monitor the activity of the entire chain of child applications.
Allow interaction with the application interface	Kaspersky Endpoint Security Self-Defense blocks all attempts to manage application services from a remote computer. If the check box is selected, the remote access application is allowed to manage Kaspersky Endpoint Security settings through the Kaspersky Endpoint Security interface.
Do not block interaction with AMSI Protection component	Kaspersky Endpoint Security will not monitor the trusted application's requests for objects to be scanned by the AMSI Protection component.
Do not scan network traffic	Network traffic initiated by the application will be excluded from scans by Kaspersky Endpoint Security. You can exclude either all traffic or only encrypted traffic from scans. You can also exclude individual IP addresses and port numbers from scans. Kaspersky Endpoint Security version 14.0 or earlier does not support excluding network traffic if a hash is specified for a trusted application instead of a path.
Do not intercept file modifications *(available only in the Kaspersky Security Center Console)*	Kaspersky Endpoint Security does not monitor changes in files from the System Integrity Monitoring monitoring scope. The application applies the exclusion to all System Integrity Monitoring modes: Real-Time System Integrity Monitoring and On-Demand System Integrity Check.
Do not intercept registry modifications *(available only in the Kaspersky Security Center Console)*	Kaspersky Endpoint Security does not monitor changes in registry keys from the System Integrity Monitoring monitoring scope. The application applies the exclusion to all System Integrity Monitoring modes: Real-Time System Integrity Monitoring and On-Demand System Integrity Check.
Comment	If necessary, you can provide a brief comment for the trusted application. Comments help simplify searches and sorting of trusted applications.
Status	Status of the trusted application: • **Active** status means that the application is in the trusted zone. • **Inactive** status means that the application is excluded from the trusted zone.

Creating a local trusted zone

The user now can create their own local trusted zone for a specific computer. This way, the user can create their own local lists of scan exclusions and trusted applications in addition to the general trusted zone in a policy. An administrator can allow or block the use of local exclusions or local trusted applications in policy settings. To do so, use the **Allow use of local exclusions** and **Allow use of local trusted applications** check boxes in the **Exclusions** section of the policy.

If creating a local trusted zone is allowed by an administrator, the user can add their own scan exclusions and trusted applications in the user interface of the application. At the same time, the user does not have permissions to modify or delete objects from the trusted zone configured in the policy. The administrator can also view, add, modify, or delete list items in the Kaspersky Security Center console if exclusions need to be added for an individual computer.

> Kaspersky Endpoint Security hides the lists of scan exclusions and trusted applications in the user interface of the application if configuration of the trusted zone is blocked by the administrator in the console ("closed lock" symbol) and local scan exclusions and trusted applications are prohibited.

How to add an object to the local trusted zone in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the **Managed devices** folder in the Administration Console tree, open the folder with the name of the administration group to which the relevant client computers belong.
3. In the workspace, select the **Devices** tab.
4. Double-click to open the computer properties window.
5. In the computer properties window, select the **Applications** section.
6. In the list of Kaspersky applications installed on the computer, select **Kaspersky Endpoint Security for Windows (14.2)** and double-click to open the application properties.
7. In the application settings window, select **General settings** → **Exclusions and object types**.
8. In the **Scan exclusions and trusted applications** → **Local scan exclusions** block, click the **Settings** button.

This opens a window containing a list of local exclusions.

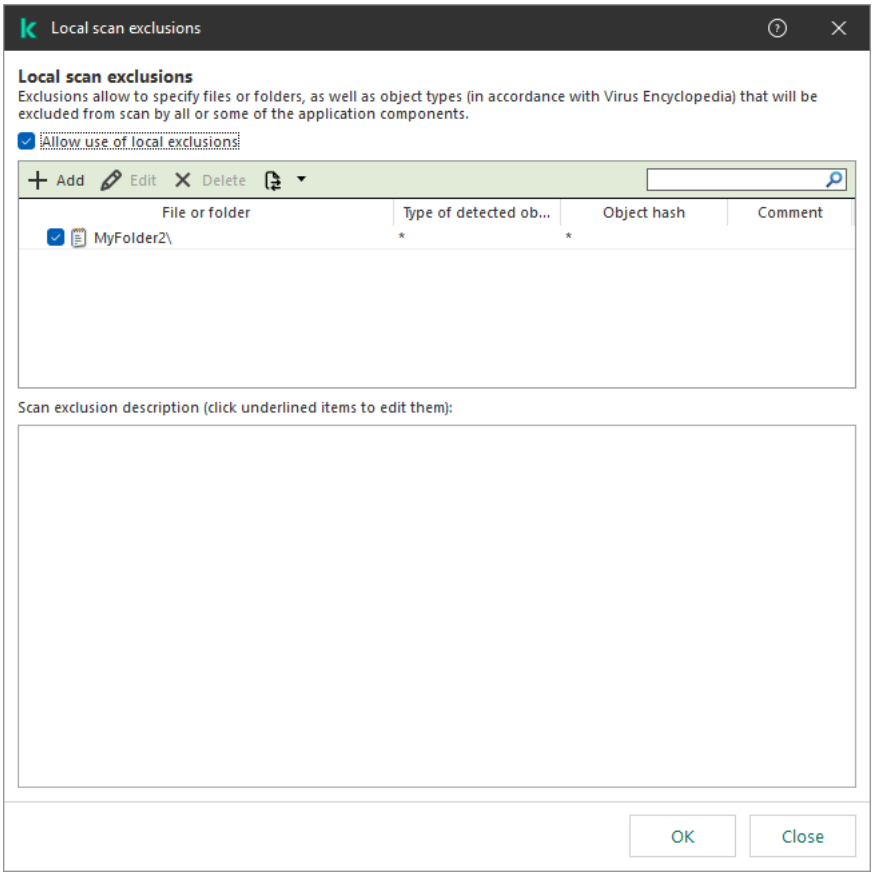

Trusted zone settings

9. Make a list of local scan exclusions.

   The rules for creating local scan exclusions are the same as for general exclusions. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

10. In the **Scan exclusions and trusted applications** → **Local trusted applications** block, click the **Settings** button.

    This opens a window containing a list of local trusted applications.

11. Make a list of local trusted applications.

    Rules for adding applications to the list of local trusted applications are the same as the rules for adding them to the general list. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

12. Save your changes.

How to add an object to the local trusted zone in the Kaspersky Security Center Web Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.

2. Click the name of the computer on which you want to allow a user to perform a blocked action.

3. Select the **Applications** tab.

4. Click **Kaspersky Endpoint Security for Windows**.

   This opens the local application settings.

5. Select the **Application settings** tab.

6. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.

7. In the **Scan exclusions and trusted applications** block, click the **Local scan exclusions** link.

8. Make a list of local scan exclusions.

   Rules for creating local exclusions are the same as the rules for creating general exclusions. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

9. In the **Scan exclusions and trusted applications** block, click the **Local trusted applications** link.

10. Make a list of local trusted applications.

    Rules for adding applications to the list of local trusted applications are the same as the rules for adding them to the general list. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

11. Save your changes.

How to create a local scan exclusion in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.

3. In the **Exclusions** block, click the **Manage exclusions** link.

Kaspersky Endpoint Security hides the list of scan exclusions in the user interface of the application if configuration of scan exclusions is blocked by the administrator in the console ("closed lock" symbol) and local scan exclusions are prohibited (the **Allow use of local exclusions** check box is cleared).

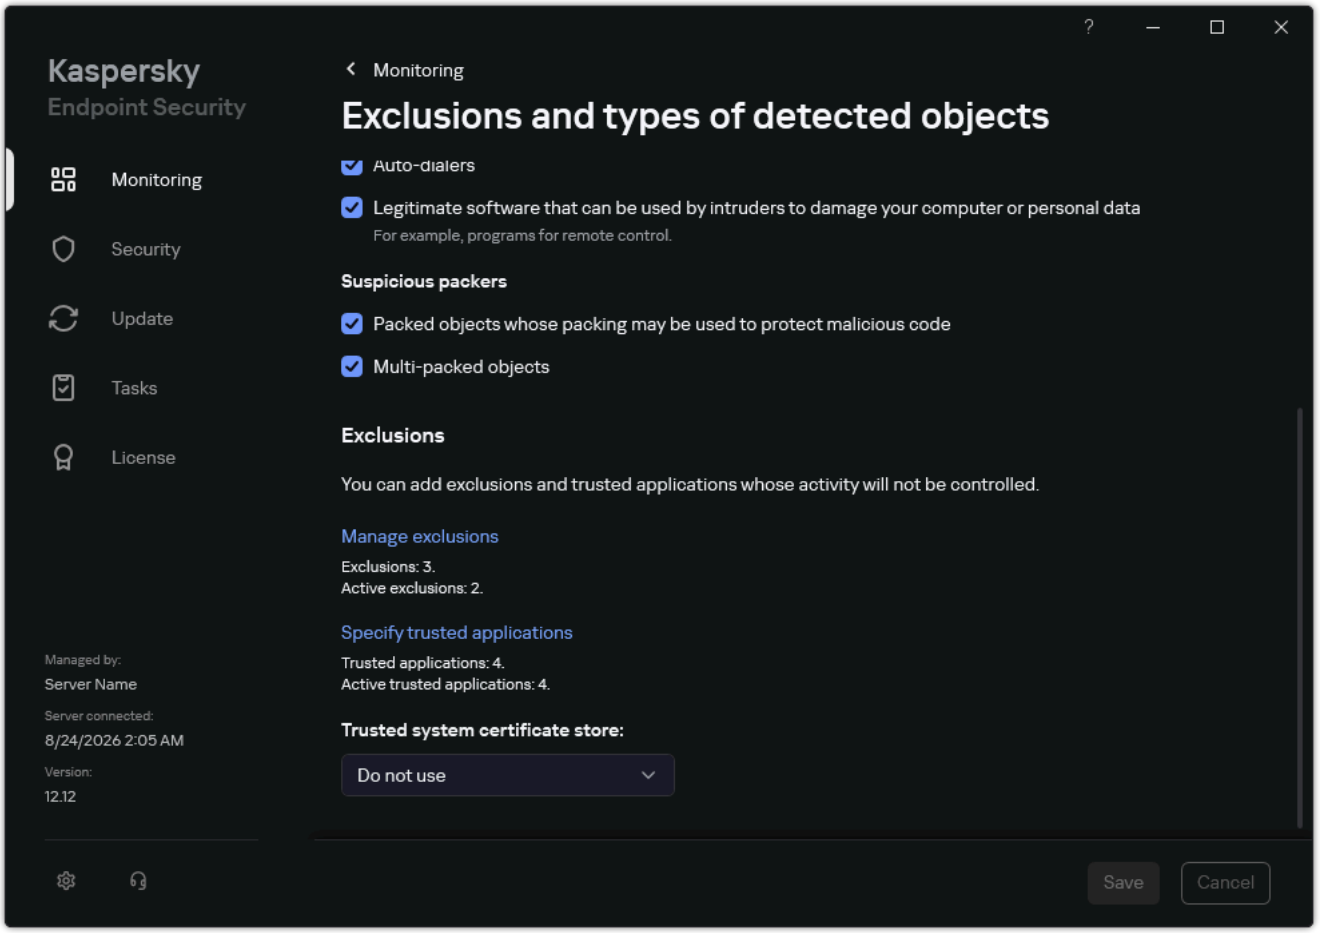

Settings of exclusions

4. Click **Add** and select an action:

- **Category**. You can group scan exclusions into separate categories. To create a new category, enter the name of the category and add at least one scan exclusion to the category.
- **New exclusion**. Kaspersky Endpoint Security adds a new scan exclusion to the root of the list.
- **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined scan exclusions*. Also predefined scan exclusions have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined scan exclusions depending on the purpose of the protected server.

To add a new scan exclusion to a specific category, select the check box next to that category and select the **New exclusion** option.

5. If you want to exclude a file or folder from scans, select the file or folder by clicking the **Browse** button.

You can also enter the path manually. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask:

- The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

- Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.

- The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

  You can use masks at the beginning, in the middle or at the end of the file path. For example, if you want to add a folder for all users to exclusions, enter the `?:\Users\*\Folder\` mask.

  You can exclude network folders. To do this, enter the path to the network folder manually (for example, `\\Network Share\*`).

6. If you want to exclude a specific type of object from scans, in the **Type of detected object** field enter the name of the object type according to the classification of the Kaspersky Encyclopedia (for example, `Email-Worm`, `Rootkit` or `RemoteAdmin`).

   You can use masks with the `?` character (replaces any single character) and the `*` character (replaces any number of characters). For example, if the `Client*` mask is specified, Kaspersky Endpoint Security excludes `Client-IRC`, `Client-P2P` and `Client-SMTP` objects from scans.

7. If you want to exclude an individual file from scans, enter the file hash in the **Object hash** field.

   If the file is modified, the file hash will also be modified. If this happens, the modified file will not be added to exclusions.

8. In the **Protection components** block, select the components that you want the scan exclusion to apply to.

9. If necessary, in the **Comment** field, enter a brief comment on the scan exclusion that you are creating.

10. Select the **Active** status for the exclusion.

11. Click **Add**.

    The new exclusion will be added to the list. You can disable the exclusion at any time using the check box in the **Status** column.

12. Save your changes.

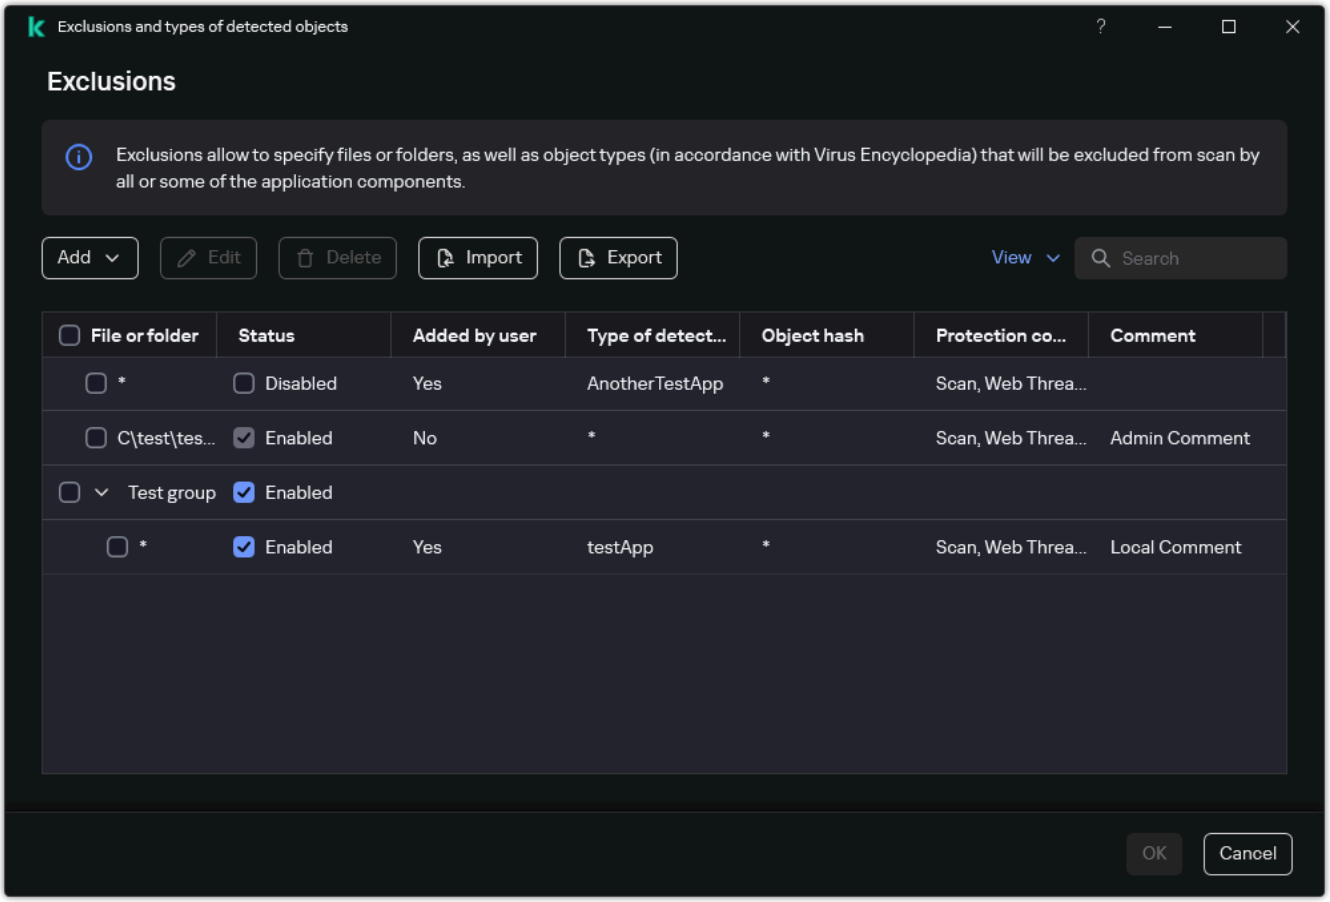

List of exclusions

How to add an application to the list of local trusted applications in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.
3. In the **Exclusions** block, click the **Specify trusted applications** link.

Kaspersky Endpoint Security hides the consolidated list of trusted applications in the user interface of the application if configuration of trusted applications is blocked by the administrator in the console ("closed lock" symbol) and local trusted applications are prohibited (the **Allow use of local trusted applications** check box is cleared).

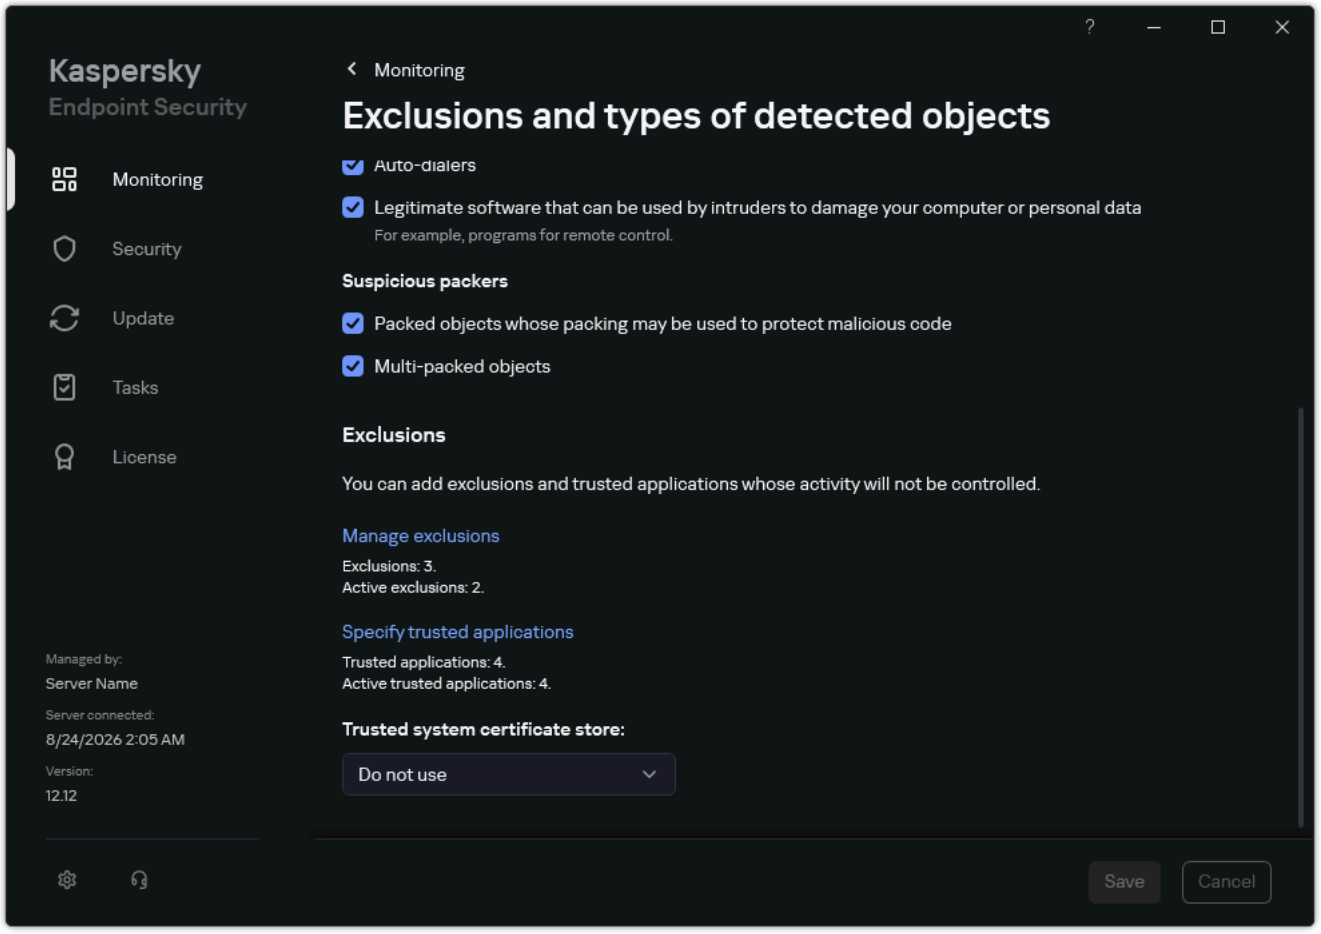

Settings of exclusions

4. Click **Add** and select an action:

- **Category**. You can group trusted applications into separate categories. To create a new category, enter the name of the category and add at least one trusted application to the category.
- **New exclusion**. Kaspersky Endpoint Security adds a new trusted application to the root of the list.
- **Select exclusion from list**. To quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager, the application includes *predefined trusted applications*. Also predefined trusted applications have been added to support application set-up in Citrix and VMware virtual environments. You must select predefined trusted applications depending on the purpose of the protected server.

To add a new trusted application to a specific category, select the check box next to that category and select the **New exclusion** option.

5. Select the trusting criteria:

- **Use full process path on disk to consider it trusted**. Enter the path to the executable file of the trusted application.

  Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

Kaspersky Endpoint Security treats the file name of a trusted application as case-sensitive. If the file name you enter has the wrong case, Kaspersky Endpoint Security will not recognize the trusted application.

- **Use process file hash to consider it trusted**.

> Kaspersky Endpoint Security supports environment variables and converts the path in the local interface of the application. In other words, if you enter the file path `%userprofile%\Documents\File.exe`, a `C:\Users\Fred123\Documents\File.exe` record is added in local interface of the application for user Fred123. Accordingly, Kaspersky Endpoint Security ignores the `File.exe` trusted program for other users. To apply the entry to all user accounts, you can use the `*` character (for example, `C:\Users\*\Documents\File.exe`). Whenever you add a new environment variable, you need to restart the application.

6. In the trusted application properties window, configure the advanced settings.

7. Click **OK**.

   The new trusted application will be added to the list. You can exclude an application from the trusted zone at any time using the check box in the **Status** column.

8. Save your changes.

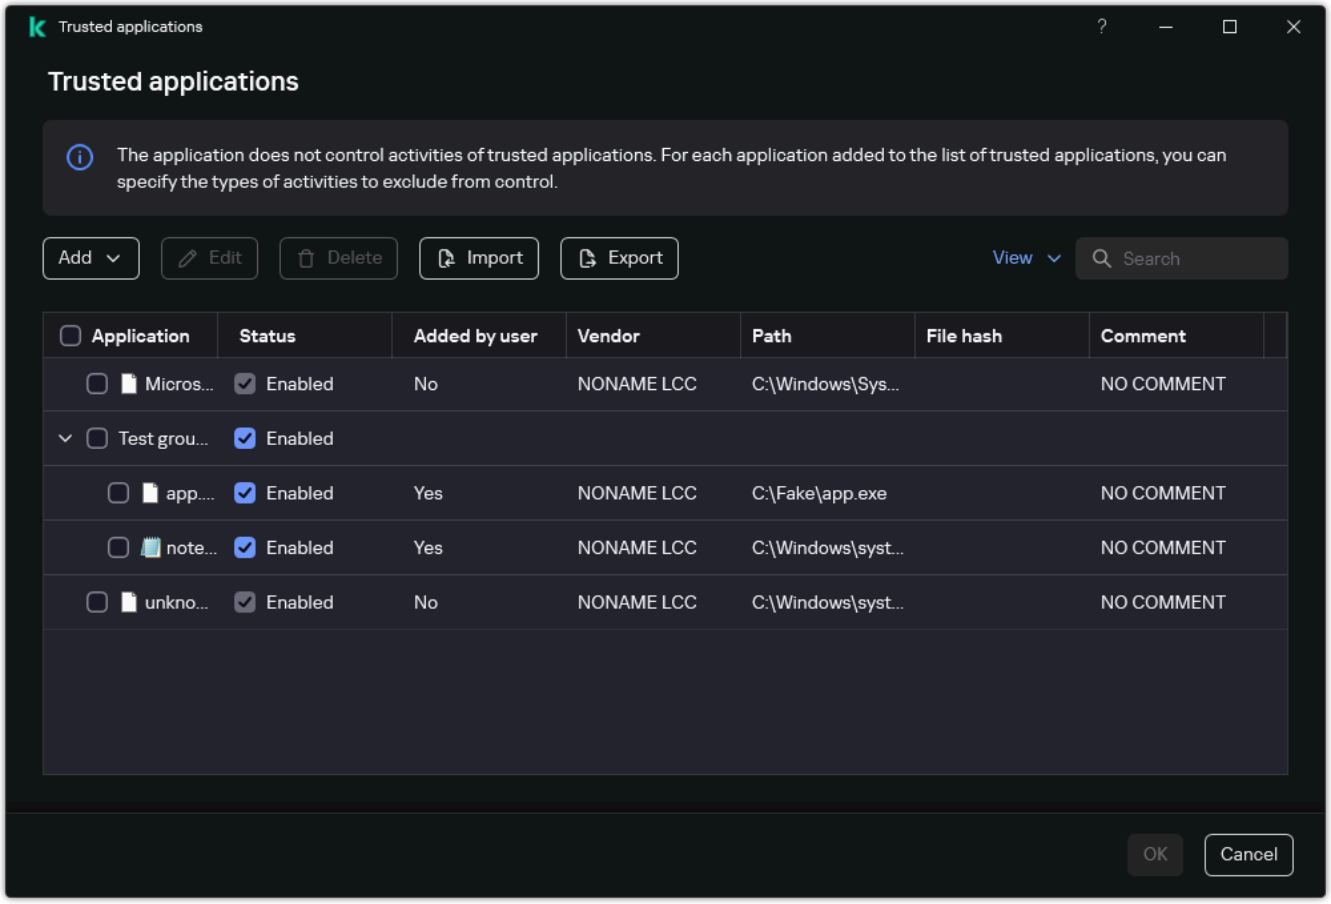

List of trusted applications

Exporting and importing the trusted zone

A *trusted zone* is a system administrator-configured list of objects and applications that Kaspersky Endpoint Security does not monitor when active. The trusted zone consists of the following lists: *scan exclusions* and *trusted applications*. You can export these lists to XML files and other formats. Then you can modify the file to, for example, add a large number of exclusions of the same type. You can also use the export/import function to back up the list of exclusions and the list of trusted applications, or to migrate the lists to a different server.

The application uses the following formats for exporting and importing the *list of exclusions*:

- XML is available in Administration Console (MMC), Web Console, and Cloud Console.
- DAT is available only for import in the Administration Console (MMC). The purpose of this format is to maintain compatibility with older versions of the application. You can convert a DAT file to XML in the Administration Console (MMC) to migrate exclusion lists to Web Console.
- CSV is only available in the local interface of the application.

Kaspersky Endpoint Security uses the XML format for exporting and importing the *list of trusted applications*.

How to export and import the trusted zone in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Exclusions and object types**.
4. Under **Scan exclusions and trusted applications**, select the component of the trusted zone that you want to export or import: **Scan exclusions** or **Trusted applications**.
5. Click **Settings**.
6. To export the list of rules:
   a. Select the exclusions that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.
      If you did not select any exclusion, Kaspersky Endpoint Security will export all exclusions.
   b. Click the → **Export** button.
   c. In the window that opens, specify the name of the XML file to which you want to export the list of exclusions, and select the folder in which you want to save this file.

d. Save the file.

Kaspersky Endpoint Security exports the entire list of exclusions to the XML file. Kaspersky Endpoint Security also supports exporting the list of exclusions to a DAT file.

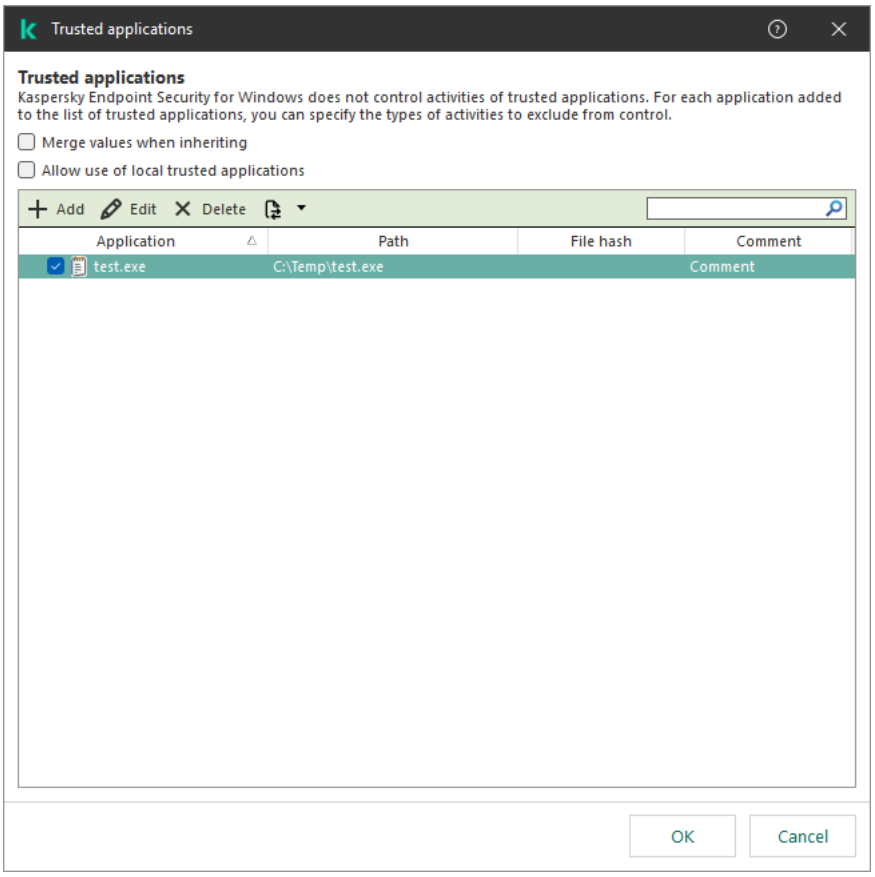

List of trusted applications

7. To import the list of exclusions:

   a. Click the → **Import** button.

   b. In the window that opens, select the XML file from which you want to import the list of exclusions.

   c. Open the file.

   If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file. Kaspersky Endpoint Security also supports importing a list of exclusions from a DAT file.

8. Save your changes.

How to export or import the trusted zone in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to the **Trusted Zone** section.

5. To export the list of rules:

   a. Click the **Malware Scan exclusions** link.

   b. Select the exclusions that you want to export.

   c. Click the → **Export** button.

      Kaspersky Endpoint Security exports the list of exclusions to a JSON file in the default downloads folder.

6. To export the list of trusted applications:

   a. Select the trusted applications that you want to export.

   b. Click the → **Export** button.

      Kaspersky Endpoint Security exports the list of trusted applications to a JSON file in the default downloads folder.

7. To import the list of exclusions:

   a. Click the **Malware Scan exclusions** link.

   b. Click the → **Import** button.

      In the window that opens, select the JSON file from which you want to import the list of exclusions.

   c. Open the file.

      If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.

8. To import a list of trusted applications:

   a. Click the **Applications** link.

   b. Click the → **Import** button.

      This opens a window; in that window, select the JSON file from which you want to import the list of trusted applications.

   c. Open the file.

      If the computer already has a list of trusted applications, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.

9. Save your changes.

How to export or import the trusted zone in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.

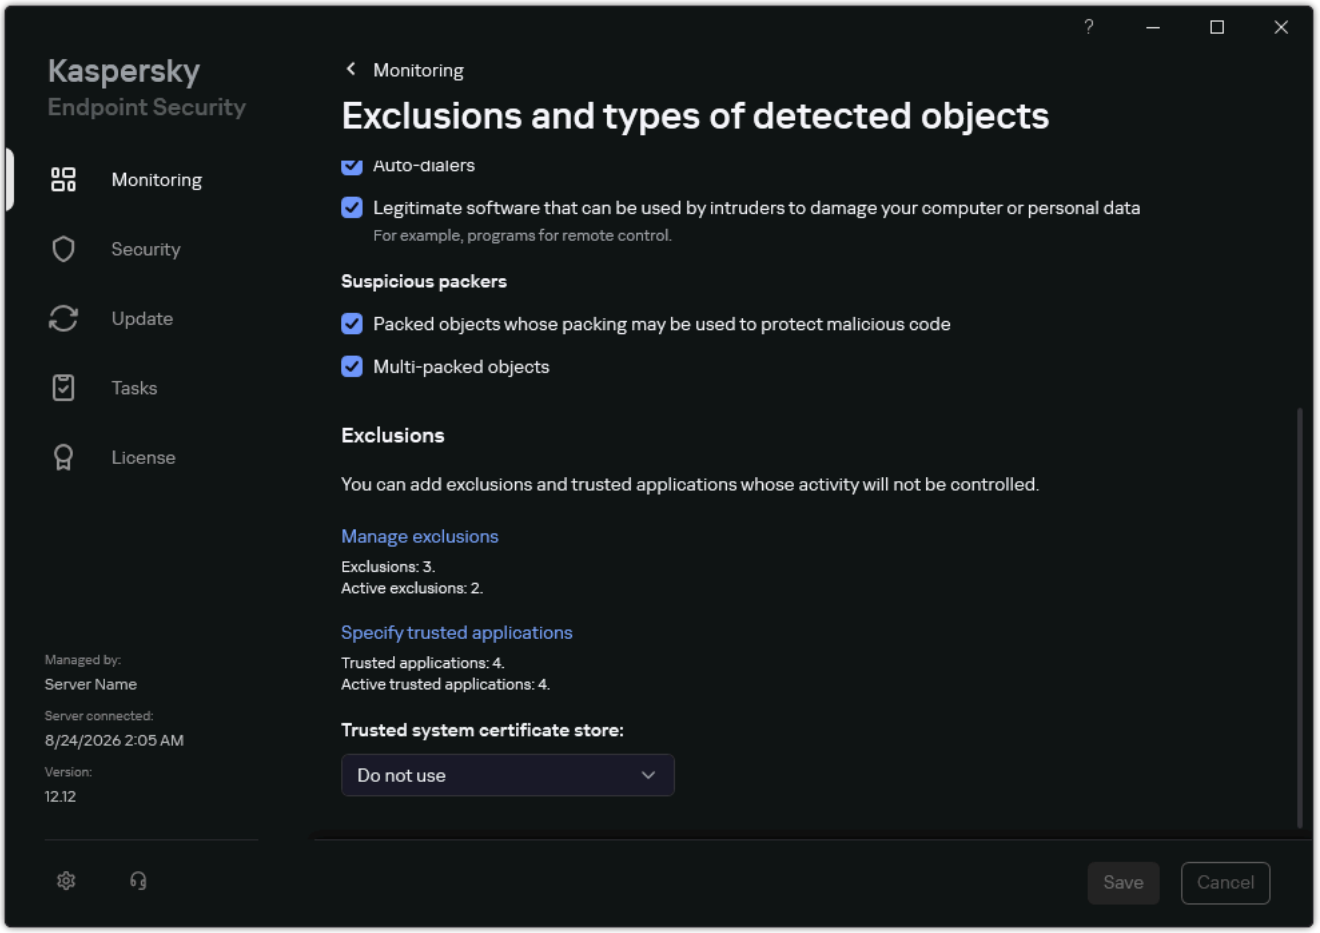

Settings of exclusions

3. To export the list of rules:

   a. In the **Exclusions** block, click the **Manage exclusions** link.

   b. Select the exclusions that you want to export.

   c. Click **Export**.

   d. Confirm that you want to export only the selected exclusions, or export the entire list of exclusions.

   e. In the window that opens, specify the name of the CSV file to which you want to export the list of exclusions, and select the folder in which you want to save this file.

f. Save the file.

Kaspersky Endpoint Security exports the entire list of exclusions to the CSV file.

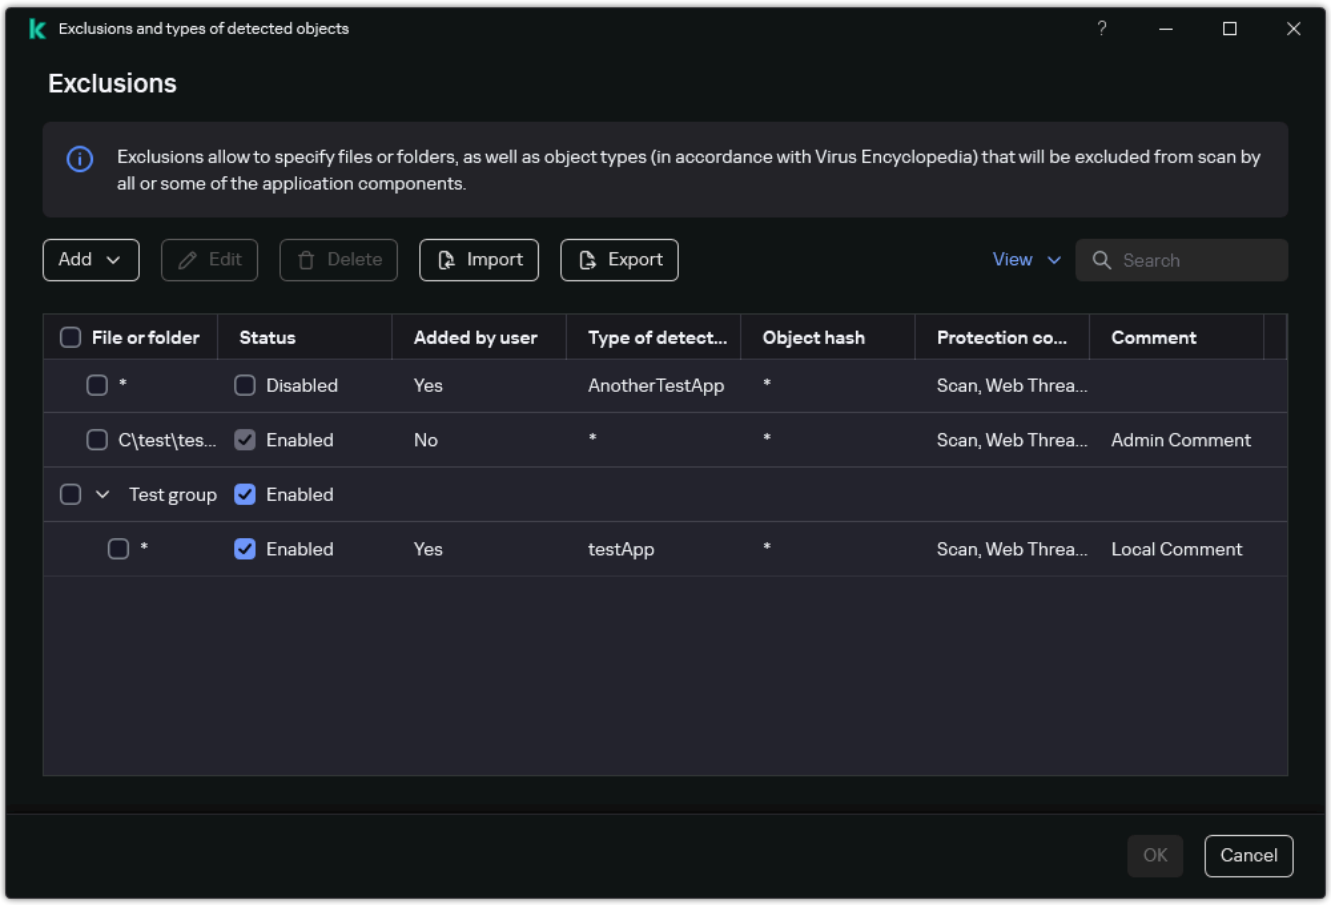

List of exclusions

4. To export the list of trusted applications:

   a. In the **Exclusions** block, click the **Specify trusted applications** link.

   b. Select the trusted applications that you want to export.

   c. Click **Export**.

   d. Confirm that you want to export only the selected trusted applications, or export the entire list.

   e. This opens a window; in that window, enter the name of the XML file to which you want to export the list of trusted applications, and select the folder in which you want to save this file.

f. Save the file.

Kaspersky Endpoint Security exports the entire list of trusted applications to the XML file.

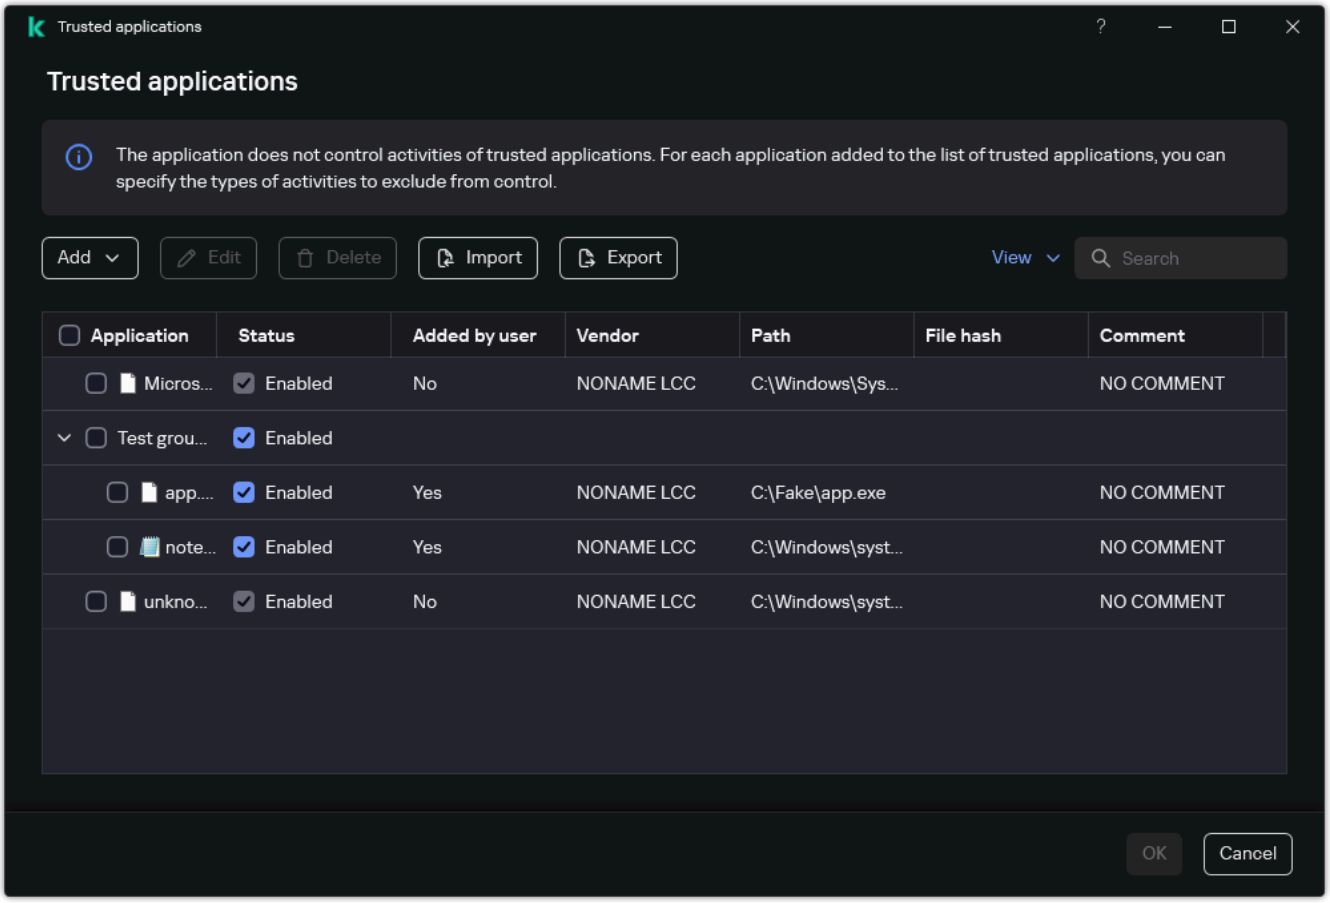

List of trusted applications

5. To import the list of exclusions:

   a. In the **Exclusions** block, click the **Manage exclusions** link.

   b. Click **Import**.

   c. In the window that opens, select the CSV file from which you want to import the list of exclusions.

   d. Open the file.

   If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the CSV file.

6. To import a list of trusted applications:

   a. In the **Exclusions** block, click the **Specify trusted applications** link.

   b. Click **Import**.

   c. This opens a window; in that window, select the XML file from which you want to import the list of trusted applications.

d. Open the file.

If the computer already has a list of trusted applications, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

7. Save your changes.

Handling applications with a trusted digital signature

Use of system certificate storage lets you exclude applications signed by a trusted digital signature from virus scans. Kaspersky Endpoint Security automatically assigns such applications to the *Trusted* group.

How to start the use of a trusted system certificate storage in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Exclusions and object types**.
4. In the **Trusted system certificate store** block, select the **Use trusted system certificate store** check box.
5. In the drop-down list, select which system store must be considered as trusted by Kaspersky Endpoint Security.
6. Save your changes.

How to start the use of a trusted system certificate storage in the Web Console and Cloud Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to the **Trusted Zone** section.
5. In the window that opens, click the **Root certificates** link.
6. In the window that opens, select the **Use trusted system certificate store** check box.
7. Select which system store must be considered as trusted by Kaspersky Endpoint Security.
8. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to start the use of a trusted system certificate storage in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.

3. In the **Trusted system certificate store** drop-down list, select which system store must be considered as trusted by Kaspersky Endpoint Security.

4. Save your changes.

Appendix. Predefined scan exclusions and trusted applications

Starting with Kaspersky Endpoint Security 12.6 for Windows, scan exclusions and trusted applications are added to the trusted zone. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers. Starting with Kaspersky Endpoint Security 12.8 for Windows, you can install the application in Light Agent mode for protecting virtual environments. Predefined scan exclusions and trusted applications can help you quickly configure Kaspersky Endpoint Security in Citrix and VMware virtual environments.

You can select predefined exclusions and trusted applications in the following ways:

- Installing the application.
  - Installing the application locally using the Wizard
  - Installation package properties
- Setting the policy.
  - New policy wizard
  - Policy properties: scan exclusions and trusted applications

Microsoft SQL Server

When installing Kaspersky Endpoint Security on an SQL server, you must create a trusted zone from predefined exclusions and trusted applications to make sure the operation of the server is not interfered with.

Predefined scan exclusions

Path	SQL version
%ProgramFiles%\Microsoft SQL Server\MSSQL??. MSSQLSERVER\MSSQL\DATA*.mdf	2012 2014 2016 2017 2019 2022
%ProgramFiles(x86)%\Microsoft SQL Server\MSSQL.?*\Data*.mdf	2012
%ProgramFiles%\Microsoft SQL Server\MSSQL.?*\Data*.mdf	2012
%ProgramFiles%\Microsoft SQL Server\MSSQL??. MSSQLSERVER\MSSQL\DATA*.ldf	2012 2014 2016 2017 2019 2022

Path	SQL version
%ProgramFiles(x86)%\Microsoft SQL Server\MSSQL.?*\Data*.ldf	2012
%ProgramFiles%\Microsoft SQL Server\MSSQL.?*\Data*.ldf	2012
%ProgramFiles%\Microsoft SQL Server\MSSQL??.*\MSSQL\DATA*.mdf	2012 2014 2016 2017 2019 2022
%ProgramFiles%\Microsoft SQL Server\MSSQL??.**\MSSQL\DATA*.ldf	2012 2014 2016 2017 2019 2022

Microsoft Exchange Server

When installing Kaspersky Endpoint Security on a Microsoft Exchange server, you must create a trusted zone from predefined exclusions and trusted applications to make sure the operation of the server is not interfered with.

Predefined scan exclusions

Path	Microsoft Exchange version
C:\Program Files\Microsoft\Exchange Server\V15\Mailbox*.Chk	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\Mailbox*.Edb	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\Mailbox*.Jrs	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\Mailbox*.log	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\Mailbox*.Que	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\Mailbox*.jsl	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\TransportRoles\Data\Queue*.Chk	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\TransportRoles\Data\Queue*.Edb	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\TransportRoles\Data\Queue*.Jrs	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\TransportRoles\Data\Queue*.log	2013 2016 2019
C:\Program Files\Microsoft\Exchange Server\V15\TransportRoles\Data\Queue*.Que	2013 2016 2019

Path	Microsoft Exchange version
C:\Program Files\Microsoft\Exchange Server\V15\TransportRoles\Data\Queue*.jsl	2013 2016 2019

Predefined trusted applications

Path	Microsoft Exchange version
%ProgramFiles%\Microsoft\Exchange Server\V15\Bin\EdgeTransport.exe	2013 2016 2019
%ProgramFiles%\Microsoft\Exchange Server\V15\Bin\MSExchangeFrontendTransport.exe	2013 2016 2019

Microsoft System Center Configuration Manager

If Microsoft System Center Configuration Manager is installed in the operating system of the protected computer, you need to add a predefined exclusion to the list of scan exclusions to ensure stable operation of the solution.

Predefined scan exclusions

Path	System Center Configuration Manager version
%ProgramFiles%\Microsoft Configuration Manager\Inboxes	2012 2012 R2

Citrix

When installing Kaspersky Endpoint Security in a Citrix virtual environment, you must create a trusted zone from predefined exclusions and trusted applications to make sure the operation of the server is not interfered with.

Predefined scan exclusions

Path
%SystemRoot%\ServiceProfiles\NetworkService\HaDatabaseName.mdf
%SystemRoot%\ServiceProfiles\NetworkService\HaImportDatabaseName.mdf
%SystemRoot%\ServiceProfiles\NetworkService\HaDatabaseName_log.ldf
%SystemRoot%\ServiceProfiles\NetworkService\HaImportDatabaseName_log.ldf
%ProgramData%\Citrix\Broker\Cache
%SystemRoot%\System32\drivers\CtxUvi.sys
%ProgramFiles%\Citrix\HDX\bin\CitrixLogonCsp.dll

Path
mcsdif.vhdx
%Temp%\Citrix\RTMediaEngineSRV\MediaEngineSRVDebugLogs**.txt
%Temp%\Citrix\HDXRTConnector**.txt
%SystemDrive%\Users*\AppData\Local\Temp\Citrix\RTMediaEngineSRV\MediaEngineSRVDebugLogs**.txt
%ProgramFiles(x86)%\Citrix\ICA Client\epclient32.dll
%ProgramFiles(x86)%\Citrix\ICA Client\epclient64.dll
%ProgramFiles(x86)%\Citrix\ICA Client\epinject.sys
%ProgramFiles(x86)%\Citrix\ICA Client\EntryProtect.dll
*.vhd
*.avhd
*.vhdx
*.avhdx
*.pvp
*.lok
%SystemRoot%\System32\drivers\CVhdMp.sys (Windows Server 2012 R2)
%SystemRoot%\System32\drivers\CfsDep2.sys
%ProgramData%\Citrix\Provisioning Services\Tftpboot\ARDBP32.BIN
.vdiskcache
vdiskdif.vhdx
%SystemRoot%\ServiceProfiles\NetworkService\AppData\Roaming\Citrix\SubscriptionsStore**\PersistentDictionary.edb

Predefined trusted applications

Path	Citrix Solution
%ProgramFiles%\Citrix\Broker\Service\BrokerService.exe	Virtual Apps and Desktops
%ProgramFiles%\Microsoft SQL Server\150\LocalDB\Binn\sqlservr.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\Broker\Service\HighAvailabilityService.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\ConfigSync\ConfigSyncService.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\User Profile Manager\UserProfileManager.exe	Virtual Apps and Desktops

Path	Citrix Solution
%ProgramFiles%\Citrix\Virtual Desktop Agent\BrokerAgent.exe	Virtual Apps and Desktops
%SystemRoot%\System32\drivers\CVhdFilter.sys	Virtual Apps and Desktops
%ProgramFiles(x86)%\Citrix\ICAService\CtxSvcHost.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\System32\ctxgfx.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\ICAService\picaSvc2.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\ICAService\CpSvc.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\HDX\bin\ctxgfx.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\HDX\bin\CtxSvcHost.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\HDX\bin\ctxgfx.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\HDX\bin\picaSvc2.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\HDX\bin\CpSvc.exe	Virtual Apps and Desktops
%ProgramFiles(x86)%\Citrix\System32\WebSocketService.exe	Virtual Apps and Desktops
%ProgramFiles%\Citrix\ICAService\WebSocketService.exe	Virtual Apps and Desktops
%ProgramFiles(x86)%\Citrix\HDX\bin\WebSocketService.exe	Virtual Apps and Desktops
%ProgramFiles(x86)%\Citrix\HDX RealTime Connector\AudioTranscoder.exe	Virtual Apps and Desktops
%ProgramFiles(x86)%\Citrix\HDX RealTime Connector\MediaEngine.Net.Service.exe	Virtual Apps and Desktops
%ProgramFiles(x86)%\Citrix\HDX RealTime Connector\MediaEngineService.exe	Virtual Apps and Desktops
%ProgramFiles(x86)%\Citrix\ICA Client\MediaEngineService.exe	Workspace app
%ProgramFiles(x86)%\Citrix\ICA Client\CDViewer.exe	Workspace app
%ProgramFiles(x86)%\Citrix\ICA Client\concentr.exe	Workspace app

Path	Citrix Solution
%ProgramFiles(x86)%\Citrix\ICA Client\wfica32.exe	Workspace app
%ProgramFiles(x86)%\Citrix\ICA Client\bgblursvc.exe	Workspace app
%ProgramFiles(x86)%\Citrix\ICA Client\AuthManager\AuthManSvr.exe	Workspace app
%ProgramFiles(x86)%\Citrix\ICA Client\SelfServicePlugin\SelfService.exe	Workspace app
%ProgramFiles(x86)%\Citrix\ICA Client\SelfServicePlugin\SelfServicePlugin.exe	Workspace app
%ProgramFiles(x86)%\Citrix\ICA Client\HdxRtcEngine.exe	Workspace app
%ProgramFiles(x86)%\Citrix\ICA Client\HdxTeams.exe	Workspace app
%ProgramFiles%\Citrix\Provisioning Services\BNTFTP.EXE	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\PVSTSB.EXE	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\StreamService.exe	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\StreamProcess.exe	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\soapserver.exe	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\Inventory.exe	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\Notifier.exe	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\MgmtDaemon.exe	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\BNPXE.exe	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\CdfSvc.exe	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\BNAbsService.exe	Provisioning
%SystemRoot%\System32\drivers\bnistack6.sys	Provisioning
%SystemRoot%\System32\drivers\CfsDep2.sys	Provisioning
%SystemRoot%\System32\drivers\cnicteam.sys	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\BNDevice.exe	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\drivers\BNIstack6.sys	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\drivers\CNicTeam.sys	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\drivers\CFsDep2.sys	Provisioning
%ProgramFiles%\Citrix\Provisioning Services\drivers\CVhdMp.sys	Provisioning
%ProgramFiles%\Citrix\Receiver StoreFront\Services\SubscriptionsStoreService\Citrix.DeliveryServices.SubscriptionsStore.ServiceHost.exe	StoreFront
%ProgramFiles%\Citrix\Receiver StoreFront\Services\CredentialWallet\Citrix.DeliveryServices.CredentialWallet.ServiceHost.exe	StoreFront

VMware

When installing Kaspersky Endpoint Security in a VMware virtual environment, you must create a trusted zone from predefined trusted applications to make sure the operation of the server is not interfered with.

Path	VMware Solution
C:\Program Files\VMware\VMware View\Agent\bin\wsnm.exe	Horizon
C:\Program Files\VMware\VMware View\Agent\bin\wsnm_jms.exe	Horizon
C:\Program Files\VMware\VMware View\Agent\bin\ws_scripthost.exe	Horizon
C:\Program Files\VMware\VMware View\Agent\VMware Blast\VMBlastS.exe	Horizon
C:\Program Files\VMware\VMware View\Agent\VMware Blast\VMBlastW.exe	Horizon
C:\Program Files\VMware\VMware View\Agent\bin\SecurityGateway.exe	Horizon
C:\Program Files\Common Files\VMware\Teradici PCoIP Server\x64\pcoip_server_win32.exe	Horizon
C:\Program Files\Common Files\VMware\Teradici PCoIP Server\pcoip_server_win32.exe	Horizon
C:\Program Files (x86)\Common Files\VMware\USB\vmware-usbarbitrator64.exe	Horizon
C:\Program Files\Common Files\VMware\ScannerRedirection\Scanner.exe	Horizon
C:\Program Files\VMware\VMware View\Agent\bin\tsdrvdisvc.dll	Horizon
C:\Program Files\VMware\VMware View\Server\appblastgateway\nssm.exe	Horizon
C:\Program Files\VMware\VMware View\Server\bin\wsnm.exe	Horizon
C:\Program Files\VMware\VMware View\Server\bin\SecurityGateway.exe	Horizon
C:\Program Files\VMware\VMware View\Server\bin\ws_TunnelService.exe	Horizon
C:\Program Files\VMware\VMware View\Server\bin\ws_SecurityServer.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\vmUpdateLauncher.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\vmware-appstub.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\vmware-view.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\vmware-print-helper.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\vmware-print-previewer.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\vmware-print-redir-client.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\vmware-remotemks.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\vmware-view-usbloader.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\ClientService\horizon_client_service.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\DCT\ws_diag.exe	Horizon
C:\Program Files\VMware\VMware Horizon View Client\cef\HTML5VideoPlayer.exe	Horizon
C:\Program Files (x86)\Common Files\VMware\USB\vmware-usbarbitrator.exe	Horizon
C:\Program Files (x86)\Common Files\VMware\USB\vmware-usbarbitrator64.exe	Horizon
C:\Program Files (x86)\Common Files\VMware\USB\vnetlib.exe	Horizon
C:\Program Files (x86)\Common Files\VMware\USB\vnetlib64.exe	Horizon
C:\Program Files (x86)\Common Files\VMware\USB\DriverCache\vnetlib.exe	Horizon
C:\Program Files (x86)\Common Files\VMware\USB\DriverCache\vnetlib64.exe	Horizon
C:\Program Files\Common Files\VMware\DeviceRedirectionCommon\ftnlping.exe	Horizon
C:\Program Files\Common Files\VMware\DeviceRedirectionCommon\ftnlsv.exe	Horizon
C:\Program Files\Common Files\VMware\ScannerRedirection\diagutil.exe	Horizon
C:\Program Files\Common Files\VMware\ScannerRedirection\ftscanmgrhv.exe	Horizon
C:\Program Files\Common Files\VMware\ScannerRedirection\scan.exe	Horizon

Path	VMware Solution
`C:\Program Files\Common Files\VMware\ScannerRedirection\scan64.exe`	Horizon
`C:\Program Files\Common Files\VMware\SerialPortRedirection\Client\vmwsprrdpwks.exe`	Horizon

Data deduplication in Microsoft Windows Server

If data deduplication is enabled in the Microsoft Windows Server operating system on which Kaspersky Endpoint Security is installed, you need to a predefined trusted application to the list of trusted applications to optimize Kaspersky Endpoint Security and reduce CPU load.

Predefined trusted applications

Path	Microsoft Windows Server version
`%SystemRoot%\system32\fsdmhost.exe`	All supported versions

Managing Backup

Backup stores backup copies of files that were deleted or modified during disinfection. A *backup copy* is a file copy created before the file was disinfected or deleted. Backup copies of files are stored in a special format and do not pose a threat.

Backup copies of files are stored in the folder `C:\ProgramData\Kaspersky Lab\KES.14.2\QB`.

Users in the Administrators group are granted full permission to access this folder. Limited access rights to this folder are granted to the user whose account was used to install Kaspersky Endpoint Security.

> Kaspersky Endpoint Security does not provide the capability to configure user access permissions to backup copies of files.

Sometimes it is not possible to maintain the integrity of files during disinfection. If you partially or completely lose access to important information in a disinfected file after disinfection, you can attempt to restore the file from its backup copy to its original folder.

If Kaspersky Endpoint Security is running under the management of Kaspersky Security Center, backup copies of files may be transmitted to the Kaspersky Security Center Administration Server. For more details about managing backup copies of files in Kaspersky Security Center, please refer to the Kaspersky Security Center Help system.

Configuring the maximum storage period for files in Backup

The default maximum storage period for copies of files in Backup is 30 days. After expiration of the maximum storage term, Kaspersky Endpoint Security deletes the oldest files from Backup.

To configure the maximum storage period for files in Backup:

1. In the main application window, click the ⚙ button.

2. In the application settings window, under **General settings** click the **Reports and Storage** tile.

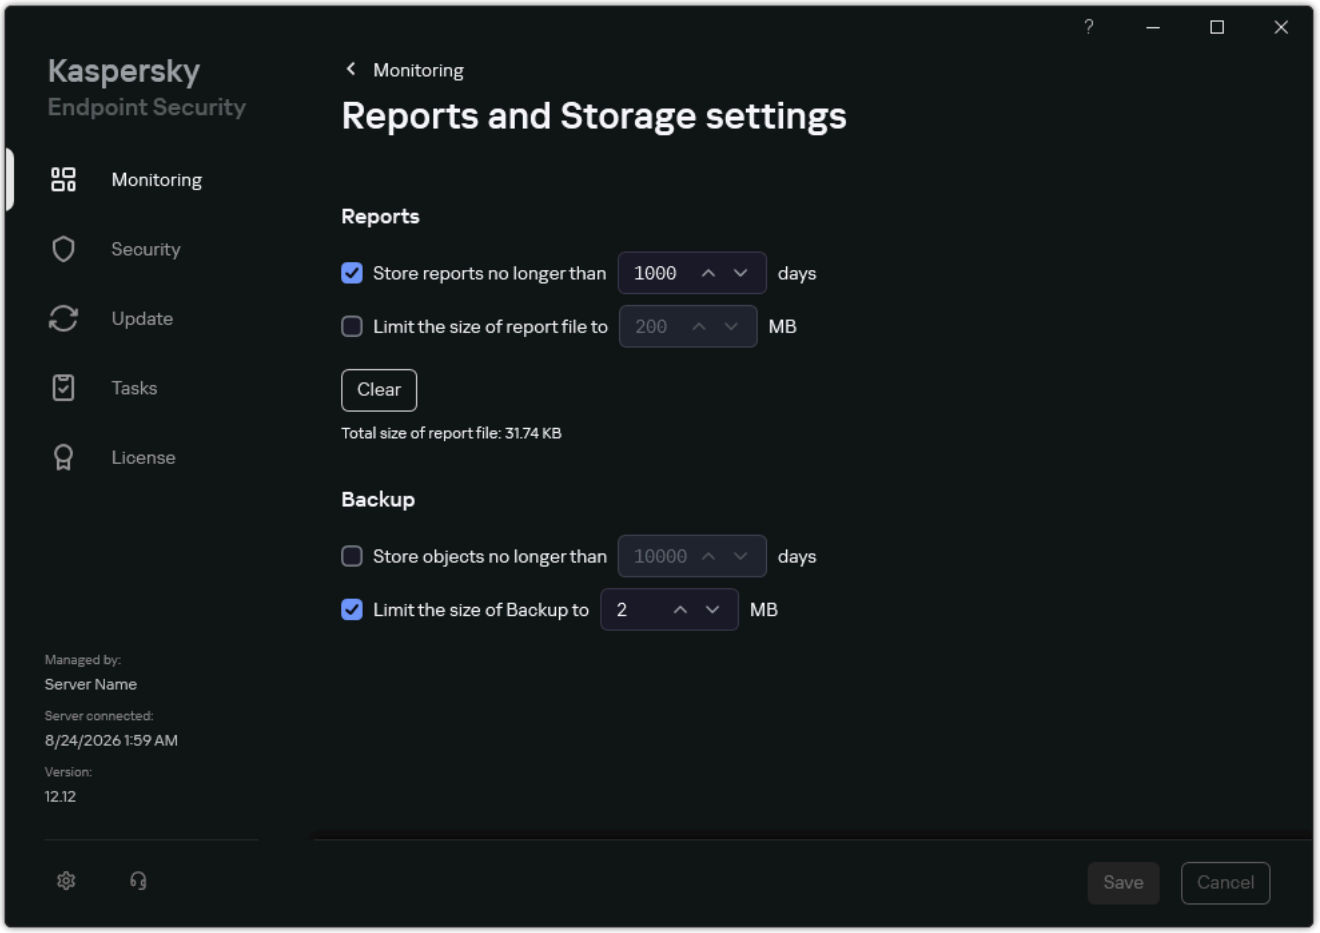

Backup settings

3. If you want to limit the storage period for copies of files in Backup, select the **Store objects no longer than N days** check box in the **Backup** block. Enter the maximum storage duration for copies of files in Backup.

4. Save your changes.

Configuring the maximum size of Backup

You can specify the maximum size of Backup. The size of Backup is unlimited by default. After the maximum size is reached, Kaspersky Endpoint Security automatically deletes the oldest files from Backup.

To configure the maximum size of Backup:

1. In the main application window, click the ⚙ button.

2. In the application settings window, under **General settings** click the **Reports and Storage** tile.

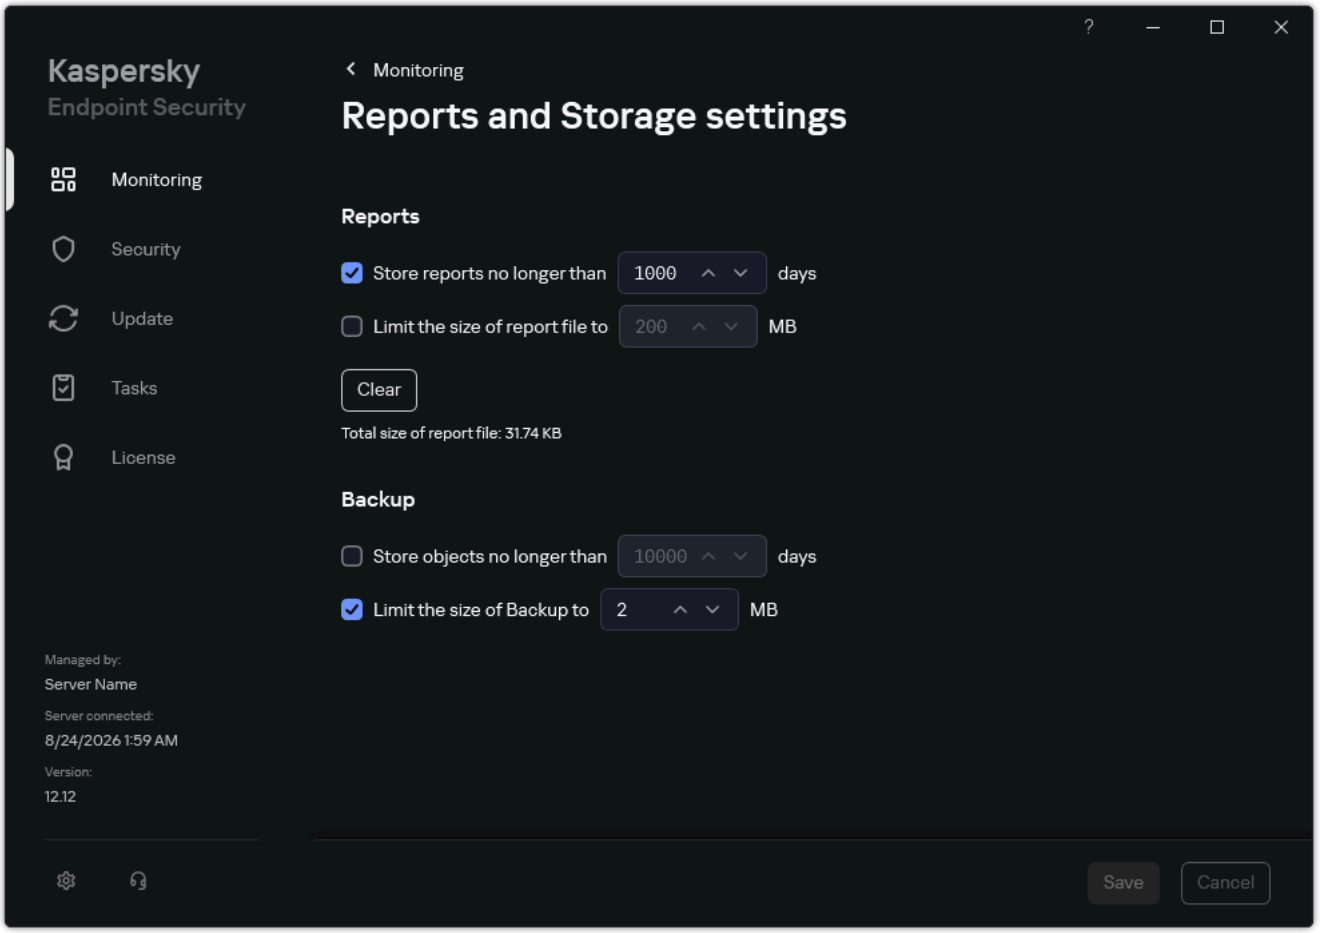

Backup settings

3. In the **Backup** block, select the **Limit the size of Backup to N MB** check box. If the check box is selected, the maximum storage size is limited to the defined value. By default, the maximum size is 1024 MB. To avoid exceeding the maximum storage size, Kaspersky Endpoint Security automatically deletes the oldest files from storage when the maximum storage size is reached.

4. Save your changes.

Restoring files from Backup

If malicious code is detected in a file, Kaspersky Endpoint Security blocks the file, assigns the *Not disinfected* status to it, places a copy of it in Backup, and attempts to disinfect it. If file disinfection succeeds, the status of the backup copy of the file changes to *Disinfected*. The file becomes available in its original folder. If a file cannot be disinfected, Kaspersky Endpoint Security deletes it from its original folder. You can restore the file from its backup copy to its original folder.

Files with the *Will be deleted on computer restart* status cannot be restored. Restart the computer, and the file status will change to *Disinfected* or *Deleted*. You can also restore the file from its backup copy to its original folder.

> Upon detecting malicious code in a file that is part of the Windows Store application, Kaspersky Endpoint Security immediately deletes the file without moving a copy of the file to Backup. You can restore the integrity of the Windows Store application by using the appropriate tools of the operating system (see the Microsoft Windows help files for details on restoring a Windows Store application).

The set of backup copies of files is presented as a table. For a backup copy of a file, the path to the original folder of the file is displayed. The path to the original folder of the file may contain personal data.

> If several files with identical names and different content located in the same folder are moved to Backup, only the file that was last placed in Backup can be restored.

To restore files from Backup:

1. In the main application window, in the **Monitoring** section, click the **Backup** tile.
2. This opens the list of files in Backup; in that list, select the files that you want to restore and click **Restore**.

   Kaspersky Endpoint Security restores files from the selected backup copies to their original folders.

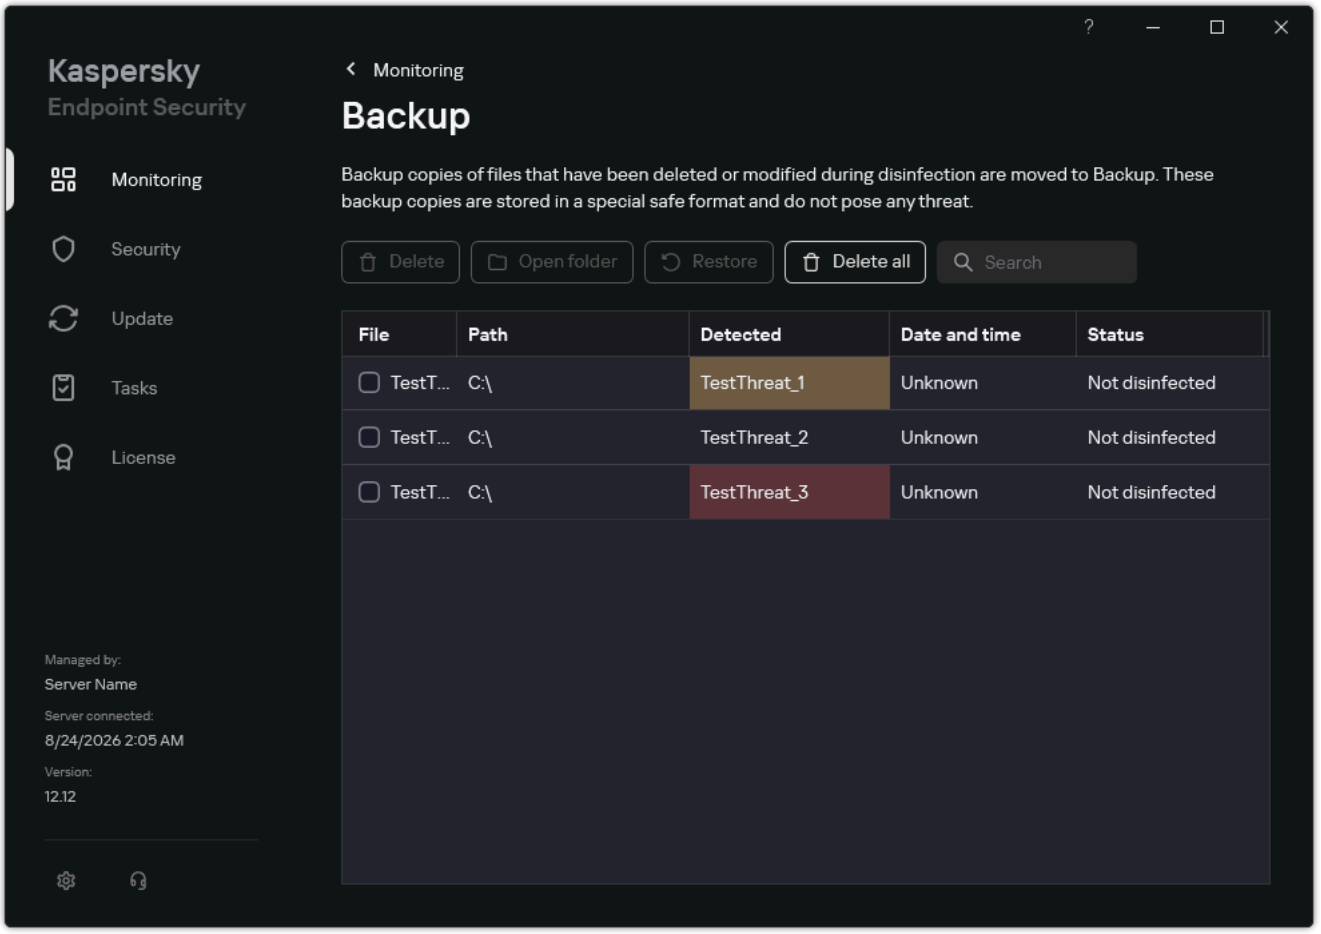

Backup

Deleting backup copies of files from Backup

Kaspersky Endpoint Security automatically deletes backup copies of files with any status from Backup after the storage term configured in application settings has elapsed. You can also manually delete any copy of a file from Backup.

To delete backup copies of files from Backup:

1. In the main application window, in the **Monitoring** section, click the **Backup** tile.

2. This opens the list of files in Backup; in this list, select files that you want to delete from Backup and click **Delete**.

Kaspersky Endpoint Security deletes the selected backup copies of files from Backup.

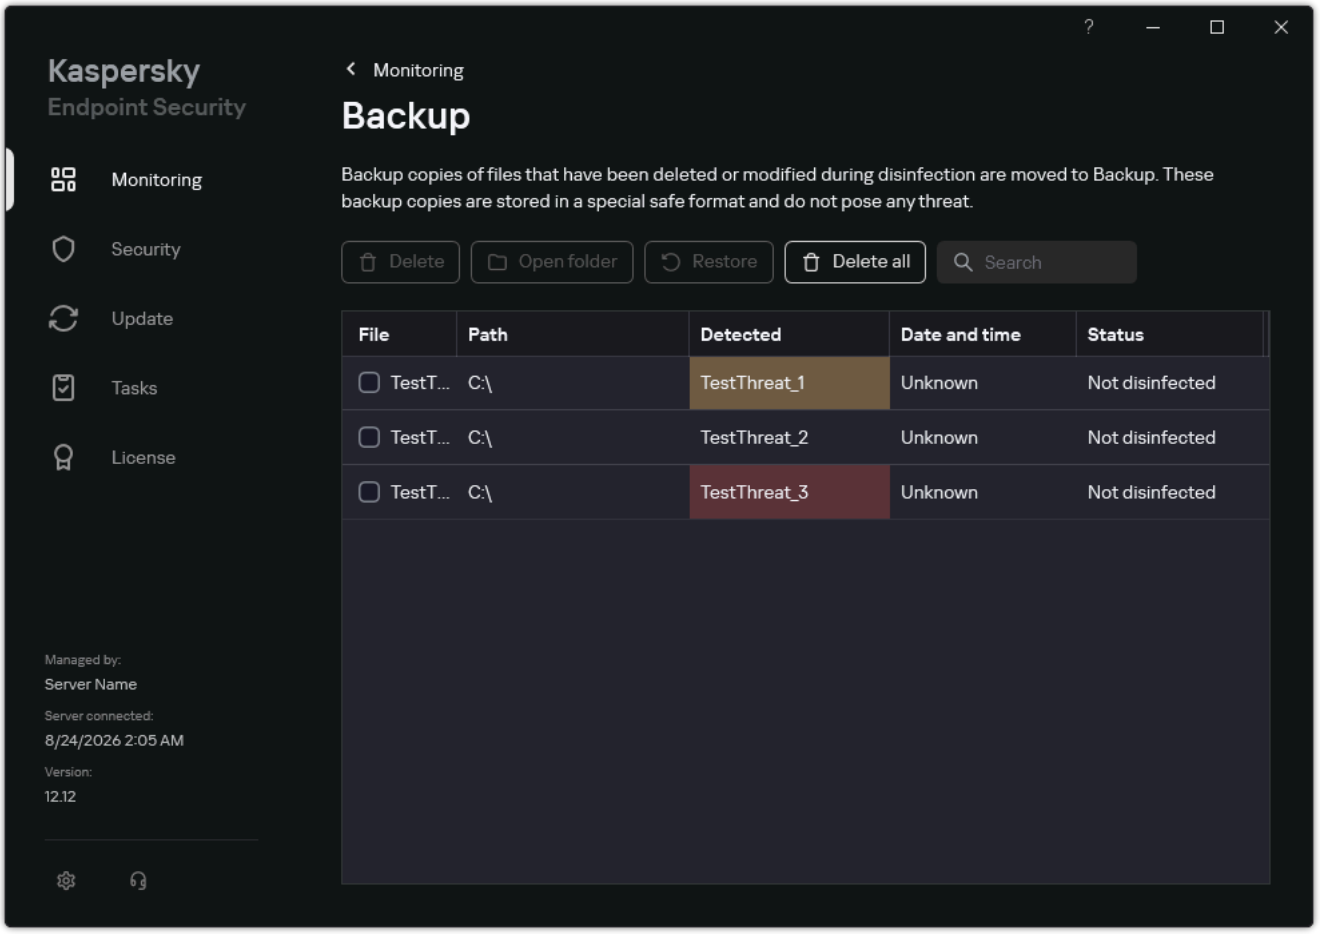

Backup

Notification service

All sorts of events occur during the operation of Kaspersky Endpoint Security. Notifications of these events can be either be purely informational or contain critical information. For example, notifications may inform of a successful database and application modules update or log component errors that need remedying.

Kaspersky Endpoint Security supports the logging of information about events in the operation of the Microsoft Windows application log and / or the Kaspersky Endpoint Security event log.

Kaspersky Endpoint Security delivers notifications in the following ways:

- using pop-up notifications in the Microsoft Windows taskbar notification area;
- by email.

You can configure the delivery of event notifications. The method of notification delivery is configured for each type of event.

When using the table of events to configure the notification service, you can perform the following actions:

- Filter notification service events by column values or by custom filter conditions.
- Use the search function for notification service events.
- Sort notification service events.
- Change the order and set of columns that are displayed in the list of notification service events.

Configuring event log settings

To configure event log settings:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Interface**.
3. In the **Notifications** block, click the **Configure notifications** button.

   Kaspersky Endpoint Security components and tasks are shown in the left part of the window. The right part of the window lists the events generated for the selected component or task.

   Events may contain the following user data:

   - Paths to files scanned by Kaspersky Endpoint Security.
   - Paths to registry keys modified during the operation of Kaspersky Endpoint Security.
   - Microsoft Windows user name.
   - Addresses of web pages opened by the user.

4. In the left part of the window, select the component or task for which you want to configure the event log settings.

5. Select check boxes opposite the relevant events in the **Save in local report** and **Save in Windows Event Log** columns.

   Events whose check boxes are selected in the **Save in local report** column are displayed in the application logs. Events that have the check box in the **Save in Windows Event Log** column selected are displayed in Windows logs in the `Application` channel.

6. Save your changes.

Configuring the display and delivery of notifications

To configure the display and delivery of notifications:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Interface**.

3. In the **Notifications** block, click the **Configure notifications** button.

   Kaspersky Endpoint Security components and tasks are shown in the left part of the window. The right part of the window lists the events generated for the selected component or task.

   Events may contain the following user data:

   - Paths to files scanned by Kaspersky Endpoint Security.
   - Paths to registry keys modified during the operation of Kaspersky Endpoint Security.
   - Microsoft Windows user name.
   - Addresses of web pages opened by the user.

4. In the left part of the window, select the component or task for which you want to configure the delivery of notifications.

5. In the **Notify on screen** column, select check boxes next to relevant events.

   Information about the selected events is displayed on the screen as pop-up messages in the Microsoft Windows taskbar notification area.

6. In the **Notify by email** column, select check boxes next to relevant events.

   Information about the selected events is delivered by email if the mail notification delivery settings are configured.

7. Click **OK**.

8. If you enabled email notifications, configure the settings for email delivery:

   a. Click **Configure email notifications**.

   b. Select the **Notify about events** check box to enable delivery of information about Kaspersky Endpoint Security events selected in the **Notify by email** column.

c. Specify the email notification delivery settings.

d. Click **OK**.

9. Save your changes.

Configuring the display of warnings about the application status in the notification area

To configure the display of application status warnings in the notification area:

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Interface**.

3. In the **Show application's status in notifications area** block, select the check boxes opposite those categories of events about which you want to see notifications in the notification area of Microsoft Windows.

4. Save your changes.

When events associated with the selected categories occur, the application icon in the notification area will change to or depending on the severity of the warning.

Messaging between users and the administrator

The Application Control, Device Control, Web Control and Adaptive Anomaly Control components enable LAN users whose computers have Kaspersky Endpoint Security installed to send messages to the administrator.

A user may need to send a message to the local corporate network administrator in the following cases:

- Device Control blocked access to the device.

  The message template for a request to access a blocked device is available in the Kaspersky Endpoint Security interface in the Device Control section.

- Application Control blocked the startup of an application.

  The message template for a request to allow the startup of a blocked application is available in the Kaspersky Endpoint Security interface in the Application Control section.

- Web Control blocked access to a web resource.

  The message template for a request to access a blocked web resource is available in the Kaspersky Endpoint Security interface in the Web Control section.

The method used to send messages and the utilized template depends on whether or not there is an active Kaspersky Security Center policy running on the computer that has Kaspersky Endpoint Security installed, and whether or not there is a connection with the Kaspersky Security Center Administration Server. The following scenarios are possible:

- If a Kaspersky Security Center policy is not running on the computer that has Kaspersky Endpoint Security installed, a user's message is sent to the local area network administrator by email.

  The message fields are populated with the values of fields from the template defined in the local interface of Kaspersky Endpoint Security.

- If a Kaspersky Security Center policy is running on the computer that has Kaspersky Endpoint Security installed, the standard message is sent to the Kaspersky Security Center Administration Server.

  In this case, user messages are available for viewing in the Kaspersky Security Center event storage (see instruction below). The message fields are populated with the values of fields from the template defined in the Kaspersky Security Center policy.

- If a Kaspersky Security Center out-of-office policy is running on the computer with Kaspersky Endpoint Security installed, the method used to send messages depends on whether or not there is a connection with Kaspersky Security Center.

  - If a connection with Kaspersky Security Center is established, Kaspersky Endpoint Security sends the standard message to the Kaspersky Security Center Administration Server.

  - If a connection with Kaspersky Security Center is absent, a user's message is sent to the local area network administrator by email.

  In both cases, the message fields are populated with the values of fields from the template defined in the Kaspersky Security Center policy.

To view a user message in the Kaspersky Security Center event storage:

1. Open the Kaspersky Security Center Administration Console.

2. In the **Administration Server** node of the Administration Console tree, select the **Events** tab.

   The Kaspersky Security Center workspace displays all events occurring during the operation of Kaspersky Endpoint Security, including messages to the administrator that are received from LAN users.

3. To configure the event filter, in the **Event selections** drop-down list, select **User requests**.

4. Select the message sent to the administrator.

5. Click the **Open event properties window** button in the right part of the Administration Console workspace.

Managing reports

Information about the operation of each Kaspersky Endpoint Security component, data encryption events, the performance of each scan task, the update task and integrity check task, and the overall operation of the application is recorded in reports.

Reports are stored in the folder `C:\ProgramData\Kaspersky Lab\KES.14.2\Report`.

Reports may contain the following user data:

- Paths to files scanned by Kaspersky Endpoint Security.
- Paths to registry keys modified during the operation of Kaspersky Endpoint Security.
- Microsoft Windows user name.
- Addresses of web pages opened by the user.

The data in the report is presented in tabular form. Each table row contains information on a separate event. Event attributes are located in the table columns. Certain columns are compound ones which contain nested columns with additional attributes. To view additional attributes, click the ⊞ button next to the name of the column. Events that are logged during the operation of various components or during the performance of various tasks have different sets of attributes.

The following reports are available:

- **System audit** report. Contains information about events occurring during the interaction between the user and the application and in the course of application operation in general, which are unrelated to any particular Kaspersky Endpoint Security components or tasks.
- Reports on the operation of Kaspersky Endpoint Security components.
- Kaspersky Endpoint Security task reports.
- **Data Encryption** report. Contains information about events occurring during data encryption and decryption.

Reports use the following event importance levels:

ⓘ **Informational messages**. Reference events that normally do not contain important information.

⚠ **Warnings**. Events that need attention because they reflect important situations in the operation of Kaspersky Endpoint Security.

⊘ **Critical events**. Events of critical importance that indicate problems in the operation of Kaspersky Endpoint Security or vulnerabilities in the protection of the user's computer.

For convenient processing of reports, you can modify the presentation of data on the screen in the following ways:

- Filter the event list by various criteria.
- Use the search function to find a specific event.

- View the selected event in a separate section.
- Sort the list of events by each report column.
- Display and hide events grouped by the event filter using the ⊞ button.
- Change the order and arrangement of columns that are shown in the report.

You can save a generated report to a text file, if necessary. You can also delete report information on Kaspersky Endpoint Security components and tasks that are combined into groups.

If Kaspersky Endpoint Security is running under the management of Kaspersky Security Center, information about events may be relayed to the Kaspersky Security Center Administration Server (for more details, please refer to the Kaspersky Security Center Help).

Viewing reports

If a user can view reports, the user can also view all events reflected in the reports.

To view reports:

1. In the main application window, in the **Monitoring** section, click the **Reports** tile.

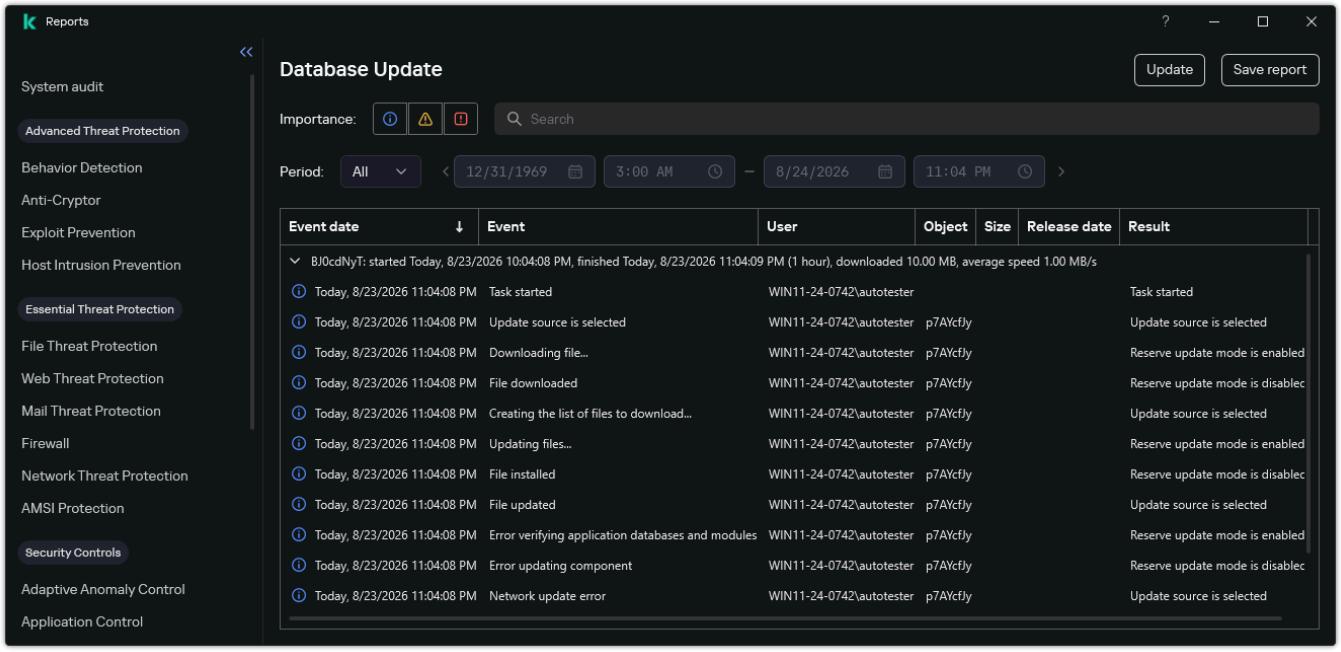

Reports

2. In the list of components and tasks, select a component or task.

   The right part of the window displays a report containing a list of events resulting from the operation of the selected component or selected task of Kaspersky Endpoint Security. You can sort events in the report based on the values in cells of one of the columns.

3. To view detailed information about an event, select the event in the report.

   A block with the event summary is displayed in the lower part of the window.

Configuring the maximum report storage term

The default maximum storage term for reports on events that are logged by Kaspersky Endpoint Security is 30 days. After that period of time, Kaspersky Endpoint Security automatically deletes the oldest entries from the report file.

To modify the report maximum storage term:

1. In the main application window, click the ⚙ button.

2. In the application settings window, under **General settings** click the **Reports and Storage** tile.

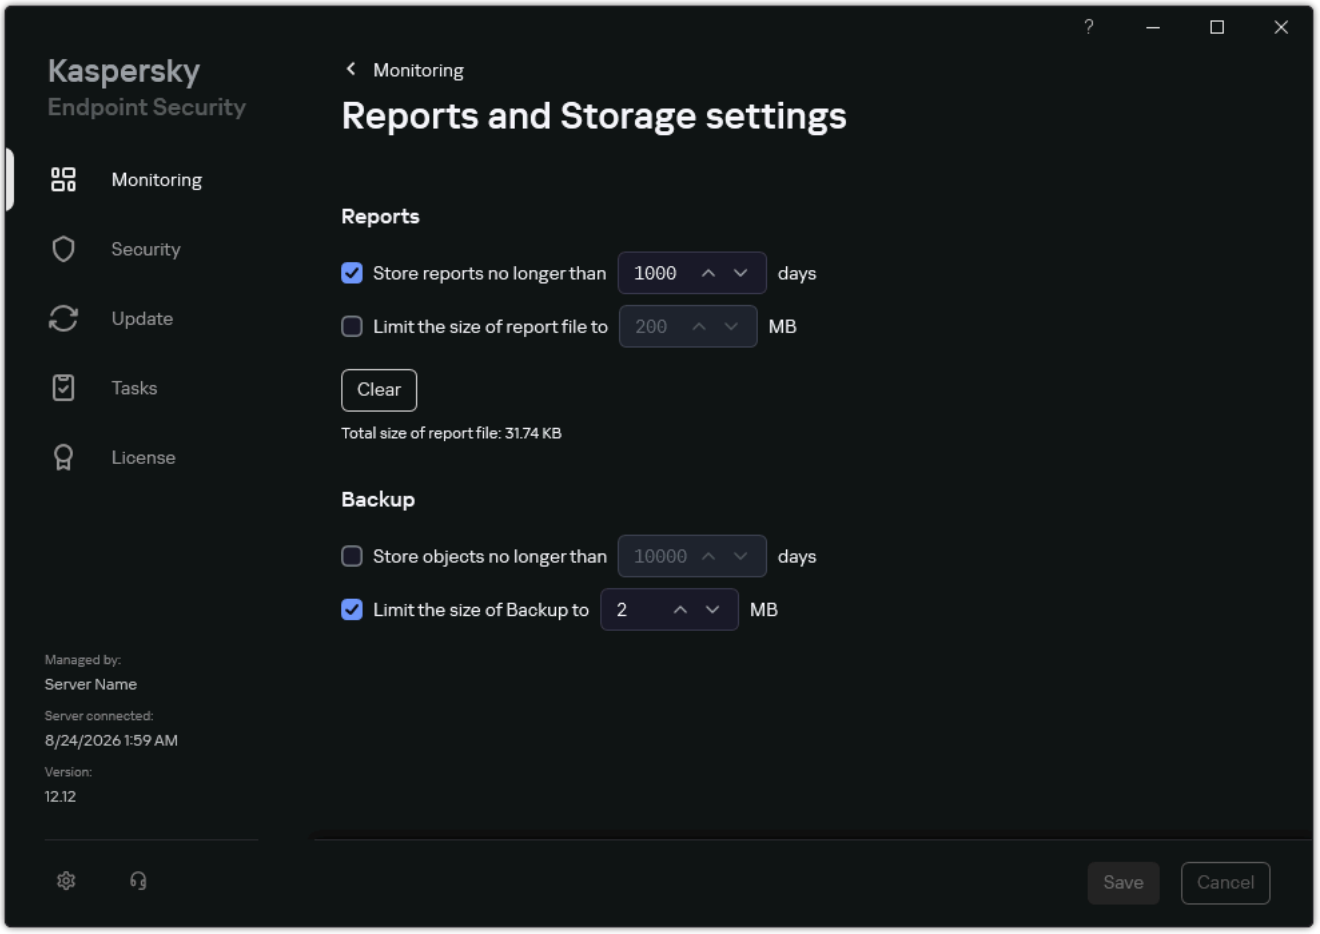

Report settings

3. If you want to limit the report storage term, select the **Store reports no longer than N days** check box in the **Reports** block. Define the maximum report storage term.

4. Save your changes.

Configuring the maximum size of the report file

You can specify the maximum size of the file that contains the report. By default, the maximum report file size is 1024 MB. To avoid exceeding the maximum report file size, Kaspersky Endpoint Security automatically deletes the oldest entries from the report file when the maximum report file size is reached.

To configure the maximum report file size:

1. In the main application window, click the ⚙ button.

2. In the application settings window, under **General settings** click the **Reports and Storage** tile.

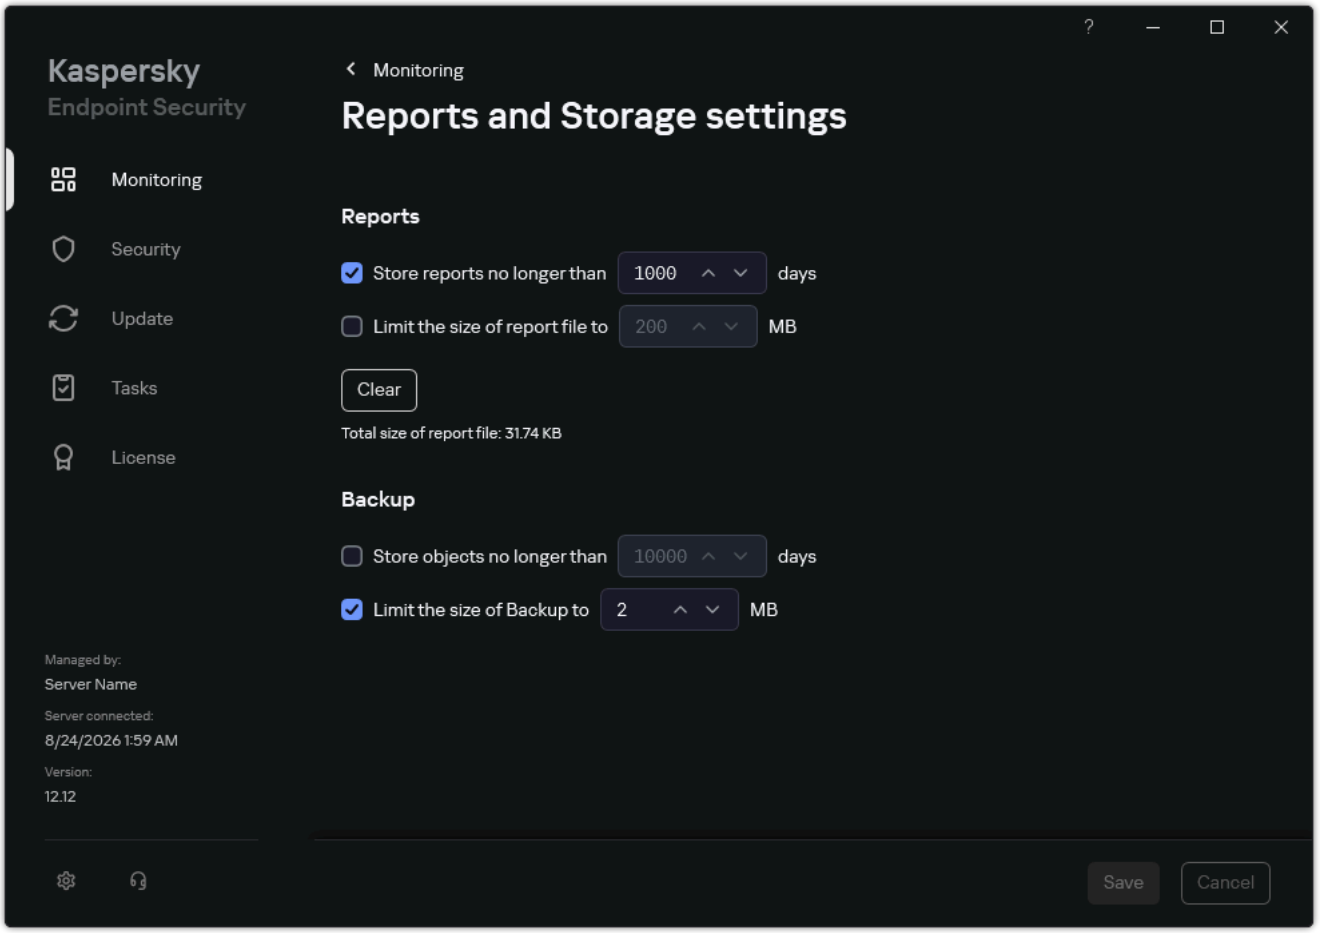

Report settings

3. In the **Reports** block, select the **Limit the size of report file to N MB** check box if you want to limit the size of a report file. Define the maximum size of the report file.

4. Save your changes.

Saving a report to file

The user is personally responsible for ensuring the security of information from a report saved to file, and particularly for controlling and restricting access to this information.

You can save the report that you generate to a file in text format (TXT) or a CSV file.

Kaspersky Endpoint Security logs events in the report in the same way as they are displayed on the screen: in other words, with the same set and sequence of event attributes.

To save a report to file:

1. In the main application window, in the **Monitoring** section, click the **Reports** tile.

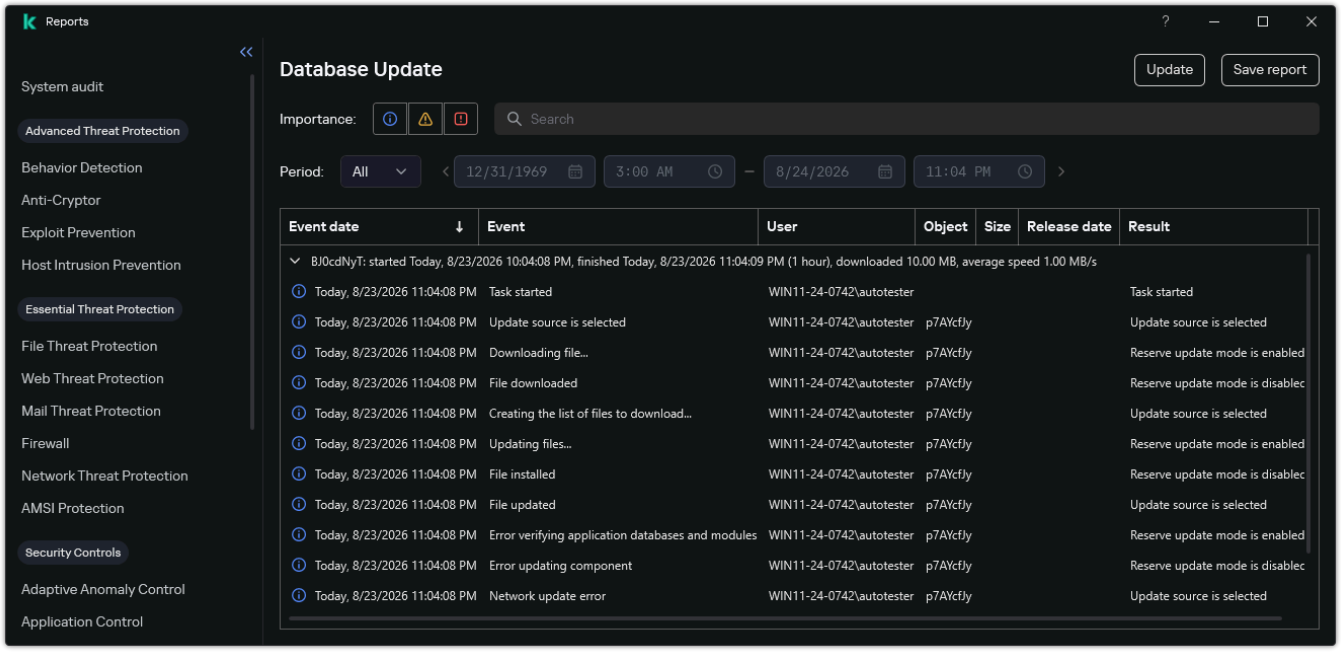

Reports

2. This opens a window; in this window, select the component or task.

   A report is displayed in the right part of the window, which contains a list of events in the operation of the selected Kaspersky Endpoint Security component or task.

3. If necessary, you can modify data presentation in the report by:

   - Filtering events
   - Running an event search
   - Rearranging columns
   - Sorting events

4. Click the **Save report** button in the upper right part of the window.

5. In the window that opens, specify the destination folder for the report file.

6. Enter the name of the report file.

7. Select the necessary report file format: TXT or CSV.

8. Save your changes.

Clearing reports

To remove information from reports:

1. In the main application window, click the ⚙ button.

2. In the application settings window, under **General settings** click the **Reports and Storage** tile.

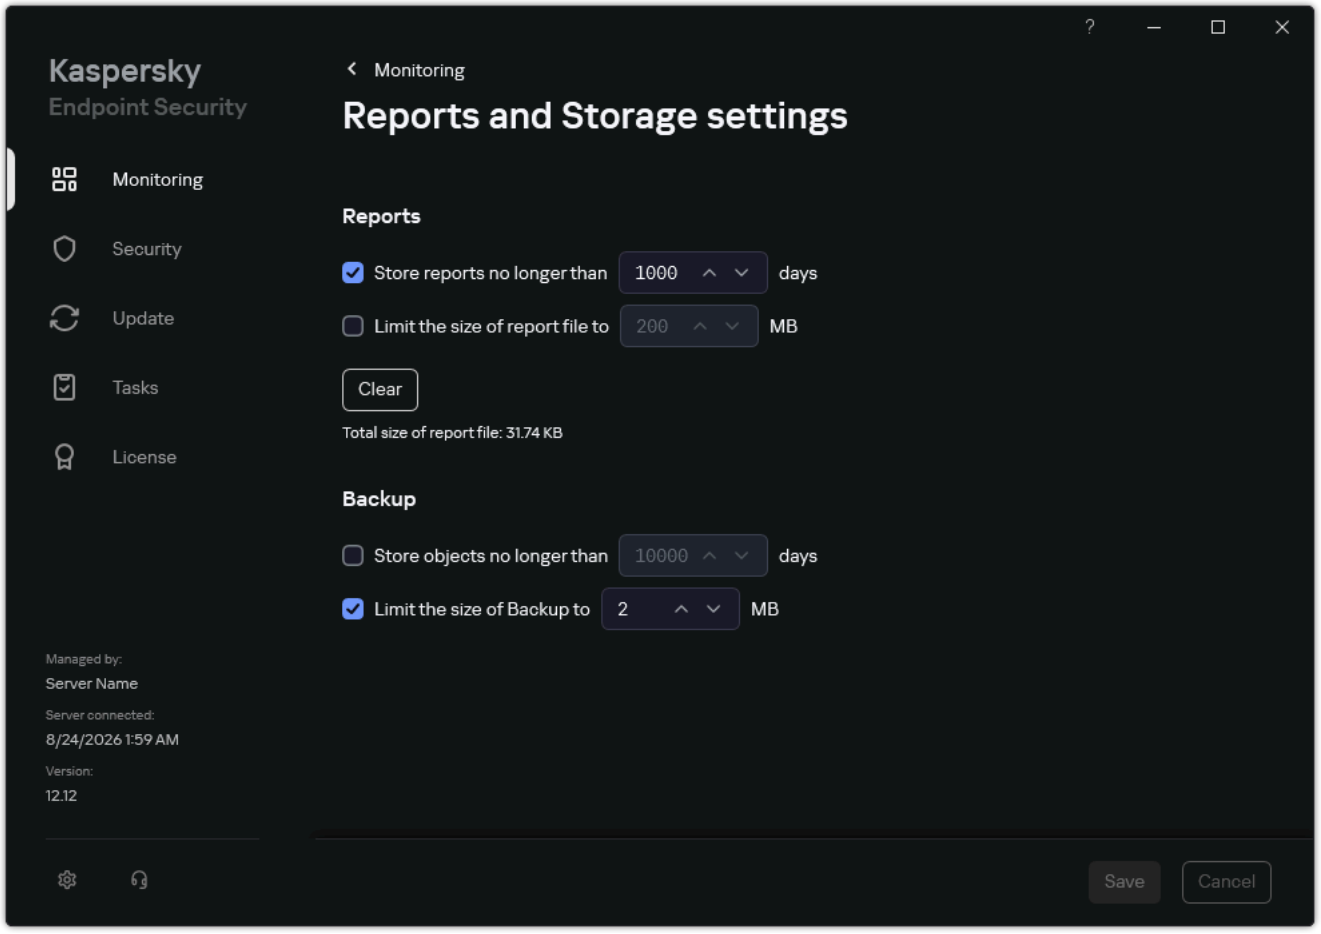

Report settings

3. In the **Reports** block, click the **Clear** button.

4. If Password Protection is enabled, Kaspersky Endpoint Security may prompt you for user account credentials. The application prompts for account credentials if the user does not have the required permission.

Kaspersky Endpoint Security will delete all reports for all application components and tasks.

Kaspersky Endpoint Security Self-Defense

Self-Defense prevents other applications from performing actions that can interfere with the operation of Kaspersky Endpoint Security and, for example, remove Kaspersky Endpoint Security from the computer. The set of available Self-Defense technologies for Kaspersky Endpoint Security depends on whether the operating system is 32-bit or 64-bit (refer to the table below). Self-Defense also includes Password protection and Administration Server connection protection.

Password protection lets you restrict users' access to Kaspersky Endpoint Security according to the permissions granted to them (for example, permission to exit the application).

Administration Server connection protection prevents unauthorized reconnection of the computer to an untrusted server.

Kaspersky Endpoint Security Self-Defense technologies

Technology	Description	x86 computer	x64 computer
Self-Defense mechanism	The technology blocks access to the following application components: • files in the Kaspersky Endpoint Security installation folder and other files of the application; • registry keys with records belonging to the application; • processes that the application runs.	✓	✓
AM-PPL (Antimalware Protected Process Light)	The technology protects Kaspersky Endpoint Security processes against malicious actions. For more details about AM-PPL technology, please visit the Microsoft website. AM-PPL technology is available for Windows 10 version 1703 (RS2) or later, and Windows Server 2019 operating systems.	✓	✓
External management defense mechanism	This technology prevents other applications (for example, TeamViewer or RemotelyAnywhere) from gaining access to Kaspersky Endpoint Security.	✓	– (except for Windows 7)

Enabling and disabling Self-Defense

Kaspersky Endpoint Security prevents alteration or deletion of application files on the hard drive, memory processes, and entries in the system registry.

The technology blocks access to the following application components:

- files in the Kaspersky Endpoint Security installation folder and other files of the application;
- registry keys with records belonging to the application;
- processes that the application runs.

Self-defense mechanisms do not apply to Kaspersky Endpoint Security processes initiated by untrusted parent processes.

The Self-Defense mechanism of Kaspersky Endpoint Security is enabled by default.

How to enable or disable Self-Defense in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Application settings**.
4. Use the **Enable Self-Defense** check box to enable or disable the Self-Defense mechanism.
5. Save your changes.

How to enable or disable Self-Defense in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Self-Defense**.
5. Use the **Self-Defense ENABLED** toggle switch to enable or disable the Self-Defense mechanism.
6. Save your changes.

How to enable or disable Self-Defense in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Application settings**.

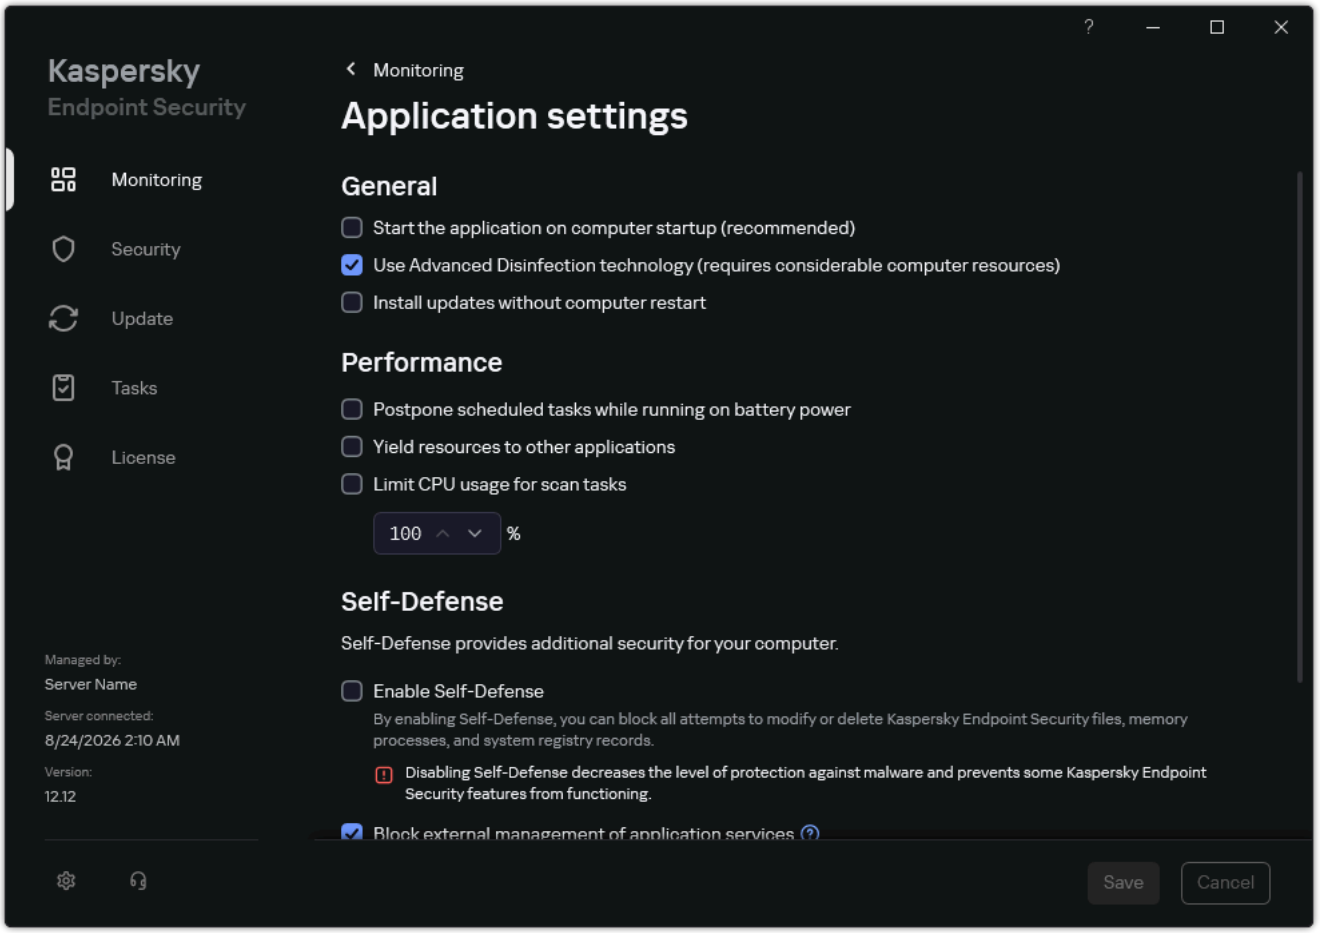

Kaspersky Endpoint Security for Windows settings

3. Use the **Enable Self-Defense** check box to enable or disable the Self-Defense mechanism.

4. Save your changes.

Enabling and disabling AM-PPL support

Kaspersky Endpoint Security supports Antimalware Protected Process Light technology (hereinafter referred to as "AM-PPL") from Microsoft. AM-PPL protects Kaspersky Endpoint Security processes against malicious actions (for example, terminating the application). AM-PPL allows only trusted processes to run. Kaspersky Endpoint Security processes are signed in accordance with Windows security requirements, and therefore they are trusted. For more details about AM-PPL technology, please visit the Microsoft website. AM-PPL technology is enabled by default.

Kaspersky Endpoint Security also has built-in mechanisms for protecting application processes. AM-PPL support lets you delegate process security functions to the operating system. You can thereby increase the speed of the application and reduce the consumption of computer resources.

Use the AM-PPL technology continuously. AM-PPL is an important component of operating system protection. Disabling AM-PPL support may cause some Kaspersky Endpoint Security features to fail (for example, the integration of the application with the Windows Security Center). Disabling AM-PPL support is allowed only in a separate test environment for troubleshooting purposes.

AM-PPL technology is available for Windows 10 version 1703 (RS2) or later, and Windows Server 2019 operating systems.

To enable or disable AM-PPL technology:

1. Turn off the application's Self-Defense mechanism.

   The Self-Defense mechanism prevents modification and deletion of application processes in the computer memory, including changing the AM-PPL status.

2. Run the command line interpreter (cmd.exe) as an administrator.

3. Go to the folder where the Kaspersky Endpoint Security executable file is located.

   You can add path to the executable file to the %PATH% system variable during application installation.

4. Type the following in the command line:

   - `klpsm.exe enable` – enable support for AM-PPL technology (see the figure below).
   - `klpsm.exe disable` – disable support for AM-PPL technology.

5. Restart Kaspersky Endpoint Security.

6. Resume the application's Self-Defense mechanism.

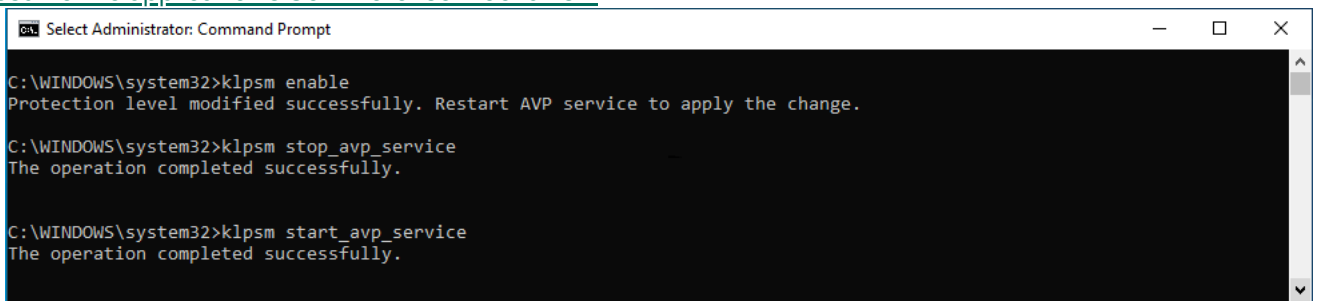

Enabling support for AM-PPL technology

Protection of application services against external management

Protection of application services against external management blocks attempts by users and other applications to stop Kaspersky Endpoint Security services. Protection ensures the operation of the following services:

- Kaspersky Endpoint Security service (AVP.KES.14.2)
- Kaspersky Seamless Update Service service (AVPSUS.KES.14.2)

To quit the application from the command line, disable the protection of Kaspersky Endpoint Security services against external management.

You can allow external management of application services only on computers that do not support the AM-PPL technology or on computers that have the technology disabled.

How to enable or disable Protection of application services against external management in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Application settings**.
4. Use the **Block external management of application services** check box to enable or disable the protection of Kaspersky Endpoint Security services against external management.
5. Save your changes.

How to enable or disable Protection of application services against external management in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Self-Defense**.
5. Use the **Block external management of application services** check box to enable or disable the protection of Kaspersky Endpoint Security services against external management.
6. Save your changes.

How to enable or disable Protection of application services against external management in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Application settings**.

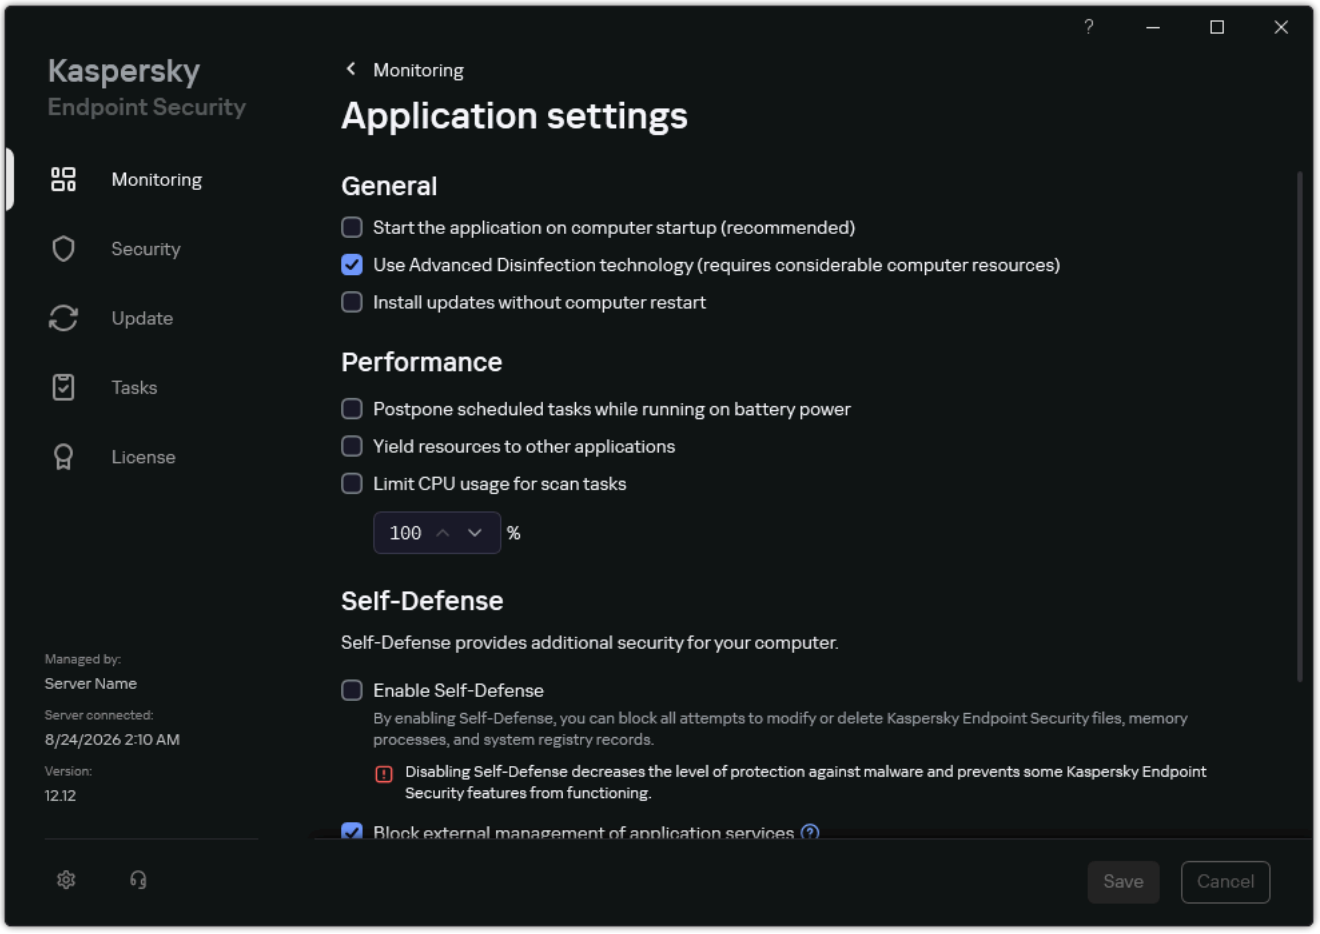

Kaspersky Endpoint Security for Windows settings

3. Use the **Block external management of application services** check box to enable or disable the protection of Kaspersky Endpoint Security services against external management.

4. Save your changes.

As a result, when a user attempts to stop application services, a system window with an error message appears. The user can only manage application services from the Kaspersky Endpoint Security interface.

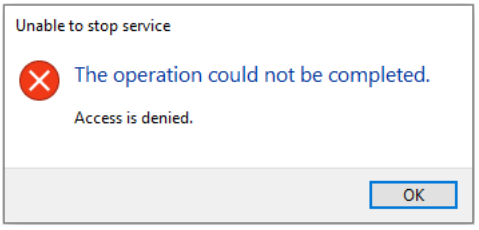

Application services access error

Supporting remote administration applications

You may occasionally need to use a remote administration application while external management defense is enabled.

To enable the operation of remote administration applications:

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Exclusions and types of detected objects**.
3. In the **Exclusions** block, click the **Specify trusted applications** link.
4. In the window that opens, click the **Add** button.
5. Select the executable file of the remote administration application.

   You can also enter the path manually. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.
6. Select the **Allow interaction with the Kaspersky Endpoint Security interface** check box.
7. Save your changes.

Password protection

Multiple users with different levels of computer literacy can share a computer. If users have unrestricted access to Kaspersky Endpoint Security and its settings, the overall level of computer protection may be reduced. Password protection lets you restrict users' access to Kaspersky Endpoint Security according to the permissions granted to them (for example, permission to exit the application).

If the user that started the Windows session (*session user*) has the permission to perform the action, Kaspersky Endpoint Security does not request the user name and password or a temporary password. The user receives access to Kaspersky Endpoint Security in accordance with the granted permissions.

If a session user does not have the permission to perform an action, the user can obtain access to the application in the following ways:

- Enter a user name and password.

  This method is suitable for day-to-day operations. To perform a password-protected action, you must enter the domain account credentials of the user with the required permission. In this case, the computer must be in that domain. If the computer is not in the domain, you can use the KLAdmin account or an account added manually.

- Enter a temporary password.

  This method is suitable for granting temporary permissions to perform blocked actions (for example, exiting the application) to users outside the corporate network. When a temporary password expires or a session ends, Kaspersky Endpoint Security reverts its settings to their previous state.

- Token.

  This method is suitable for privileged users (such as technical support staff). Token authentication allows using the smart card logon mode in Active Directory. This improves the security of the organization's infrastructure.

When a user attempts to perform a password-protected action, Kaspersky Endpoint Security prompts the user for a user name and password, token password, or temporary password (see the figure below).

> In the password entry window, you can switch languages only by pressing **ALT+SHIFT**. Using other shortcuts, even if they are configured in the operating system, do not work for switching languages.

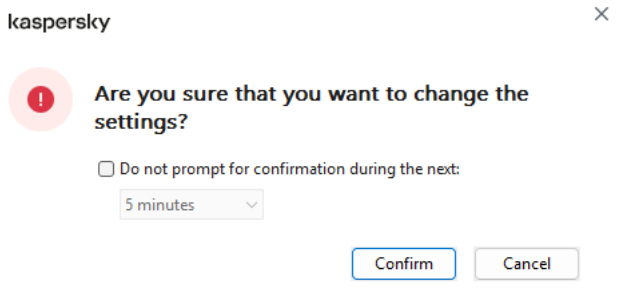

Kaspersky Endpoint Security access password prompt

User name and password

To access Kaspersky Endpoint Security, you should enter account credentials. Password protection supports the following accounts:

- **KLAdmin**. An Administrator account with unrestricted access to Kaspersky Endpoint Security. The KLAdmin account has the right to perform any action that is password-protected. The permissions for the KLAdmin account cannot be revoked. When you enable password protection, Kaspersky Endpoint Security prompts you to set a password for the KLAdmin account.

- **Account added manually**. An account outside the Active Directory domain. You can use this service account instead of KLAdmin if you do not want to share the administrator password. You can set any user name and password and configure individual permissions.

- **The Everyone group**. A built-in Windows group that includes all users within the corporate network. Users in the Everyone group can access the application according to the permissions that are granted to them.

- **Individual users or groups**. User accounts for which you can configure individual permissions. For example, if an action is blocked for the Everyone group, you can allow this action for an individual user or a group.

- **Session user**. Account of the user who started the Windows session. You can switch to another session user when prompted for a password (the **Save password for current session** check box). In this case, Kaspersky Endpoint Security regards the user whose account credentials were entered as the session user instead of the user who started the Windows session.

Temporary password

A temporary password can be used to grant temporary access to Kaspersky Endpoint Security for an individual computer outside of the corporate network. The Administrator generates a temporary password for an individual computer in the computer properties in Kaspersky Security Center. The Administrator selects the actions that will be protected with the temporary password, and specifies the temporary password's validity period.

Token

To access the Kaspersky Endpoint Security functionality, you must select the appropriate user certificate from the list of certificates stored on the connected token and enter your PIN. Token-based authentication is available only to users within the Active Directory domain. The administrator can configure permissions for an individual user or a group. For token-based authentication to work, you must deploy a trusted PKI infrastructure and install special software to manage the token.

Enabling Password protection

Password protection lets you restrict users' access to Kaspersky Endpoint Security according to the permissions granted to them (for example, permission to exit the application).

How to enable Password protection in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Interface**.
4. In the **Password protection** block, click the **Settings** button.

   This opens a window with Password protection settings.
5. Use the **Enable password protection** check box to enable or disable the component.
6. Under **Permissions**, select the KLAdmin account.
7. This opens a window; in that window, click **Password** and set a password for the KLAdmin account.

   The KLAdmin account has the right to perform any action that is password-protected.

   > If you forgot your KLAdmin account password, you can reset the password in policy properties.

8. Go back to the list of accounts.

9. Set permissions for all users within the corporate network:

   a. Under **Permissions**, select the "Everyone" group.

      The Everyone group is a built-in Windows group that includes all users within the corporate network.

   b. In the window that was opened, select the check boxes next to the actions that users will be allowed to perform without entering the password.

      If a check box is cleared, the users are blocked from performing the action. For example, if the check box next to the **Exit the application** permission is cleared, you can exit the application only if you are logged in as KLAdmin, or as an individual user who has the required permission, or if you enter a temporary password.

      > Password protection permissions have some important aspects to consider. Make sure that all conditions for accessing Kaspersky Endpoint Security are fulfilled.

10. Save your changes.

How to enable Password protection in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Self-Defense**.
5. Under **Password Protection**, use the **Password Protection ENABLED** toggle switch to enable or disable the component.
6. Specify the password for the KLAdmin account and confirm it.

   The KLAdmin account has the right to perform any action that is password-protected.

   > If you forgot your KLAdmin account password, you can reset the password in policy properties.

7. Go back to the list of accounts.
8. Set permissions for all users within the corporate network:

   a. In the table of accounts, select the "Everyone" group.

      The Everyone group is a built-in Windows group that includes all users within the corporate network.

   b. In the window that was opened, select the check boxes next to the actions that users will be allowed to perform without entering the password.

      If a check box is cleared, the users are blocked from performing the action. For example, if the check box next to the **Exit the application** permission is cleared, you can exit the application only if you are logged in as KLAdmin, or as an individual user who has the required permission, or if you enter a temporary password.

> Password protection permissions have some important aspects to consider. Make sure that all conditions for accessing Kaspersky Endpoint Security are fulfilled.

9. Save your changes.

How to enable Password protection in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, select **General settings** → **Interface**.
3. Use the **Password protection** toggle to enable or disable the component.
4. Specify the password for the KLAdmin account and confirm it.

   The KLAdmin account has the right to perform any action that is password-protected.

   > If a computer is running under a policy, the Administrator can reset the password for the KLAdmin account in the policy properties. If the computer is not connected to Kaspersky Security Center and you have forgotten the password for the KLAdmin account, it is not possible to recover the password.

5. Set permissions for all users within the corporate network:

   a. In the account table, click **Edit** to open the list of permissions for the Everyone group.

      The Everyone group is a built-in Windows group that includes all users within the corporate network.

   b. Select the check boxes next to the actions that users will be allowed to perform without entering the password.

      If a check box is cleared, the users are blocked from performing the action. For example, if the check box next to the **Exit the application** permission is cleared, you can exit the application only if you are logged in as KLAdmin, or as an individual user who has the required permission, or if you enter a temporary password.

      > Password protection permissions have some important aspects to consider. Make sure that all conditions for accessing Kaspersky Endpoint Security are fulfilled.

6. Save your changes.

When password protection is enabled, the application will restrict users' access to Kaspersky Endpoint Security according to the permissions granted to the Everyone group. You can perform the actions that are blocked for the Everyone group only if you use the KLAdmin account, another account that is granted the required permissions, or if you enter a temporary password.

> You can disable Password protection only if you are logged in as KLAdmin. It is not possible to disable password protection if you are using any other user account or a temporary password.

During the password check, you can select the **Save password for current session** check box. In this case, Kaspersky Endpoint Security will not prompt for a password when a user attempts to perform another password-protected action for the duration of the session.

Granting permissions to individual users or groups

Password protection allows granting Kaspersky Endpoint Security access to individual Active Directory user accounts and manually added user accounts.

Active Directory user accounts

You can grant Kaspersky Endpoint Security access to individual users or groups within the Active Directory domain. For example, if exiting the application is blocked for the Everyone group, you can grant the **Exit the application** permission to an individual user. As a result, you can exit the application only if you are logged in as that user or as KLAdmin.

> You can use account credentials to access the application only if the computer is in the domain. If the computer is not in the domain, you can use the KLAdmin account or a temporary password.

Manually added user accounts

You can create a user account that is not present in Active Directory and assign individual permissions to that user account. That is, you can create a *service user account* and use it instead of KLAdmin. This way, you do not need to share your KLAdmin password with other users or create new Active Directory user accounts. You can specify any user name and password. For example, you can grant the **View reports** permission to the service user account. As a result, if viewing reports is prohibited to the 'All' group, you can open the reports using the service user account or the KLAdmin user account.

Granting permissions to individual users or groups

How to grant permissions to individual users or groups in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Interface**.
4. In the **Password protection** block, click the **Settings** button.

   This opens a window with Password protection settings.
5. In the account table, click **Add**.

6. Select the type of the user account that you want to add:

   - **Select a user / group from Active Directory** – Active Directory user accounts.

     To select a user account, click **Select**. Select a user or a group in Active Directory and confirm your selection.

   - **Add a user / group of users manually** for a manually added service user account.

     To add a service user account, enter a user name and a password (for example, SecureAdmin).

     > You can reset a service user account password in the policy settings. The service user account password must be reset in the same way as the KLAdmin password. If editing Password protection settings is allowed (the "lock" is open) or no policy is applied on the computer, you can reset the password of the service user account in the application interface. To do so, confirm the changes of the service user account information using the KLAdmin password.

7. In the **Permissions** list, select the check boxes next to the actions that the selected user or group will be allowed to perform without being prompted for a password.

   If a check box is cleared, the users are blocked from performing the action. For example, if the check box next to the **Exit the application** permission is cleared, you can exit the application only if you are logged in as KLAdmin, or as an individual user who has the required permission, or if you enter a temporary password.

   > Password protection permissions have some important aspects to consider. Make sure that all conditions for accessing Kaspersky Endpoint Security are fulfilled.

8. Save your changes.

How to grant permissions to individual users or groups in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **Self-Defense**.

5. In the **Password Protection** block, click the **User permissions** link.

   This opens the form for granting Enabling Password permissions.

6. Click **Add**.

7. Select the type of the user account that you want to add:

   - **Select from Active Directory** – Active Directory user accounts.

     To select a user account, click **Edit**. Select a user or a group in Active Directory and confirm your selection.

   - **Add manually** for a manually added service user account.

     To add a service user account, enter a user name and a password (for example, SecureAdmin).

> You can reset a service user account password in the policy settings. The service user account password must be reset in the same way as the KLAdmin password. If editing Password protection settings is allowed (the "lock" is open) or no policy is applied on the computer, you can reset the password of the service user account in the application interface. To do so, confirm the changes of the service user account information using the KLAdmin password.

8. In the **Permissions** list, select the check boxes next to the actions that the selected user or group will be allowed to perform without being prompted for a password.

   If a check box is cleared, the users are blocked from performing the action. For example, if the check box next to the **Exit the application** permission is cleared, you can exit the application only if you are logged in as KLAdmin, or as an individual user who has the required permission, or if you enter a temporary password.

   > Password protection permissions have some important aspects to consider. Make sure that all conditions for accessing Kaspersky Endpoint Security are fulfilled.

9. Click **Add**.

10. Save your changes.

How to grant permissions to individual users or groups in the user interface of the application

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Interface**.

3. In the account table, click **Add**.

4. Select the type of the user account that you want to add:

   - **Select a user / group from Active Directory** – Active Directory user accounts.

     To select a user account, click **Select user or group**. Select a user or a group in Active Directory and confirm your selection.

   - **Add a user manually** for a manually added service user account.

     To add a service user account, enter a user name and a password (for example, SecureAdmin).

   > You can reset a service user account password in the policy settings. The service user account password must be reset in the same way as the KLAdmin password. If editing Password protection settings is allowed (the "lock" is open) or no policy is applied on the computer, you can reset the password of the service user account in the application interface. To do so, confirm the changes of the service user account information using the KLAdmin password.

5. In the **Permissions** list, select the check boxes next to the actions that the selected user or group will be allowed to perform without being prompted for a password.

   If a check box is cleared, the users are blocked from performing the action. For example, if the check box next to the **Exit the application** permission is cleared, you can exit the application only if you are logged in as KLAdmin, or as an individual user who has the required permission, or if you enter a temporary password.

Password protection permissions have some important aspects to consider. Make sure that all conditions for accessing Kaspersky Endpoint Security are fulfilled.

6. Save your changes.

As a result, if access to the application is restricted for the Everyone group, users will be granted permissions to access Kaspersky Endpoint Security according to the users' individual permissions.

Using a temporary password to grant permissions

A temporary password can be used to grant temporary access to Kaspersky Endpoint Security for an individual computer outside of the corporate network. This is necessary to allow the user to perform a blocked action without obtaining the KLAdmin account credentials. To use a temporary password, the computer must be added to Kaspersky Security Center.

How to allow a user to perform a blocked action using a temporary password through the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the **Managed devices** folder in the Administration Console tree, open the folder with the name of the administration group to which the relevant client computers belong.
3. In the workspace, select the **Devices** tab.
4. Double-click to open the computer properties window.
5. In the computer properties window, select the **Applications** section.
6. In the list of Kaspersky applications installed on the computer, select **Kaspersky Endpoint Security for Windows (14.2)** and double-click to open the application properties.
7. In the application settings window, select **General settings** → **Interface**.
8. In the **Password protection** block, click the **Settings** button.
9. In the window that opens, in the **Temporary password** block, click the **List of temporary passwords** button.

   Management of temporary passwords window opens.
10. Click **Add**.
11. In the **Expiration date** field, specify the expiration date when the temporary password will expire.
12. In the **Temporary password scope** table, select the check boxes next to the actions that will be available to the user after entering the temporary password.
13. Click **Generate**.

    A window containing the temporary password opens (see the figure below).
14. Copy the password and provide it to the user.

How to allow a user to perform a blocked action using a temporary password through the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Click the name of the computer on which you want to allow a user to perform a blocked action.
3. Select the **Applications** tab.
4. Click **Kaspersky Endpoint Security for Windows**.

   This opens the local application settings.
5. Select the **Application settings** tab.
6. In the application settings window, select **General settings** → **Interface**.
7. In the **Temporary passwords** block, click the **Add** button.
8. In the **Expiration date** field, specify the expiration date when the temporary password will expire.
9. In the **Temporary password scope** table, select the check boxes next to the actions that will be available to the user after entering the temporary password.
10. Click **Generate**.

    A window containing the temporary password opens.
11. Copy the password and provide it to the user.

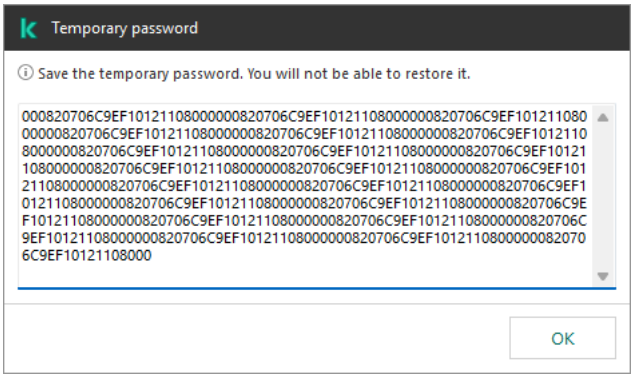

Temporary password

Revoking temporary password

Starting with version 12.9, Kaspersky Endpoint Security for Windows includes the *Management of temporary passwords* functionality. Management of temporary passwords lets you perform the following actions:

- Save password history (up to 30 days).
- Monitor temporary password status: *Active*, *Expired*, *Revoked*.

- Revoke temporary passwords.

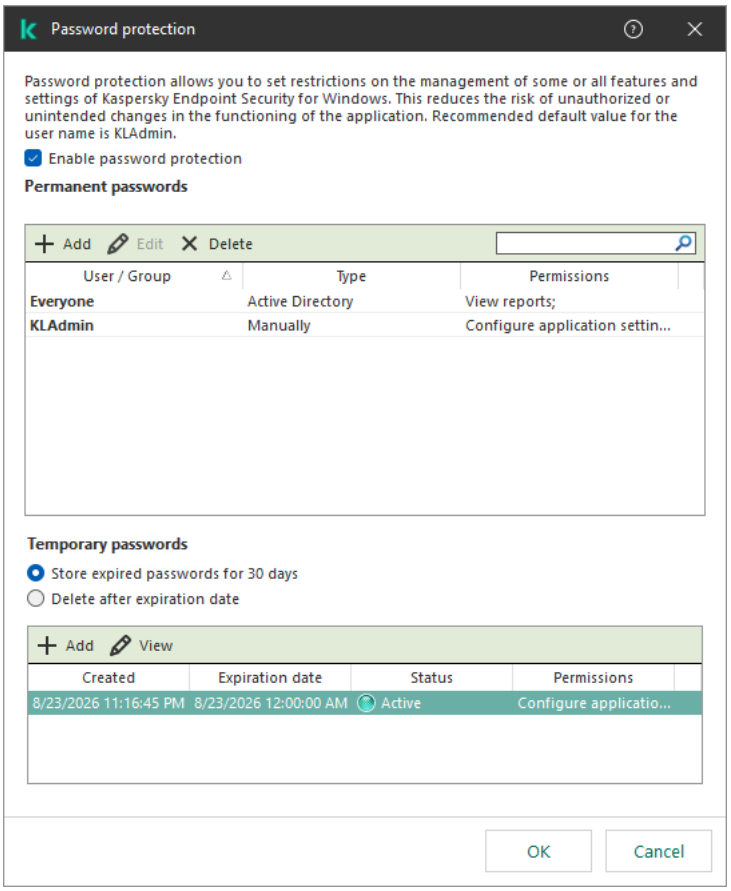

Management of temporary passwords

Management of temporary passwords updates the status of the password and revokes the password only after synchronizing the computer with Kaspersky Security Center.

How to revoke temporary password using the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the **Managed devices** folder in the Administration Console tree, open the folder with the name of the administration group to which the relevant client computers belong.
3. In the workspace, select the **Devices** tab.
4. Double-click to open the computer properties window.
5. In the computer properties window, select the **Applications** section.
6. In the list of Kaspersky applications installed on the computer, select **Kaspersky Endpoint Security for Windows (14.2)** and double-click to open the application properties.
7. In the application settings window, select **General settings** → **Interface**.
8. In the **Password protection** block, click the **Settings** button.
9. This opens a window; in that window under **Temporary password**, configure the storage settings for expired passwords.

10. Click **List of temporary passwords**.

    Management of temporary passwords window opens. Management of temporary passwords displays the expiration date of the password, the status of the password, and the list of permissions.

11. Select the active temporary password that you want to revoke and double-click the password to open its properties.

12. In the window that opens, click the **Revoke** button.

13. Save your changes. To apply the policy on computers, close the padlocks .

How to revoke temporary password using the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.

2. Click the name of the computer on which you want to allow a user to perform a blocked action.

3. Select the **Applications** tab.

4. Click **Kaspersky Endpoint Security for Windows**.

   This opens the local application settings.

5. Select the **Application settings** tab.

6. In the application settings window, select **General settings** → **Interface**.

7. Under **Temporary passwords**, configure the storage of expired passwords.

8. Click the **Temporary password** link.

   Management of temporary passwords window opens. Management of temporary passwords displays the expiration date of the password, the status of the password, and the list of permissions.

9. Select the active temporary password that you want to revoke.

10. In the window that opens, click the **Revoke password** button.

11. Save your changes. To apply the policy on computers, close the padlocks .

As a result, Management of temporary passwords sets the status of the password to *Revoking (synchronizing with a host)*. After synchronizing the computer with Kaspersky Security Center, the application revokes the temporary password and blocks the granted permissions immediately.

Special aspects of Password protection permissions

Password protection permissions have some important aspects and limitations to consider.

Configure application settings

If a user's computer is running under a policy, make sure that all the required settings in the policy are available for editing (the attributes are open).

Exit the application

There are no special considerations or limitations.

Disable protection components

- It is not possible to grant the permission to disable protection components for the Everyone group. To allow users other than KLAdmin to disable control components, add a user or group that has the **Disable protection components** permission in the Password Protection settings.
- If a user's computer is running under a policy, make sure that all the required settings in the policy are available for editing (the attributes are open).
- To disable protection components in the application settings, a user must have the **Configure application settings** permission.
- To disable protection components from the context menu (by using the **Pause protection** menu item), a user must have the **Disable protection components** permission in addition to the **Disable control components** permission.

Disable control components

- It is not possible to grant the permission to disable control components for the Everyone group. To allow users other than KLAdmin to disable control components, add a user or group that has the **Disable control components** permission in the Password Protection settings.
- If a user's computer is running under a policy, make sure that all the required settings in the policy are available for editing (the attributes are open).
- To disable control components in the application settings, a user must have the **Configure application settings** permission.
- To disable control components from the context menu (by using the **Pause protection** menu item), a user must have the **Disable control components** permission in addition to the **Disable protection components** permission.

Disable Kaspersky Security Center policy

You cannot grant the "Everyone" group the permission to disable the Kaspersky Security Center policy. To allow users other than KLAdmin to disable the policy, add a user or group that has the **Disable Kaspersky Security Center policy** permission in the Password Protection settings.

Remove key

There are no special considerations or limitations.

Remove / modify / restore the application

If you have allowed removing, modifying, and restoring the application for the "All" group, Kaspersky Endpoint Security does not request a password when the user attempts to carry out these operations. Therefore, any user including users from outside the domain, can install, modify, or restore the application.

Restore access to data on encrypted drive

You can restore access to data on encrypted drives only if you are logged in as KLAdmin. Permission to perform this action cannot be granted to any other user.

View reports

There are no special considerations or limitations.

Restore from Backup

There are no special considerations or limitations.

Export settings

By default, exporting application settings is denied to the "All" group. You can export application settings using the KLAdmin user account. Exporting application settings includes only creating a configuration file with Kaspersky Endpoint Security settings in the application interface. The permission does not restrict exporting lists of scan exclusions, trusted web addresses, trusted devices, or other lists maintained by application components.

Resetting the KLAdmin password

If you forgot your KLAdmin account password, you can reset the password in policy properties. You cannot reset the password in the application interface.

You can perform password-protected actions using a temporary password. In this case, you do not need to enter KLAdmin credentials.

If the computer is not connected to Kaspersky Security Center and you have forgotten the password for the KLAdmin account, it is not possible to recover the password.

How to reset the KLAdmin account password using the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Interface**.
4. In the **Password protection** block, click the **Settings** button.
5. In the window that opens, clear the **Enable password protection** check box.
6. Save your changes.
7. Select the **Enable password protection** check box again.
8. Click **OK**.
   This opens the administrator password window.
9. Specify the new password for the KLAdmin account and confirm it.
10. Save your changes.

How to reset the KLAdmin account password in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Select the computer for which you want to configure local application settings.
   This opens the computer properties.
3. Select the **Applications** tab.
4. Click **Kaspersky Endpoint Security for Windows 14.2**.
   This opens the local application settings.
5. Select the **Application settings** tab.
6. Go to **General Settings** → **Self-Defense**.
7. Under **Password protection**, turn off the **Password protection** switch.
8. Save your changes.
9. Turn the **Password protection** switch back on again.

10. Specify the new password for the KLAdmin account and confirm it.

11. Save your changes.

As a result, the password of your KLAdmin account is updated after the policy is applied.

Administration Server connection protection

Connecting the computer to the Administration Server is achieved using the *Network Agent* component of Kaspersky Security Center. If an intruder has sufficient rights to modify server connection settings, a risk exists of connecting the computer to an untrusted server. This would allow the intruder to apply their own group policies and, for example, disable self-defense of the application. Kaspersky Endpoint Security can prevent unauthorized reconnection of a computer to a different server. To protect the server connection, the application suggests setting a password and using the Password-Based key Derivation Function (PBKDF2). As a result, access to the application without a password is impossible.

To ensure comprehensive protection of Kaspersky Endpoint Security and Network Agent from unauthorized access, we recommend enabling additional protection. For Kaspersky Endpoint Security, we recommend enabling Password protection. To protect Network Agent, we recommend setting an uninstall password. For details about protecting Network Agent from removal, please refer to the Kaspersky Security Center Help.

Managing the connection of the computer to the Administration Server is achieved using the *Administration Server connection protection* task. The task lets you perform the following actions:

- Set a password to protect the server connection.
- Change the password.
- Reconnect the computer to a different server.
- Disable the server connection protection.

Authentication of the computer when connecting to the Administration Server

After setting a password, the application creates a data array using PBKDF2 transformation of the password. The application then encrypts this data array using the Network Agent key. The application uses the encrypted data array to check rights and privileges of the Administration Server for subsequent connections.

Subsequently, whenever an attempt is made to reconnect the computer to the Administration Server, the application decrypts the data array with the Network Agent key and compares it with the local copy. If they do not match, access to the application is restricted.

Administration Server connection protection

How to set a password for server connection protection in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Administration Server connection protection**.

Step 2. Protecting the Administration Server connection

Set a password to protect the Administration Server connection:

1. Under **Administration Server connection protection**, select **Protect with a password**.

2. In the **Administration Server** drop-down list, select **New server**.

3. In the **Password for connection to the Administration Server** field, set a password for connecting to the Administration Server and confirm it.

   If you forget the password, you can change the password using a task.

4. If you have Kaspersky Endpoint Security 12.7 or an earlier version of the application deployed, select the **Enable password encryption compatibility for previous application versions (12.7 and lower)** check box.

   Starting with Kaspersky Endpoint Security 12.8 for Windows, the application uses stronger password encryption. If you have Kaspersky Endpoint Security 12.8 or later deployed, we recommend clearing this check box and using the stronger password encryption. Earlier versions of the application do not support strong password encryption. To run the task, you must select the check box.

Step 3. Selecting the account to run the task

Select **Default account**. By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

Step 4. Configuring a task start schedule

Under **Scheduled start**, select **Manually**.

Step 5. Defining the task name

Enter a name for the task, for example, *Main server connection password*.

Step 6. Completing task creation

Finish the wizard. Select the **Run the task after the wizard finishes** check box or run the task manually. You can monitor the progress of the task in the task properties.

How to set a password for server connection protection in Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Administration Server connection protection**.

   c. In the **Task name** field, enter a brief description, for example, *Main server connection password*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Select a default user account. By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

6. Finish the wizard.

   A new task will be displayed in the list of tasks.

7. Click the **Administration Server connection protection** task of Kaspersky Endpoint Security.

   The task properties window opens.

8. Select the **Application settings** tab.

9. Under **Administration Server connection protection**, select **Protect with a password**.

10. In the **Connection to the Administration Server** drop-down list, select **New password**.

11. In the **Password for connection to the Administration Server** field, set a password for connecting to the Administration Server and confirm it.

    If you forget the password, you can change the password using a task.

12. If you have Kaspersky Endpoint Security 12.7 or an earlier version of the application deployed, select the **Enable password encryption compatibility for previous application versions (12.7 and lower)** check box.

    Starting with Kaspersky Endpoint Security 12.8 for Windows, the application uses stronger password encryption. If you have Kaspersky Endpoint Security 12.8 or later deployed, we recommend clearing this check box and using the stronger password encryption. Earlier versions of the application do not support strong password encryption. To run the task, you must select the check box.

13. Save your changes.

14. Select the check box next to the task.

15. Click **Start**.

    You can monitor the status of the task, and the number of devices on which the task was completed successfully or completed with an error.

Reconnecting the computer to a different Administration Server

Reconnecting the computer to a different Administration Server involves the following steps:

1. In the console of the current `[KSC1]` server, run the *Change Administration Server* task for Network Agent.

   After running the task, the computer is reconnected to the new `[KSC2]` server.

   The computer will be displayed in the `[KSC1]` server console with the *Critical* status. Configuring the application using policies or remotely running tasks on the computer is impossible.

2. In the console of the new `[KSC2]` server, create a new *Administration Server connection protection* task for Kaspersky Endpoint Security. In task properties, enter the password of the previous server and set a password for the new server.

   How to set a new password for reconnecting to a new server in Administration Console (MMC)

   1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

      The list of tasks opens.

   2. Click **New task**.

   The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Administration Server connection protection**.

Step 2. Protecting the Administration Server connection

Set a password to protect the connection to the new Administration Server:

1. Under **Administration Server connection protection**, select **Protect with a password**.
2. In the **Administration Server** drop-down list, select **Reconnect from another server**.
3. In the **Current password** field, enter the password set for the connection to the previously used trusted server.
4. In the **New password** field, set a password for connecting to the new Administration Server and confirm the password.

   If you forget the password, you can change the password using a task.
5. If you have Kaspersky Endpoint Security 12.7 or an earlier version of the application deployed, select the **Enable password encryption compatibility for previous application versions (12.7 and lower)** check box.

   Starting with Kaspersky Endpoint Security 12.8 for Windows, the application uses stronger password encryption. If you have Kaspersky Endpoint Security 12.8 or later deployed, we recommend clearing this check box and using the stronger password encryption. Earlier versions of the application do not support strong password encryption. To run the task, you must select the check box.

Step 3. Selecting the account to run the task

Select **Default account**. By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

Step 4. Configuring a task start schedule

Under **Scheduled start**, select **Manually**.

Step 5. Defining the task name

Enter a name for the task, for example, *Main server connection password*.

Step 6. Completing task creation

Finish the wizard. Select the **Run the task after the wizard finishes** check box or run the task manually. You can monitor the progress of the task in the task properties.

How to set a new password for reconnecting to a new server in Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Administration Server connection protection**.

   c. In the **Task name** field, enter a brief description, for example, *Main server connection password*.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Select a default user account. By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

6. Finish the wizard.

   A new task will be displayed in the list of tasks.

7. Click the **Administration Server connection protection** task of Kaspersky Endpoint Security.

   The task properties window opens.

8. Select the **Application settings** tab.

9. Under **Administration Server connection protection**, select **Protect with a password**.

10. In the **Connection to the Administration Server** drop-down list, select **Reconnect from another server**.

11. In the **Current password** field, enter the password set for the connection to the previously used trusted server.

12. In the **New password** field, set a password for connecting to the new Administration Server and confirm the password.

    If you forget the password, you can change the password using a task.

13. If you have Kaspersky Endpoint Security 12.7 or an earlier version of the application deployed, select the **Enable password encryption compatibility for previous application versions (12.7 and lower)** check box.

    Starting with Kaspersky Endpoint Security 12.8 for Windows, the application uses stronger password encryption. If you have Kaspersky Endpoint Security 12.8 or later deployed, we recommend clearing this check box and using the stronger password encryption. Earlier versions of the application do not support strong password encryption. To run the task, you must select the check box.

14. Save your changes.

15. Select the check box next to the task.

16. Click **Start**.

    You can monitor the status of the task, and the number of devices on which the task was completed successfully or completed with an error.

After completing the task, make sure that in the console of the new `[KSC2]` server, the computer has the *OK* status. Test if you can run tasks remotely and configure the application using policies.

Resetting the Administration Server connection password

If you forgot your Administration Server connection password or the password is compromised, you can reset the password in task properties. You can also reset the password and set a new password for a group of computers with different Administration Server connection protection statuses. That is, if some computers have the protection enabled and some have it disabled, the task sets a password for all computers.

> You can only reset the Administration Server connection password in the console of the trusted server to which the computer is connected.

How to reset the Administration Server connection password using the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Tasks**.
3. Select the **Administration Server connection protection** task and double-click to open the task properties.
4. In the task properties window, select the **Settings** section.
5. Under **Administration Server connection protection**, select **Protect and change password**.
6. In the **Password for connection to the Administration Server** field, set a new password for connecting to the current trusted server and confirm the password.
7. Save your changes.
8. Run the task.

How to reset the Administration Server connection password in Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.
2. Click the **Administration Server connection protection** task of Kaspersky Endpoint Security.

   The task properties window opens.
3. Select the **Application settings** tab.
4. Under **Administration Server connection protection**, select **Protect and change password**.
5. In the **Password for connection to the Administration Server** field, set a new password for connecting to the current trusted server and confirm the password.

6. Save your changes.

7. Select the check box next to the task.

8. Click **Start**.

As a result, the Administration Server connection password is reset after the task finishes.

Disabling Administration Server connection protection

You can only remotely disable Administration Server connection protection in the console of the trusted server to which the computer is connected. You can also disable the protection locally on the command line.

How to disable the server connection protection in Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Tasks**.

3. Select the **Administration Server connection protection** task and double-click to open the task properties.

4. In the task properties window, select the **Settings** section.

5. Under **Administration Server connection protection**, select **Do not protect**.

6. Save your changes.

7. Run the task.

   You can monitor the status of the task, and the number of devices on which the task was completed successfully or completed with an error.

How to disable the server connection protection in Web Console and Cloud Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **Administration Server connection protection** task of Kaspersky Endpoint Security.

   The task properties window opens.

3. Select the **Application settings** tab.

4. Under **Administration Server connection protection**, select **Do not protect with a password**.

5. Save your changes.

6. Select the check box next to the task.

7. Click **Start**.

   You can monitor the status of the task, and the number of devices on which the task was completed successfully or completed with an error.

How to disable the server connection protection on the command line

1. Run the command line interpreter (cmd.exe) as an administrator.

2. Go to the folder where the Kaspersky Endpoint Security executable file is located.

3. Run the following command:

   ```
   avp.com SERVERBINDINGDISABLE [/password=<password>]
   ```

   where `<password>` is the password of the KLAdmin user account or the password from the *Administration Server connection protection* task. If the parameter is not specified, Kaspersky Endpoint Security prompts you to enter a password on the next line.

   To execute this command, Password protection must be enabled.

Example

```
avp.com SERVERBINDINGDISABLE /password=samplePassword
```

Data Encryption

Kaspersky Endpoint Security lets you encrypt files and folders that are stored on local and removable drives, or entire removable drives and hard drives. Data encryption minimizes the risk of information leaks that may occur when a portable computer, removable drive or hard drive is lost or stolen, or when data is accessed by unauthorized users or applications. Kaspersky Endpoint Security uses the Advanced Encryption Standard (AES) encryption algorithm.

If the license has expired, the application does not encrypt new data, and old encrypted data remains encrypted and available for use. In this event, encrypting new data requires the application be activated with a new license that permits the use of encryption.

If Kaspersky Endpoint Security is installed on an Arm-based computer, only BitLocker Drive Encryption is available. The application does not support other data encryption components.

If your license has expired, or the End User License Agreement has been violated, the license key, Kaspersky Endpoint Security, or encryption components has been removed, the encrypted status of previously encrypted files is not guaranteed. This is because some applications, such as Microsoft Office Word, create a temporary copy of files during editing. When the original file is saved, the temporary copy replaces the original file. As a result, on a computer that has no or inaccessible encryption functionality, the file remains unencrypted.

Kaspersky Endpoint Security offers the following aspects of data protection:

- **File Level Encryption on local computer drives**. You can compile lists of files by extension or group of extensions and lists of folders stored on local computer drives, and create rules for encrypting files that are created by specific applications. After a policy is applied, Kaspersky Endpoint Security encrypts and decrypts the following files:
  - files individually added to lists for encryption and decryption;
  - files stored in folders added to lists for encryption and decryption;
  - files created by separate applications.
- **Encryption of removable drives**. You can specify a default encryption rule, according to which the application applies the same action to all removable drives, or specify encryption rules for individual removable drives.

  The default encryption rule has a lower priority than encryption rules created for individual removable drives. Encryption rules created for removable drives of the specified device model have a lower priority than encryption rules created for removable drives with the specified device ID.

  To select an encryption rule for files on a removable drive, Kaspersky Endpoint Security checks whether or not the device model and ID are known. The application then performs one of the following operations:
  - If only the device model is known, the application uses the encryption rule (if any) created for removable drives of the specific device model.
  - If only the device ID is known, the application uses the encryption rule (if any) created for removable drives with the specific device ID.

- If the device model and ID are known, the application applies the encryption rule (if any) created for removable drives with the specific device ID. If no such rule exists, but there is an encryption rule created for removable drives with the specific device model, the application applies this rule. If no encryption rule is specified for the specific device ID nor for the specific device model, the application applies the default encryption rule.

- If neither the device model nor device ID is known, the application uses the default encryption rule.

The application lets you prepare a removable drive for using encrypted data stored on it in portable mode. After enabling portable mode, you can access encrypted files on removable drives connected to a computer without encryption functionality.

- **Managing rules of application access to encrypted files**. For any application, you can create an encrypted file access rule that blocks access to encrypted files or allows access to encrypted files only as ciphertext, which is a sequence of characters obtained when encryption is applied.

- **Creating encrypted packages**. You can create encrypted archives and protect access to such archives with a password. The contents of encrypted archives can be accessed only by entering the passwords with which you protected access to those archives. Such archives can be securely transmitted over networks or on removable drives.

- **Full Disk Encryption**. You can select an encryption technology: Kaspersky Disk Encryption or BitLocker Drive Encryption (hereinafter also referred to as simply "BitLocker").

  BitLocker is a technology that is part of the Windows operating system. If a computer is equipped with a Trusted Platform Module (TPM), BitLocker uses it to store recovery keys that provide access to an encrypted hard drive. When the computer starts, BitLocker requests the hard drive recovery keys from the Trusted Platform Module and unlocks the drive. You can configure the use of a password and/or PIN code for accessing recovery keys.

  You can specify the default full disk encryption rule and create a list of hard drives to be excluded from encryption. Kaspersky Endpoint Security performs full disk encryption by sector after the Kaspersky Security Center policy is applied. The application encrypts all logical partitions of hard drives simultaneously.

  After the system hard drives have been encrypted, at the next computer startup the user must complete authentication using the Authentication Agent before the hard drives can be accessed and the operating system is loaded. This requires entering the password of the token or smart card connected to the computer, or the user name and password of the Authentication Agent account created by the local area network administrator using the *Manage Authentication Agent accounts* task. These accounts are based on Microsoft Windows accounts under which users log into the operating system. You can also use Single Sign-On (SSO) technology, which lets you automatically log in to the operating system using the user name and password of the Authentication Agent account.

  > If you back up a computer and then encrypt the computer data, after which you restore the backup copy of the computer and encrypt the computer data again, Kaspersky Endpoint Security creates duplicates of Authentication Agent accounts. To remove the duplicate accounts, you must use the klmover utility with the `dupfix` key. The klmover utility is included in the Kaspersky Security Center build. You can read more about its operation in the Kaspersky Security Center Help.

  Access to encrypted hard drives is possible only from computers on which Kaspersky Endpoint Security with full disk encryption functionality is installed. This precaution minimizes the risk of data leaks from an encrypted hard drive when an attempt to access it is made outside of the local area network of the company.

To encrypt hard drives and removable drives, you can use the Encrypt used disk space only function. It is recommended you only use this function for new devices that have not been previously used. If you are applying encryption to a device that is already in use, it is recommended you encrypt the entire device. This ensures that all data is protected – even deleted data that might still contain retrievable information.

Before beginning encryption, Kaspersky Endpoint Security obtains the map of file system sectors. The first wave of encryption includes sectors that are occupied by files at the moment when encryption is started. The second wave of encryption includes sectors that were written to after encryption began. After encryption is complete, all sectors containing data are encrypted.

After encryption is complete and a user deletes a file, the sectors that stored the deleted file become available for storing new information at the file system level but remain encrypted. Thus, as files are written to a new device and the device is regularly encrypted with the **Encrypt used disk space only** function enabled, all sectors will be encrypted after some time.

The data needed to decrypt files is provided by the Kaspersky Security Center Administration Server that controlled the computer at the time of encryption. If the computer with encrypted objects was managed by a different Administration Server for some reason, you can obtain access to the encrypted data in one of the following ways:

- Administration Servers in the same hierarchy:
  - You do not need to take any additional actions. The user will retain access to the encrypted objects. Encryption keys are distributed to all Administration Servers.
- Separated Administration Servers:
  - Request access to encrypted objects from the LAN administrator.
  - Restore data on encrypted devices using the Restore Utility.
  - Restore the configuration of the Kaspersky Security Center Administration Server that controlled the computer at the time of encryption from a backup copy and use this configuration on the Administration Server that now controls the computer with encrypted objects.

If there is no access to encrypted data, follow the special instructions for working with encrypted data (Restoring access to encrypted files, Working with encrypted devices when there is no access to them).

Encryption functionality limitations

Data Encryption has the following limitations:

- The application creates service files during encryption. Around 0.5% of non-fragmented free space on the hard drive is required to store them. If there is not enough non-fragmented free space on the hard drive, encryption will not start until enough space is freed up.
- You can manage all data encryption components in the Kaspersky Security Center Administration Console and in the Kaspersky Security Center Web Console. In the Kaspersky Security Center Cloud Console, you can only manage Bitlocker.
- Data encryption is available only when using Kaspersky Endpoint Security with the Kaspersky Security Center administration system or the Kaspersky Security Center Cloud Console (BitLocker only). Data Encryption when using Kaspersky Endpoint Security in offline mode is not possible because Kaspersky Endpoint Security stores encryption keys in Kaspersky Security Center.

- If Kaspersky Endpoint Security is installed on a computer running Microsoft Windows for Servers, only full disk encryption using BitLocker Drive Encryption technology is available. If Kaspersky Endpoint Security is installed on a computer running Windows for Workstations, data encryption functionality is fully available.

- If Kaspersky Endpoint Security is installed on an Arm-based computer, only Full Disk Encryption using the BitLocker Drive Encryption technology is available, other encryption components are not supported.

Full disk encryption using Kaspersky Disk Encryption technology is unavailable for hard drives that do not meet the hardware and software requirements.

Compatibility between the full disk encryption functionality of Kaspersky Endpoint Security and Kaspersky Anti-Virus for UEFI is not supported. Kaspersky Anti-Virus for UEFI starts before the operating system loads. When using full disk encryption, the application will detect the absence of an installed operating system on the computer. As a result, the operation of Kaspersky Anti-Virus for UEFI will end with an error. File Level Encryption (FLE) does not affect the operation of Kaspersky Anti-Virus for UEFI.

Kaspersky Endpoint Security supports the following configurations:

- HDD, SSD, and USB drives.

  > Kaspersky Disk Encryption (FDE) technology supports working with SSD while preserving the performance and service life of SSD drives.

- Drives connected via bus: SCSI, ATA, IEEE1934, USB, RAID, SAS, SATA, NVME.

- Non-removable drives connected via SD or MMC bus.

- Drives with 512-byte sectors.

- Drives with 4096-byte sectors that emulate 512 bytes.

- Drives with the following type of partitions: GPT, MBR, and VBR (removable drives).

- Embedded software of the UEFI 64 and Legacy BIOS standard.

- Embedded software of the UEFI standard with Secure Boot support.

  Secure Boot is a technology designed to verify digital signatures for UEFI loader applications and drivers. Secure Boot blocks the startup of UEFI applications and drivers that are unsigned or signed by unknown publishers. Kaspersky Disk Encryption (FDE) fully supports Secure Boot. Authentication Agent is signed by a Microsoft Windows UEFI Driver Publisher certificate.

  On some devices (for example, Microsoft Surface Pro and Microsoft Surface Pro 2), an out-of-date list of digital signature verification certificates may be installed by default. Prior to encrypting the drive, you need to update the list of certificates.

- Embedded software of the UEFI standard with Fast Boot support.

  Fast Boot is a technology that helps the computer start up faster. When Fast Boot technology is enabled, normally the computer loads only the minimum set of UEFI drivers required for starting the operating system. When Fast Boot technology is enabled, USB keyboards, mice, USB tokens, touchpads and touchscreens may not work while Authentication Agent is running.

  > To use Kaspersky Disk Encryption (FDE), it is recommended to disable Fast Boot technology. You can use the FDE Test Utility to test the operation of Kaspersky Disk Encryption (FDE).

Kaspersky Endpoint Security does not support the following configurations:

- The boot loader is located on one drive while the operating system is on a different drive.
- The system contains embedded software of the UEFI 32 standard.
- The system has Intel® Rapid Start Technology and drives that have a hibernation partition even when Intel® Rapid Start Technology is disabled.
- Drives in MBR format with more than 10 extended partitions.
- The system has a swap file located on a non-system drive.
- Multiboot system with multiple simultaneously installed operating systems.
- Dynamic partitions (only primary partitions are supported).
- Drives with less than 0.5% free unfragmented disk space.
- Drives with a sector size different from 512 bytes or 4096 bytes that emulate 512 bytes.
- Hybrid drives.
- The system has third-party loaders.
- Drives with compressed NTFS directories.
- Kaspersky Disk Encryption (FDE) technology is incompatible with other full disk encryption technologies (such as BitLocker, McAfee Drive Encryption, and WinMagic SecureDoc).
- Kaspersky Disk Encryption (FDE) technology is incompatible with ExpressCache technology.
- Creating, deleting, and modifying partitions on an encrypted drive is not supported. You could lose data.
- File system formatting is not supported. You could lose data.

  If you need to format a drive that was encrypted with Kaspersky Disk Encryption (FDE) technology, format the drive on a computer that does not have Kaspersky Endpoint Security for Windows and use only full disk encryption.

  An encrypted drive that is formatted with the quick format option may be mistakenly identified as encrypted the next time it is connected to a computer that has Kaspersky Endpoint Security for Windows installed. User data will be unavailable.
- Authentication Agent supports no more than 100 accounts.
- Single Sign-On technology is incompatible with other technologies of third-party developers.
- Kaspersky Disk Encryption (FDE) technology is not supported on the following models of devices:
  - Dell Latitude E6410 (UEFI mode)
  - HP Compaq nc8430 (Legacy BIOS mode)
  - Lenovo ThinkCentre 8811 (Legacy BIOS mode)

- Authentication Agent does not support working with USB tokens when Legacy USB Support is enabled. Only password-based authentication will be possible on the computer.
- When encrypting a drive in Legacy BIOS mode, you are advised to enable Legacy USB Support on the following models of devices:
  - Acer Aspire 5560G
  - Acer Aspire 6930
  - Acer TravelMate 8572T
  - Dell Inspiron 1420
  - Dell Inspiron 1545
  - Dell Inspiron 1750
  - Dell Inspiron N4110
  - Dell Latitude E4300
  - Dell Studio 1537
  - Dell Studio 1569
  - Dell Vostro 1310
  - Dell Vostro 1320
  - Dell Vostro 1510
  - Dell Vostro 1720
  - Dell Vostro V13
  - Dell XPS L502x
  - Fujitsu Celsius W370
  - Fujitsu LifeBook A555
  - HP Compaq dx2450 Microtower PC
  - Lenovo G550
  - Lenovo ThinkPad L530
  - Lenovo ThinkPad T510
  - Lenovo ThinkPad W540
  - Lenovo ThinkPad X121e
  - Lenovo ThinkPad X200s (74665YG)

- Samsung R530
- Toshiba Satellite A350
- Toshiba Satellite U400 10O
- MSI 760GM-E51 (motherboard)

Changing the length of the encryption key (AES56 / AES256)

Kaspersky Endpoint Security uses the Advanced Encryption Standard (AES) encryption algorithm. Kaspersky Endpoint Security supports the AES encryption algorithm with an effective key length of 256 or 56 bits. The data encryption algorithm depends on the AES encryption library that is included in the distribution package: *Strong encryption (AES256)* or *Lite encryption (AES56)*. The AES encryption library is installed together with the application.

Changing the length of the encryption key is available only for Kaspersky Endpoint Security 11.2.0 or later.

Changing the encryption key length consists of the following steps:

1. Decrypt objects that Kaspersky Endpoint Security encrypted before you begin changing the encryption key length:

   a. Decrypt hard drives.

   b. Decrypt files on local drives.

   c. Decrypt removable drives.

   After the encryption key length is changed, objects that were previously encrypted become unavailable.

2. Remove Kaspersky Endpoint Security.

3. Install Kaspersky Endpoint Security from the Kaspersky Endpoint Security distribution package containing a different encryption library.

You can also change the encryption key length by upgrading the application. The key length can be changed through an application upgrade only if the following conditions are met:

- Kaspersky Endpoint Security version 10 Service Pack 2 or later is installed on the computer.
- Data encryption components (File Level Encryption, Full Disk Encryption) are not installed on the computer.

  By default, data encryption components are not included in Kaspersky Endpoint Security. The BitLocker Management component does not affect the change in the length of the encryption key.

To change the encryption key length, run the kes_win.msi or setup_kes.exe file from the distribution package containing the necessary encryption library. You can also remotely upgrade the application by using the installation package.

It is impossible to change the length of the encryption key using the distribution package of the same version of the application that is installed on your computer without first uninstalling the application.

Kaspersky Disk Encryption

Kaspersky Disk Encryption is not supported on Arm-based computers.

Kaspersky Disk Encryption is available only for computers running a Windows operating system for workstations. For computers running a Windows operating system for servers, use BitLocker Drive Encryption technology.

Kaspersky Endpoint Security supports full disk encryption in FAT32, NTFS and exFat file systems.

Before starting full disk encryption, the application runs a series of checks to determine if the device can be encrypted, which includes checking the system hard drive for compatibility with Authentication Agent or with BitLocker encryption components. To check for compatibility, the computer must be restarted. After the computer has been rebooted, the application performs all the necessary checks automatically. If the compatibility check is successful, full disk encryption starts after the operating system has loaded and the application has started. If the system hard drive is found to be incompatible with Authentication Agent or with BitLocker encryption components, the computer must be restarted by pressing the Reset hardware button. Kaspersky Endpoint Security logs information about the incompatibility. Based on this information, the application does not start full disk encryption at operating system startup. Information about this event is logged in Kaspersky Security Center reports.

If the hardware configuration of the computer has changed, the incompatibility information logged by the application during the previous check should be deleted in order to check the system hard drive for compatibility with Authentication Agent and BitLocker encryption components. To do so, prior to full disk encryption, type `avp pbatestreset` in the command line. If the operating system fails to load after the system hard drive has been checked for compatibility with Authentication Agent, you must remove the objects and data remaining after test operation of Authentication Agent by using the Restore Utility and then start Kaspersky Endpoint Security and execute the `avp pbatestreset` command again.

After full disk encryption has started, Kaspersky Endpoint Security encrypts all data that is written to hard drives.

If the user shuts down or restarts the computer during full disk encryption, Authentication Agent is loaded before the next startup of the operating system. Kaspersky Endpoint Security resumes full disk encryption after successful authentication in Authentication Agent and operating system startup.

If the operating system switches to hibernation mode during full disk encryption, Authentication Agent is loaded when the operating system switches back from hibernation mode. Kaspersky Endpoint Security resumes full disk encryption after successful authentication in Authentication Agent and operating system startup.

If the operating system goes into sleep mode during full disk encryption, Kaspersky Endpoint Security resumes full disk encryption when the operating system comes out of sleep mode without loading Authentication Agent.

User authentication in the Authentication Agent can be performed in two ways:

- Enter the name and password of the Authentication Agent account created by the LAN administrator using Kaspersky Security Center tools.
- Enter the password of a token or smart card connected to the computer.

> Use of a token or smart card is available only if the computer hard drives were encrypted using the AES256 encryption algorithm. If the computer hard drives were encrypted using the AES56 encryption algorithm, addition of the electronic certificate file to the command will be denied.

The authentication agent supports keyboard layouts for the following languages:

- English (UK)
- English (USA)
- Arabic (Algeria, Morocco, Tunis; AZERTY layout)
- Spanish (Latin America)
- Italian
- German (Germany and Austria)
- German (Switzerland)
- Portuguese (Brazil, ABNT2 layout)
- Russian (for 105-key IBM / Windows keyboards with the QWERTY layout)
- Turkish (QWERTY layout)
- French (France)
- French (Switzerland)
- French (Belgium, AZERTY layout)
- Japanese (for 106-key keyboards with the QWERTY layout)

> A keyboard layout becomes available in the Authentication Agent if this layout has been added in the language and regional standards settings of the operating system and has become available on the welcome screen of Microsoft Windows.

If the Authentication Agent account name contains symbols that cannot be entered using keyboard layouts available in the Authentication Agent, encrypted hard drives can be accessed only after they are restored using the Restore Utility or after the Authentication Agent account name and password are restored.

Special features of SSD drive encryption

The application supports encryption of SSD drives, hybrid SSHD drives, and drives with the Intel Smart Response feature. The application does not support encryption of drives with the Intel Rapid Start feature. Disable the Intel Rapid Start feature prior to encrypting such a drive.

Encryption of SSD drives has the following special features:

- If an SSD drive is new and contains no confidential data, enable encryption of only occupied space. This lets you overwrite the relevant drive sectors.
- If an SSD drive is in use and it has confidential data, select one of the following options:
  - Fully wipe the SSD drive (Secure Erase), install the operating system and run encryption of the SSD drive with the option to encrypt only occupied space enabled.
  - Run encryption of the SSD drive with the option to encrypt only occupied space disabled.

Encryption of an SSD drive requires 5-10 GB of free space. The free space requirements for storing encryption administration data are provided in the table below.

Free space requirements for storing encryption administration data

SSD drive size (GB)	Free space on primary partition of SSD drive (MB)	Free space on secondary partition of SSD drive (MB)
128	250	64
256	250	640
512	300	128

Starting Kaspersky Disk Encryption

Prior to starting full disk encryption, you are advised to make sure that the computer is not infected. To do so, start the Full Scan or Critical Areas Scan task. Performing full disk encryption on a computer that is infected by a rootkit may cause the computer to become inoperable.

Before you start disk encryption, you must check the settings of Authentication Agent accounts. Authentication Agent is needed for working with drives that are protected using Kaspersky Disk Encryption (FDE) technology. Before the operating system is loaded, the user needs to complete authentication with the Agent. Kaspersky Endpoint Security allows you to automatically create Authentication Agent accounts before encrypting a drive. You can enable automatic creation of Authentication Agent accounts in the Full Disk Encryption policy settings (see the instructions below). You can also use Single Sign-On (SSO) technology.

Kaspersky Endpoint Security allows you to automatically create Authentication Agent for the following user groups:

- **All accounts on the computer**. All accounts on the computer that have been active at any time.
- **All domain accounts on the computer**. All accounts on the computer that belong to some domain and that have been active at any time.

- **All local accounts on the computer**. All local accounts on the computer that have been active at any time.

- **Service account with a one-time password**. The service account is necessary to gain access to the computer, for example, when the user forgets the password. You can also use the service account as a reserve account. You must enter the name of the account (by default, `ServiceAccount`). Kaspersky Endpoint Security creates a password automatically. You can find the password in the Kaspersky Security Center console.

- **Local administrator**. Kaspersky Endpoint Security creates an Authentication Agent user account for the local administrator of the computer.

- **Computer manager**. Kaspersky Endpoint Security creates an Authentication Agent user account for the account of the computer manager. You can see which account has the computer manager role in computer properties in Active Directory. By default, the computer manager role is not defined, that is, it does not correspond to any account.

- **Active account**. Kaspersky Endpoint Security automatically creates an Authentication Agent account for the account that is active at the time of disk encryption.

The *Manage Authentication Agent accounts* task is designed for configuring user authentication settings. You can use this task to add new accounts, modify the settings of current accounts, or remove accounts if necessary. You can use local tasks for individual computers as well as group tasks for computers from separate administration groups or a selection of computers.

How to run Kaspersky Disk Encryption through the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Data Encryption** → **Full Disk Encryption**.

4. In the **Encryption technology** drop-down list, select **Kaspersky Disk Encryption**.

   Kaspersky Disk Encryption technology cannot be used if the computer has hard drives that were encrypted by BitLocker.

5. In the **Encryption mode** drop-down list, select **Encrypt all hard drives**.

   If the computer has several operating systems installed, after encrypting all hard drives you will be able to load only the operating system that has the application installed.

   If you need to exclude some of the hard drives from encryption, create a list of such hard drives.

6. Configure advanced Kaspersky Disk Encryption options (see table below).

7. Save your changes.

How to run Kaspersky Disk Encryption through the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Data Encryption** → **Full Disk Encryption**.
5. Select the **Kaspersky Disk Encryption** technology.

   Kaspersky Disk Encryption technology cannot be used if the computer has hard drives that were encrypted by BitLocker.
6. In the **Action on devices** block, select **Encrypt all hard drives**.

   If the computer has several operating systems installed, after encryption you will be able to load only the operating system in which the encryption was performed.

   If you need to exclude some of the hard drives from encryption, create a list of such hard drives.
7. Configure advanced Kaspersky Disk Encryption options (see table below).
8. Save your changes.

You can use the Encryption Monitor tool to control the disk encryption or decryption process on a user's computer. You can run the Encryption Monitor tool from the main application window.

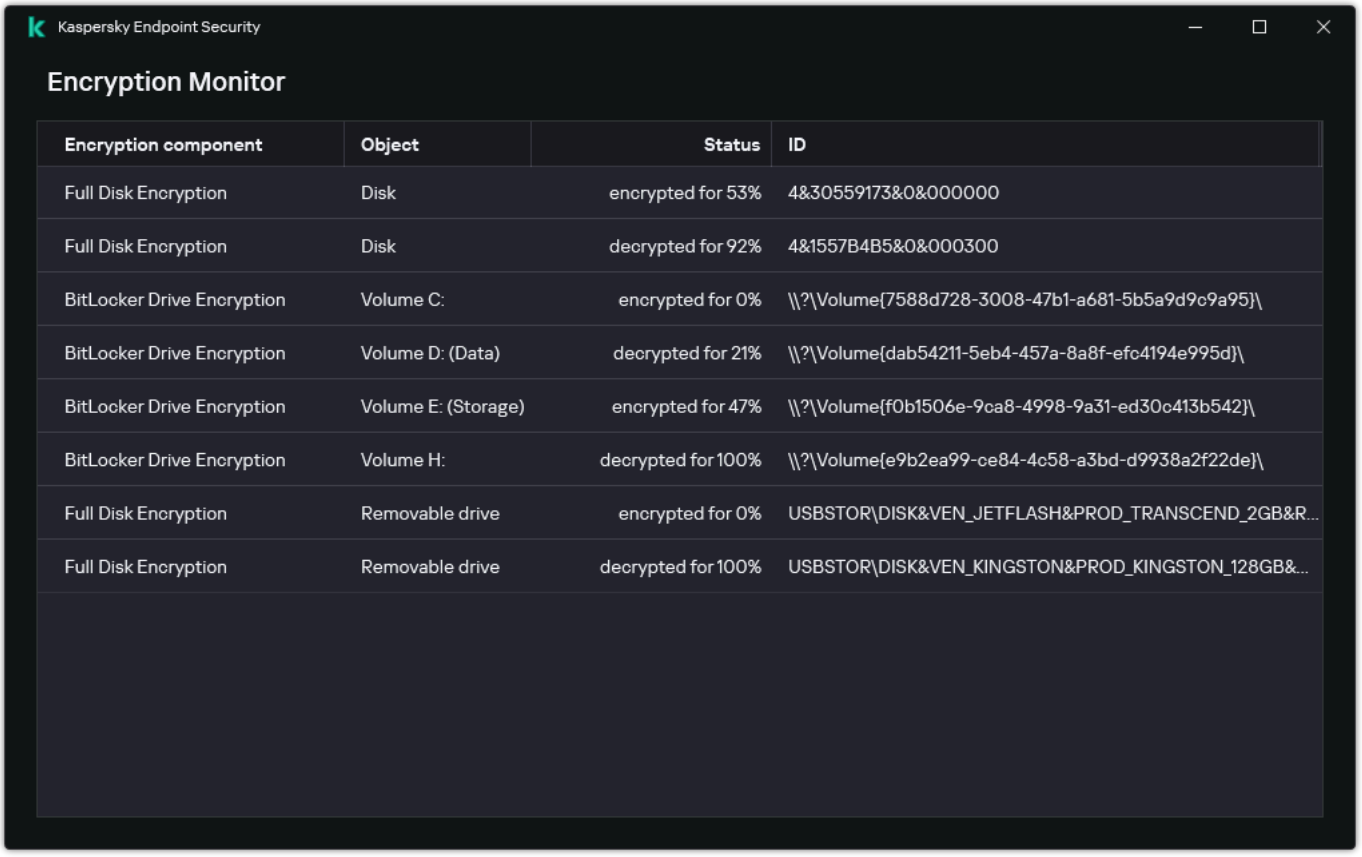

Encryption Monitor

If system hard drives are encrypted, the Authentication Agent loads before startup of the operating system. Use the Authentication Agent to complete authentication for obtaining access to encrypted system hard drives and load the operating system. After successful completion of the authentication procedure, the operating system loads. The authentication process is repeated every time the operating system restarts.

Kaspersky Disk Encryption component settings

Parameter	Description
Automatically create Authentication Agent accounts for users during encryption	If this check box is selected, the application creates Authentication Agent accounts based on the list of Windows user accounts on the computer. By default, Kaspersky Endpoint Security uses all local and domain accounts with which the user logged in to the operating system over the past 30 days.
Automatically create Authentication Agent accounts for all users of this computer upon sign-in	If this check box is selected, the application checks information about Windows user accounts on the computer before starting Authentication Agent. If Kaspersky Endpoint Security detects a Windows user account that has no Authentication Agent account, the application will create a new account for accessing encrypted drives. The new Authentication Agent account will have the following default settings: password-protected sign-on only, and password change on first authentication. Therefore, you do not need to manually add Authentication Agent accounts using the *Manage Authentication Agent accounts* task for computers with already encrypted drives.
Save user name entered in Authentication Agent	If the check box is selected, the application saves the name of the Authentication Agent account. You will not be required to enter the account name the next time you attempt to complete authorization in the Authentication Agent under the same account.

Parameter	Description
Encrypt used disk space only (reduces encryption time)	This check box enables / disables the option that limits the encryption area to only occupied hard drive sectors. This limit lets you reduce encryption time. Enabling or disabling the **Encrypt used disk space only (reduces encryption time)** feature after starting encryption does not modify this setting until the hard drives are decrypted. You must select or clear the check box before starting encryption. If the check box is selected, only portions of the hard drive that are occupied by files are encrypted. Kaspersky Endpoint Security automatically encrypts new data as it is added. If the check box is cleared, the entire hard drive is encrypted, including residual fragments of previously deleted and modified files. This option is recommended for new hard drives whose data has not been modified or deleted. If you are applying encryption on a hard drive that is already in use, it is recommended to encrypt the entire hard drive. This ensures protection of all data, even deleted data that is potentially recoverable. By default, the check box is cleared.
Use Legacy USB Support (not recommended)	This check box enables or disables the Legacy USB Support functionality. *Legacy USB Support* **is** a BIOS/UEFI function that allows you to use USB devices (such as a security token) during the computer's boot phase before starting the operating system (BIOS mode). Legacy USB Support does not affect support for USB devices after the operating system is started. If the check box is selected, support for USB devices during initial startup of the computer will be enabled. When the Legacy USB Support function is enabled, the Authentication Agent in BIOS mode does not support working with tokens via USB. It is recommended to use this option only when there is a hardware compatibility issue and only for those computers on which the problem occurred.

Creating a list of hard drives excluded from encryption

You can create a list of exclusions from encryption only for Kaspersky Disk Encryption technology.

To form a list of hard drives excluded from encryption:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Full Disk Encryption**.
4. In the **Encryption technology** drop-down list, select **Kaspersky Disk Encryption**.

   Entries corresponding to hard drives excluded from encryption appear in the **Do not encrypt the following hard drives** table. This table is empty if you have not previously formed a list of hard drives excluded from encryption.
5. To add hard drives to the list of hard drives excluded from encryption:

   a. Click **Add**.

   b. In the window that opens, specify the values for **Device name**, **Computer**, **Disk type**, **Kaspersky Disk Encryption**.

c. Click **Refresh**.

d. In the **Name** column, select the check boxes in the table rows corresponding to those hard drives that you want to add to the list of hard drives excluded from encryption.

e. Click **OK**.

The selected hard drives appear in the **Do not encrypt the following hard drives** table.

6. Save your changes.

Exporting and importing a list of hard drives excluded from encryption

You can export the list of hard drive encryption exclusions to an XML file. Then you can modify the file to, for example, add a large number of exclusions of the same type. You can also use the export/import function to back up the list of exclusions or to migrate the exclusions to a different server.

How to export and import a list of hard drive encryption exclusions in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Data Encryption** → **Full Disk Encryption**.

4. In the **Encryption technology** drop-down list, select **Kaspersky Disk Encryption**.

   Entries corresponding to hard drives excluded from encryption appear in the **Do not encrypt the following hard drives** table.

5. To export the list of exclusions:

   a. Select the exclusions that you want to export. To select multiple ports, use the **`CTRL`** or **`SHIFT`** keys.

      If you did not select any exclusion, Kaspersky Endpoint Security will export all exclusions.

   b. Click the → **Export** button.

   c. In the window that opens, specify the name of the XML file to which you want to export the list of exclusions, and select the folder in which you want to save this file.

   d. Save the file.

      Kaspersky Endpoint Security exports the entire list of exclusions to the XML file.

6. To import the list of rules:

   a. Click the → **Import** button.

   b. In the window that opens, select the XML file from which you want to import the list of exclusions.

c. Open the file.

If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

7. Save your changes.

How to export and import a list of hard drive encryption exclusions in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Data Encryption** → **Full Disk Encryption**.

   Select the **Kaspersky Disk Encryption** technology.

5. Click the **Exclusions** link.

   The list of exclusions opens.

6. To export the list of rules:

   a. Select the exclusions that you want to export.

   b. Click the → **Export** button.

   Kaspersky Endpoint Security exports the list of exclusions to a JSON file in the default downloads folder.

7. To import the list of exclusions:

   a. Click the → **Import** button.

   In the window that opens, select the JSON file from which you want to import the list of exclusions.

   b. Open the file.

   If the computer already has a list of exclusions, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the JSON file.

8. Save your changes.

Enabling Single Sign-On (SSO) technology

Single Sign-On (SSO) technology allows you to automatically log into the operating system using the credentials of the Authentication Agent. This means that a user needs to enter a password only once when signing in to Windows (Authentication Agent account password). Single Sign-On technology also lets you automatically update the Authentication Agent account password when the Windows account password is changed.

When using Single Sign-on technology, the Authentication Agent ignores the password strength requirements specified in Kaspersky Security Center. You can set the password strength requirements in the operating system settings.

Enabling Single Sign-On technology

How to enable the use of Single Sign-On technology in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Common encryption settings**.
4. In the **Password settings** block, click the **Settings** button.
5. In the window that opens, on the **Authentication Agent** tab, select the **Use Single Sign-On (SSO) technology** check box.
6. If you are using a third-party credential provider, select the **Wrap third-party credential providers** check box.
7. Save your changes.

   As a result, the user needs to complete the authentication procedure only once with the Agent. The authentication procedure is not required for loading the operating system. The operating system loads automatically.

How to enable use of Single Sign-On in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Data Encryption** → **Full Disk Encryption**.
5. Select the **Kaspersky Disk Encryption** technology.
6. In the **Password settings** block, select the **Use Single Sign-On (SSO) technology** check box.
7. If you are using a third-party credential provider, select the **Wrap third-party credential providers** check box.
8. Save your changes.

   As a result, the user needs to complete the authentication procedure only once with the Agent. The authentication procedure is not required for loading the operating system. The operating system loads automatically.

For Single Sign-On to work, the Windows account password and the password for the Authentication Agent account must match. If the passwords do not match, the user needs to perform the authentication procedure twice: in the interface of the Authentication Agent and before loading the operating system. These actions need to be performed only once to synchronize the passwords. After that, Kaspersky Endpoint Security replaces the password of the Authentication Agent account with the password of the Windows account. When the Windows account password is changed, the application will automatically update the password for the Authentication Agent account.

Third-party credential providers

Kaspersky Endpoint Security supports the third-party credential provider ADSelfService Plus.

When working with third-party credential providers, Authentication Agent intercepts the password before the operating system is loaded. This means that a user needs to enter a password only once when signing in to Windows. After signing in to Windows, the user can utilize the capabilities of a third-party credential provider for authentication in corporate services, for example. Third-party credential providers also allow users to independently reset their own password. In this case, Kaspersky Endpoint Security will automatically update the password for Authentication Agent.

If you are using a third-party credential provider that is not supported by the application, you may encounter some limitations in Single Sign-On technology operation. When signing in to Windows, two profiles will be available to the user: in-system credential provider and third-party credential provider. The icons of these profiles will be identical (see the figure below). The user will have the following options for continuing:

- If the user selects the *third-party credential provider*, Authentication Agent will not be able to synchronize the password with the Windows account. Therefore, if the user has changed the Windows account password, Kaspersky Endpoint Security cannot update the password for the Authentication Agent account. As a result, the user needs to perform the authentication procedure twice: in the interface of the Authentication Agent and before loading the operating system. In this case, the user can utilize the capabilities of a third-party credential provider for authentication in corporate services, for example.

- If the user selects the *in-system credential provider*, Authentication Agent will synchronize the passwords with the Windows account. In this case, the user cannot utilize the capabilities of a third-party provider for authentication in corporate services, for example.

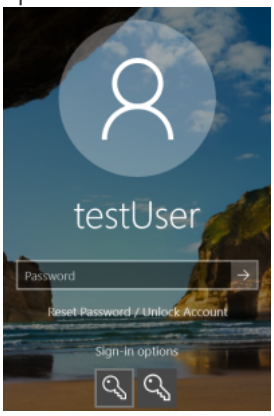

System authentication profile and third-party authentication profile for Windows sign-in

Managing Authentication Agent accounts

Authentication Agent is needed for working with drives that are protected using Kaspersky Disk Encryption (FDE) technology. Before the operating system is loaded, the user needs to complete authentication with the Agent. The *Manage Authentication Agent accounts* task is designed for configuring user authentication settings. You can use local tasks for individual computers as well as group tasks for computers from separate administration groups or a selection of computers.

> You cannot configure a schedule for starting the *Manage Authentication Agent accounts* task. It is also impossible to forcibly stop a task.

How to create the Manage Authentication Agent accounts task in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.
   The list of tasks opens.
2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **Manage Authentication Agent accounts**.

Step 2. Selecting an Authentication Agent account management command

Generate a list of Authentication Agent account management commands. Management commands allow you to add, modify, and delete Authentication Agent accounts (see instructions below). Only users who have an Authentication Agent account can complete the authentication procedure, load the operating system, and gain access to the encrypted drive.

Step 3. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 4. Defining the task name

Enter a name for the task, for example, *Administrator Accounts*.

Step 5. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

As a result, after the task is completed at the next computer startup, the new user can complete the authentication procedure, load the operating system, and gain access to the encrypted drive.

How to create the Manage Authentication Agent accounts task in the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Configuring general task settings

Configure the general task settings:

1. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.
2. In the **Task type** drop-down list, select **Manage Authentication Agent accounts**.
3. In the **Task name** field, enter a brief description, such as *Administrator accounts*.
4. In the **Devices to which the task will be assigned** block, select the task scope.

Step 2. Managing Authentication Agent accounts

Generate a list of Authentication Agent account management commands. Management commands allow you to add, modify, and delete Authentication Agent accounts (see instructions below). Only users who have an Authentication Agent account can complete the authentication procedure, load the operating system, and gain access to the encrypted drive.

Step 3. Completing task creation

Finish the wizard. A new task will be displayed in the list of tasks.

To run a task, select the check box opposite the task and click the **Start** button.

As a result, after the task is completed at the next computer startup, the new user can complete the authentication procedure, load the operating system, and gain access to the encrypted drive.

To add an Authentication Agent account, you need to add a special command to the *Manage Authentication Agent accounts* task. It is convenient to use a group task, for example, to add an administrator account to all computers.

Kaspersky Endpoint Security allows you to automatically create Authentication Agent accounts before encrypting a drive. You can enable automatic creation of Authentication Agent accounts in the Full Disk Encryption policy settings. You can also use Single Sign-On (SSO) technology.

How to add an Authentication Agent account through the Administration Console (MMC)

1. Open the properties of the *Manage Authentication Agent accounts* task.
2. In the task properties, select the **Settings** section.
3. Click **Add** → **Account adding command**.
4. In the window that opens, in the **Windows account** field, specify the name of the Microsoft Windows account that will be used to create the Authentication Agent account.
5. If you manually entered the Windows account name, click the **Allow** button to define the account security identifier (SID).

   If you choose not to determine the security identifier (SID) by clicking the **Allow** button, it will be determined when the task is performed on the computer.

   > Defining a Windows account security identifier is necessary to verify that the Windows account name was entered correctly. If the Windows account does not exist on the computer or in the trusted domain, the *Manage Authentication Agent accounts* task will end with an error.

6. Select the **Replace existing account** check box if you want the existing account previously created for the Authentication Agent to be replaced with the account being created.

   > This step is available when you are adding an Authentication Agent account creation command in the properties of a group task for managing Authentication Agent accounts. This step is not available when you are adding an Authentication Agent account creation command in the properties of the *Manage Authentication Agent accounts* local task.

7. In the **User name** field, type the name of the Authentication Agent account that must be entered during authentication for access to encrypted hard drives.
8. Select the **Allow password-based authentication** check box if you want the application to prompt the user to enter the Authentication Agent account password during authentication for accessing encrypted hard drives. Set a password for the Authentication Agent account. If necessary, you can request a new password from the user after the first authentication.
9. Select the **Allow certificate-based authentication** check box if you want the application to prompt the user to connect a token or smart card to the computer during authentication for accessing encrypted hard drives. Select a certificate file for authentication with a smart card or token.
10. If required, in the **Command description** field, enter the Authentication Agent account details that you need for managing the command.
11. In the **Access to authentication in Authentication Agent** block, configure access to authentication in Authentication Agent for the user that uses the account specified in the command.
12. Save your changes.

How to add an Authentication Agent account through the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **Manage Authentication Agent accounts** task of Kaspersky Endpoint Security.

   The task properties window opens.

3. Select the **Application settings** tab.

4. In the list of Authentication Agent accounts, click the **Add** button and select the **Add account** command type.

5. Select a user account. You can select an account from the list of domain accounts or manually enter the account name. Go to the next step.

   Kaspersky Endpoint Security determines the account security identifier (Security Identifier, SID). This is necessary to verify the account. If you entered the user name incorrectly, Kaspersky Endpoint Security will end the task with an error.

6. Configure the Authentication Agent account settings.

   - **Create a new Authentication Agent account to replace the existing account**. Kaspersky Endpoint Security scans existing accounts on the computer. If the user security ID on the computer and in the task match, Kaspersky Endpoint Security will change the user account settings in accordance with the task.

   - **User name**. The default user name of the Authentication Agent account corresponds to the domain name of the user.

   - **Allow password-based authentication**. Set a password for the Authentication Agent account. If necessary, you can request a new password from the user after the first authentication. This way, each user will have their own unique password. You can also set password strength requirements for the Authentication Agent account in the policy.

   - **Allow certificate-based authentication**. Select a certificate file for authentication with a smart card or token. This way, the user will need to enter the password for the smart card or token.

   - **Account access to encrypted data**. Configure user access to the encrypted drive. You can, for example, temporarily disable user authentication instead of deleting the Authentication Agent account.

   - **Comment**. Enter an account description, if necessary.

7. Save your changes.

8. Select the check box next to the task and click the **Start** button.

As a result, after the task is completed at the next computer startup, the new user can complete the authentication procedure, load the operating system, and gain access to the encrypted drive.

To change the password and other settings of the Authentication Agent account, you need to add a special command to the *Manage Authentication Agent accounts* task. It is convenient to use a group task, for example, to replace the administrator token certificate on all computers.

How to change the Authentication Agent account through the Administration Console (MMC)

1. Open the properties of the *Manage Authentication Agent accounts* task.

2. In the task properties, select the **Settings** section.

3. Click **Add** → **Account editing command**.

4. In the window that opens, in the **Windows account** field, specify the name of the Microsoft Windows user account that you want to change.

5. If you manually entered the Windows account name, click the **Allow** button to define the account security identifier (SID).

   If you choose not to determine the security identifier (SID) by clicking the **Allow** button, it will be determined when the task is performed on the computer.

   > Defining a Windows account security identifier is necessary to verify that the Windows account name was entered correctly. If the Windows account does not exist on the computer or in the trusted domain, the *Manage Authentication Agent accounts* task will end with an error.

6. Select the **Change user name** check box and enter a new name for the Authentication Agent account if you want Kaspersky Endpoint Security to change the user name for all Authentication Agent accounts created using the Microsoft Windows account with the name indicated in the **Windows account** field to the name typed in the field below.

7. Select the **Modify password-based authentication settings** check box to make password-based authentication settings editable.

8. Select the **Allow password-based authentication** check box if you want the application to prompt the user to enter the Authentication Agent account password during authentication for accessing encrypted hard drives. Set a password for the Authentication Agent account.

9. Select the **Edit the password change rule upon authentication in Authentication Agent** check box if you want Kaspersky Endpoint Security to change the value of the password change setting for all Authentication Agent accounts created using the Microsoft Windows account with the name indicated in the **Windows account** field to the setting value specified below.

10. Specify the value of the password change setting upon authentication in Authentication Agent.

11. Select the **Modify certificate-based authentication settings** check box to make settings of authentication based on the electronic certificate of a token or smart card editable.

12. Select the **Allow certificate-based authentication** check box if you want the application to prompt the user to enter the password to the token or smart card connected to the computer during the authentication process in order to access encrypted hard drives. Select a certificate file for authentication with a smart card or token.

13. Select the **Edit command description** check box and edit the command description if you want Kaspersky Endpoint Security to change the command description for all Authentication Agent accounts created using the Microsoft Windows account with the name indicated in the **Windows account** field.

14. Select the **Edit the authentication access rule in Authentication Agent** check box if you want Kaspersky Endpoint Security to change the rule for user access to the authentication dialog in Authentication Agent to the value specified below for all Authentication Agent accounts created using the Microsoft Windows account with the name indicated in the **Windows account** field.

15. Specify the rule for accessing the authentication dialog in Authentication Agent.

16. Save your changes.

How to change the Authentication Agent account through the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **Manage Authentication Agent accounts** task of Kaspersky Endpoint Security.

   The task properties window opens.

3. Select the **Application settings** tab.

4. In the list of Authentication Agent accounts, click the **Add** button and select the **Edit account** command type.

5. Select a user account. You can select an account from the list of domain accounts or manually enter the account name. Go to the next step.

   Kaspersky Endpoint Security determines the account security identifier (Security Identifier, SID). This is necessary to verify the account. If you entered the user name incorrectly, Kaspersky Endpoint Security will end the task with an error.

6. Select the check boxes next to the settings that you want to edit.

7. Configure the Authentication Agent account settings.

   - **Create a new Authentication Agent account to replace the existing account**. Kaspersky Endpoint Security scans existing accounts on the computer. If the user security ID on the computer and in the task match, Kaspersky Endpoint Security will change the user account settings in accordance with the task.

   - **User name**. The default user name of the Authentication Agent account corresponds to the domain name of the user.

   - **Allow password-based authentication**. Set a password for the Authentication Agent account. If necessary, you can request a new password from the user after the first authentication. This way, each user will have their own unique password. You can also set password strength requirements for the Authentication Agent account in the policy.

   - **Allow certificate-based authentication**. Select a certificate file for authentication with a smart card or token. This way, the user will need to enter the password for the smart card or token.

   - **Account access to encrypted data**. Configure user access to the encrypted drive. You can, for example, temporarily disable user authentication instead of deleting the Authentication Agent account.

   - **Comment**. Enter an account description, if necessary.

8. Save your changes.

9. Select the check box next to the task and click the **Start** button.

To delete an Authentication Agent account, you need to add a special command to the *Manage Authentication Agent accounts* task. It is convenient to use a group task, for example, to delete the account of a dismissed employee.

How to delete an Authentication Agent account through the Administration Console (MMC)

1. Open the properties of the *Manage Authentication Agent accounts* task.

2. In the task properties, select the **Settings** section.

3. Click **Add** → **Account deletion command**.

4. In the window that opens, in the **Windows account** field, specify the name of the Windows user account that was used to create the Authentication Agent account that you want to delete.

5. If you manually entered the Windows account name, click the **Allow** button to define the account security identifier (SID).

   If you choose not to determine the security identifier (SID) by clicking the **Allow** button, it will be determined when the task is performed on the computer.

   > Defining a Windows account security identifier is necessary to verify that the Windows account name was entered correctly. If the Windows account does not exist on the computer or in the trusted domain, the *Manage Authentication Agent accounts* task will end with an error.

6. Save your changes.

How to delete an Authentication Agent account through the Web Console

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **Manage Authentication Agent accounts** task of Kaspersky Endpoint Security.

   The task properties window opens.

3. Select the **Application settings** tab.

4. In the list of Authentication Agent accounts, click the **Add** button and select the **Remove account** command type.

5. Select a user account. You can select an account from the list of domain accounts or manually enter the account name.

6. Save your changes.

7. Select the check box next to the task and click the **Start** button.

As a result, after the task is completed at the next computer startup, the user will not be able to complete the authentication procedure and load the operating system. Kaspersky Endpoint Security will deny access to encrypted data.

To view the list of users who can complete authentication with the Agent and load the operating system, you need to go to the properties of the managed computer.

How to view the list of Authentication Agent accounts through the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Devices**.

3. Double-click to open the computer properties window.

4. In the computer properties window, select the **Tasks** section.

5. In the task list, select **Manage Authentication Agent accounts** and open the task properties by double-clicking.

6. In the task properties, select the **Settings** section.

As a result, you will be able to access a list of Authentication Agent accounts on this computer. Only users from the list can complete authentication with the Agent and load the operating system.

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Click the name of the computer on which you want to view the list of Authentication Agent accounts.
3. In computer properties, select the **Tasks** tab.
4. In the task list, select **Manage Authentication Agent accounts**.
5. In the task properties, select the **Application settings** tab.

As a result, you will be able to access a list of Authentication Agent accounts on this computer. Only users from the list can complete authentication with the Agent and load the operating system.

Using a token and smart card with Authentication Agent

A token or smart card can be used for authentication when accessing encrypted hard drives. To do so, you must add the electronic certificate file of a token or smart card to the *Manage Authentication Agent accounts* task.

> Use of a token or smart card is available only if the computer hard drives were encrypted using the AES256 encryption algorithm. If the computer hard drives were encrypted using the AES56 encryption algorithm, addition of the electronic certificate file to the command will be denied.

Kaspersky Endpoint Security supports the following tokens, smart card readers, and smart cards:

- SafeNet eToken PRO 64K (4.2b);
- SafeNet eToken PRO 72K Java;
- SafeNet eToken 4100-72K Java;
- SafeNet eToken 5100;
- SafeNet eToken 5105;
- SafeNet eToken 7300;
- EMC RSA SID 800;
- Gemalto IDPrime.NET 510;
- Gemalto IDPrime.NET 511;
- Rutoken ECP;
- Rutoken ECP Flash;
- Athena IDProtect Laser;

- SafeNet eToken PRO 72K Java;
- Aladdin-RD JaCarta PKI.

To add the file of a token or smart card electronic certificate to the command for creating an Authentication Agent account, you must first save the file using third-party software for managing certificates.

The token or smart-card certificate must have the following properties:

- The certificate must be compliant with the X.509 standard, and the certificate file must have DER encoding.
- The certificate contains an RSA key with a length of at least 1024 bits.

If the electronic certificate of the token or smart card does not meet these requirements, you cannot load the certificate file into the command for creating an Authentication Agent account.

The `KeyUsage` parameter of the certificate must have the value `keyEncipherment` or `dataEncipherment`. The `KeyUsage` parameter determines the purpose of the certificate. If the parameter has a different value, Kaspersky Security Center will download the certificate file but will display a warning.

If a user has lost a token or smart card, the administrator must add the file of a token or smart card electronic certificate to the command for creating an Authentication Agent account. Then the user must complete the procedure for receiving access to encrypted devices or restoring data on encrypted devices.

Hard drive decryption

You can decrypt hard drives even if there is no current license permitting data encryption.

To decrypt hard drives:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Full Disk Encryption**.
4. In the **Encryption technology** drop-down list, select the technology with which the hard drives were encrypted.
5. Do one of the following:
   - In the **Encryption mode** drop-down list, select the **Decrypt all hard drives** option if you want to decrypt all encrypted hard drives.
   - Add the encrypted hard drives that you want to decrypt to the **Do not encrypt the following hard drives** table.

     This option is available only for Kaspersky Disk Encryption technology.
6. Save your changes.

You can use the Encryption Monitor tool to control the disk encryption or decryption process on a user's computer. You can run the Encryption Monitor tool from the main application window.

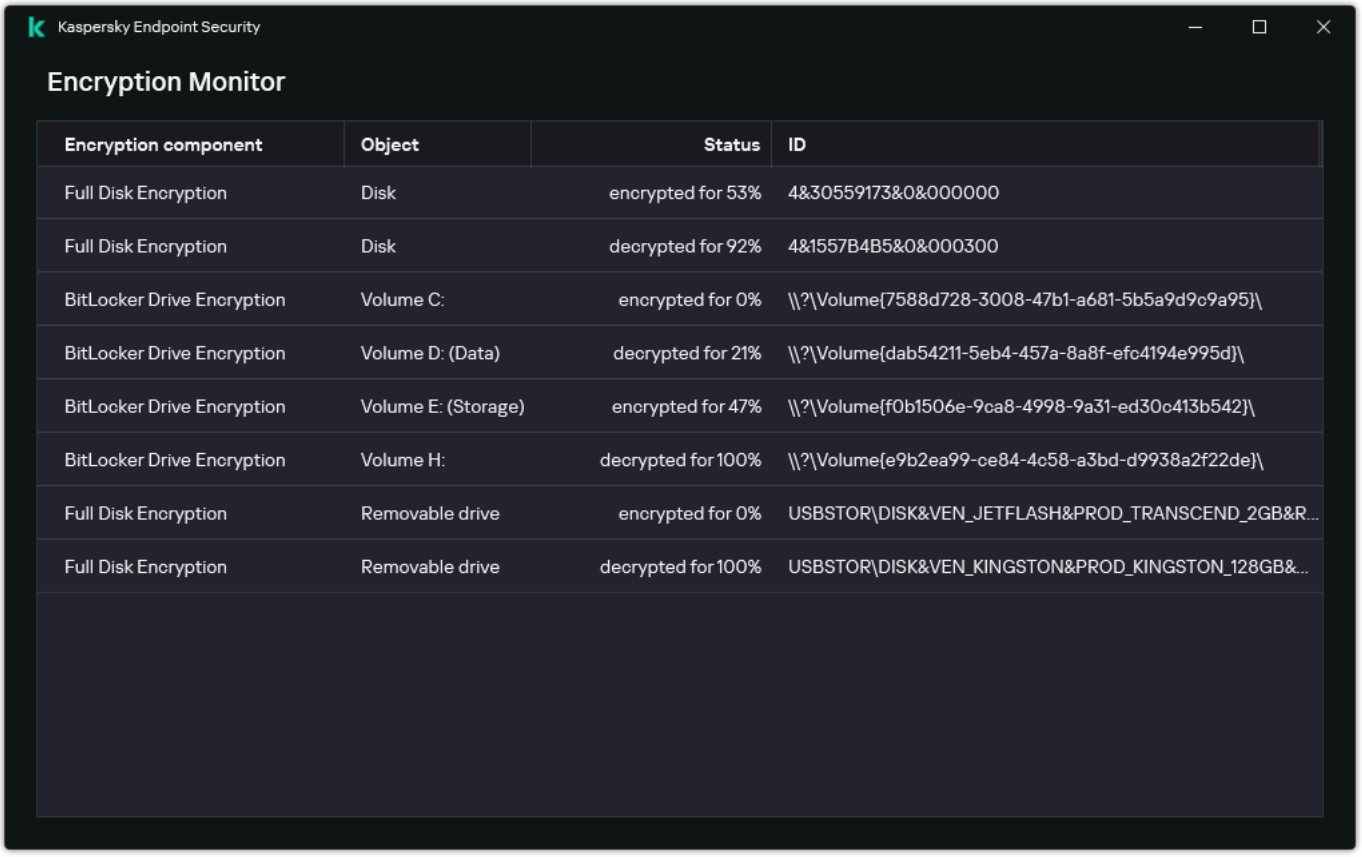

Encryption component	Object	Status	ID
Full Disk Encryption	Disk	encrypted for 53%	4&30559173&0&000000
Full Disk Encryption	Disk	decrypted for 92%	4&1557B4B5&0&000300
BitLocker Drive Encryption	Volume C:	encrypted for 0%	\\?\Volume{7588d728-3008-47b1-a681-5b5a9d9c9a95}\
BitLocker Drive Encryption	Volume D: (Data)	decrypted for 21%	\\?\Volume{dab54211-5eb4-457a-8a8f-efc4194e995d}\
BitLocker Drive Encryption	Volume E: (Storage)	encrypted for 47%	\\?\Volume{f0b1506e-9ca8-4998-9a31-ed30c413b542}\
BitLocker Drive Encryption	Volume H:	decrypted for 100%	\\?\Volume{e9b2ea99-ce84-4c58-a3bd-d9938a2f22de}\
Full Disk Encryption	Removable drive	encrypted for 0%	USBSTOR\DISK&VEN_JETFLASH&PROD_TRANSCEND_2GB&R...
Full Disk Encryption	Removable drive	decrypted for 100%	USBSTOR\DISK&VEN_KINGSTON&PROD_KINGSTON_128GB&...

Encryption Monitor

If the user shuts down or restarts the computer during decryption of hard drives that were encrypted using Kaspersky Disk Encryption technology, the Authentication Agent loads before the next startup of the operating system. Kaspersky Endpoint Security resumes hard drive decryption after successful authentication in the authentication agent and operating system startup.

If the operating system switches to hibernation mode during decryption of hard drives that were encrypted using Kaspersky Disk Encryption technology, Authentication Agent loads when the operating system comes out of hibernation mode. Kaspersky Endpoint Security resumes hard drive decryption after successful authentication in the authentication agent and operating system startup. After hard drive decryption, hibernation mode is unavailable until the first reboot of the operating system.

If the operating system goes into sleep mode during hard drive decryption, Kaspersky Endpoint Security resumes hard drive decryption when the operating system comes out of sleep mode without loading the Authentication Agent.

Restoring access to a drive protected by Kaspersky Disk Encryption technology

If a user has forgotten the password for accessing a hard drive protected by Kaspersky Disk Encryption technology, you need to start the recovery procedure (Request-Response). You can also use the service account to gain access to the hard disk if this feature is enabled in disk encryption settings.

Restoring access to the system hard drive

Restoring access to a system hard drive protected by Kaspersky Disk Encryption technology consists of the following steps:

1. The user reports the request blocks to the administrator (see the figure below).

2. The administrator enters the request blocks into Kaspersky Security Center, receives the response blocks and reports the response blocks to the user.

3. The user enters the response blocks in the Authentication Agent interface and obtains access to the hard drive.

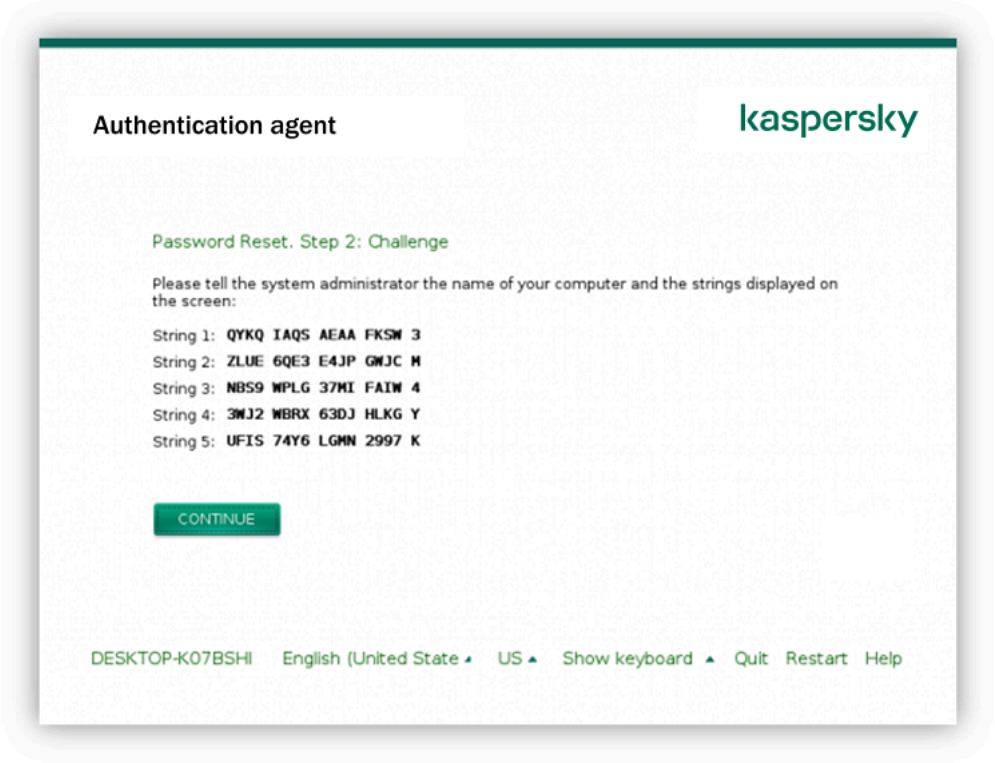

Restoring access to a system hard drive protected by Kaspersky Disk Encryption technology

To start the recovery procedure, the user needs to click the **Forgot your password** button in the Authentication Agent interface.

How to obtain response blocks for a system hard drive protected by Kaspersky Disk Encryption technology in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Devices**.

3. On the **Devices** tab, select the computer of the user requesting access to encrypted data and right-click to open the context menu.

4. In the context menu, select **Grant access in offline mode**.

5. This opens a window; in that window, select the **Authentication Agent** tab.

6. In the **Encryption algorithm in use** block, select an encryption algorithm: **AES56** or **AES256**.

   The data encryption algorithm depends on the AES encryption library that is included in the distribution package: *Strong encryption (AES256)* or *Lite encryption (AES56)*. The AES encryption library is installed together with the application.

7. In the **Account** drop-down list, select the name of the Authentication Agent account of the user who requested recovery of access to the drive.

8. In the **Hard drive** drop-down list, select the encrypted hard drive for which you need to recover access.

9. In the **User request** block enter the blocks of request dictated by the user.

As a result, the contents of the blocks of the response to the user's request for recovery of the user name and password of an Authentication Agent account will be displayed in the **Access key** field. Convey the contents of the response blocks to the user.

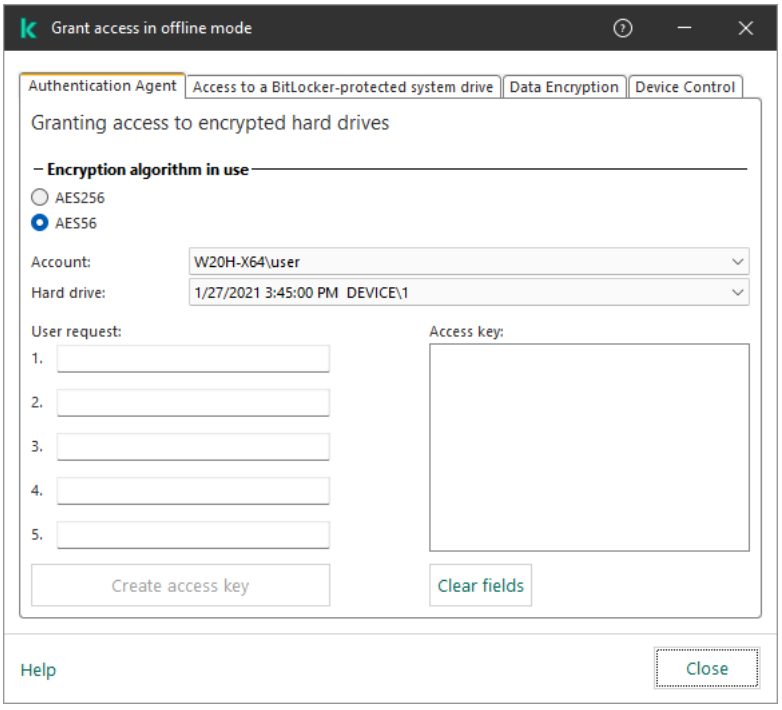

Granting access in offline mode

How to obtain response blocks for a system hard drive protected by Kaspersky Disk Encryption technology in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.

2. Select the check box next to the name of the computer whose drive you want to restore access to.

3. Click **Grant access to the device in offline mode**.

4. In the window that opens, select the **Authentication Agent** section.

5. In the **Account** drop-down list, select the name of the Authentication Agent account created for the user who is requesting recovery of the Authentication Agent account name and password.

6. Enter the request blocks conveyed by the user.

The contents of the blocks of the response to the user's request for recovery of the user name and password of the Authentication Agent account will be displayed at the bottom of the window. Convey the contents of the response blocks to the user.

After completing the recovery procedure, the Authentication Agent will prompt the user to change the password.

Restoring access to a non-system hard drive

Restoring access to a non-system hard drive protected by Kaspersky Disk Encryption technology consists of the following steps:

1. The user sends a request access file to the administrator.
2. The administrator adds the request access file to Kaspersky Security Center, creates an access key file and sends the file to the user.
3. The user adds the access key file to Kaspersky Endpoint Security and obtains access to the hard drive.

To start the recovery procedure, the user needs to attempt to access a hard drive. As a result, Kaspersky Endpoint Security will create a request access file (a file with the KESDC extension), which the user needs to send to the administrator, for example, by email.

How to obtain an access key file for an encrypted non-system hard drive in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Devices**.
3. On the **Devices** tab, select the computer of the user requesting access to encrypted data and right-click to open the context menu.
4. In the context menu, select **Grant access in offline mode**.
5. This opens a window; in that window, select the **Data Encryption** tab.
6. On the **Data Encryption** tab, click the **Browse** button.
7. In the window for selecting a request access file, specify the path to the file received from the user.

You will see information about the user's request. Kaspersky Security Center generates a key file. Email the generated encrypted data access key file to the user. Or save the access file and use any available method to transfer the file.

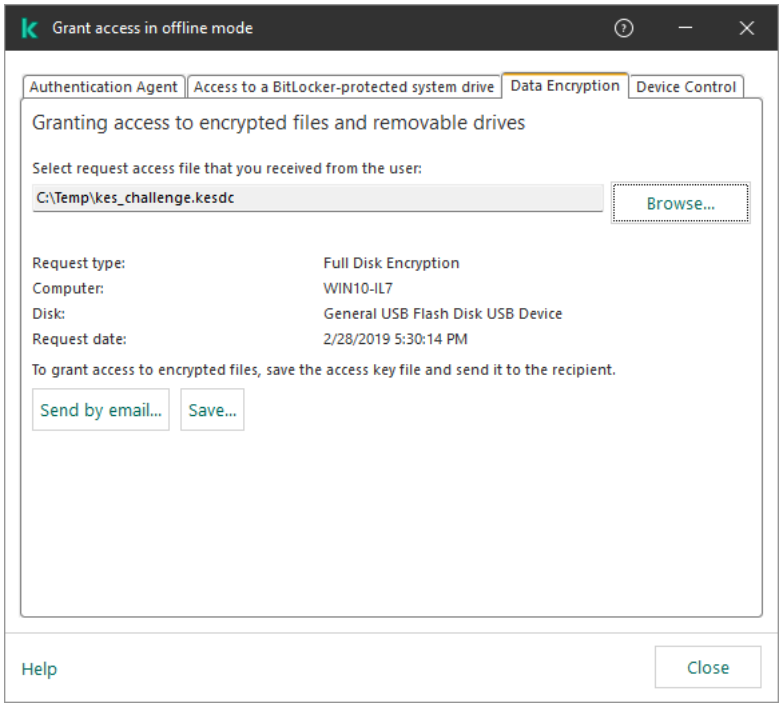

Granting access in offline mode

How to obtain an encrypted non-system hard drive access key file in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Select the check box next to the name of the computer whose data you want to restore access to.
3. Click **Grant access to the device in offline mode**.
4. Select **Data Encryption**.
5. Click the **Select file** button and select the request access file that you received from the user (a file with the KESDC extension).

   The Web Console will display information about the request. This will include the name of the computer on which the user is requesting access to the file.
6. Click the **Save key** button and select a folder to save the encrypted data access key file (a file with the KESDR extension).

As a result, you will be able to obtain the encrypted data access key, which you will need to transfer to the user.

Signing in with the Authentication Agent service account

Kaspersky Endpoint Security allows you to add an Authentication Agent service account when encrypting a drive. The service account is necessary to gain access to the computer, for example, when the user forgets the password. You can also use the service account as a reserve account. To add an account, select a service account in disk encryption settings and enter the name of the user account (by default, `ServiceAccount`). To authenticate using the agent, you will need a one-time password.

How to find out the one-time password in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Devices**.
3. Double-click to open the computer properties window.
4. In the computer properties window, select the **Tasks** section.
5. In the task list, select **Manage Authentication Agent accounts** and open the task properties by double-clicking.
6. In the task properties window, select the **Settings** section.
7. In the list of accounts, select the Authentication Agent service account (for example, `WIN10-USER\ServiceAccount`).
8. In the **Action** drop-down list, select **View account**.
9. In account properties, select the **Show original password** check box.
10. Copy the one-time password for logging in with the service account.

How to find out the one-time password in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Click the name of the computer on which you want to view the list of Authentication Agent accounts.

   This opens the computer properties.
3. In computer properties, select the **Tasks** tab.
4. In the task list, select **Manage Authentication Agent accounts**.
5. In the task properties, select the **Application settings** tab.
6. In the list of accounts, select the Authentication Agent service account (for example, `WIN10-USER\ServiceAccount`).
7. In account properties, select the **Show password** check box.
8. Copy the one-time password for logging in with the service account.

Kaspersky Endpoint Security automatically updates the password every time a user authenticates with the service account. After authenticating using the agent, you must enter the Windows account password. When signing in with the service account, you cannot use the SSO technology.

Updating the operating system

There are a number of special considerations for updating the operating system of a computer that is protected by Full Disk Encryption (FDE). Update the operating system as follows: first update the OS on one computer, then update the OS on a small portion of the computers, then update the OS on all computers of the network.

If you are using Kaspersky Disk Encryption technology, Authentication Agent is loaded before the operating system is started. Using Authentication Agent, the user can sign in to the system and receive access to encrypted drives. Then the operating system begins loading. If you start an update of the operating system on a computer that is protected using Kaspersky Disk Encryption technology, the OS Update Wizard will remove Authentication Agent. As a result, the computer can be locked because the OS loader will not be able to access the encrypted drive.

Features of the operating system update:

- **Updating OS through WSUS**. You can update the operating system in the usual way.
- **Updating OS from ISO**. To update the operating system, you must specify the folder with the Kaspersky disk encryption drivers. The application automatically copies the drivers to a separate folder. Do the following:
  1. Mount the ISO image.
  2. Start the installation of the system update with the following key:

     ```
     setup.exe /ReflectDrivers %ProgramFiles(x86)%\Kaspersky Lab\KES.14.2\reflect_drivers
     ```

> Automatic OS update is available only if the computer is running Windows 10 1607 (RS1) or higher. To upgrade earlier versions of the operating system, it is recommended that you first decrypt the disk, perform an OS upgrade, and then encrypt the disk.

If you are using BitLocker Drive Encryption technology, you do not need to decrypt the hard drives to update Windows 10. For more details on BitLocker, please visit the Microsoft website.

Eliminating errors of encryption functionality update

Full Disk Encryption is updated when a previous version of the application is upgraded to Kaspersky Endpoint Security for Windows 14.2.

When starting update of the Full Disk Encryption functionality the following errors may occur:

- Unable to initialize update.
- Device is incompatible with Authentication Agent.

To eliminate errors that occurred when you start update process of the Full Disk Encryption functionality in the new application version:

1. Decrypt hard drives.
2. Encrypt hard drives once again.

During update of the Full Disk Encryption functionality the following errors may occur:

- Unable to complete the update.
- Full Disk Encryption upgrade rollback completed with an error.

To eliminate errors that occurred during update process of the Full Disk Encryption functionality,

restore access to encrypted devices using Restore Utility.

Tracing the Authentication Agent

The application logs service information about the operation of the Authentication Agent and information about the user's operations with the Authentication Agent in the trace file.

To enable Authentication Agent tracing:

1. Enable Kaspersky Endpoint Security tracing.
2. Restart the computer.
3. As soon as a computer with encrypted hard drives starts, press the **F3** button to call up a window for configuring Authentication Agent settings.
4. After the FDE boot loader starts, select the **KES (FDE <version>)** boot manager.
5. In the boot manager menu, go to the **Log profile** settings.

```
Press a number to choose from the options below:

  1. Log profile (current: Release for delayed log)
  2. Log messages on screen mode: (current: without pause)
  3. Serial port (current: 0x3f8)
  4. Enable USB3 logging (current: no)
  5. Ignore test boot status (current: no)
  6. Use USB legacy support (current: no)
  7. Log UEFI handles (current: no)
  8. Repair MBR

  9. Boot system
```

Boot manager menu

6. Select the tracing level in the log profile settings window:

```
Choose logging profile:

  1. Release
  2. Debug
  3. Debug on display
  4. Verbose
  5. Verbose on display

  9. Return to main menu_
```

Authentication Agent trace levels

- **Release**. If this option is selected, the application does not log information about Authentication Agent events in the trace file.
- **Debug**. If this option is selected, the application logs information about the operation of the Authentication Agent and the user operations performed with the Authentication Agent in the trace file.

- **Debug on display**. If this option is selected, the application logs information about the operation of the Authentication Agent and the user operations performed with the Authentication Agent in the trace file, and relays it via the COM port.

  If a computer with encrypted hard drives is connected to another computer via the COM port, Authentication Agent events can be examined from this other computer.

- **Verbose**. If this option is selected, the application logs detailed information about the operation of the Authentication Agent and the user operations performed with the Authentication Agent in the trace file.

  The level of detail of entries under this option is higher compared to the level of the **Debug** option. A high level of detail of entries can slow down the startup of the Authentication Agent and the operating system.

- **Verbose on display**. If this option is selected, the application logs detailed information about the operation of the Authentication Agent and the user operations performed with the Authentication Agent in the trace file, and relays it via the COM port.

  The level of detail of entries under this option is higher compared to the level of the **Debug on display** option. A high level of detail of entries can slow down the startup of the Authentication Agent and the operating system.

After you select a trace level, the boot manager displays the menu again.

7. In the boot manager menu, select **Boot system**.

   The FDE boot loader starts the Authentication Agent.

   Reproduce the problem.

   Data is recorded in the Authentication Agent trace file if there are encrypted hard drives on the computer or during full disk encryption.

8. To stop the tracing process, return to the Support Tools window and disable tracing.

As a result, Authentication Agent KES.SRV operation trace files are created in the `%ProgramData%\Kaspersky Lab\KES.14.2\Traces` folder. The Authentication Agent trace file is not sent to Kaspersky, unlike other trace files of the application. If necessary, you can manually send the Authentication Agent trace file to Kaspersky for analysis.

Editing Authentication Agent help texts

Before editing help messages of the Authentication Agent, please review the list of supported characters in a preboot environment (see below).

To edit Authentication Agent help messages:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Data Encryption** → **Common encryption settings**.

4. In the **Templates** block, click the **Help** button.

5. In the window that opens, do the following:

   - Select the **Authentication** tab to edit the help text shown in the Authentication Agent window when account credentials are being entered.

   - Select the **Change password** tab to edit the help text shown in the Authentication Agent window when the password for the Authentication Agent account is being changed.

   - Select the **Recover password** tab to edit the help text shown in the Authentication Agent window when the password for the Authentication Agent account is being recovered.

6. Edit help messages.

   If you want to restore the original text, click the **By default** button.

   > You can enter help text containing 16 lines or less. The maximum length of a line is 64 characters.

7. Save your changes.

Limited support for characters in Authentication Agent help messages

In a preboot environment, the following Unicode characters are supported:

- Basic Latin alphabet (0000 - 007F)
- Additional Latin-1 characters (0080 - 00FF)
- Extended Latin-A (0100 - 017F)
- Extended Latin-B (0180 - 024F)
- Uncombined extended ID characters (02B0 - 02FF)
- Combined diacritical marks (0300 - 036F)
- Greek and Coptic alphabets (0370 - 03FF)
- Cyrillic (0400 - 04FF)
- Hebrew (0590 - 05FF)
- Arabic script (0600 - 06FF)
- Additional extended Latin (1E00 - 1EFF)
- Punctuation marks (2000 - 206F)
- Currency symbols (20A0 - 20CF)
- Letter-like symbols (2100 - 214F)

- Geometric figures (25A0 - 25FF)
- Presentation forms of Arabic script-B (FE70 - FEFF)

Characters that are not specified in this list are not supported in a preboot environment. It is not recommended to use such characters in Authentication Agent help messages.

Removing leftover objects and data after testing the operation of Authentication Agent

During application uninstallation, if Kaspersky Endpoint Security detects objects and data that remained on the system hard drive after test operation of Authentication Agent, application uninstallation is interrupted and becomes impossible until such objects and data are removed.

Objects and data may remain on the system hard drive after test operation of Authentication Agent only in exceptional cases. For example, this can happen if the computer has not been restarted after a Kaspersky Security Center policy with encryption settings was applied, or if the application fails to start after test operation of Authentication Agent.

You can remove objects and data that remained on the system hard drive after test operation of Authentication Agent in the following ways:

- Using the Kaspersky Security Center policy.
- using Restore Utility.

To use a Kaspersky Security Center policy to remove objects and data that remained after test operation of Authentication Agent:

1. Apply to the computer a Kaspersky Security Center policy with settings configured to decrypt all computer hard drives.
2. Start Kaspersky Endpoint Security.

To use a Restore Utility to remove objects and data that remained after test operation of Authentication Agent:

1. Run the file named fdert.exe, which is the executable file of the Restore Utility. This file is created by Kaspersky Endpoint Security.
2. In the Restore Utility window, select the required device.
3. Click **Scan**.
4. If, after diagnosing the system hard drive, you receive a message indicating that objects and data remain from the test operation of Authentication Agent, click **Delete AA objects and data**.

   The **Delete AA objects and data** button is available only if objects and data remaining after test operation of Authentication Agent are detected.

To remove information about application incompatibility with Authentication Agent,

type the `avp pbatestreset` command in the command line.

BitLocker Management

BitLocker is an encryption technology built into Windows operating systems. Kaspersky Endpoint Security allows you to control and manage Bitlocker by using the Kaspersky Next infrastructure. BitLocker encrypts logical volumes. BitLocker cannot be used for the encryption of removable drives. For more details on BitLocker, refer to the Microsoft documentation.

When encrypting the disk, BitLocker puts the boot loader and other auxiliary files in the system partition. This partition is not encrypted. The operating system creates the system partition automatically during the installation of Windows. If the disk is fully partitioned before installing Windows, the operating system cannot create a system partition. In this case, when you start BitLocker disk encryption, the operating system prompts you to repartition the disk and create a system partition. After creating a system partition, the operating system starts BitLocker encryption.

The BitLocker encryption algorithm does not depend on the AES library version included in the distribution package (AES256 or AES56). Encryption uses the operating system's built-in encryption library.

By default, the application uses the BitLocker encryption algorithm with an effective key length of 256 bits to encrypt devices that have never been encrypted. For a device that was encrypted before the application installation, the encryption algorithm may be different. For detailed information on selecting the encryption algorithm, refer to the Microsoft Technical Support website. Starting with version 12.9, Kaspersky Endpoint Security sends the original recovery key for devices previously encrypted by third-party applications to Kaspersky Security Center.

BitLocker provides secure storage of access keys by using a trusted platform module. A *Trusted Platform Module* (TPM) is a microchip developed to provide basic functions related to security (for example, to store encryption keys). A Trusted Platform Module is usually installed on the computer motherboard and interacts with all other system components via the hardware bus. Using TPM is the safest way to store BitLocker access keys, since TPM provides pre-startup system integrity verification. You can still encrypt drives on a computer without a TPM. In this case, the access key will be encrypted with a password. BitLocker uses the following authentication methods:

- TPM.
- TPM and PIN.
- Password.

After encrypting the system hard drive, the user needs to go through BitLocker authentication to boot the operating system. After authentication, BitLocker allows the user to log in. BitLocker does not support single sign-on technology (SSO).

After encrypting a drive, BitLocker creates a recovery key. Kaspersky Endpoint Security sends the recovery key to Kaspersky Security Center so that you can restore access to the disk, for example, if a user has forgotten their password.

If a user encrypts a disk using BitLocker, Kaspersky Endpoint Security will send the recovery key and information about disk encryption to Kaspersky Security Center.

If you are using Windows group policies, turn off BitLocker management in the policy settings. Windows policy settings may conflict with Kaspersky Endpoint Security policy settings. When encrypting a drive, errors may occur.

Starting BitLocker Drive Encryption

Prior to starting full disk encryption, you are advised to make sure that the computer is not infected. To do so, start the Full Scan or Critical Areas Scan task. Performing full disk encryption on a computer that is infected by a rootkit may cause the computer to become inoperable.

To use BitLocker Drive Encryption on computers running Windows operating systems for servers, installing the BitLocker Drive Encryption component may be required. Install the component using the operating system tools (Add Roles and Components Wizard). For more information about installing BitLocker Drive Encryption, refer to the Microsoft documentation.

How to run BitLocker Drive Encryption through the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Full Disk Encryption**.
4. In the **Encryption technology** drop-down list, select **BitLocker Drive Encryption**.
5. In the **Encryption mode** drop-down list, select **Encrypt all hard drives**.

   If the computer has several operating systems installed, after encryption you will be able to load only the operating system in which the encryption was performed.

6. Configure advanced BitLocker Drive Encryption options (see table below).
7. Save your changes.

How to run BitLocker Drive Encryption using the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Data Encryption** → **Full Disk Encryption**.

5. Select the **BitLocker Disk Encryption** technology.

6. In the **Action on devices** block, select **Encrypt all hard drives**.

> If the computer has several operating systems installed, after encryption you will be able to load only the operating system in which the encryption was performed.

7. Configure advanced BitLocker Drive Encryption options (see table below).

8. Save your changes.

You can use the Encryption Monitor tool to control the disk encryption or decryption process on a user's computer. You can run the Encryption Monitor tool from the main application window.

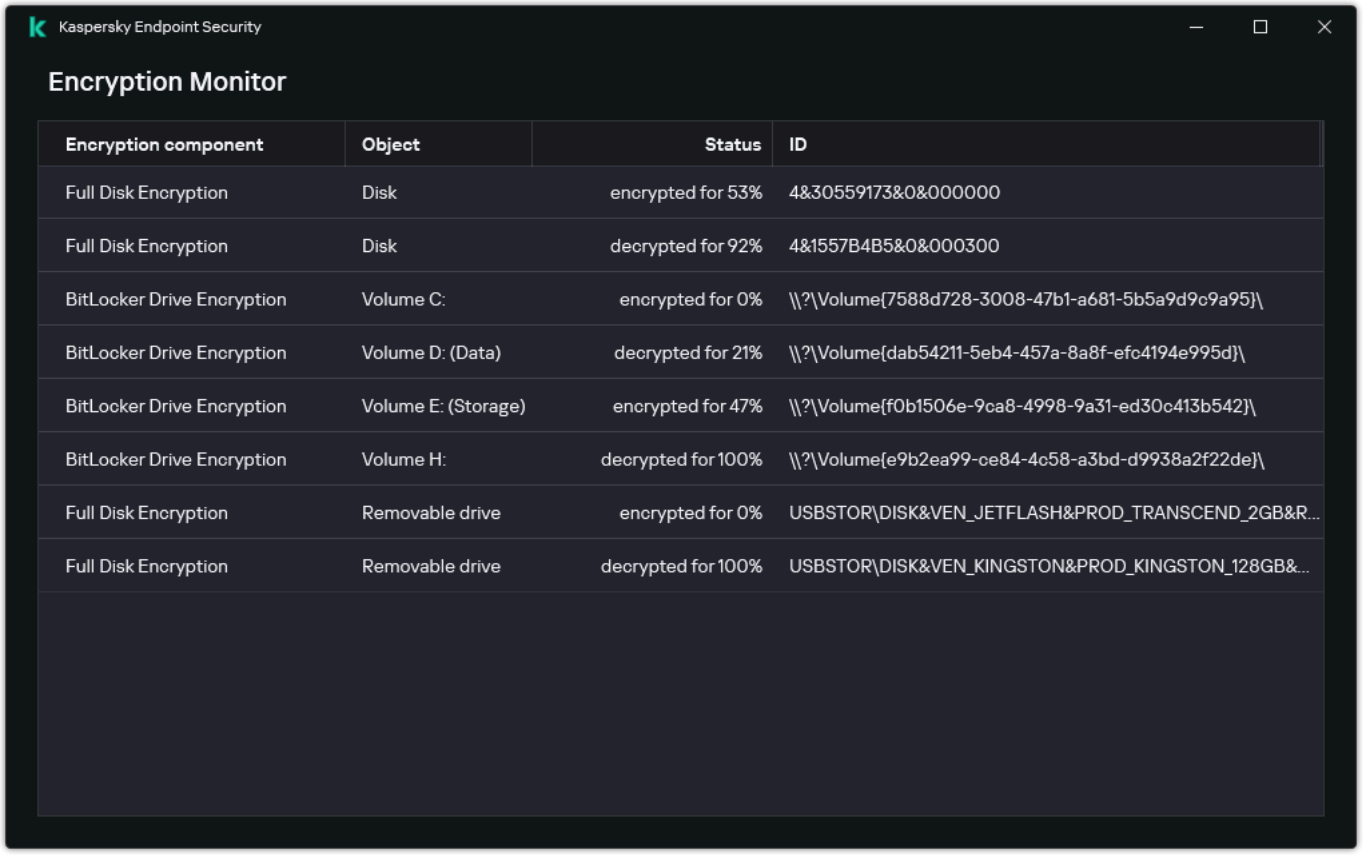

Encryption component	Object	Status	ID
Full Disk Encryption	Disk	encrypted for 53%	4&30559173&0&000000
Full Disk Encryption	Disk	decrypted for 92%	4&1557B4B5&0&000300
BitLocker Drive Encryption	Volume C:	encrypted for 0%	\\?\Volume{7588d728-3008-47b1-a681-5b5a9d9c9a95}\
BitLocker Drive Encryption	Volume D: (Data)	decrypted for 21%	\\?\Volume{dab54211-5eb4-457a-8a8f-efc4194e995d}\
BitLocker Drive Encryption	Volume E: (Storage)	encrypted for 47%	\\?\Volume{f0b1506e-9ca8-4998-9a31-ed30c413b542}\
BitLocker Drive Encryption	Volume H:	decrypted for 100%	\\?\Volume{e9b2ea99-ce84-4c58-a3bd-d9938a2f22de}\
Full Disk Encryption	Removable drive	encrypted for 0%	USBSTOR\DISK&VEN_JETFLASH&PROD_TRANSCEND_2GB&R...
Full Disk Encryption	Removable drive	decrypted for 100%	USBSTOR\DISK&VEN_KINGSTON&PROD_KINGSTON_128GB&...

Encryption Monitor

After the policy is applied, the application will display the following queries, depending on the authentication settings:

- TPM only. No user input required. The disk will be encrypted when the computer restarts.
- TPM + PIN / Password. If a TPM module is available, a PIN code prompt window appears. If a TPM module is not available, you will see a password prompt window for preboot authentication.
- Password only. You will see a password prompt window for preboot authentication.

> If the Federal Information Processing standard compatibility mode is enabled for computer operating system, then in Windows 8 and earlier versions of operating system, a request for connecting a storage device is displayed to save the recovery key file. You can save multiple recovery key files on a single storage device.

After setting a password or a PIN, BitLocker will ask you to restart your computer to complete the encryption. Next, the user needs to go through the BitLocker authentication procedure. After the authentication procedure, the user must log on to the system. After the operating system has loaded, BitLocker will complete the encryption.

If there is no access to encryption keys, the user may request the local network administrator to provide a recovery key (if the recovery key was not saved earlier on the storage device or was lost).

BitLocker Drive Encryption component settings

Parameter	Description
Enable use of BitLocker authentication requiring pre-boot keyboard input on tablets	Using authentication that requires data input in a preboot environment, even if the platform does not have the capability for preboot input (for example, with touchscreen keyboards on tablets). The touchscreen of tablet computers is not available in the preboot environment. To complete BitLocker authentication on tablet computers, the user must connect a USB keyboard, for example. If the check box is selected, use of authentication requiring preboot input is allowed. We recommend using this setting only for devices that have alternative data input tools in a preboot environment, such as a USB keyboard in addition to touchscreen keyboards. If the check box is cleared, BitLocker Drive Encryption is not possible on tablets.
Use hardware encryption (Windows 8 and later versions)	If the check box is selected, the application applies hardware encryption. This lets you increase the speed of encryption and use fewer computer resources.
Encrypt used disk space only (Windows 8 and later versions)	This check box enables / disables the option that limits the encryption area to only occupied hard drive sectors. This limit lets you reduce encryption time. Enabling or disabling the **Encrypt used disk space only (reduces encryption time)** feature after starting encryption does not modify this setting until the hard drives are decrypted. You must select or clear the check box before starting encryption. If the check box is selected, only portions of the hard drive that are occupied by files are encrypted. Kaspersky Endpoint Security automatically encrypts new data as it is added. If the check box is cleared, the entire hard drive is encrypted, including residual fragments of previously deleted and modified files. This option is recommended for new hard drives whose data has not been modified or deleted. If you are applying encryption on a hard drive that is already in use, it is recommended to encrypt the entire hard drive. This ensures protection of all data, even deleted data that is potentially recoverable. By default, the check box is cleared.

Parameter	Description
Authentication method	**Only password (Windows 8 and later versions)** If this option is selected, Kaspersky Endpoint Security prompts the user for a password when the user attempts to access an encrypted drive. This option can be selected when a Trusted Platform Module (TPM) is not being used. **Trusted platform module (TPM)** If this option is selected, BitLocker uses a Trusted Platform Module (TPM). A *Trusted Platform Module* (TPM) is a microchip developed to provide basic functions related to security (for example, to store encryption keys). A Trusted Platform Module is usually installed on the computer motherboard and interacts with all other system components via the hardware bus. For computers running Windows 7 or Windows Server 2008 R2, only encryption using a TPM module is available. If a TPM module is not installed, BitLocker encryption is not possible. Use of a password on these computers is not supported. A device equipped with a Trusted Platform Module can create encryption keys that can be decrypted only with the device. A Trusted Platform Module encrypts encryption keys with its own root storage key. The root storage key is stored within the Trusted Platform Module. This provides an additional level of protection against attempts to hack encryption keys. This action is selected by default. You can set an additional layer of protection for access to the encryption key, and encrypt the key with a password or a PIN: • **Use PIN for TPM**. If this check box is selected, a user can use a PIN code to obtain access to an encryption key that is stored in a Trusted Platform Module (TPM). If this check box is cleared, users are prohibited from using PIN codes. To access the encryption key, a user must enter the password. • **Trusted platform module (TPM), or password if TPM is unavailable**. If this option is selected, the user can use a password to obtain access to encryption keys when a Trusted Platform Module (TPM) is not available. If the check box is cleared and the TPM is not available, full disk encryption will not start. The selected authentication method must be configured by specifying password or PIN requirements: • **Minimum PIN length (characters)** (the default value is 6). • **Minimum password length (characters)** (the default value is 8). • **Maximum number of stored passwords / PINs** (the default value is 5). • **Limit password / PIN validity period for TPM (days)** (disabled by default). • **Use enhanced PIN (letters and numbers)**. *Enhanced PIN* allows using other characters in addition to numerical characters: uppercase and lowercase Latin letters, special characters, and spaces. Disabled by default.
Automatically recreate recovery key (days)	Automatically update the password to restore access to a drive protected by BitLocker. If the check box is selected, specify the validity period of the recovery key password. This helps prevent recovery key password reuse.

Decrypting a hard drive protected by BitLocker

Users can decrypt a disk using the operating system (the *Turn Off BitLocker* function). After that, Kaspersky Endpoint Security will prompt the user to encrypt the disk again. Kaspersky Endpoint Security will be prompting to encrypt the disk unless you enable disk decryption in the policy.

How to decrypt a hard drive protected by BitLocker through the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Full Disk Encryption**.
4. In the **Encryption technology** drop-down list, select **BitLocker Drive Encryption**.
5. In the **Encryption mode** drop-down list, select **Decrypt all hard drives**.
6. Save your changes.

How to decrypt a BitLocker-encrypted hard drive through the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Data Encryption** → **Full Disk Encryption**.
5. Select the **BitLocker Disk Encryption** technology.
6. In the **Action on devices** block, select **Decrypt all hard drives**.
7. Save your changes.

You can use the Encryption Monitor tool to control the disk encryption or decryption process on a user's computer. You can run the Encryption Monitor tool from the main application window.

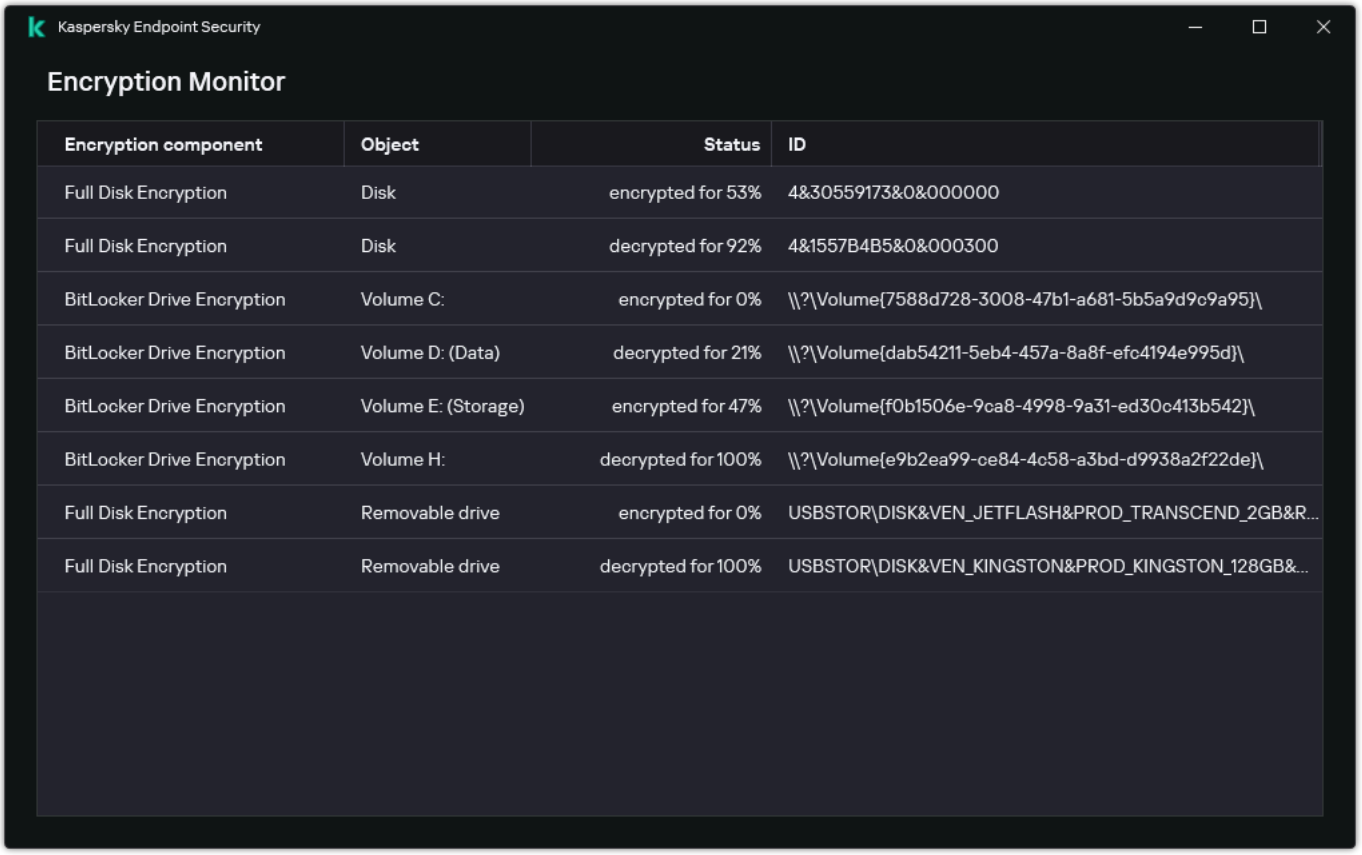

Encryption component	Object	Status	ID
Full Disk Encryption	Disk	encrypted for 53%	4&30559173&0&000000
Full Disk Encryption	Disk	decrypted for 92%	4&1557B4B5&0&000300
BitLocker Drive Encryption	Volume C:	encrypted for 0%	\\?\Volume{7588d728-3008-47b1-a681-5b5a9d9c9a95}\
BitLocker Drive Encryption	Volume D: (Data)	decrypted for 21%	\\?\Volume{dab54211-5eb4-457a-8a8f-efc4194e995d}\
BitLocker Drive Encryption	Volume E: (Storage)	encrypted for 47%	\\?\Volume{f0b1506e-9ca8-4998-9a31-ed30c413b542}\
BitLocker Drive Encryption	Volume H:	decrypted for 100%	\\?\Volume{e9b2ea99-ce84-4c58-a3bd-d9938a2f22de}\
Full Disk Encryption	Removable drive	encrypted for 0%	USBSTOR\DISK&VEN_JETFLASH&PROD_TRANSCEND_2GB&R...
Full Disk Encryption	Removable drive	decrypted for 100%	USBSTOR\DISK&VEN_KINGSTON&PROD_KINGSTON_128GB&...

Encryption Monitor

Restoring access to a drive protected by BitLocker

If a user has forgotten the password for accessing a hard drive encrypted by BitLocker, you need to start the recovery procedure (Request-Response).

> If the computer's operating system has Federal Information Processing standard (FIPS) compatibility mode enabled, then in Windows 8 and older the recovery key file is saved to the removable drive before encryption. To restore access to the drive, insert the removable drive and follow the on-screen instructions.

Restoring access to a hard drive encrypted by BitLocker consists of the following steps:

1. The user tells the administrator the recovery key ID (see the figure below).
2. The administrator verifies the ID of the recovery key in the computer properties in Kaspersky Security Center. The ID that the user provided must match the ID that is displayed in the computer properties.
3. If the recovery key IDs match, the administrator provides the user with the recovery key or sends a recovery key file.

   A recovery key file is used for computers running the following operating systems:

   - Windows 7
   - Windows 8
   - Windows Server 2008
   - Windows Server 2011
   - Windows Server 2012

   For all other operating systems, a recovery key is used.

   To prevent the recovery key password reuse, you can configure automatic password update in policy settings.

4. The user enters the recovery key and gains access to the hard drive.

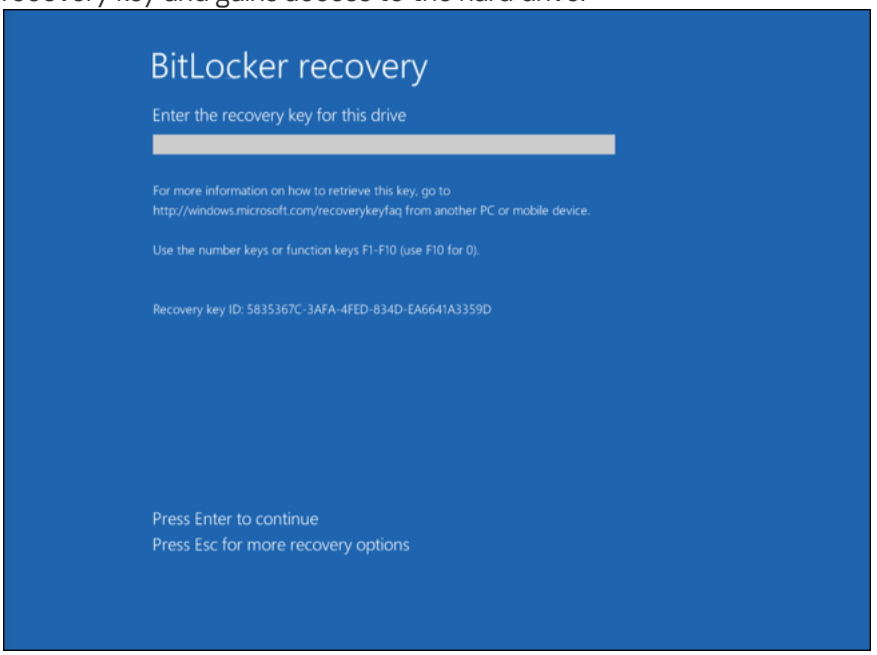

Restoring access to a hard drive encrypted by BitLocker

Restoring access to a system drive

To start the recovery procedure, the user needs to press the **Esc** key at the pre-boot authentication stage.

How to view the recovery key for a system drive encrypted by BitLocker in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Managed devices**.
3. On the **Devices** tab, select the computer of the user requesting access to encrypted data and right-click to open the context menu.
4. In the context menu, select **Grant access in offline mode**.
5. This opens a window; in that window, select the **Access to a BitLocker-protected system drive** tab.
6. Prompt the user for the recovery key ID indicated in the BitLocker password input window, and compare it with the ID in the **Recovery key ID** field.

   If the IDs do not match, this key is not valid for restoring access to the specified system drive. Make sure that the name of the selected computer matches the name of the user's computer.

As a result, you will have access to the recovery key or file of the recovery key, which will need to be transferred to the user.

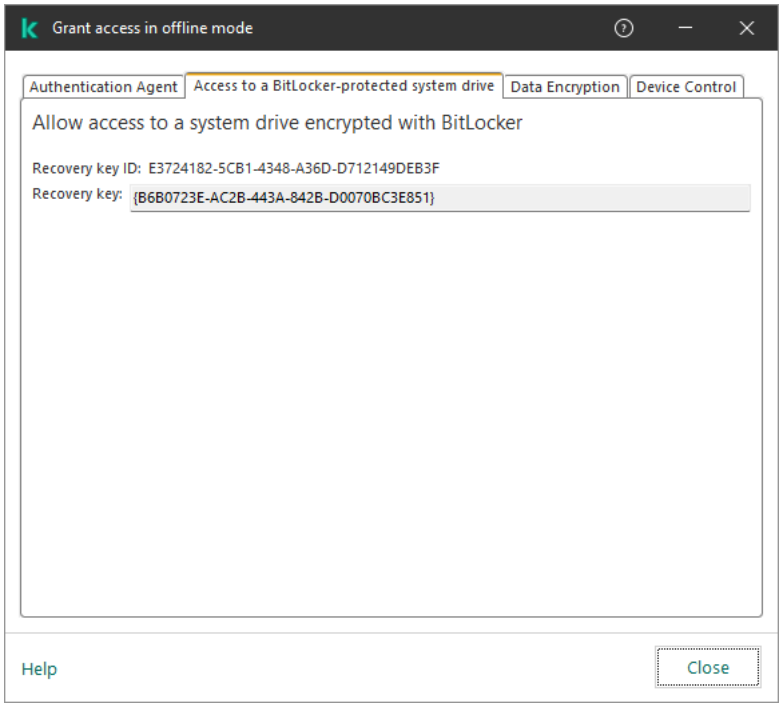

Restoring access to a drive encrypted with BitLocker

How to view the recovery key for a BitLocker-encrypted system drive in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Select the check box next to the name of the computer whose drive you want to restore access to.
3. Click **Grant access to the device in offline mode**.
4. In the window that opens, select the **BitLocker** section.
5. Verify the recovery key ID. The ID provided by the user must match the ID that is displayed in the computer settings.

   If the IDs do not match, this key is not valid for restoring access to the specified system drive. Make sure that the name of the selected computer matches the name of the user's computer.

6. Click **Receive key**.

As a result, you will have access to the recovery key or file of the recovery key, which will need to be transferred to the user.

After the operating system is loaded, Kaspersky Endpoint Security prompts the user to change the password or PIN code. After you set a new password or PIN code, BitLocker will create a new recovery key and send the key to Kaspersky Security Center. As a result, the recovery key and recovery key file will be updated. If the user has not changed the password, you can use the old recovery key the next time the operating system loads.

Windows 7 computers don't allow changing the password or PIN code. After the recovery key is entered and the operating system is loaded, Kaspersky Endpoint Security won't prompt the user to change the password or PIN code. Thus, it is impossible to set a new password or a PIN code. This issue stems from the peculiarities of the operating system. To continue, you need to re-encrypt the hard drive.

Restoring access to a non-system drive

To start the recovery procedure, the user needs to click the **Forgot your password** link in the window providing access to the drive. After gaining access to the encrypted drive, the user can enable automatic unlocking of the drive during Windows authentication in the BitLocker settings.

How to view the recovery key for a non-system drive encrypted by BitLocker in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the Administration Console tree, select the **Advanced** → **Data encryption and protection** → **Encrypted drives** folder.
3. In the workspace, select the encrypted device for which you want to create an access key file, then in the context menu of the device, click **Get access to the device in Kaspersky Endpoint Security**.
4. Prompt the user for the recovery key ID indicated in the BitLocker password input window, and compare it with the ID in the **Recovery key ID** field.

   If the IDs do not match, this key is not valid for restoring access to the specified drive. Make sure that the name of the selected computer matches the name of the user's computer.

5. Send the user the key that is indicated in the **Recovery key** field.

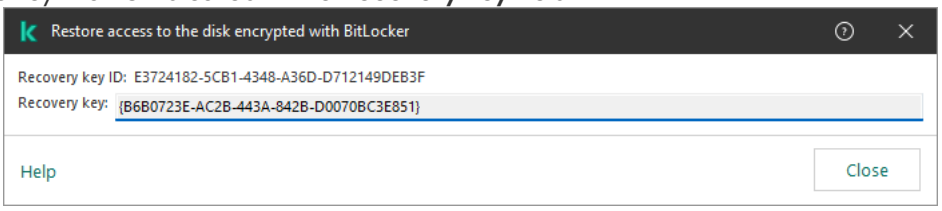

Restoring access to a drive encrypted with BitLocker

How to view the recovery key for a BitLocker-encrypted non-system drive in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Operations** → **Data encryption and protection** → **Encrypted drives**.
2. Select the check box next to the name of the computer whose drive you want to restore access to.

3. Click **Grant access to the device in offline mode**.

   This starts the Wizard for granting access to a device.

4. Follow the instructions of the Wizard for granting access to a device:

   a. Select the **Kaspersky Endpoint Security for Windows** plug-in

   b. Verify the recovery key ID. The ID provided by the user must match the ID that is displayed in the computer settings.

   > If the IDs do not match, this key is not valid for restoring access to the specified system drive. Make sure that the name of the selected computer matches the name of the user's computer.

   c. Click **Receive key**.

As a result, you will have access to the recovery key or file of the recovery key, which will need to be transferred to the user.

Pausing BitLocker protection to update software

There are a number of special considerations for updating the operating system, installing update packages for the operating system, or updating other software with BitLocker protection turned on. Installing updates may require restarting the computer multiple times. After each restart, the user must complete BitLocker authentication. To make sure updates install correctly, you can temporarily turn off BitLocker authentication. In this case the disk stays encrypted and the user has access to data after signing in to the system. To manage BitLocker authentication, you can use the *BitLocker Protection Management* task. You can use this task to specify the number of computer restarts that do not require BitLocker authentication. In this way, after updates are installed and the *BitLocker Protection Management* task is complete, BitLocker authentication is automatically enabled. You can enable BitLocker authentication at any time.

How to pause BitLocker protection using the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.

   The list of tasks opens.

2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

Select **Kaspersky Endpoint Security for Windows (14.2)** → **BitLocker Protection Management**.

Step 2. BitLocker Protection Management

Configure BitLocker authentication. To pause BitLocker protection, select **Temporarily allow skipping BitLocker authentication** and enter the number of restarts without BitLocker authentication (1 to 15 times). If necessary, enter an expiration date and time for the task. At the specified time, the task is automatically turned off, and the user must complete BitLocker authentication when the computer is restarted.

Step 3. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 4. Defining the task name

Enter the name of the task, for example *Updating to Windows 10*.

Step 5. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

How to pause BitLocker protection using Web Console

1. In the main window of the Web Console, select **Asset management** → **Tasks**.

   The list of tasks opens.

2. Click **Add**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Configuring general task settings

Configure the general task settings:

1. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows**.
2. In the **Task type** drop-down list, select **BitLocker Protection Management**.
3. In the **Task name** field, enter a brief description, for example, *Updating to Windows 10*.
4. In the **Devices to which the task will be assigned** block, select the task scope.

Step 2. BitLocker Protection Management

Configure BitLocker authentication. To pause BitLocker protection, select **Temporarily allow skipping BitLocker authentication** and enter the number of restarts without BitLocker authentication (1 to 15 times). If necessary, enter an expiration date and time for the task. At the specified time, the task is automatically turned off, and the user must complete BitLocker authentication when the computer is restarted.

Step 3. Completing task creation

Finish the wizard. A new task will be displayed in the list of tasks.

To run a task, select the check box opposite the task and click the **Start** button.

As a result, when the task is running, after the next restart of the computer, BitLocker does not prompt the user for authentication. After each restart of the computer without BitLocker authentication, Kaspersky Endpoint Security generates a corresponding event and records the number of remaining restarts. Kaspersky Endpoint Security then sends the event to Kaspersky Security Center to be monitored by the administrator. You can also view the number of remaining restarts in the **Managed devices** folder of Kaspersky Security Center console in the device status description.

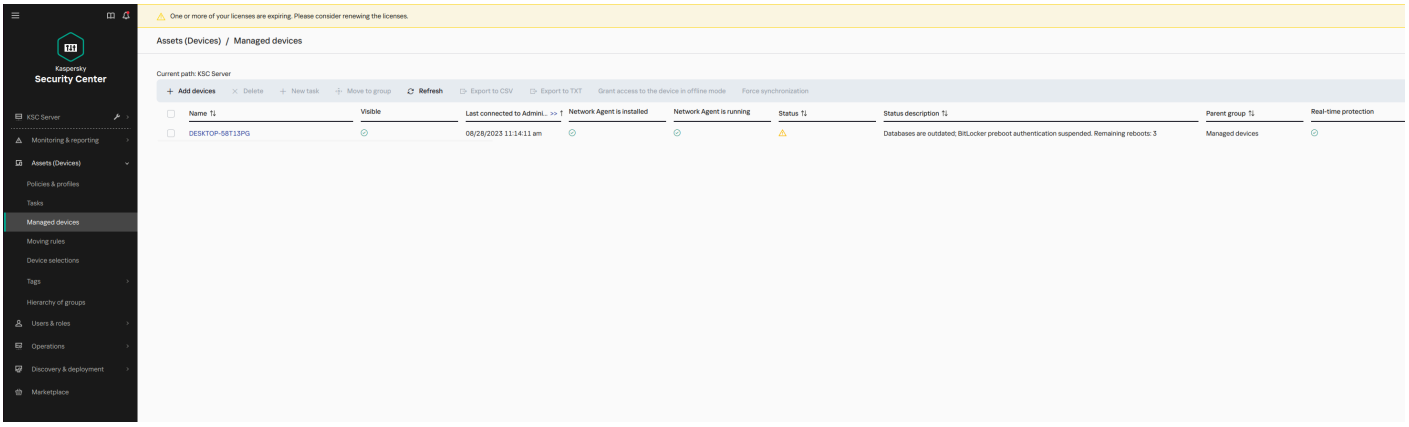

The list of managed devices

When the specified number of restarts or the expiration time of the task is reached, BitLocker authentication is automatically turned on. To gain access to data, the user must complete BitLocker authentication.

On computers running Windows 7, BitLocker cannot count computer restarts. Counting restarts on Windows 7 computers is handled by Kaspersky Endpoint Security. Thus to automatically turn on BitLocker authentication after each restart, Kaspersky Endpoint Security must be started.

To turn on BitLocker authentication ahead of time, open the *BitLocker Protection Management* task properties and select **Request authentication each time in preboot**.

File Level Encryption on local computer drives

File encryption is not supported on Arm-based computers.

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers.

File encryption has the following special features:

- Kaspersky Endpoint Security encrypts / decrypts files in predefined folders only for local user profiles of the operating system. Kaspersky Endpoint Security does not encrypt or decrypt files in predefined folders of roaming user profiles, mandatory user profiles, temporary user profiles, or redirected folders.
- Kaspersky Endpoint Security does not encrypt files whose modification could harm the operating system and installed applications. For example, the following files and folders with all nested folders are on the list of encryption exclusions:
  - %WINDIR%;
  - %PROGRAMFILES% and %PROGRAMFILES(X86)%;
  - Windows registry files.

  The list of encryption exclusions cannot be viewed or edited. While files and folders on the list of encryption exclusions can be added to the encryption list, they will not be encrypted during file encryption.

Encrypting files on local computer drives

Kaspersky Endpoint Security does not encrypt files that are located in OneDrive cloud storage or in other folders that have OneDrive as their name. Kaspersky Endpoint Security also blocks the copying of encrypted files to OneDrive folders if those files are not added to the decryption rule.

To encrypt files on local drives:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **File Level Encryption**.
4. In the **Encryption mode** drop-down list, select **According to rules**.
5. On the **Encryption** tab, click the **Add** button, and in the drop-down list select one of the following items:

   a. Select the **Predefined folders** item to add files from folders of local user profiles suggested by Kaspersky experts to an encryption rule.

   - **Documents**. Files in the standard *Documents* folder of the operating system, and its subfolders.
   - **Favorites**. Files in the standard *Favorites* folder of the operating system, and its subfolders.
   - **Desktop**. Files in the standard *Desktop* folder of the operating system, and its subfolders.
   - **Temporary files**. Temporary files related to the operation of applications installed on the computer. For example, Microsoft Office applications create temporary files containing backup copies of documents.

     > It is not recommended to encrypt temporary files, as this can cause data loss. For example, Microsoft Word creates temporary files when processing a document. If temporary files are encrypted, but the original file is not, the user may receive an *Access Denied* error when trying to save the document. Additionally, Microsoft Word might save the file, but it will not be possible to open the document the next time, i.e. the data will be lost.

   - **Outlook files**. Files related to the operation of the Outlook mail client: data files (PST), offline data files (OST), offline address book files (OAB), and personal address book files (PAB).

   b. Select the **Custom folder** item to add a manually entered folder path to an encryption rule.

   When adding a folder path, adhere to the following rules:

   - Use an environment variable (for example, `%FOLDER%\UserFolder\`). You can use an environment variable only once and only at the beginning of the path.
   - Do not use relative paths.
   - Do not use the `*` and `?` characters.
   - Do not use UNC paths.
   - Use `;` or `,` as a separator character.

c. Select the **Files by extension** item to add individual file extensions to an encryption rule. Kaspersky Endpoint Security encrypts files with the specified extensions on all local drives of the computer.

d. Select the **Files by groups of extensions** item to add groups of file extensions to an encryption rule (for example, *Microsoft Office documents*). Kaspersky Endpoint Security encrypts files that have the extensions listed in the groups of extensions on all local drives of the computer.

6. Save your changes.

As soon as the policy is applied, Kaspersky Endpoint Security encrypts the files that are included in the encryption rule and not included in the decryption rule.

File encryption has the following special features:

- If the same file is added to both an encryption rule and a decryption rule, then Kaspersky Endpoint Security performs the following actions:
  - If the file is not encrypted, Kaspersky Endpoint Security does not encrypt this file.
  - If the file is encrypted, Kaspersky Endpoint Security decrypts this file.
- Kaspersky Endpoint Security continues to encrypt new files if these files meet the criteria of the encryption rule. For example, when you change the properties of an unencrypted file (path or extension), the file then meets the criteria of the encryption rule. Kaspersky Endpoint Security encrypts this file.
- When the user creates a new file whose properties meet the encryption rule criteria, Kaspersky Endpoint Security encrypts the file as soon as it is opened.
- Kaspersky Endpoint Security postpones the encryption of open files until they are closed.
- If you move an encrypted file to another folder on the local drive, the file remains encrypted regardless of whether or not this folder is included in the encryption rule.
- If you decrypt a file and copy it to another local folder that is not included in the decryption rule, a copy of the file may be encrypted. To prevent the copied file from being encrypted, create a decryption rule for the target folder.

Forming encrypted file access rules for applications

By default, all applications work with encrypted files in a decrypted state. If you use certain applications often (for example, browsers or text editors), you can create encrypted file access rules to protect information.

We recommend creating an encrypted file access rule for Microsoft Internet Explorer and Microsoft Edge browsers. Because of how these browsers work, if you upload an encrypted file to a website (for example, cloud storage), the file is automatically decrypted. This can cause a data leak. It is not possible to upload an encrypted file using these browsers. We recommend setting up the **Grant access to encrypted files in ciphertext only** rule. You do not need to create a rule for other browsers (such as Google Chrome).

To form encrypted file access rules for applications:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Data Encryption** → **File Level Encryption**.

4. In the **Encryption mode** drop-down list, select **According to rules**.

   Access rules are applied only when in the **According to rules** mode. After applying access rules in **According to rules** mode, if you switch to **Leave unchanged** mode, Kaspersky Endpoint Security will ignore all access rules. All applications will have access to all encrypted files.

5. In the right part of the window, select the **Rules for applications** tab.

6. If you want to select applications exclusively from the Kaspersky Security Center list, click the **Add** button and in the drop-down list select the **Applications from Kaspersky Security Center list** item.

   a. Specify the filters to narrow down the list of applications in the table. To do so, specify the values of the **Application**, **Vendor**, and **Period added** parameters, and all check boxes from the **Group** block.

   b. Click **Refresh**.

   c. The table lists applications that match the applied filters.

   d. In the **Application** column, select check boxes opposite the applications for which you want to form encrypted file access rules.

   e. In the **Rule for applications** drop-down list, select the rule that will determine the access of applications to encrypted files.

   f. In the **Actions for applications that were selected earlier** drop-down list, select the action to be taken by Kaspersky Endpoint Security on encrypted file access rules that were previously formed for such applications.

   The details of an encrypted file access rule for applications appear in the table on the **Rules for applications** tab.

7. If you want to manually select applications, click the **Add** button and in the drop-down list select the **Custom applications** item.

   a. In the entry field, type the name or list of names of executable application files, including their extensions.

      You can also add the names of executable files of applications from the Kaspersky Security Center list by clicking the **Add from Kaspersky Security Center list** button.

   b. If required, in the **Description** field, enter a description of the list of applications.

   c. In the **Rule for applications** drop-down list, select the rule that will determine the access of applications to encrypted files.

The details of an encrypted file access rule for applications appear in the table on the **Rules for applications** tab.

8. Save your changes.

Encrypting files that are created or modified by specific applications

You can create a rule by which Kaspersky Endpoint Security will encrypt all files created or modified by the applications specified in the rule.

Files that were created or modified by the specified applications before the encryption rule was applied will not be encrypted.

To configure encryption of files that are created or modified by specific applications:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **File Level Encryption**.
4. In the **Encryption mode** drop-down list, select **According to rules**.

   Encryption rules are applied only in **According to rules** mode. After applying encryption rules in **According to rules** mode, if you switch to **Leave unchanged** mode, Kaspersky Endpoint Security will ignore all encryption rules. Files that were previously encrypted will remain encrypted.

5. In the right part of the window, select the **Rules for applications** tab.
6. If you want to select applications exclusively from the Kaspersky Security Center list, click the **Add** button and in the drop-down list select the **Applications from Kaspersky Security Center list** item.

   a. Specify the filters to narrow down the list of applications in the table. To do so, specify the values of the **Application**, **Vendor**, and **Period added** parameters, and all check boxes from the **Group** block.

   b. Click **Refresh**.

      The table lists applications that match the applied filters.

   c. In the **Application** column, select the check boxes next to the applications whose created files you want to encrypt.

   d. In the **Rule for applications** drop-down list, select **Encrypt all created files**.

   e. In the **Actions for applications that were selected earlier** drop-down list, select the action to be taken by Kaspersky Endpoint Security on file encryption rules that were previously formed for such applications.

   Information about the encryption rule for files created or modified by selected applications is displayed in the table on the **Rules for applications** tab.

7. If you want to manually select applications, click the **Add** button and in the drop-down list select the **Custom applications** item.

   a. In the entry field, type the name or list of names of executable application files, including their extensions.

      You can also add the names of executable files of applications from the Kaspersky Security Center list by clicking the **Add from Kaspersky Security Center list** button.

   b. If required, in the **Description** field, enter a description of the list of applications.

   c. In the **Rule for applications** drop-down list, select **Encrypt all created files**.

   Information about the encryption rule for files created or modified by selected applications is displayed in the table on the **Rules for applications** tab.

8. Save your changes.

Generating a decryption rule

To generate a decryption rule:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Data Encryption** → **File Level Encryption**.

4. In the **Encryption mode** drop-down list, select **According to rules**.

5. On the **Decryption** tab, click the **Add** button, and in the drop-down list select one of the following items:

   a. Select the **Predefined folders** item to add files from folders of local user profiles suggested by Kaspersky experts to a decryption rule.

   b. Select the **Custom folder** item to add a manually entered folder path to a decryption rule.

   c. Select the **Files by extension** item to add individual file extensions to a decryption rule. Kaspersky Endpoint Security does not encrypt files with the specified extensions on all local drives of the computer.

   d. Select the **Files by groups of extensions** item to add groups of file extensions to a decryption rule (for example, *Microsoft Office documents*). Kaspersky Endpoint Security does not encrypt files that have the extensions listed in the groups of extensions on all local drives of the computer.

6. Save your changes.

If the same file has been added to the encryption rule and the decryption rule, Kaspersky Endpoint Security does not encrypt this file if it is not encrypted, and decrypts the file if it is encrypted.

Decrypting files on local computer drives

To decrypt files on local drives:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **File Level Encryption**.
4. In the right part of the window, select the **Encryption** tab.
5. Remove files and folders that you want to decrypt from the encryption list. To do so, select files and select the **Delete rule and decrypt files** item in the context menu of the **Delete** button.

   Files and folders removed from the encryption list are automatically added to the decryption list.
6. Form a file decryption list.
7. Save your changes.

As soon as the policy is applied, Kaspersky Endpoint Security decrypts encrypted files that are added to the decryption list.

Kaspersky Endpoint Security decrypts encrypted files if their parameters (file path / file name / file extension) change to match the parameters of objects added to the decryption list.

Kaspersky Endpoint Security postpones the decryption of open files until they are closed.

Creating encrypted packages

To protect your data when sending files to users outside the corporate network, you can use encrypted packages. Encrypted packages can be convenient for transferring large files on removable drives, as email clients have file size restrictions.

Before creating encrypted packages, Kaspersky Endpoint Security will prompt the user for a password. To reliably protect the data, you can enable password strength check and specify password strength requirements. This will prevent users from using short and simple passwords, for example, `1234`.

How to enable password strength check when creating encrypted archives in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Common encryption settings**.
4. In the **Password settings** block, click the **Settings** button.

5. This opens a window; in that window, select the **Encrypted packages** tab.

6. Configure password complexity settings when creating encrypted packages.

How to enable password strength check when creating encrypted archives in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Data Encryption** → **File Level Encryption**.

5. In the **Encrypted package password settings** block, configure the password strength criteria required when creating encrypted packages.

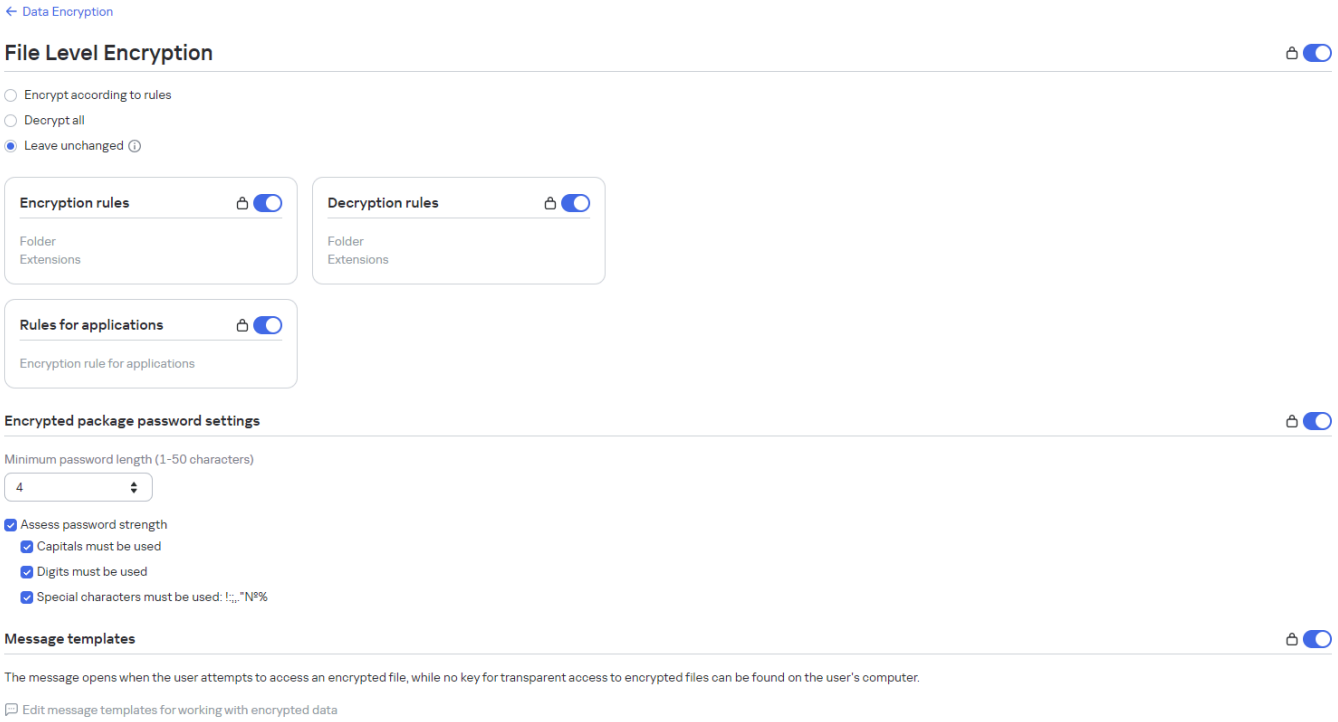

File Encryption settings

You can create encrypted packages on computers with Kaspersky Endpoint Security installed with File Level Encryption available.

> When adding a file to the encrypted package whose contents reside in OneDrive cloud storage, Kaspersky Endpoint Security downloads the contents of the file and performs encryption.

To create an encrypted package:

1. In any file manager, select the files or folders that you want to add to the encrypted package. Right-click to open their context menu.

2. In the context menu, select **New encrypted package** (see figure below).

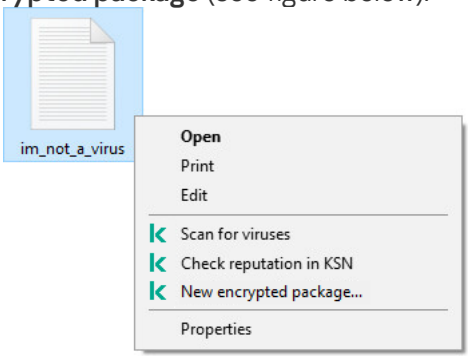

Creating an encrypted package

3. In the window that opens, specify the password and confirm it.

   The password must meet the complexity criteria specified in the policy.

4. Click **Create**.

   The encrypted package creation process starts. Kaspersky Endpoint Security does not perform file compression when it creates an encrypted package. When the process finishes, a self-extracting password-protected encrypted package (an executable file with .exe extension –) is created in the selected destination folder.

To access files in an encrypted package, double-click it to start the Unpacking Wizard, then enter the password. If you forgot or lost your password, it is not possible to recover it and access the files in the encrypted package. You can recreate the encrypted package.

Restoring access to encrypted files

When files are encrypted, Kaspersky Endpoint Security receives an encryption key required for directly accessing the encrypted files. Using this encryption key, a user working under any Windows user account that was active during file encryption can directly access the encrypted files. Users working under Windows accounts that were inactive during file encryption must connect to Kaspersky Security Center in order to access the encrypted files.

Encrypted files may be inaccessible under the following circumstances:

- The user's computer stores encryption keys, but there is no connection with Kaspersky Security Center for managing them. In this case, the user must request access to encrypted files from the LAN administrator.

  If access to Kaspersky Security Center does not exist, you must:

  - request an access key for access to encrypted files on computer hard drives;

  - to access encrypted files that are stored on removable drives, request separate access keys for encrypted files on each removable drive.

- Encryption components are deleted from the user's computer. In this event, the user may open encrypted files on local and removable disks but the contents of those files will appear encrypted.

The user may work with encrypted files under the following circumstances:

- Files are placed inside encrypted packages created on a computer with Kaspersky Endpoint Security installed.
- Files are stored on removable drives on which portable mode has been allowed.

To gain access to encrypted files, the user needs to start the recovery procedure (Request-Response).

Recovering access to encrypted files consists of the following steps:

1. The user sends a request access file to the administrator (see the figure below).
2. The administrator adds the request access file to Kaspersky Security Center, creates an access key file and sends the file to the user.
3. The user adds the access key file to Kaspersky Endpoint Security and gains access to the files.

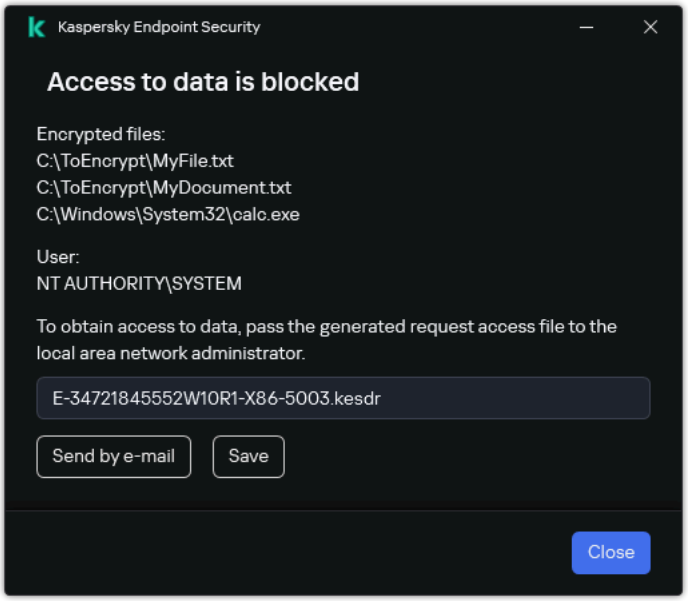

Restoring access to encrypted files

To start the recovery procedure, the user needs to attempt to access a file. As a result, Kaspersky Endpoint Security will create a request access file (a file with the KESDC extension), which the user needs to send to the administrator, for example, by email.

Kaspersky Endpoint Security generates a request access file for access to all encrypted files stored on the computer's drive (local drive or removable drive).

How to obtain an encrypted data access key file in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Devices**.
3. On the **Devices** tab, select the computer of the user requesting access to encrypted data and right-click to open the context menu.
4. In the context menu, select **Grant access in offline mode**.

5. This opens a window; in that window, select the **Data Encryption** tab.

6. On the **Data Encryption** tab, click the **Browse** button.

7. In the window for selecting a request access file, specify the path to the file received from the user.

   You will see information about the user's request. Kaspersky Security Center generates a key file. Email the generated encrypted data access key file to the user. Or save the access file and use any available method to transfer the file.

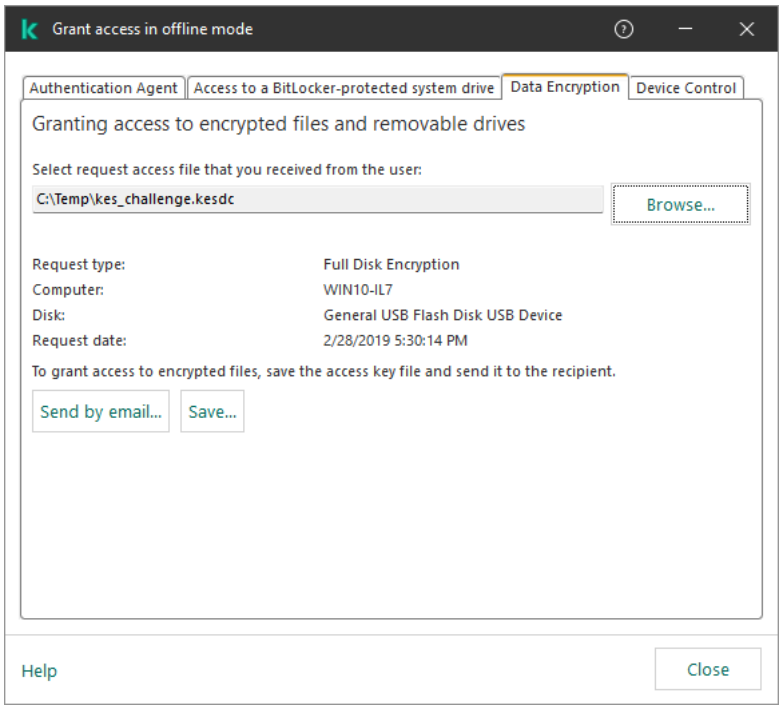

Granting access in offline mode

How to obtain an encrypted data access key file in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.

2. Select the check box next to the name of the computer whose data you want to restore access to.

3. Click **Grant access to the device in offline mode**.

4. Select **Data Encryption**.

5. Click the **Select file** button and select the request access file that you received from the user (a file with the KESDC extension).

   The Web Console will display information about the request. This will include the name of the computer on which the user is requesting access to the file.

6. Click the **Save key** button and select a folder to save the encrypted data access key file (a file with the KESDR extension).

   As a result, you will be able to obtain the encrypted data access key, which you will need to transfer to the user.

After receiving the encrypted data access key file, the user needs to run the file by double-clicking it. As a result, Kaspersky Endpoint Security will grant access to all encrypted files stored on the drive. To access encrypted files that are stored on other drives, you must obtain a separate access key file for each drive.

Restoring access to encrypted data after operating system failure

You can restore access to data after operating system failure only for file level encryption (FLE). You cannot restore access to data if full disk encryption (FDE) is used.

To restore access to encrypted data after operating system failure:

1. Reinstall the operating system without formatting the hard drive.
2. Install Kaspersky Endpoint Security.
3. Establish a connection between the computer and the Kaspersky Security Center Administration Server that controlled the computer when the data was encrypted.

   Access to encrypted data will be granted under the same conditions that applied before operating system failure.

Editing templates of encrypted file access messages

To edit templates of encrypted file access messages:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Common encryption settings**.
4. In the **Templates** block, click the **Templates** button.
5. In the window that opens, do the following:
   - If you want to edit the user message template, select the **User's message** tab. The following window opens when the user attempts to access an encrypted file while there is no key available on the computer for access to encrypted files (see figure below). Clicking the **Send by e-mail** button automatically creates a user message. This message is sent to the corporate LAN administrator along with the file requesting access to encrypted files.
   - If you want to edit the administrator message template, select the **Administrator's message** tab. The user receives this message after access to encrypted files is granted.
6. Edit the message templates.

   To add a variable to the template text, place the cursor in the desired position, click **Variable** and select the required variable from the list of available options.

   You can also restore the default template text using the **By default** button.

7. Save your changes.

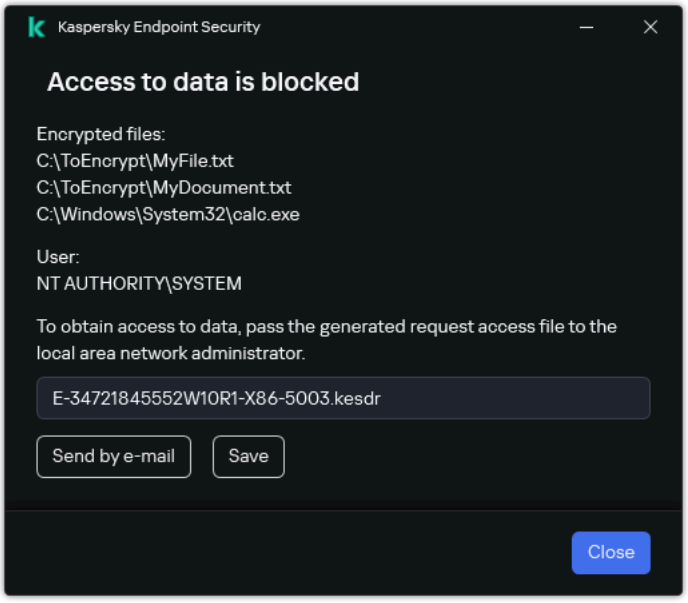

Restoring access to encrypted files

Encryption of removable drives

Encryption of removable drives is not supported on Arm-based computers.

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers.

Kaspersky Endpoint Security supports encryption of files in FAT32 and NTFS file systems. If a removable drive with an unsupported file system is connected to the computer, the encryption task for this removable drive ends with an error and Kaspersky Endpoint Security assigns the read-only status to the removable drive.

To protect data on removable drives, you can use the following types of encryption:

- Full Disk Encryption (FDE).

  Encryption of the entire removable drive, including the file system.

  It is not possible to access encrypted data outside the corporate network. It is also impossible to access encrypted data inside the corporate network if the computer is not connected to Kaspersky Security Center (e.g. on a guest computer).

- File Level Encryption (FLE).

  Encryption of only files on a removable drive. The file system remains unchanged.

Encryption of files on removable drives provides the capability to access data outside the corporate network using a special mode called *portable mode*.

During encryption, Kaspersky Endpoint Security creates a master key. Kaspersky Endpoint Security saves the master key in the following repositories:

- Kaspersky Security Center.
- User's computer.

  The master key is encrypted with the user's secret key.
- Removable drive.

  The master key is encrypted with the public key of Kaspersky Security Center.

After encryption is complete, the data on the removable drive can be accessed within the corporate network as if was on an ordinary unencrypted removable drive.

Accessing encrypted data

When a removable drive with encrypted data is connected, Kaspersky Endpoint Security performs the following actions:

1. Checks for a master key in the local storage on the user's computer.

   If the master key is found, the user gains access to the data on the removable drive.

   If the master key is not found, Kaspersky Endpoint Security performs the following actions:

   a. Sends a request to Kaspersky Security Center.

      After receiving the request, Kaspersky Security Center sends a response that contains the master key.

   b. Kaspersky Endpoint Security saves the master key in the local storage on the user's computer for subsequent operations with the encrypted removable drive.
2. Decrypts the data.

Special features of removable drive encryption

Encryption of removable drives has the following special features:

- The policy with preset settings for removable drive encryption is formed for a specific group of managed computers. Therefore, the result of applying the Kaspersky Security Center policy configured for encryption / decryption of removable drives depends on the computer to which the removable drive is connected.
- Kaspersky Endpoint Security does not encrypt / decrypt read-only files that are stored on removable drives.

- The following device types are supported as removable drives:
  - Data media connected via the USB bus
  - hard drives connected via USB and FireWire buses
  - SSD drives connected via USB and FireWire buses

Starting encryption of removable drives

You can use a policy to decrypt a removable drive. A policy with defined settings for removable drive encryption is generated for a specific administration group. Therefore, the result of data decryption on removable drives depends on the computer to which the removable drive is connected.

Kaspersky Endpoint Security supports encryption of files in FAT32 and NTFS file systems. If a removable drive with an unsupported file system is connected to the computer, the encryption task for this removable drive ends with an error and Kaspersky Endpoint Security assigns the read-only status to the removable drive.

Before encrypting files on a removable drive, make sure it is formatted and there are no hidden partitions (such as an EFI system partition). If the drive contains unformatted or hidden partitions, file encryption may fail with an error.

To encrypt removable drives:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Encryption of removable drives**.
4. In the **Encryption mode** drop-down list, select the default action that you want Kaspersky Endpoint Security to perform on removable drives:
   - **Encrypt entire removable drive** (FDE). Kaspersky Endpoint Security encrypts the contents of a removable drive sector by sector. As a result, the application encrypts not only the files stored on the removable drive but also its file systems, including the file names and folder structures on the removable drive.
   - **Encrypt all files** (FLE). Kaspersky Endpoint Security encrypts all files that are stored on removable drives. The application does not encrypt the file systems of removable drives, including the names of files and folder structures.
   - **Encrypt new files only** (FLE). Kaspersky Endpoint Security encrypts only those files that have been added to removable drives or that were stored on removable drives and have been modified after the Kaspersky Security Center policy was last applied.

   Kaspersky Endpoint Security does not encrypt a removable drive that is already encrypted.

5. If you want to use portable mode for encryption of removable drives, select the **Portable mode** check box.

   Portable mode is a mode of file encryption (FLE) on removable drives that provides the ability to access data outside of a corporate network. Portable mode also lets you work with encrypted data on computers that do not have Kaspersky Endpoint Security installed.

6. If you want to encrypt a new removable drive, it is recommended to select the **Encrypt used disk space only** check box. If the check box is cleared, Kaspersky Endpoint Security will encrypt all files, including the residual fragments of deleted or modified files.

7. If you want to configure encryption for individual removable drives, define encryption rules.

8. If you want to use full disk encryption of removable drives in offline mode, select the **Allow encryption of removable drives in offline mode** check box.

   Offline encryption mode refers to encryption of removable drives (FDE) when there is no connection to Kaspersky Security Center. During encryption, Kaspersky Endpoint Security saves the master key only on the user's computer. Kaspersky Endpoint Security will send the master key to Kaspersky Security Center during the next synchronization.

   > If the computer on which the master key is saved is corrupted and data is not sent to Kaspersky Security Center, it is not possible to obtain access to the removable drive.

   If the **Allow encryption of removable drives in offline mode** check box is cleared and there is no connection to Kaspersky Security Center, removable drive encryption is not possible.

9. Save your changes.

After the policy is applied, when the user connects a removable drive or if a removable drive is already connected, Kaspersky Endpoint Security prompts the user for confirmation to perform the encryption operation (see the figure below).

The application lets you perform the following actions:

- If the user confirms the encryption request, Kaspersky Endpoint Security encrypts the data.
- If the user declines the encryption request, Kaspersky Endpoint Security leaves the data unchanged and assigns read-only access for this removable drive.
- If the user does not respond to the encryption request, Kaspersky Endpoint Security leaves the data unchanged and assigns read-only access for this removable drive. The application prompts for confirmation again when subsequently applying a policy or the next time this removable drive is connected.

If the user initiates safe removal of a removable drive during data encryption, Kaspersky Endpoint Security interrupts the data encryption process and allows removal of the removable drive before the encryption process has finished. Data encryption will be continued the next time the removable drive is connected to this computer.

If encryption of a removable drive failed, view the **Data Encryption** report in the Kaspersky Endpoint Security interface. Access to files may be blocked by another application. In this case, try unplugging the removable drive from the computer and connecting it again.

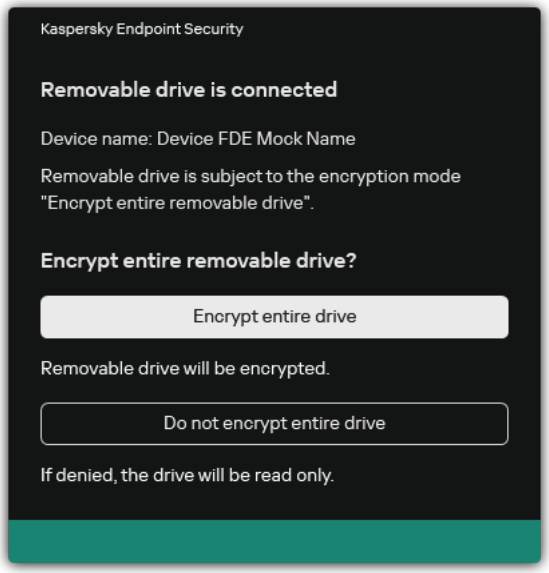

Removable drive encryption request

Adding an encryption rule for removable drives

To add an encryption rule for removable drives:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Encryption of removable drives**.
4. Click the **Add** button, and in the drop-down list select one of the following items:
   - If you want to add encryption rules for removable drives that are in the list of trusted devices of the Device Control component, select **From list of trusted devices of this policy**.
   - If you want to add encryption rules for removable drives that are in the Kaspersky Security Center list, select **From Kaspersky Security Center list of devices**.
5. In the **Encryption mode for selected devices** drop-down list, select the action to be performed by Kaspersky Endpoint Security on files stored on the selected removable drives.
6. Select the **Portable mode** check box if you want Kaspersky Endpoint Security to prepare removable drives before encryption, making it possible to use encrypted files stored on them in portable mode.

   Portable mode lets you use encrypted files stored on removable drives that are connected to computers without encryption functionality.

7. Select the **Encrypt used disk space only** check box if you want Kaspersky Endpoint Security to encrypt only those disk sectors that are occupied by files.

   If you are applying encryption on a drive that is already in use, it is recommended to encrypt the entire drive. This ensures that all data is protected – even deleted data that might still contain retrievable information. The **Encrypt used disk space only** function is recommended for new drives that have not been previously used.

   > If a device was previously encrypted using the **Encrypt used disk space only** function, after applying a policy in **Encrypt entire removable drive** mode, sectors that are not occupied by files will still not be encrypted.

8. In the **Actions for devices that were selected earlier** drop-down list, select the action to be performed by Kaspersky Endpoint Security according to encryption rules that had been previously defined for removable drives:

   - If you want the previously created encryption rule for the removable drive to remain unchanged, select **Skip**.
   - If you want the previously created encryption rule for the removable drive to be replaced by the new rule, select **Refresh**.

9. Save your changes.

The added encryption rules for removable drives will be applied to removable drives connected to any computers in the organization.

Exporting and importing a list of encryption rules for removable drives

You can export the list of removable drive encryption rules to an XML file. Then you can modify the file to, for example, add a large number of rules for the same type of removable drives. You can also use the export/import function to back up the list of rules or to migrate the rules to a different server.

How to export and import a list of removable drive encryption rules in the Administration Console (MMC)

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Data Encryption** → **Encryption of removable drives**.
5. In the **Encryption rules for selected devices** block, click the **<N> rules** link.

   This opens a list of encryption rules for removable drives.
6. To export the list of encryption rules for removable drives:

   a. Select the rules that you want to export.

   b. Click **Export**.

c. Confirm that you want to export only the selected rules, or export the entire list.

d. Save the file.

Kaspersky Endpoint Security exports the list of rules to an XML file in the default downloads folder.

7. To import the list of rules:

a. Click the **Import** link.

In the window that opens, select the XML file from which you want to import the list of rules.

b. Open the file.

If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

8. Save your changes.

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Data Encryption** → **Encryption of removable drives**.

4. To export the list of encryption rules for removable drives:

a. Select the rules that you want to export. To select multiple ports, use the **CTRL** or **SHIFT** keys.

If you did not select any rule, Kaspersky Endpoint Security will export all rules.

b. Click the **Export** link.

c. In the window that opens, specify the name of the XML file to which you want to export the list of rules, and select the folder in which you want to save this file.

d. Save the file.

Kaspersky Endpoint Security exports the list of rules to the XML file.

5. To import a list of encryption rules for removable drives:

a. Click the **Import** link.

In the window that opens, select the XML file from which you want to import the list of rules.

b. Open the file.

If the computer already has a list of rules, Kaspersky Endpoint Security will prompt you to delete the existing list or add new entries to it from the XML file.

6. Save your changes.

Portable mode for accessing encrypted files on removable drives

Portable mode is a mode of file encryption (FLE) on removable drives that provides the ability to access data outside of a corporate network. Portable mode also lets you work with encrypted data on computers that do not have Kaspersky Endpoint Security installed.

Portable mode is convenient to use in the following cases:

- There is no connection between the computer and the Kaspersky Security Center Administration Server.
- The infrastructure has changed with the change of the Kaspersky Security Center Administration Server.
- Kaspersky Endpoint Security is not installed on the computer.

Portable File Manager

To work in portable mode, Kaspersky Endpoint Security installs a special encryption module named *Portable File Manager* on a removable drive. The Portable File Manager provides an interface for working with encrypted data if Kaspersky Endpoint Security is not installed on the computer (see the figure below). If Kaspersky Endpoint Security is installed on your computer, you can work with encrypted removable drives using your usual file manager (for example, Explorer).

The Portable File Manager stores a key to encrypt files on a removable drive. The key is encrypted with the user password. The user sets a password before encrypting files on a removable drive.

> The Portable File Manager starts automatically when a removable drive is connected to a computer on which Kaspersky Endpoint Security is not installed. If automatic startup of applications is disabled on the computer, manually start the Portable File Manager. To do so, run the file named pmv.exe that is stored on the removable drive.

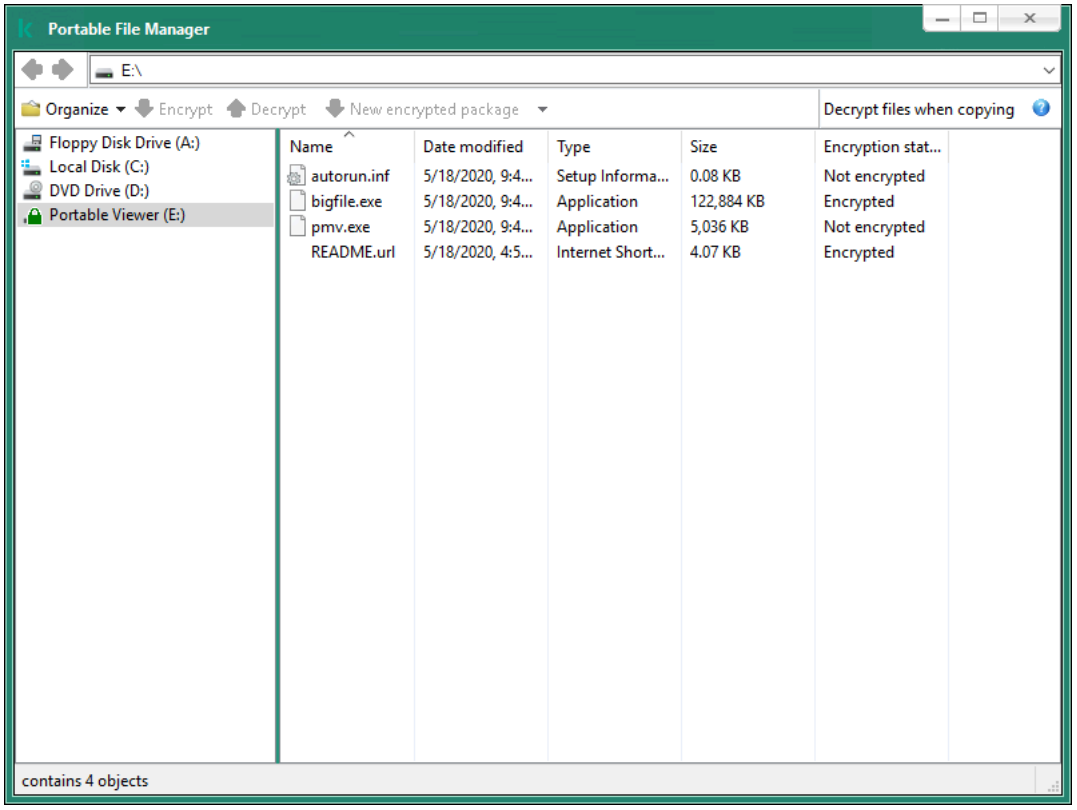

Portable File Manager

Support for portable mode for working with encrypted files

How to enable portable mode support for working with encrypted files on removable drives in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Encryption of removable drives**.
4. In the **Encryption mode for selected devices** drop-down list, select **Encrypt all files** or **Encrypt new files only**.

   Portable mode is available only with File Level Encryption (FLE). It is not possible to enable portable mode support for Full Disk Encryption (FDE).

5. Select the **Portable mode** check box.
6. If necessary, add encryption rules for individual removable drives.
7. Save your changes.
8. After applying the policy, connect the removable drive to the computer.
9. Confirm the removable drive encryption operation.

   This opens a window in which you can create a password for Portable File Manager.

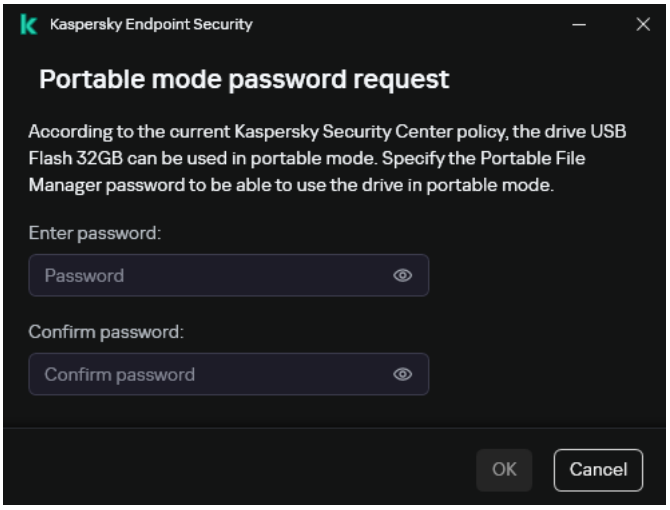

Portable mode password request

10. Specify a password that meets the strength requirements and confirm it.
11. Save your changes.

How to enable portable mode support for working with encrypted files on removable drives in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Data Encryption** → **Encryption of removable drives**.
5. In the **Default action** block, select **Encrypt all files** or **Encrypt new files only**.

   > Portable mode is available only with File Level Encryption (FLE). It is not possible to enable portable mode support for Full Disk Encryption (FDE).
6. Select the **Portable mode** check box.
7. If necessary, add encryption rules for individual removable drives.
8. Save your changes.
9. After applying the policy, connect the removable drive to the computer.
10. Confirm the removable drive encryption operation.

    This opens a window in which you can create a password for Portable File Manager.

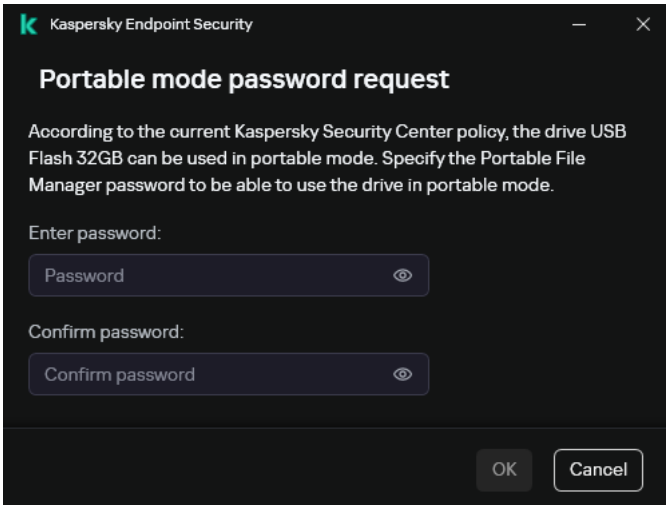

Portable mode password request

11. Specify a password that meets the strength requirements and confirm it.
12. Save your changes.

Kaspersky Endpoint Security will encrypt files on the removable drive. The Portable File Manager used for working with encrypted files will also be added to the removable drive. If there are already encrypted files on the removable drive, Kaspersky Endpoint Security will encrypt them again using its own key. This allows the user to access all files on the removable drive in portable mode.

Accessing encrypted files on a removable drive

After encrypting files on a removable drive with portable mode support, the following file access methods are available:

- If Kaspersky Endpoint Security is not installed on the computer, the Portable File Manager will prompt you to enter a password. You will need to enter the password each time you restart the computer or reconnect the removable drive.
- If the computer is located outside the corporate network and Kaspersky Endpoint Security is installed on the computer, the application will prompt you to enter the password or send the administrator a request to access the files. After gaining access to files on a removable drive, Kaspersky Endpoint Security will save the secret key in the computer's key storage. This will allow access to files in the future without entering a password or asking the administrator (see figure below).
- If the computer is located inside the corporate network and Kaspersky Endpoint Security is installed on the computer, you will get access to the device without entering a password. Kaspersky Endpoint Security will receive the secret key from the Kaspersky Security Center Administration Server to which the computer is connected.

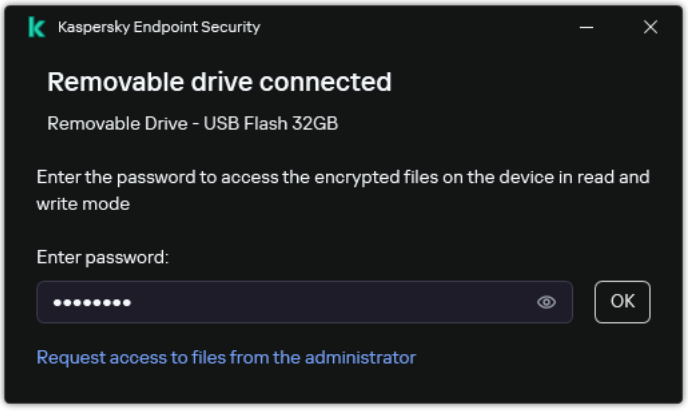

Accessing encrypted files on a removable drive

Recovering the password for working in portable mode

If you have forgotten the password for working in portable mode, you need to connect the removable drive to a computer with Kaspersky Endpoint Security installed inside the corporate network. You will get access to the files because the secret key is stored in the computer's key storage or on the Administration Server. Decrypt and re-encrypt files with a new password.

Features of portable mode when connecting a removable drive to a computer from another network

If the computer is located outside the corporate network and Kaspersky Endpoint Security is installed on the computer, you can access the files in the following ways:

- **Password-based access**

After entering the password, you will be able to view, modify, and save files on the removable drive (*transparent access*). Kaspersky Endpoint Security can set a read-only access right for a removable drive if the following parameters are configured in the policy settings for encryption of removable drives:

- Portable mode support is disabled.
- The **Encrypt all files** or **Encrypt new files only** mode is selected.

In all other cases, you will get full access to the removable drive (read/write permission). You will be able to add and delete files.

You can change the removable drive access permissions even while the removable drive is connected to the computer. If the removable drive access permissions are changed, Kaspersky Endpoint Security will block access to the files and prompt you for the password again.

After entering the password, you cannot apply encryption policy settings for the removable drive. In this case, it is impossible to decrypt or re-encrypt files on the removable drive.

- **Ask the administrator for access to files**

  If you have forgotten the password for working in portable mode, ask the administrator for access to files. To access the files, the user needs to send the administrator a request access file (a file with the KESDC extension). The user can send the request access file by email, for example. The administrator will send an encrypted data access file (a file with the KESDR extension).

  After you complete the Request-Response password recovery procedure, you will receive transparent access to files on the removable drive, and full access to the removable drive (read/write permission).

  You can apply a removable drive encryption policy, and decrypt files, for example. After recovering the password or when the policy is updated, Kaspersky Endpoint Security will prompt you to confirm the changes.

  How to obtain an encrypted data access file in the Administration Console (MMC)

  1. Open the Kaspersky Security Center Administration Console.
  2. In the console tree, select **Devices**.
  3. On the **Devices** tab, select the computer of the user requesting access to encrypted data and right-click to open the context menu.
  4. In the context menu, select **Grant access in offline mode**.
  5. This opens a window; in that window, select the **Data Encryption** tab.
  6. On the **Data Encryption** tab, click the **Browse** button.
  7. In the window for selecting a request access file, specify the path to the file received from the user.

You will see information about the user's request. Kaspersky Security Center generates a key file. Email the generated encrypted data access key file to the user. Or save the access file and use any available method to transfer the file.

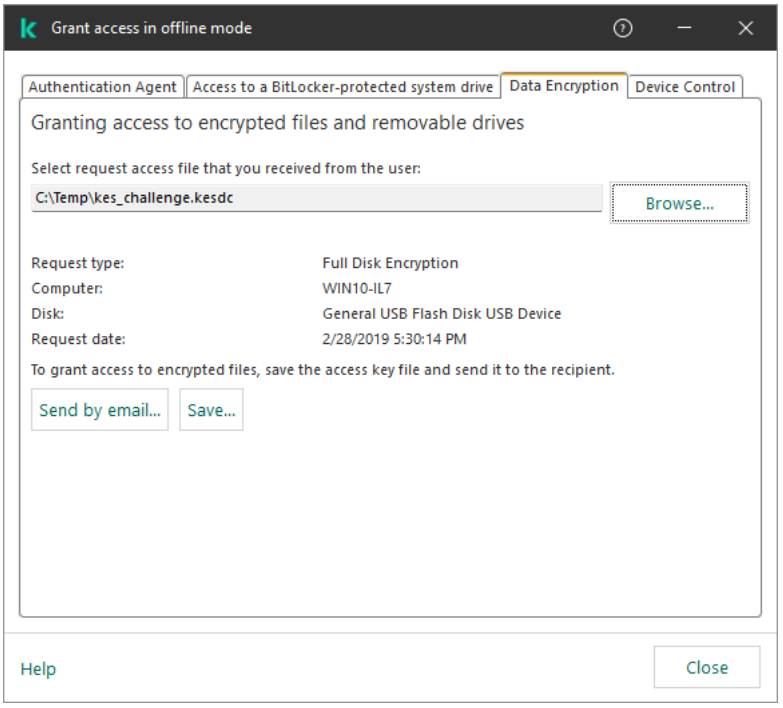

Granting access in offline mode

How to obtain an encrypted data access file in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Select the check box next to the name of the computer whose data you want to restore access to.
3. Click **Grant access to the device in offline mode**.
4. Select **Data Encryption**.
5. Click the **Select file** button and select the request access file that you received from the user (a file with the KESDC extension).

   The Web Console will display information about the request. This will include the name of the computer on which the user is requesting access to the file.
6. Click the **Save key** button and select a folder to save the encrypted data access key file (a file with the KESDR extension).

As a result, you will be able to obtain the encrypted data access key, which you will need to transfer to the user.

Decryption of removable drives

You can use a policy to decrypt a removable drive. A policy with defined settings for removable drive encryption is generated for a specific administration group. Therefore, the result of data decryption on removable drives depends on the computer to which the removable drive is connected.

To decrypt removable drives:

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Data Encryption** → **Encryption of removable drives**.
4. If you want to decrypt all encrypted files that are stored on removable drives, in the **Encryption mode** drop-down list select **Decrypt entire removable drive**.
5. To decrypt data that is stored on individual removable drives, edit the encryption rules for removable drives whose data you want to decrypt. To do so:
   a. In the list of removable drives for which encryption rules have been configured, select an entry corresponding to the removable drive you need.
   b. Click the **Set a rule** button to edit the encryption rule for the selected removable drive.
   c. In the context menu of the **Set a rule** button, select the **Decrypt entire removable drive** item.
6. Save your changes.

As a result, if a user connects a removable drive or if it is already connected, Kaspersky Endpoint Security decrypts the removable drive. The application warns the user that the decryption process may take some time. If the user initiates safe removal of a removable drive during data decryption, Kaspersky Endpoint Security interrupts the data decryption process and allows removal of the removable drive before the decryption operation has finished. Data decryption will be continued the next time the removable drive is connected to the computer.

If decryption of a removable drive failed, view the **Data Encryption** report in the Kaspersky Endpoint Security interface. Access to files may be blocked by another application. In this case, try unplugging the removable drive from the computer and connecting it again.

Viewing data encryption details

While encryption or decryption in progress, Kaspersky Endpoint Security relays information about the status of encryption parameters applied to client computers to Kaspersky Security Center.

Viewing the encryption status

You can look at the status to monitor data encryption. Kaspersky Endpoint Security assigns the following encryption statuses:

- **Does not meet the policy; canceled by user**. The user has canceled data encryption.
- **Does not meet the policy due to an error**. Data encryption error, for example, a license is missing.

- **Applying the policy; restart is required**. Data encryption is in progress on the computer. Restart the computer to complete data encryption.
- **No encryption policy specified**. Data encryption is turned off in policy settings.
- **Not supported**. Data encryption components are not installed on the computer.
- **Applying the policy**. Data encryption and / or decryption is in progress on the computer.

To view the encryption status of computer data:

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Managed devices**.
3. On the **Devices** tab in the workspace, slide the scroll bar all the way to the right. If the **Encryption status** column is not displayed, add this column in Kaspersky Security Center console settings.

   The **Encryption status** column shows the encryption status of data on computers in the selected administration group. This status is formed based on information about file encryption on local drives of the computer, and about full disk encryption.
4. If the status of data encryption for the computer is **Applying policy**, you can monitor the encryption progress panel:

   a. Open the properties of the computer with the **Applying policy** status by double-clicking it.

   b. In the computer properties window, select the **Applications** section.

   c. In the list of Kaspersky applications installed on the computer, select **Kaspersky Endpoint Security for Windows**.

   d. Click **Statistics**.

   e. Under **Encryption of devices** you can see the current progress of data encryption as a percentage.

Viewing encryption statistics on Kaspersky Security Center dashboards

To view the encryption status on Kaspersky Security Center dashboards:

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select the **Administration Server** node.
3. In the workspace to the right of the Administration Console tree, select the **Statistics** tab.
4. Create a new page with details panes containing data encryption statistics. To do so:

   a. On the **Statistics** tab, click the **Customize view** button.

   b. In the window that opens, click the **Add** button.

   c. This opens a window; in that window, in the **General** section, enter the name of the page.

d. In the **Information panels** section, click the **Add** button.

e. In the window that opens in the **Protection status** group, select the **Encryption of devices** item.

f. Click **OK**.

g. If necessary, edit the settings of the details pane. To do so, use the **View** and **Devices** sections.

h. Click **OK**.

i. Repeat steps d – h of the instructions, selecting the **Encryption of removable drives** item in the **Protection status** section.

The details panes added appear in the **Information panels** list.

j. Click **OK**.

The name of the page with details panes created at the previous steps appears in the **Pages** list.

k. Click the **Close** button.

5. On the **Statistics** tab, open the page that was created during the previous steps of the instructions.

The details panes appear, showing the encryption status of computers and removable drives.

Viewing file encryption errors on local computer drives

To view the file encryption errors on local computer drives:

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Managed devices**.

3. On the **Devices** tab, select the name of the computer in the list and right-click it to open the context menu.

4. In the context menu of the computer, select the **Properties** item. In the window that opens, select the **Protection** section.

5. Click the **View data encryption errors** link to open the **Data encryption errors** window.

This window shows the details of file encryption errors on local computer drives. When an error is corrected, Kaspersky Security Center removes the error details from the **Data encryption errors** window.

Viewing the data encryption report

Kaspersky Security Center allows you to create data encryption reports:

- **Report on encryption status of managed devices**. The report includes information on whether the encryption status of the computer complies with the encryption policy.

- **Report on encryption status of mass storage devices**. The report includes information about the encryption status of external devices and storage devices.

- **Report on rights to access encrypted drives**. The report includes information about the status of accounts that have access to encrypted drives.
- **Report on file encryption errors**. The report includes information about errors that occurred during the execution of data encryption or decryption tasks on computers.
- **Report on blockage of access to encrypted files**. The report includes information about applications being blocked from gaining access to encrypted files.

To view the data encryption report:

1. Open the Kaspersky Security Center Administration Console.
2. In the **Administration Server** node of the Administration Console tree, select the **Reports** tab.
3. Click the **New report template** button.

   The New Report Template Wizard starts.
4. Follow the instructions of the Report Template Wizard. In the **Selecting the report template type** window in the **Other** section, select one of the data encryption reports.

   After you have finished with the New Report Template Wizard, the new report template appears in the table on the **Reports** tab.
5. Select the report template that was created at the previous steps of the instructions.
6. In the context menu of the template, select **Show report**.

The report generation process starts. The report is displayed in a new window.

Working with encrypted devices when there is no access to them

Obtaining access to encrypted devices

A user may be required to request access to encrypted devices in the following cases:

- The hard drive was encrypted on a different computer.
- The encryption key for a device is not on the computer (for example, upon the first attempt to access the encrypted removable drive on the computer), and the computer is not connected to Kaspersky Security Center.

  After the user has applied the access key to the encrypted device, Kaspersky Endpoint Security saves the encryption key on the user's computer and allows access to this device upon subsequent access attempts even if there is no connection to Kaspersky Security Center.

Access to encrypted devices can be obtained as follows:

1. The user uses the Kaspersky Endpoint Security application interface to create a request access file with the kesdc extension and sends it to the corporate LAN administrator.

2. The administrator uses the Kaspersky Security Center Administration Console to create an access key file with the kesdr extension and sends it to the user.

3. The user applies the access key.

Restoring data on encrypted devices

A user can use the Encrypted Device Restore Utility (hereinafter referred to as the Restore Utility) to work with encrypted devices. This may be required in the following cases:

- The procedure for using an access key to obtain access was unsuccessful.

- Encryption components have not been installed on the computer with the encrypted device.

The data needed to restore access to encrypted devices using the Restore Utility resides in the memory of the user's computer in unencrypted form for some time. To reduce the risk of unauthorized access to such data, you are advised to restore access to encrypted devices on trusted computers.

Data on encrypted devices can be restored as follows:

1. The user uses the Restore Utility to create a request access file with the fdertc extension and sends it to the corporate LAN administrator.

2. The administrator uses the Kaspersky Security Center Administration Console to create an access key file with the fdertr extension and sends it to the user.

3. The user applies the access key.

To restore data on encrypted system hard drives, the user can also specify the Authentication Agent account credentials in the Restore Utility. If the metadata of the Authentication Agent account has been corrupted, the user must complete the restoration procedure using a request access file.

Before restoring data on encrypted devices, it is recommended to cancel the Kaspersky Security Center policy or disable encryption in the Kaspersky Security Center policy settings on the computer where the procedure will be performed. This prevents the device from being encrypted again.

Recovering data by using the FDERT Restore Utility

If the hard drive fails, the file system may be corrupt. If this is the case, data protected by Kaspersky Disk Encryption technology will be unavailable. You can decrypt the data and copy the data to a new drive.

Data recovery on a drive protected by Kaspersky Disk Encryption technology consists of the following steps:

1. Create a stand-alone Restore Utility (see the figure below).

2. Connect a drive to a computer that does not have Kaspersky Endpoint Security encryption components installed.

3. Run the Restore Utility and diagnose the hard drive.

4. Access data on the drive. To do so, enter the credentials of the Authentication Agent or start the recovery procedure (Request-Response).

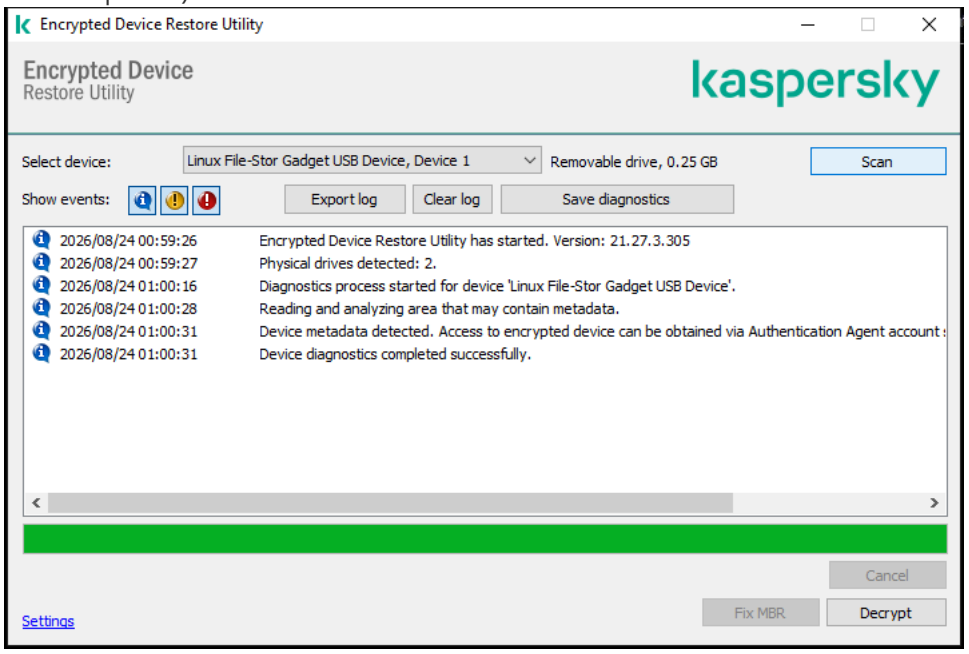

FDERT Restore Utility

Creating a standalone restore utility

To create the executable file of Restore Utility:

1. In the main application window, click the button.

2. In the window that opens, click the **Restore encrypted device** button.

   Encrypted device Restore Utility starts.

3. Click the **Create Stand-alone Restore Utility** button in the window of Restore Utility.

4. Save the stand-alone Restore Utility to computer memory.

   As a result, the executable file of the Restore Utility (fdert.exe) will be saved in the specified folder. Copy the Restore Utility to a computer that does not have Kaspersky Endpoint Security encryption components. This prevents the drive from being encrypted again.

The data needed to restore access to encrypted devices using the Restore Utility resides in the memory of the user's computer in unencrypted form for some time. To reduce the risk of unauthorized access to such data, you are advised to restore access to encrypted devices on trusted computers.

Recovering data on a hard drive

To restore access to an encrypted device using the Restore Utility:

1. Run the file named fdert.exe, which is the executable file of the Restore Utility. This file is created by Kaspersky Endpoint Security.

2. In the Restore Utility window, select the encrypted device to which you want to restore access.

3. Click the **Scan** button to allow the utility to define which of the actions should be taken on the device: whether it should be unlocked or decrypted.

   If the computer has access to Kaspersky Endpoint Security encryption functionality, the Restore Utility prompts you to unlock the device. While unlocking the device does not decrypt it, the device becomes directly accessible as a result of being unlocked. If the computer does not have access to Kaspersky Endpoint Security encryption functionality, the Restore Utility prompts you to decrypt the device.

4. If you want to import diagnostic information, click the **Save diagnostics** button.

   The utility will save an archive with files containing diagnostic information.

5. Click the **Fix MBR** button if diagnostics of the encrypted system hard drive has returned a message about problems involving the master boot record (MBR) of the device.

   Fixing the master boot record of the device can speed up the process of obtaining information that is needed for unlocking or decrypting the device.

6. Click the **Unlock** or **Decrypt** button depending on the results of diagnostics.

7. If you want to restore data using an Authentication Agent account, select the **Use Authentication Agent account settings** option and enter the credentials of the Authentication Agent.

   This method is possible only when restoring data on a system hard drive. If the system hard drive was corrupted and Authentication Agent account data has been lost, you must obtain an access key from the corporate LAN administrator to restore data on an encrypted device.

8. If you want to start the recovery procedure, do the following:

   a. Select the **Specify device access key manually** option.

   b. Click the **Receive access key** button and save the request access file to computer memory (a file with the FDERTC extension).

   c. Send the request access file to the corporate LAN administrator.

   > Do not close the **Receive device access key** window until you have received the access key. When this window is opened again, you will not be able to apply the access key that was previously created by the administrator.

   d. Receive and save the access file (a file with the FDERTR extension) created and sent to you by the corporate LAN administrator (see the instructions below).

   e. Download the access file in the **Receive device access key** window.

9. If you are decrypting a device, you must configure additional decryption settings:

   - Specify area to decrypt:

     - If you want to decrypt the entire device, select the **Decrypt entire device** option.

     - If you want to decrypt a portion of the data on a device, select the **Decrypt individual device areas** option and specify the decryption area boundaries.

   - Select the location for writing the decrypted data:

     - If you want the data on the original device to be rewritten with the decrypted data, clear the **Decrypt to a disk image file** check box.

     - If you want to save decrypted data separately from the original encrypted data, select the **Decrypt to a disk image file** check box and use the **Browse** button to specify the path where to save the VHD file.

10. Click **OK**.

    The device unlocking / decryption process starts.

How to create an encrypted data access file in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the Administration Console tree, select the **Advanced** → **Data encryption and protection** → **Encrypted drives** folder.

3. In the workspace, select the encrypted device for which you want to create an access key file, then in the context menu of the device, click **Get access to the device in Kaspersky Endpoint Security**.

   If you are not sure for which computer the access request file was generated, in the Administration Console tree select the **Advanced** → **Data encryption and protection** folder and in the workspace, click **Get device encryption key in Kaspersky Endpoint Security**.

4. In the window that opens, select the encryption algorithm to use: AES256 or AES56.

   The data encryption algorithm depends on the AES encryption library that is included in the distribution package: *Strong encryption (AES256)* or *Lite encryption (AES56)*. The AES encryption library is installed together with the application.

5. Click **Browse** to open a window; in this window, specify the path to the request file with the fdertc extension that was received from the user.

6. Click **Unlock**.

   You will see information about the user's request. Kaspersky Security Center generates a key file. Email the generated encrypted data access key file to the user. Or save the access file and use any available method to transfer the file.

How to create an encrypted data access file in the Web Console

1. In the main window of the Web Console, select **Operations** → **Data encryption and protection** → **Encrypted drives**.

2. Select the check box next to the name of the computer on which you want to recover data.

3. Click **Grant access to the device in offline mode**.

   This starts the Wizard for granting access to a device.

4. Follow the instructions of the Wizard for granting access to a device:

   a. Select the Kaspersky Endpoint Security for Windows plug-in.

   b. Select the encryption algorithm to use: AES256 or AES56.

      The data encryption algorithm depends on the AES encryption library that is included in the distribution package: *Strong encryption (AES256)* or *Lite encryption (AES56)*. The AES encryption library is installed together with the application.

   c. Select the request access file received from the user (a file with the FDERTC extension).

   d. Select a folder to save the encrypted data access key file (a file with the FDERTR extension).

As a result, you will be able to obtain the encrypted data access key, which you will need to transfer to the user.

Creating an operating system rescue disk

The operating system rescue disk can be useful when an encrypted hard drive cannot be accessed for some reason and the operating system cannot load.

You can load an image of the Windows operating system using the rescue disk and restore access to the encrypted hard drive using Restore Utility included in the operating system image.

To create an operating system rescue disk:

1. Create an executable file for the Encrypted Device Restore Utility.

2. Create a custom image of the Windows pre-boot environment. While creating the custom image of the Windows pre-boot environment, add the executable file of Restore Utility to the image.

3. Save the custom image of the Windows pre-installation environment to bootable media such as a CD or removable drive.

   Refer to Microsoft help files for instructions on creating a custom image of the Windows pre-boot environment (for example, in the Microsoft TechNet resource).

Detection and Response solutions

Kaspersky Detection and Response solutions are security systems for detecting advanced threats and indicators of attack on different levels of an organization's infrastructure. Detection and Response solutions provide information about the detected threat and allow managing Threat Response actions.

Thus, Detection and Response solution do the following:

- Receive information about the operation of a computer, server, or other devices (telemetry).
- Automatically analyze the information to detect threats.
- Generate alert details as columns of the threat development chain for analysis and choosing Threat Response actions.
- Carry out Threat Response actions (for example, network isolation of the computer).

Kaspersky Endpoint Security supports Detection and Response solutions using a built-in agent. The built-in agent sends telemetry to servers of solutions and carries out Threat Response actions. The built-in agent supports:

- Kaspersky Managed Detection and Response (MDR)
- Kaspersky Endpoint Detection and Response Optimum 2.0 (EDR Optimum)
- Kaspersky Endpoint Detection and Response Expert (EDR Expert)
- Kaspersky Anti Targeted Attack Platform:
  - Endpoint Detection and Response (EDR) version 7.1 or earlier
  - Network Detection and Response (NDR)
  - KATA Sandbox
- Kaspersky Endpoint Detection and Response Expert (on-premises)
- Kaspersky Sandbox 2.0

You can use Kaspersky Endpoint Security with Detection and Response solution in various configurations, for example, [EDR Optimum+MDR].

MDR and EDR Optimum licensing

Kaspersky Endpoint Security supports the functionality of the Kaspersky Managed Detection and Response (MDR) and Kaspersky Endpoint Detection and Response Optimum (EDR Optimum) solutions. You can use Kaspersky Endpoint Security with these solutions in various configurations and build a custom protection system that satisfies your particular requirements. To do so, you must purchase a license for each of the solutions. The license may cover the right to use a single solution (for example, MDR Add-on only) or several solutions, [EDR Optimum+MDR] Add-on.

MDR and EDR Optimum support the following licensing methods:

- The MDR or EDR Optimum functionality is covered by the Kaspersky Endpoint Security for Windows license.

  The functionality is available immediately after the activation of Kaspersky Endpoint Security for Windows. You only need to add one key.

- Separate licenses for MDR or EDR Optimum (MDR Add-on, EDR Optimum Add-on, [EDR Optimum+MDR] Add-on).

  The functionality becomes available after adding a separate key for MDR Add-on, EDR Optimum Add-on, or [EDR Optimum+MDR] Add-on. As a result, two keys are added on the computer: a key for Kaspersky Endpoint Security and a key for MDR or EDR Optimum. The Kaspersky Endpoint Security key must be the first to be added.

Kaspersky Endpoint Security allows adding only one *active key* for MDR and EDR Optimum licensing. Therefore, if you need to activate both of these solutions, you must add one [EDR Optimum+MDR] Add-on key instead of a separate key for each solution. You can also add one *reserve key*.

If you used a BLOB file when deploying MDR, you do not need a separate key to activate MDR. The BLOB file already contains license information.

Initial licensing of solutions

When first deploying MDR and EDR Optimum, the solutions are activated in the same way as the Kaspersky Endpoint Security application. You can add a key using the *Add key* task or use the automatic key distribution functionality. The license key is added to the application as a second active key or as a reserve key if you select the relevant check box.

Switching from one license to another

If your organization already has one of these solutions deployed, and the corresponding key has been added to the application, there are some special considerations involved with the licensing of the new configuration. When switching to a different license, the application does not add the new key to the application, instead it replaces the current key with the new key. The reason of this is the restriction that allows the application to add only one key to activate MDR and EDR Optimum.

For example, suppose your organization has the [EDR Optimum+MDR] solution deployed, and you decided to switch to the MDR Add-on configuration. To switch to the new configuration, you must replace the [EDR Optimum+MDR] Add-on key with the MDR Add-on key.

A separate license for EDR Optimum and MDR ([EDR Optimum+MDR] Add-on) is no longer available. If you want to use both of these solutions, you must activate MDR using a BLOB file, and EDR Optimum with a license key.

With the automatic key distribution feature, the application rejects license keys that cover the same number of solutions. That is, if you have an EDR Optimum Add-on key added, you cannot replace this key with a MDR Add-on key. However, you can replace the EDR Optimum Add-on key with an [EDR Optimum+MDR] Add-on key. The application also rejects keys if you try to replace an MDR Add-on key with an EDR Add-on key. To replace a key, you can run the *Add key* task. The *Add key* task allows replacing license keys with any number of solutions.

If you have an [EDR Optimum+MDR] Add-on reserve key added, to correctly add an active key for EDR Optimum Add-on or MDR Add-on, you must first replace the reserve key with an EDR Optimum Add-on or MDR Add-on key, or alternatively, remove the reserve key and then replace the active key.

Compatibility with third-party EDR solutions

You can use Kaspersky Endpoint Security to protect workstations and servers together with third-party EDR solutions. To eliminate false positives, we recommend adding executable files of Kaspersky Endpoint Security and Network Agent to the trusted zone of your third-party EDR solution.

Trusted zone for compatibility with third-party EDR solutions

	Kaspersky Endpoint Security for Windows	Kaspersky Security Center Network Agent
Working folder	`C:\Program Files (x86)\Kaspersky Lab\KES.14.2.0`	`C:\Program Files (x86)\Kaspersky Lab\NetworkAgent`

Executable files	`avp.exe`
	`avp.com`
	`avpsus.exe`
	`avpui.exe`
	`dump_writer_agent.exe`
	`kescli.exe`
	`kesdr.exe`
	`kldw.exe`
	`klpsm.exe`
	`kvdb_upgrader.exe`
	`modify_watcher.exe`
	`pmv.exe`
	`remediation.exe`
	`service_stub.exe`
		`AVPDTAgt.exe`
		`fix_gflags.exe`
		`getsysteminfo.exe`
		`integrity_checker.exe`
		`klcpuld.exe`
		`klcsldcl.exe`
		`klcsngtgui.exe`
		`klcspxy.exe`
		`kldumper.exe`
		`klmover.exe`
		`klnagchk.exe`
		`klnagent.exe`
		`klnagntf.exe`
		`klnagwds.exe`
		`klosprep.exe`
		`klrbtagt.exe`
		`klscflag.exe`
		`klscmodchk.exe`
		`klshwmsg.exe`
		`klwd.exe`
		`ksnproxy.exe`
		`Patch.exe`
		`tslauncher.exe`
		`Up2Date.exe`
		`vapm.exe`

Kaspersky Endpoint Agent

Kaspersky Endpoint Agent supports interaction between the application and other Kaspersky solutions for detecting advanced threats (e.g. Kaspersky Sandbox). Kaspersky solutions are compatible with specific versions of Kaspersky Endpoint Agent.

To use Kaspersky Endpoint Agent as part of Kaspersky solutions, you must activate those solutions with a corresponding license key.

For complete information about the Kaspersky Endpoint Agent included in the software solution you are using, and for complete information about the standalone solution, please refer to the Help Guide of the relevant product:

- Kaspersky Anti Targeted Attack Platform Help
- Kaspersky Sandbox Help
- Kaspersky Endpoint Detection and Response Optimum Help
- Kaspersky Managed Detection and Response Help

Distribution kit for Kaspersky Endpoint Security versions 11.2.0 – 11.8.0 includes Kaspersky Endpoint Agent. You can select Kaspersky Endpoint Agent when installing Kaspersky Endpoint Security for Windows. As a result, two applications will be installed on your computer: KEA and KES. In Kaspersky Endpoint Security 11.9.0 the Kaspersky Endpoint Agent distribution package is no longer part of the Kaspersky Endpoint Security distribution kit.

Correspondence of KEA versions (as part of KES) to KES versions

Kaspersky Endpoint Security for Windows	Kaspersky Endpoint Agent
11.8.0	3.11.0.216.mr1
11.7.0	3.11
11.6.0	3.10
11.5.0	3.9
11.4.0	3.9
11.3.0	3.9
11.2.0	3.9

Kaspersky is switching all Detection and Response to working with the Kaspersky Endpoint Security built-in agent instead of Kaspersky Endpoint Agent. Kaspersky is gradually adding support for these solutions and phasing out Kaspersky Endpoint Agent (see table below). Starting with version 12.1, the application supports all Detection and Response solutions. In addition, starting with version 12.1, the application is no longer compatible with Kaspersky Endpoint Agent, and installing both applications side by side on the same computer is no longer possible.

Version of Kaspersky Endpoint Security	Kaspersky Managed Detection and Response	Kaspersky Sandbox	Kaspersky Endpoint Detection and Response Optimum	Kaspersky Endpoint Detection and Response Expert	Kaspersky Anti Targeted Attack Platform (Endpoint Detection and Response component)	Kaspersky Anti Targeted Attack Platform (Network Detection and Response component)
11.5.0	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent
11.6.0	**Built-in agent**	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent
11.7.0	**Built-in agent**	**Built-in agent**	**Built-in agent**	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent
11.8.0	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent
11.9.0	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent
11.10.0	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent
11.11.0	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent
12	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**	Kaspersky Endpoint Agent	Kaspersky Endpoint Agent
12.1	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**	Kaspersky Endpoint Agent
12.6	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**	**Built-in agent**

Migrating the [KES+KEA] configuration to [KES+built-in agent] configuration

Kaspersky Endpoint Security includes built-in agents for working with Detection and Response solutions. You no longer need a separate Kaspersky Endpoint Agent application to work with these solutions. When you deploy Kaspersky Endpoint Security on computers that have Kaspersky Endpoint Agent installed, Detection and Response solutions will continue working with Kaspersky Endpoint Security. In addition, Kaspersky Endpoint Agent will be removed from the computer.

Distribution kit for Kaspersky Endpoint Security versions 11.2.0 – 11.8.0 includes Kaspersky Endpoint Agent. You can select Kaspersky Endpoint Agent when installing Kaspersky Endpoint Security for Windows. As a result, two applications will be installed on your computer: KEA and KES. In Kaspersky Endpoint Security 11.9.0 the Kaspersky Endpoint Agent distribution package is no longer part of the Kaspersky Endpoint Security distribution kit.

Migrating the [KES+KEA] configuration to [KES+built-in agent] involves the following steps:

1. **Upgrading Kaspersky Security Center**

   Upgrade all Kaspersky Security Center components to version 13.2 or higher, including Network Agent on user computers and Web Console.

2. **Upgrading the Kaspersky Endpoint Security web plug-in**

In Kaspersky Security Center Web Console, upgrade the Kaspersky Endpoint Security web plug-in to version 11.7.0 or higher. To manage EDR Optimum and Kaspersky Sandbox components, you must use Web Console.

To use Kaspersky Anti Targeted Attack Platform (EDR), you will need a web plug-in for Kaspersky Endpoint Security version 12.1 or later.

To use Kaspersky Anti Targeted Attack Platform (NDR), you will need a web plug-in for Kaspersky Endpoint Security version 12.7 or later.

3. **Migrating the policy and tasks**

   Use the Kaspersky Endpoint Agent Policy and Task Migration Wizard to migrate Kaspersky Endpoint Agent settings to Kaspersky Endpoint Security for Windows.

   This creates a new Kaspersky Endpoint Security policy. The new policy has the *Inactive* status. To apply the policy, open policy properties, accept the Kaspersky Security Network Statement and set the status to *Active*.

4. **Licensing functionality**

   If you use a common Kaspersky Endpoint Detection and Response Optimum or Kaspersky Optimum Security license to activate Kaspersky Endpoint Security for Windows and Kaspersky Endpoint Agent, EDR Optimum functionality will be activated automatically after upgrading the application to version 11.7.0. You do not need to do anything else.

   If you use a stand-alone Kaspersky Endpoint Detection and Response Optimum Add-on license to activate EDR Optimum functionality, you must make sure that the EDR Optimum Add-on key is added to the Kaspersky Security Center repository and the automatic license key distribution functionality is enabled. After you upgrade the application to version 11.7.0, EDR Optimum functionality is activated automatically.

   If you use a Kaspersky Endpoint Detection and Response Optimum or Kaspersky Optimum Security license to activate Kaspersky Endpoint Agent, and a different license to activate Kaspersky Endpoint Security for Windows, you must replace the Kaspersky Endpoint Security for Windows key with the common Kaspersky Endpoint Detection and Response Optimum or Kaspersky Optimum Security key. You can replace the key using the *Add key* task.

   You do not need to activate Kaspersky Sandbox functionality. Kaspersky Sandbox functionality will be available immediately after upgrading and activating Kaspersky Endpoint Security for Windows.

   Only the Kaspersky Anti Targeted Attack Platform license can be used to activate Kaspersky Endpoint Security as part of the Kaspersky Anti Targeted Attack Platform solution. After you upgrade the application to version 12.1, EDR (KATA) functionality is activated automatically. You do not need to do anything else.

5. **Upgrading the Kaspersky Endpoint Security application**

   To upgrade the application and migrate EDR Optimum and Kaspersky Sandbox functionality, a remote installation task is recommended.

   To upgrade the application using a remote installation task, you must edit the following settings:

   - Select components for Detection and Response solutions in the settings of the installation package.
   - Exclude the Kaspersky Endpoint Agent component in the settings of the installation package (for Kaspersky Endpoint Security for Windows versions 11.2.0 – 11.8.0).
   - If Password Protection is enabled to restrict access to Kaspersky Endpoint Agent, enter the application uninstallation password in the settings of the *Install application remotely* task. You can enter the uninstallation password starting with Kaspersky Security Center Linux 15.1.

You can also upgrade the application using the following methods:

- Using Kaspersky update service (Seamless Update – SMU).
- Locally, by using the Setup Wizard.

Kaspersky Endpoint Security supports automatically selecting components when upgrading the application on a computer with the Kaspersky Endpoint Agent application installed. The automatic selection of components depends on the permissions of the user account that is upgrading the application.

If you are upgrading Kaspersky Endpoint Security using the EXE or MSI file under the system account (SYSTEM), Kaspersky Endpoint Security gains access to current licenses of Kaspersky solutions. Therefore, if the computer has, for example, Kaspersky Endpoint Agent installed and the EDR Optimum solution activated, the Kaspersky Endpoint Security installer automatically configures the set of components and selects the EDR Optimum component. This makes Kaspersky Endpoint Security switch to using the built-in agent and removes Kaspersky Endpoint Agent. Running the MSI installer under the system account (SYSTEM) is usually performed when upgrading via the Kaspersky update service (SMU) or when deploying an installation package via Kaspersky Security Center.

If you are upgrading Kaspersky Endpoint Security using an MSI file under a non-privileged user account, Kaspersky Endpoint Security lacks access to current licenses of Kaspersky solutions. In this case, Kaspersky Endpoint Security automatically selects components based on Kaspersky Endpoint Agent configuration. After that Kaspersky Endpoint Security switches to using the built-in agent and removes Kaspersky Endpoint Agent.

6. **Computer restart**

   Restart your computer to finish upgrading the application with the built-in agent. When upgrading the application, the installer removes Kaspersky Endpoint Agent before the computer is restarted. After the computer is restarted, the installer adds the built-in agent. This means that Kaspersky Endpoint Security does not perform the functions of EDR and Kaspersky Sandbox until the computer is restarted.

7. **Checking the health of Kaspersky Endpoint Detection and Response Optimum and Kaspersky Sandbox**

   If after the upgrade, the computer has the *Critical* status in the Kaspersky Security Center console:

   - Make sure that the computer has Network Agent version 13.2 or higher installed.
   - Check the operating status of the built-in agent by viewing the *Report on status of application components*. If a component has the *Not installed* status, install the component using the *Change application components* task.
   - Make sure you accept the Kaspersky Security Network Statement in the new policy of Kaspersky Endpoint Security for Windows.
   - Make sure EDR Optimum functionality is activated using the *Report on status of application components*. If a component has the *Not covered by license* status, make sure that the automatic license key distribution functionality of EDR Optimum is turned on.

Policy and Task Migration for Kaspersky Endpoint Agent

Kaspersky Endpoint Security for Windows includes a wizard for migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security. You can migrate policy and task settings for the following solutions:

- Kaspersky Sandbox
- Kaspersky Endpoint Detection and Response Optimum (EDR Optimum)
- Kaspersky Anti Targeted Attack Platform

A wizard for migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security works only in Web Console and Cloud Console. In the Administration Console (MMC), you can only migrate settings for Kaspersky Anti Targeted Attack Platform (EDR) solution using the standard Kaspersky Security Center Policy and Task Migration Wizard.

> It is recommended to begin with migrating Kaspersky Endpoint Agent to Kaspersky Endpoint Security on a single computer, then do it on a group of computers, and then complete the migration on all computers of the organization.

To migrate policy and task settings from Kaspersky Endpoint Agent to Kaspersky Endpoint Security,

in the main window of the Web Console, select **Operations** → **Migration from Kaspersky Endpoint Agent**.

This runs the policies and tasks migration wizard. Follow the instructions of the Wizard.

Step 1. Policy migration

The Migration Wizard creates a new policy which merges the settings of Kaspersky Endpoint Security and Kaspersky Endpoint Agent policies. In the policy list, select Kaspersky Endpoint Agent policies whose settings you want to merge with the Kaspersky Endpoint Security policy. Click the Kaspersky Endpoint Agent policy in order to select the Kaspersky Endpoint Security policy with which you want to merge settings. Make sure you selected the correct policies and go to the next step.

Step 2. Task migration

The Migration Wizard creates new tasks for Kaspersky Endpoint Security. In the task list, select Kaspersky Endpoint Agent tasks which you want to create for Kaspersky Endpoint Security policy. The Wizard supports tasks for Kaspersky Endpoint Detection and Response and Kaspersky Sandbox. Go to the next step.

Step 3. Wizard completion

Finish the wizard. As a result, the wizard does the following:

- Creates a new Kaspersky Endpoint Security policy.

  The policy merges settings from Kaspersky Endpoint Security and Kaspersky Endpoint Agent. The policy is called *<Kaspersky Endpoint Security policy name> & <Kaspersky Endpoint Agent policy name>*. The new policy has the *Inactive* status. To continue, change the statuses of Kaspersky Endpoint Agent and Kaspersky Endpoint Security policies to *Inactive* and activate the new merged policy.

  > After migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security for Windows, please make sure that the new policy has the functionality for data transfer to the Administration Server (quarantine file data and threat development chain data) set up. Data transfer parameter values are not migrated from a Kaspersky Endpoint Agent policy.

When migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security for the Kaspersky Anti Targeted Attack Platform (EDR) solution, you may encounter errors when connecting the computer to Central Node servers. The reason is that the migration wizard in Web Console skips the following policy settings and does not migrate them:

- Settings modification prohibition **Connection to KATA servers** ("lock").

  By default, settings can be modified (the "lock" is open). Therefore the settings are not applied on the computer. You must prohibit the modification of settings and close the "lock".

- Crypto-container.

  If you are using two-way authentication for connecting to Central Node servers, you must re-add the crypto-container. The migration wizard correctly migrates the TLS certificate of the server.

The Policy and Task Migration Wizard in Administration Console (MMC) migrates all settings for the Kaspersky Anti Targeted Attack Platform (EDR) solution.

- Creates new Kaspersky Endpoint Security tasks.

  New tasks are copies of Kaspersky Endpoint Agent tasks for Kaspersky Endpoint Detection and Response and Kaspersky Sandbox. At the same time, the Wizard leaves Kaspersky Endpoint Agent tasks unchanged.

How to migrate policy and task settings from Kaspersky Endpoint Agent to Kaspersky Endpoint Security in the Administration Console (MMC) (only for KATA (EDR))

1. In the Administration Console, select the Administration Server and right-click to open the context menu.
2. Select **All tasks** → **Policies and tasks batch conversion wizard**.

The Policies and Tasks Batch Conversion Wizard will start. Follow the instructions of the Wizard.

Step 1. Selecting the application for which you need to convert policies and tasks

At this step, you need to select Kaspersky Endpoint Security for Windows. Go to the next step.

Step 2. Conversion of policies

Migration Wizard creates a new Kaspersky Endpoint Security policy into which Kaspersky Endpoint Agent policy settings will be migrated. In the list of policies, select Kaspersky Endpoint Agent policies whose settings you want to transfer to the Kaspersky Endpoint Security policy. Go to the next step.

The Migration Wizard will then begin to convert the policies. During policy conversion, the Migration Wizard prompts you to accept the Kaspersky Security Network Statement. The new policies will be named *<Policy name> (converted)*.

Step 3. Conversion of tasks

Skip this step. The Wizard supports tasks only for Kaspersky Endpoint Detection and Response Optimum and Kaspersky Sandbox. Management of these components is only available in the Web Console. Go to the next step.

Step 4. Wizard completion

Finish the wizard. As a result of the wizard, a new Kaspersky Endpoint Security policy will be created.

Endpoint Detection and Response Agent (EDR Agent)

Starting with Kaspersky Endpoint Security 12.3 for Windows, the application includes the Endpoint Detection and Response Agent (EDR Agent) configuration. *Endpoint Detection and Response Agent* is an application that is installed on individual workstations and servers in the IT infrastructure of the organization to support the following Detection and Response solutions by Kaspersky:

- Kaspersky Managed Detection and Response
- Kaspersky Anti Targeted Attack Platform (EDR)
- Kaspersky Unified Monitoring and Analysis Platform (KUMA) (starting with version 12.6)
- Kaspersky Anti Targeted Attack Platform (NDR) (starting with version 12.7)
- Kaspersky Endpoint Detection and Response Expert (on-premises) (starting with version 12.11)

EDR Agent does not support integration with the Kaspersky Endpoint Detection and Response Expert (cloud) solution.

EDR Agent continuously monitors processes running on these computers, open network connections, and files being modified. Protection and control components of the application are not available for EDR Agent.

EDR Agent is compatible with third-party EPP applications. This lets you use third-party infrastructure security tools alongside Detection and Response by Kaspersky.

To deploy EDR Agent, the computer must have the Network Agent installed, and the computer must be added in the Kaspersky Security Center console. To enable the interaction of EDR Agent with Kaspersky Security Center, you must install the Kaspersky Endpoint Security for Windows management plug-in. You can specify EDR Agent settings using a group policy. To integrate EDR Agent, you must configure the integration in appropriate policy sections.

The following Kaspersky applications must be installed on the infrastructure to support Kaspersky Detection and Response solutions:

	• Network Agent • EDR Agent
Endpoint	
	Kaspersky Endpoint Security for Windows Management Plug-in
Kaspersky Security Center	

Installing EDR Agent

Kaspersky Endpoint Security in the Endpoint Detection and Response Agent (EDR Agent) configuration for Kaspersky Detection and Response solutions is installed in the same way.

EDR Agent can be installed on the computer in one of the following ways:

- Remotely using Kaspersky Security Center.
- Locally using the Setup Wizard.
- Locally on the command line (only for KATA (EDR) and EDR Expert (on-premises)).

To install EDR Agent, you must select the appropriate configuration in installation package settings or in Setup Wizard.

How to install EDR Agent using the Setup Wizard

1. Copy the distribution kit folder to the user's computer.
2. Run setup_kes.exe.

   The Setup Wizard starts.

Configuration of Kaspersky Endpoint Security

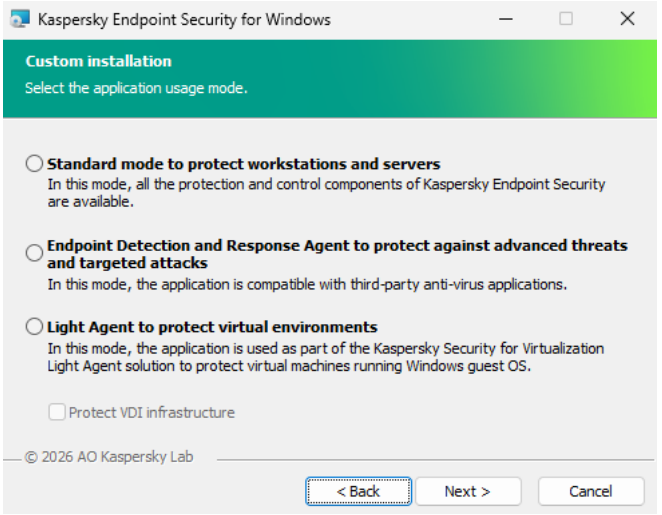

Choosing the configuration of the application

Select the **Endpoint Detection and Response Agent** configuration. In this configuration, you can only install the components that provide support for Detection and Response solutions: MDR, EDR (KATA), NDR (KATA), EDR Expert (on-premises), as well as KUMA. This configuration is needed if a third-party Endpoint Protection Platform (EPP) is deployed in your organization alongside a Kaspersky Detection and Response solution. This makes Kaspersky Endpoint Security in the Endpoint Detection and Response Agent configuration compatible with third-party EPP applications.

Kaspersky Endpoint Security components

Select the components that you want to install. You can change the available application components after the application is installed. To do so, you need to run the Setup Wizard again and choose to change the available components.

Advanced settings

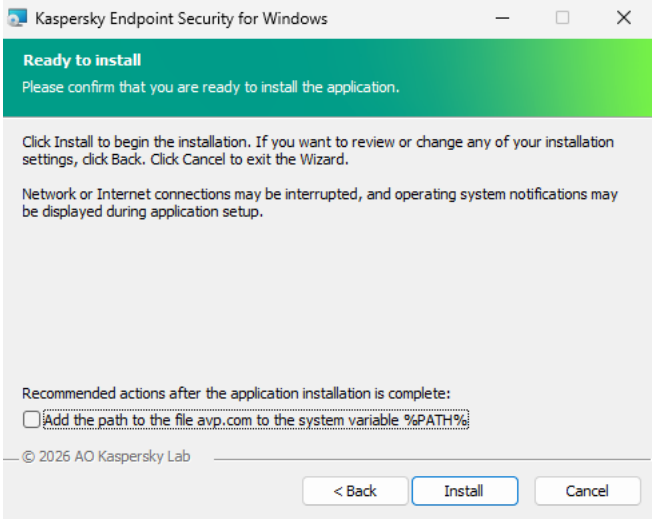

Advanced application installation settings

Protect the application installation process. Installation protection includes protection against replacement of the distribution package with malicious applications, blocking access to the installation folder of Kaspersky Endpoint Security, and blocking access to the system registry section containing application keys. However, if the application cannot be installed (for example, when performing remote installation with the help of Windows Remote Desktop), you are advised to disable protection of the installation process.

Ensure compatibility with Citrix PVS. You can enable support of Citrix Provisioning Services to install Kaspersky Endpoint Security to a virtual machine.

Add the path to the file avp.com to the system variable %PATH%. You can add the installation path to the %PATH% variable for convenient use of the command line interface.

How to install EDR Agent on the command line (only for KATA (EDR) and EDR Expert (on-premises))

1. Run the command line interpreter (cmd.exe) as an administrator.

2. Go to the folder where the Kaspersky Endpoint Security distribution package is located.

3. Run the following command:

```
setup_kes.exe /pEULA=1 /pPRIVACYPOLICY=1 /pKSN=1 /pSTANDALONEMODE=1 [/s]
```

or

```
msiexec /i <distribution kit name> EULA=1 PRIVACYPOLICY=1 KSN=1 STANDALONEMODE=1 [/qn]
```

As a result, the EDR Agent application for integration with Kaspersky Anti Targeted Attack Platform (EDR) or Kaspersky Endpoint Detection and Response Expert (on-premises) is installed on the computer. You can confirm that application is installed and check application settings by issuing the `status` command.

How to install EDR Agent using the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select the **Advanced** → **Remote installation** → **Installation packages** folder.

   This opens a list of installation packages that have been downloaded to Kaspersky Security Center.
3. Open the properties of the installation package.

   If necessary, create a new installation package.
4. Go to the **Protection components** section.
5. Select the **Endpoint Detection and Response Agent to protect against advanced threats and targeted attacks** configuration. In this configuration, you can only install the components that provide support for Detection and Response solutions: MDR, EDR (KATA), NDR (KATA), EDR Expert (on-premises), as well as KUMA. This configuration is needed if a third-party Endpoint Protection Platform (EPP) is deployed in your organization alongside a Kaspersky Detection and Response solution. This makes Kaspersky Endpoint Security in the Endpoint Detection and Response Agent configuration compatible with third-party EPP applications.
6. Select the components that you want to install.

   You can change the available application components after the application is installed.
7. Save your changes.
8. Create a remote installation task. In task properties, select the installation package you created.

How to install EDR Agent using Web Console

1. In the main window of the Web Console, select **Discovery & deployment** → **Deployment & assignment** → **Installation packages**.

This opens a list of installation packages that have been downloaded to Kaspersky Security Center.

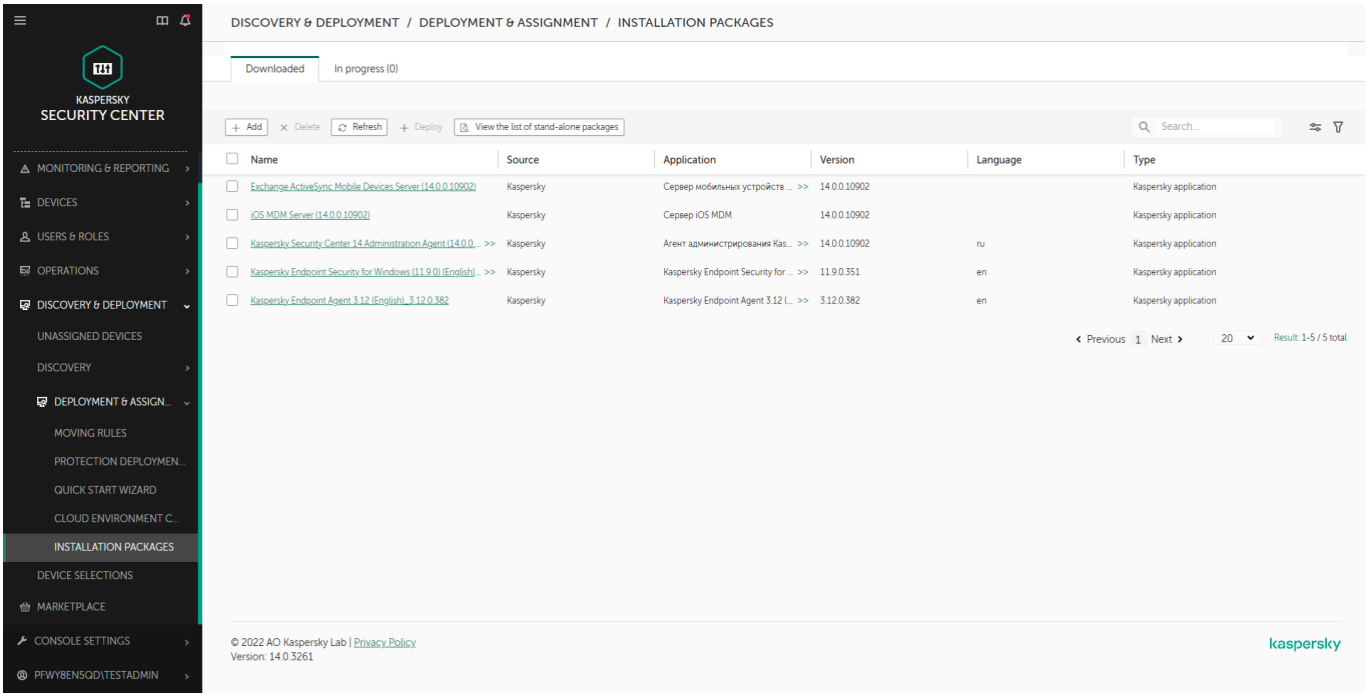

List of installation packages

2. Open the properties of the installation package.

   If necessary, create a new installation package.

3. Select the **Settings** tab.

4. Go to the **Protection components** section.

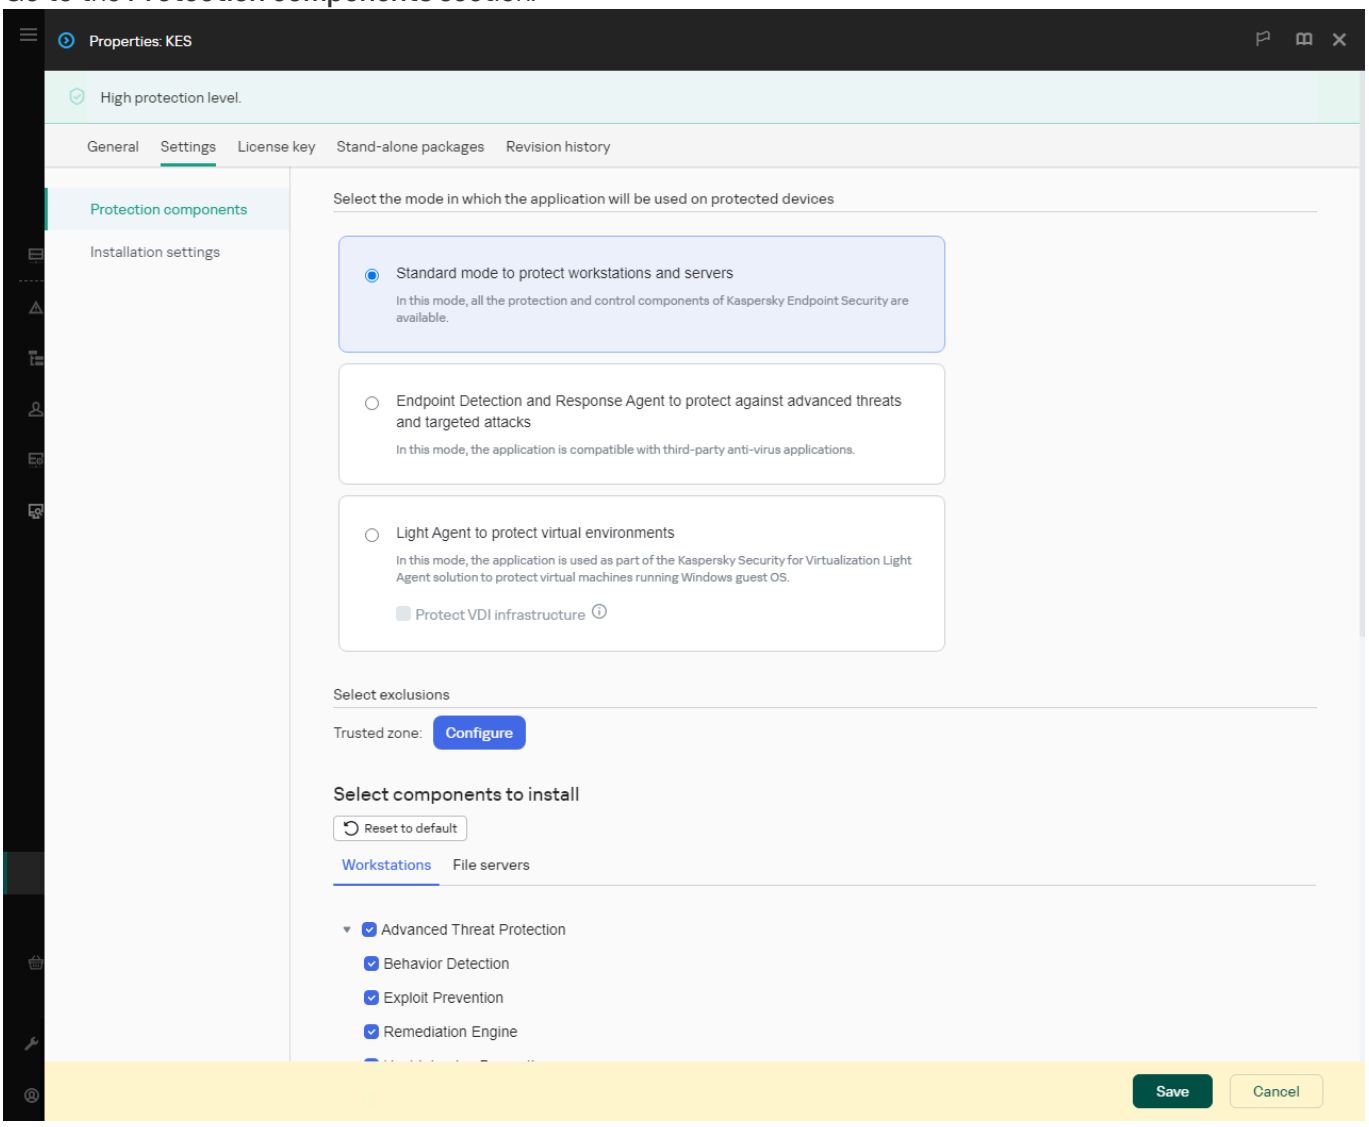

Components included in the installation package

5. Select the **Endpoint Detection and Response Agent** configuration. In this configuration, you can only install the components that provide support for Detection and Response solutions: MDR, EDR (KATA), NDR (KATA), EDR Expert (on-premises), as well as KUMA. This configuration is needed if a third-party Endpoint Protection Platform (EPP) is deployed in your organization alongside a Kaspersky Detection and Response solution. This makes Kaspersky Endpoint Security in the Endpoint Detection and Response Agent configuration compatible with third-party EPP applications.

6. Select the components that you want to install.

   You can change the available application components after the application is installed.

7. Save your changes.

8. Create a remote installation task. In task properties, select the installation package you created.

As a result, EDR Agent is installed on the user's computer. You can use the interface of the application and an icon of the application is displayed in the notification area .

In Kaspersky Security Center, the computer with the installed application in the EDR Agent configuration has the *Critical* status – . The computer has this status because the File Threat Protection component is missing. You do not need to take any action.

If you could not install EDR Agent on a computer with a third-party EPP application because the installer found incompatible software on the computer, you can skip the incompatible software check.

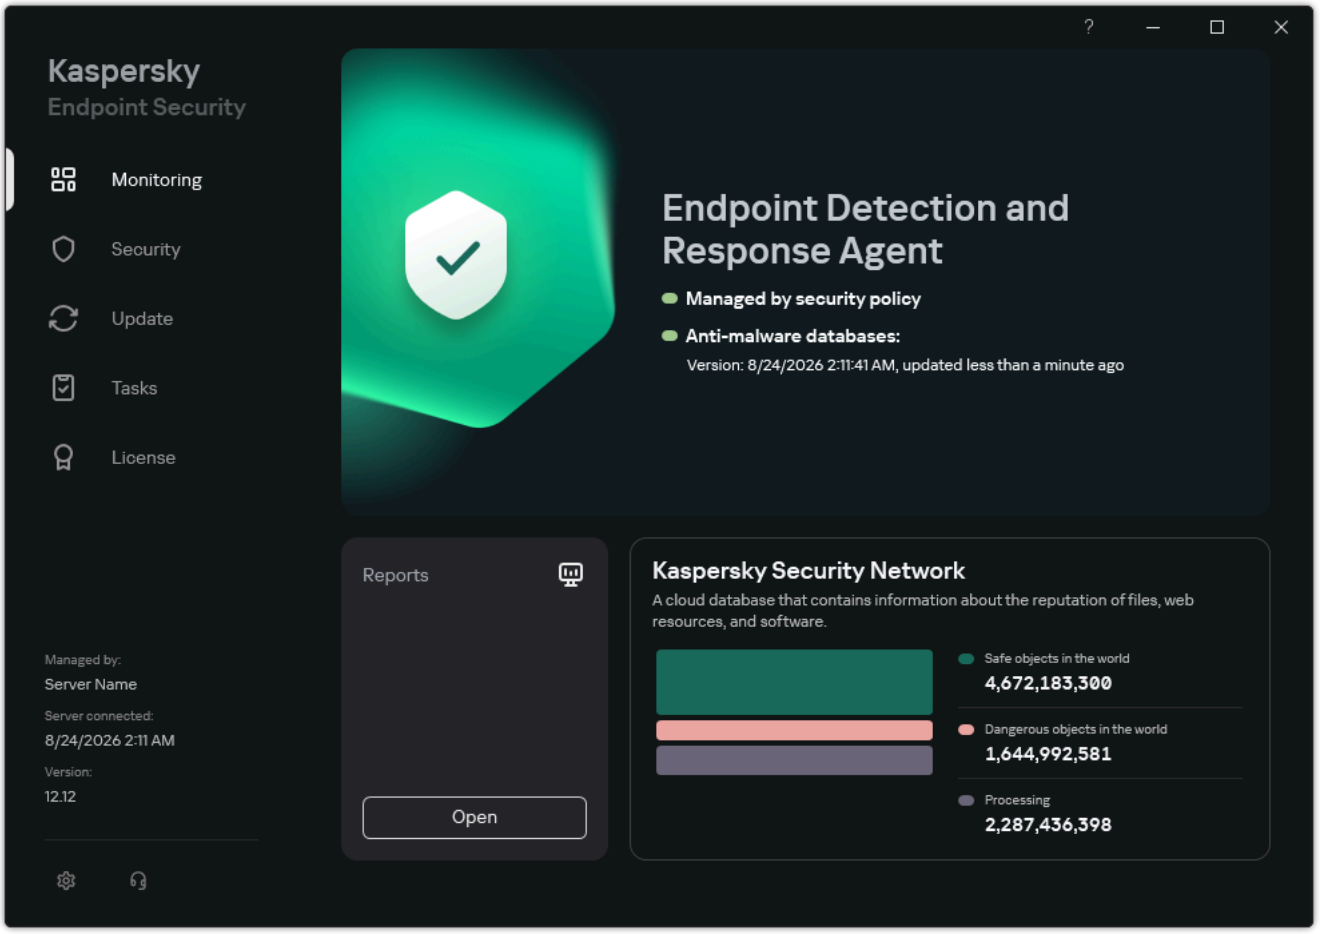

Main window of EDR Agent

Now you must configure the integration with the Kaspersky Managed Detection and Response, Kaspersky Anti Targeted Attack (EDR), or Kaspersky Anti Targeted Attack (NDR) solution. You can also specify advanced settings of the application and, for example, create a trusted zone or hide the interface of the application. Settings in the following sections are available:

- Kaspersky Security Network
- Application Settings
- Network settings
- Exclusions
- Reports

- Interface
- Manage settings

Integrating EDR Agent with MDR

EDR Agent is installed on workstations and servers in the IT infrastructure of the organization. EDR Agent processes data and sends it through Kaspersky Security Network streams to Kaspersky Managed Detection and Response.

For Kaspersky Managed Detection and Response to work with Administration Server via Kaspersky Security Center Web Console, you must establish a new secure connection, a *background connection*. Kaspersky Managed Detection and Response prompts you to establish a background connection when you deploy the solution. Make sure the background connection is established.

Establishing a background connection in Web Console

1. In the main window of the Web Console, select **Settings** → **Integration**.
2. Go to the **Integration** section.
3. Turn on the **Background connection for integration Enabled** toggle.
4. Save your changes.

Integration with Kaspersky Managed Detection and Response consists of the following steps:

1. **Installing the Managed Detection and Response component**

   You can select the MDR component during installation or upgrade, as well as using the *Change application components* task.

   > To install the Managed Detection and Response component without restarting the computer using the *Change application components* task, you need to disable the **Check for incompatible third-party applications** option in the task settings.

2. **Configuring Kaspersky Private Security Network**

   > Skip this step if you are using Kaspersky Security Center Cloud Console. Kaspersky Security Center Cloud Console automatically configures Kaspersky Private Security Network when installing the MDR plug-in.

   Kaspersky Private Security Network (KPSN) is a solution that enables users of computers hosting Kaspersky Endpoint Security or other Kaspersky applications to obtain access to Kaspersky reputation databases, and to other statistical data without sending data to Kaspersky from their own computers.

   Upload the Kaspersky Security Network configuration file in the Administration Server properties. The Kaspersky Security Network configuration file is located within the ZIP archive of the MDR configuration file. You can obtain the ZIP archive in the Kaspersky Managed Detection and Response Console. For details on configuring Kaspersky Private Security Network, please refer to the Kaspersky Security Center Help. You can also upload a Kaspersky Security Network configuration file to the computer from the command line (see the instructions below).

How to configure Kaspersky Private Security Network from the command line

1. Run the command line interpreter (cmd.exe) as an administrator.

2. Go to the folder where the Kaspersky Endpoint Security executable file is located.

3. Run the following command:

```
avp.com KSN /private <file name>
```

   where `<file name>` is the name of the configuration file containing the Kaspersky Private Security Network settings (PKCS7 or PEM file format).

   Example:
   `avp.com KSN /private C:\kpsn_config.pkcs7`

As a result, Kaspersky Endpoint Security will use Kaspersky Private Security Network to determine the reputation of files, applications, and websites. **Kaspersky Security Network** section of the policy settings will display the following operating status: *Infrastructure: Kaspersky Private Security Network*.

You must enable extended KSN mode for Managed Detection and Response to work.

3 **Activating Kaspersky Managed Detection and Response**

Starting with Kaspersky Endpoint Security for Windows 12.10, to activate the Managed Detection and Response functionality, as an alternative to an activation code, you can also use a key file.

You need to purchase a separate license for MDR (Kaspersky Managed Detection and Response Add-on).

The functionality becomes available after adding a separate key for Kaspersky Managed Detection and Response Add-on. Licensing for the stand-alone Managed Detection and Response functionality is the same as the licensing of Kaspersky Endpoint Security.

Make sure that the MDR functionality is included in the license and is working in the local interface of the application.

4 **Enabling Managed Detection and Response component**

Load the BLOB configuration file in the Kaspersky Endpoint Security policy (see the instructions below). The BLOB file contains the client ID and information about the license for Kaspersky Managed Detection and Response. The BLOB file is located inside the ZIP archive of the MDR configuration file. You can obtain the ZIP archive in the Kaspersky Managed Detection and Response Console. For detailed information about a BLOB file, please refer to the Kaspersky Managed Detection and Response Help.

Starting with Kaspersky Endpoint Security 12.6 for Windows, adding a BLOB file is optional for Kaspersky Managed Detection and Response without tenants if you have a current license.

How to enable Managed Detection and Response component in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **Detection and Response** → **Managed Detection and Response (Industrial CyberSecurity)**.

4. Select the **Managed Detection and Response (Industrial CyberSecurity)** check box.

5. In the **Settings** block, click **Upload** and select the BLOB file received in the Kaspersky Managed Detection and Response Console. The file has the P7 extension.

   By default, the user is allowed to manage application settings (the "padlock" is open). To apply the policy on computers, close the padlocks.

6. Save your changes.

How to enable Managed Detection and Response component in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Managed Detection and Response**.
5. Turn on the **Managed Detection and Response ENABLED** toggle.
6. Click **Upload** and select the BLOB file that was obtained in the Kaspersky Managed Detection and Response Console. The file has the P7 extension.

   By default, the user is allowed to manage policy settings (the "padlock" is open). To apply the policy on computers, close the padlocks.

7. Save your changes.

How to enable Managed Detection and Response component from the command line

1. Run the command line interpreter (cmd.exe) as an administrator.
2. Go to the folder where the Kaspersky Endpoint Security executable file is located.
3. Run the following command:

```
avp.com MDRLICENSE /ADD <file name> /login=<user name> /password=<password>
```

   To execute this command, Password protection must be enabled. The user must have the **Configure application settings** permission.

As a result, Kaspersky Endpoint Security will verify the BLOB file. BLOB file verification includes checking the digital signature and the license term. If the BLOB file is successfully verified, Kaspersky Endpoint Security will download the file and send the file to the computer during the next synchronization with Kaspersky Security Center. Check the operating status of the component by viewing the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Managed Detection and Response** component will be added to the list of Kaspersky Endpoint Security components.

5 **Configuring other components of the application to receive telemetry**

You must enable the following components for Managed Detection and Response to work:

- Kaspersky Security Network (extended mode).
- Behavior Detection.
- Exploit Prevention.
- Web Threat Protection.
- Mail Threat Protection.
- File Threat Protection.
- Network Threat Protection.
- Firewall.
- AMSI Protection.
- Background scan.

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Managed Detection and Response**.
5. Turn on the **Managed Detection and Response ENABLED** toggle.
6. Save your changes.

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Detection and Response** → **Managed Detection and Response (Industrial CyberSecurity)**.
4. Select the **Managed Detection and Response (Industrial CyberSecurity)** check box.
5. Save your changes.

Integrating EDR Agent with EDR (KATA)

EDR Agent is installed on workstations and servers in the IT infrastructure of the organization. On these computers, EDR Agent continuously monitors processes, open network connections, and files being modified, and sends monitoring data to the server with the Central Node component.

To integrate with EDR (KATA), you must enable the Endpoint Detection and Response (KATA) component and configure EDR Agent.

The following conditions must be fulfilled for Endpoint Detection and Response (KATA) to work:

- Kaspersky Anti Targeted Attack Platform versions 5.0–7.1.
- Kaspersky Security Center version 14.2 or higher. In earlier versions of Kaspersky Security Center, it is impossible to activate the Endpoint Detection and Response (KATA) feature.

https://www.youtube.com/watch?v=cZzgtBoeC7k

Integration with Endpoint Detection and Response (KATA) involves the following steps:

1. **Activating Endpoint Detection and Response (KATA)**

   You need to purchase a separate license for EDR (KATA) (Kaspersky Endpoint Detection and Response (KATA) Add-on).

   The functionality becomes available after adding a separate key for Kaspersky Endpoint Detection and Response (KATA). Licensing for the stand-alone Endpoint Detection and Response (KATA) functionality is the same as the licensing of Kaspersky Endpoint Security.

   Make sure that the EDR (KATA) functionality is included in the license and is running in the local interface of the application.

2. **Connecting to Central Node**

   Kaspersky Anti Targeted Attack Platform requires establishing a trusted connection between Kaspersky Endpoint Security and the Central Node component. To configure a trusted connection, you must use a TLS certificate. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). Then you must add the TLS certificate to Kaspersky Endpoint Security (see instructions below).

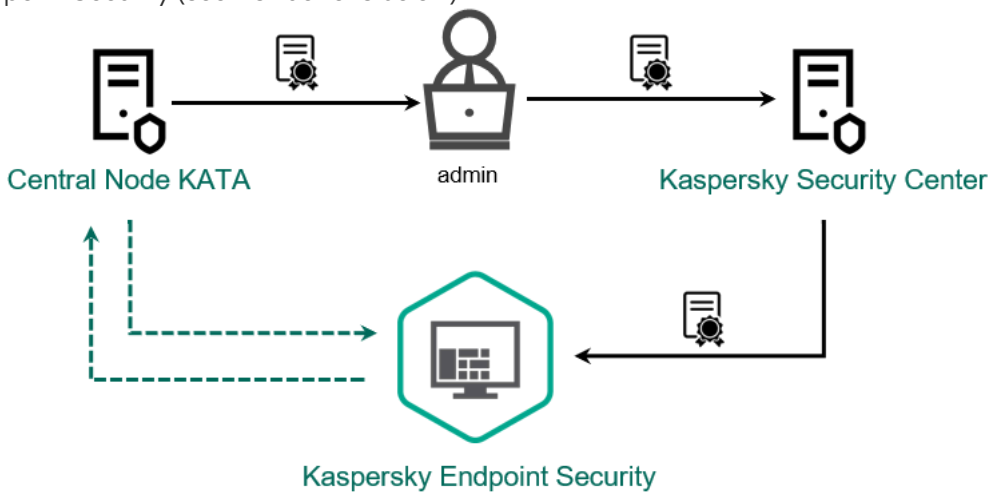

Adding a TLS certificate to Kaspersky Endpoint Security

By default, Kaspersky Endpoint Security only checks the TLS certificate of Central Node. To make the connection more secure, you can additionally enable the verification of the computer on Central Node (two-way authentication). To enable this verification, you must turn on two-way authentication in Central Node and Kaspersky Endpoint Security settings. To use two-way authentication, you will also need a crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help).

How to connect a Kaspersky Endpoint Security computer to Central Node using the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Detection and Response** → **Endpoint Detection and Response Expert (on-premises)**.
5. Select the **Endpoint Detection and Response Expert (on-premises)** check box.
6. Click **Server connection settings**.
7. Configure the server connection:
   - **Timeout (sec)**. Maximum Central Node server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different Central Node server.
   - **Server TLS certificate**. TLS certificate for establishing a trusted connection with the Central Node server. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help).
   - **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

     The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.
8. Click **OK**.
9. Add Central Node servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

   You can add multiple Central Node server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

10. If necessary, configure telemetry.

11. To apply the policy to computers, close the padlock icons and save your changes.

How to connect a Kaspersky Endpoint Security computer to Central Node using the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response Expert (on-premises)**.

5. Turn on the **Endpoint Detection and Response Expert (on-premises) ENABLED** toggle.

6. To configure EDR (KATA), select **Endpoint Detection and Response Expert (version 7.1 or earlier)** from the list of solutions.

7. Click **Connection settings**.

8. Configure the server connection:

   - **Timeout (sec)**. Maximum Central Node server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different Central Node server.

   - **Server certificate**. TLS certificate for establishing a trusted connection with the Central Node server. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help).

   - **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

     The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

9. Click **OK**.

10. Add Central Node servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

    You can add multiple Central Node server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

11. If necessary, configure telemetry.

12. To apply the policy to computers, close the padlock icons and save your changes.

As a result, the computer is added on the Kaspersky Anti Targeted Attack Platform console. Check the operating status of the component by viewing the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Endpoint Detection and Response Expert (on-premises)** component will be added to the list of Kaspersky Endpoint Security components.

Integrating EDR Agent with NDR (KATA)

EDR Agent is installed on workstations and servers in the IT infrastructure of the organization. On these computers, EDR Agent continuously monitors processes, open network connections, and files being modified, and sends monitoring data to the server with the Central Node component.

To integrate with NDR (KATA), you must enable the Network Detection and Response (KATA) component and configure EDR Agent.

The following conditions must be fulfilled for Network Detection and Response (KATA) to work:

- Kaspersky Anti Targeted Attack Platform version 7.0 or higher.
- Kaspersky Security Center version 14.2 or higher. In earlier versions of Kaspersky Security Center, it is impossible to activate the Network Detection and Response (KATA) feature.

https://www.youtube.com/watch?v=gd-rySv0ThQ

Integration with Network Detection and Response (KATA) involves the following steps:

1. **Activating Network Detection and Response (KATA)**

   You need to purchase a separate license for NDR (KATA) (Kaspersky Network Detection and Response (KATA) Add-on).

   The functionality becomes available after adding a separate key for Kaspersky Network Detection and Response (KATA). Licensing for the stand-alone Network Detection and Response (KATA) functionality is the same as the licensing of Kaspersky Endpoint Security.

   Make sure that the NDR (KATA) functionality is included in the license and is running in the local interface of the application.

2. **Connecting to Central Node**

Kaspersky Anti Targeted Attack Platform requires establishing a trusted connection between Kaspersky Endpoint Security and the Central Node component. To configure a trusted connection, you must use a TLS certificate. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). Then you must add the TLS certificate to Kaspersky Endpoint Security (see instructions below).

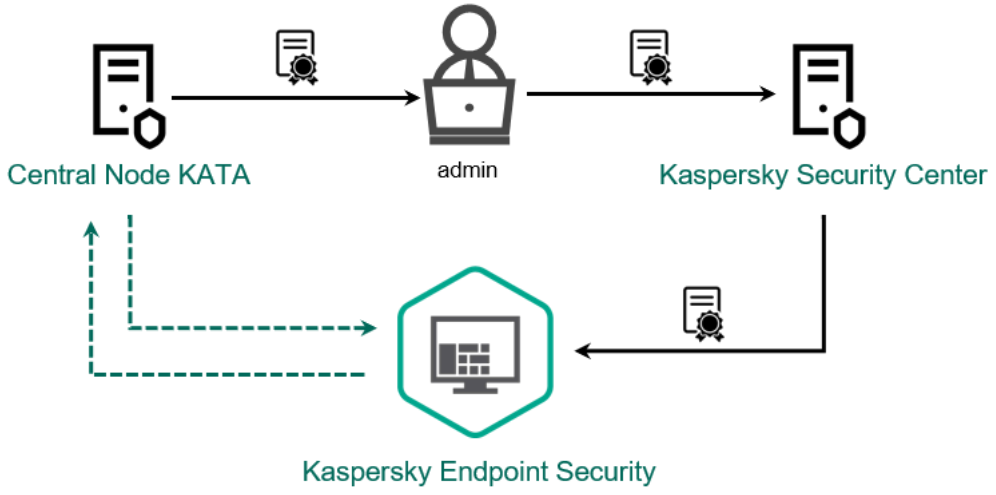

Adding a TLS certificate to Kaspersky Endpoint Security

By default, Kaspersky Endpoint Security only checks the TLS certificate of Central Node. To make the connection more secure, you can additionally enable the verification of the computer on Central Node (two-way authentication). To enable this verification, you must turn on two-way authentication in Central Node and Kaspersky Endpoint Security settings. To use two-way authentication, you will also need a crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help).

How to connect a Kaspersky Endpoint Security computer to Central Node using the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Detection and Response** → **Network Detection and Response (KATA)**.
4. Select the **Network Detection and Response (KATA)** check box.
5. Click **Connection settings**.
6. Configure the server connection:
   - **Timeout (sec)**. Maximum Central Node server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different Central Node server.
   - **Server certificate**. TLS certificate for establishing a trusted connection with the Central Node server. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help).

- **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

  > The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

7. Click **OK**.

8. Add Central Node servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

9. You can add multiple Central Node server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

10. If necessary, configure telemetry.

11. Save your changes.

How to connect a Kaspersky Endpoint Security computer to Central Node using the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Built-in Agents Configuration** → **Network Detection and Response (KATA)**.

5. Turn on the **Network Detection and Response (KATA) ENABLED** toggle.

6. Click **Connection settings**.

7. Configure the server connection:

   - **Timeout (sec)**. Maximum Central Node server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different Central Node server.

   - **Server certificate**. TLS certificate for establishing a trusted connection with the Central Node server. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help).

- **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

  > The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

8. Click **OK**.

9. Add Central Node servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

10. You can add multiple Central Node server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

11. If necessary, configure telemetry.

12. Save your changes.

As a result, the computer is added on the Kaspersky Anti Targeted Attack Platform console. Check the operating status of the component by viewing the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Network Detection and Response (KATA)** component will be added to the list of Kaspersky Endpoint Security components.

Integrating EDR Agent with EDR Expert (on-premises)

EDR Agent is installed on workstations and servers in the IT infrastructure of the organization. On these computers, EDR Agent continuously monitors processes, open network connections, and files being modified, and sends monitoring data to the EDR Expert (on-premises) server.

To integrate with EDR Expert (on-premises), you must enable the Endpoint Detection and Response Expert (on-premises) component and configure EDR Agent.

Integration with Endpoint Detection and Response Expert (on-premises) involves the following steps:

1. **Activating Kaspersky Endpoint Detection and Response Expert (on-premises)**

   You need to purchase a separate license for EDR Expert (on-premises) (Kaspersky Endpoint Detection and Response Expert (on-premises) Add-on).

   The functionality becomes available after adding a separate key for Kaspersky Endpoint Detection and Response Expert (on-premises). Licensing for the stand-alone Endpoint Detection and Response Expert (on-premises) functionality is the same as the licensing of Kaspersky Endpoint Security.

   Make sure that the EDR Expert (on-premises) functionality is included in the license and is running in the local interface of the application.

2. **Connecting to telemetry collection server and response server**

Kaspersky Endpoint Detection and Response Expert (on-premises) requires a trusted connection between Kaspersky Endpoint Security and two servers:

- A *telemetry collection server* is a server that is part of a SIEM solution that collects, normalizes, correlates, analyzes, and stores information about events occurring on the computer.
- A *response server* is a server for receiving and scanning data, studying the behavior of objects, and publishing the results of such studies.

To configure a trusted connection, you must use a TLS certificate. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). Then you must add the TLS certificate to Kaspersky Endpoint Security (see instructions below).

By default, Kaspersky Endpoint Security only checks the TLS certificate of the servers. To make the connection more secure, you can additionally enable the verification of the computer on the server (two-way authentication). To enable this verification, you must turn on two-way authentication in the server and Kaspersky Endpoint Security settings. To use two-way authentication, you will also need a crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help).

How to connect a Kaspersky Endpoint Security computer to EDR Expert (on-premises) using the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response Expert (on-premises)**.
5. Turn on the **Endpoint Detection and Response Expert (on-premises) ENABLED** toggle.
6. To configure EDR Expert (on-premises), select **Endpoint Detection and Response Expert (version 8.0 or later)** from the list of solutions.
7. Configure the *telemetry collection servers* connection:

   a. In the **Connection to telemetry collection servers** block, click the **Connection settings** link.

   b. Configure the telemetry collection servers connection:

   - **Timeout (sec)**. Maximum server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different server.
   - **Server certificate**. TLS certificate for establishing a trusted connection with the server. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help).

- **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the server. To use two-way authentication, you need to enable two-way authentication in the server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). After configuring the server settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

  > The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

c. Click **OK**.

d. Add telemetry collection servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

   You can add multiple telemetry collection server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

e. If necessary, configure telemetry.

8. Configure the *response servers* connection:

   a. In the **Connection to response servers** block, configure the **Send sync request to server every (min)** setting. Frequency of synchronization requests sent to the server. During the synchronization, Kaspersky Endpoint Security receives threat response tasks and sends task results.

   b. Click the **Connection settings** link.

   c. Configure the response servers connection:

      - **Timeout (sec)**. Maximum server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different server.

      - **Server certificate**. TLS certificate for establishing a trusted connection with the server. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help).

      - **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the server. To use two-way authentication, you need to enable two-way authentication in the server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). After configuring the server settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

        > The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

   d. Click **OK**.

e. Add response servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

You can add multiple response server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

9. To apply the policy to computers, close the padlock icons and save your changes.

As a result, the computer is added on the Open Single Management Platform (OSMP). Check the operating status of the component by viewing the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Endpoint Detection and Response Expert (on-premises)** component will be added to the list of Kaspersky Endpoint Security components.

Compatibility with third-party EPP applications

EDR Agent supports the functionality of Kaspersky Detection and Response solutions. Protection and control components are not available for EDR Agent. This configuration allows installing third-party EPP applications and deploying Kaspersky Detection and Response solutions in the infrastructure of the organization.

EDR Agent is compatible with EPP applications from the following vendors:

- **Dr.Web**

  EDR Agent is compatible with Dr.Web Agent for Windows version 13 and Dr.Web Server (x64) 13.0.0.10200.

- **Dallas Lock**

  EDR Agent is compatible with Dallas Lock 8.0-C version 843.2.

  For the EDR Agent to run on a computer that has the Dallas Lock software installed, you must allow the connection to Kaspersky external services in the settings of the Firewall module.

- **Secret Net Studio**

  EDR Agent is compatible with Secret Net Studio version 8.11 (20851).

  The application cannot be installed on a computer where Secret Net Studio is deployed with the Antivirus component. To make interoperability possible, you must remove the Antivirus component from Secret Net Studio.

- **Trend Micro**

  EDR Agent is compatible with Trend Micro Vision One (including Security Agent version 14.0.20731).

  EDR Agent is compatible with Trend Micro Deep Security version 20.0.3-18160 (including Security Agent).

- **Windows Defender**

- **Sophos**

  EDR Agent is compatible with Sophos Intercept X version 2024.1.2 (including Endpoint Agent) and Sophos Core Agent version 2026.2.1.3.

- **Bitdefender**

  EDR Agent is compatible with Bitdefender Endpoint Security Tools version 8.26.7.647.

- **ESET**

  EDR Agent is compatible with ESET Endpoint Security version 13.0.2044.0 and ESET Management Agent version 13.2.1189.0.

On computers running Windows 11 for Arm64, EDR Agent is not compatible with Bitdefender Endpoint Security Tools.

The applications must be installed in the following order: first, install the EPP application, then Kaspersky Security Center Network Agent, then EDR Agent. This is necessary because the installer of the EPP application may detect EDR Agent and Network Agent as incompatible software and remove them. The operation of EDR Agent and Network Agent should also be checked after updating the third-party EPP application because its installer may re-scan the computer for incompatible software and remove the applications.

If you could not install EDR Agent on a computer with a third-party EPP application because the installer found incompatible software on the computer, you can skip the incompatible software check.

Managed Detection and Response

Kaspersky Endpoint Security for Windows supports integration with the Managed Detection and Response solution. The *Kaspersky Managed Detection and Response (MDR)* solution automatically detects and analyzes security incidents in your infrastructure. To do so, MDR uses telemetry data received from endpoints and machine learning. MDR sends incident data to Kaspersky experts. The experts can then process the incident and, for example, add a new entry to Anti-Virus databases. Alternatively, the experts can issue recommendations on processing the incident and, for example, suggest isolating computer from the network. For detailed information about how the solution works, please refer to the Kaspersky Managed Detection and Response Help.

Configurations of Kaspersky Endpoint Security for integrating with MDR

The following configurations can be used to work with MDR:

- **[KES+built-in agent]**. In this configuration, Kaspersky Endpoint Security acts as both the application that ensures the security of the computer and the application for working with MDR.

- **[third-party EPP+EDR Agent]**. In this configuration, the security of the IT infrastructure is provided by the third-party Endpoint Protection Platform (EPP). The interaction with MDR is provided by Kaspersky Endpoint Security in the Endpoint Detection and Response Agent (EDR Agent) configuration. In this configuration, EDR Agent is compatible with third-party EPP applications.

Integration of the built-in agent with MDR

To set up integration with Kaspersky Managed Detection and Response, you must enable the Managed Detection and Response component and configure Kaspersky Endpoint Security.

For Kaspersky Managed Detection and Response to work with Administration Server via Kaspersky Security Center Web Console, you must establish a new secure connection, a *background connection*. Kaspersky Managed Detection and Response prompts you to establish a background connection when you deploy the solution. Make sure the background connection is established.

Establishing a background connection in Web Console

1. In the main window of the Web Console, select **Settings** → **Integration**.
2. Go to the **Integration** section.
3. Turn on the **Background connection for integration Enabled** toggle.
4. Save your changes.

Integration with Kaspersky Managed Detection and Response consists of the following steps:

1. **Installing the Managed Detection and Response component**

   You can select the MDR component during installation or upgrade, as well as using the *Change application components* task.

   > To install the Managed Detection and Response component without restarting the computer using the *Change application components* task, you need to disable the **Check for incompatible third-party applications** option in the task settings.

2. **Configuring Kaspersky Private Security Network**

   > Skip this step if you are using Kaspersky Security Center Cloud Console. Kaspersky Security Center Cloud Console automatically configures Kaspersky Private Security Network when installing the MDR plug-in.

   Kaspersky Private Security Network (KPSN) is a solution that enables users of computers hosting Kaspersky Endpoint Security or other Kaspersky applications to obtain access to Kaspersky reputation databases, and to other statistical data without sending data to Kaspersky from their own computers.

   Upload the Kaspersky Security Network configuration file in the Administration Server properties. The Kaspersky Security Network configuration file is located within the ZIP archive of the MDR configuration file. You can obtain the ZIP archive in the Kaspersky Managed Detection and Response Console. For details on configuring Kaspersky Private Security Network, please refer to the Kaspersky Security Center Help. You can also upload a Kaspersky Security Network configuration file to the computer from the command line (see the instructions below).

   How to configure Kaspersky Private Security Network from the command line

   1. Run the command line interpreter (cmd.exe) as an administrator.
   2. Go to the folder where the Kaspersky Endpoint Security executable file is located.
   3. Run the following command:

      ```
      avp.com KSN /private <file name>
      ```

      where `<file name>` is the name of the configuration file containing the Kaspersky Private Security Network settings (PKCS7 or PEM file format).

Example:
```
avp.com KSN /private C:\kpsn_config.pkcs7
```

As a result, Kaspersky Endpoint Security will use Kaspersky Private Security Network to determine the reputation of files, applications, and websites. **Kaspersky Security Network** section of the policy settings will display the following operating status: *Infrastructure: Kaspersky Private Security Network*.

You must enable extended KSN mode for Managed Detection and Response to work.

3 Activating Kaspersky Managed Detection and Response

Starting with Kaspersky Endpoint Security for Windows 12.10, to activate the Managed Detection and Response functionality, as an alternative to an activation code, you can also use a key file.

Kaspersky Managed Detection and Response supports the following licensing methods:

- Managed Detection and Response functionality is covered by the Kaspersky Endpoint Security for Windows license.

  The functionality is available immediately after the activation of Kaspersky Endpoint Security for Windows.

- A separate license for MDR (Kaspersky Managed Detection and Response Add-on) is used.

  The functionality becomes available after adding a separate key for Kaspersky Managed Detection and Response Add-on. As a result, two keys are added on the computer: a key for Kaspersky Endpoint Security and a key for Kaspersky Managed Detection and Response.

  Licensing for the stand-alone Managed Detection and Response functionality is the same as the licensing of Kaspersky Endpoint Security.

Make sure that the MDR functionality is included in the license and is working in the local interface of the application.

4 Enabling Managed Detection and Response component

Load the BLOB configuration file in the Kaspersky Endpoint Security policy (see the instructions below). The BLOB file contains the client ID and information about the license for Kaspersky Managed Detection and Response. The BLOB file is located inside the ZIP archive of the MDR configuration file. You can obtain the ZIP archive in the Kaspersky Managed Detection and Response Console. For detailed information about a BLOB file, please refer to the Kaspersky Managed Detection and Response Help.

Starting with Kaspersky Endpoint Security 12.6 for Windows, adding a BLOB file is optional for Kaspersky Managed Detection and Response without tenants if you have a current license.

How to enable Managed Detection and Response component in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Detection and Response** → **Managed Detection and Response (Industrial CyberSecurity)**.
4. Select the **Managed Detection and Response (Industrial CyberSecurity)** check box.

5. In the **Settings** block, click **Upload** and select the BLOB file received in the Kaspersky Managed Detection and Response Console. The file has the P7 extension.

   By default, the user is allowed to manage application settings (the "padlock" is open). To apply the policy on computers, close the padlocks .

6. Save your changes.

How to enable Managed Detection and Response component in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Managed Detection and Response**.
5. Turn on the **Managed Detection and Response ENABLED** toggle.
6. Click **Upload** and select the BLOB file that was obtained in the Kaspersky Managed Detection and Response Console. The file has the P7 extension.

   By default, the user is allowed to manage policy settings (the "padlock" is open). To apply the policy on computers, close the padlocks .

7. Save your changes.

How to enable Managed Detection and Response component from the command line

1. Run the command line interpreter (cmd.exe) as an administrator.
2. Go to the folder where the Kaspersky Endpoint Security executable file is located.
3. Run the following command:

```
avp.com MDRLICENSE /ADD <file name> /login=<user name> /password=<password>
```

   To execute this command, Password protection must be enabled. The user must have the **Configure application settings** permission.

As a result, Kaspersky Endpoint Security will verify the BLOB file. BLOB file verification includes checking the digital signature and the license term. If the BLOB file is successfully verified, Kaspersky Endpoint Security will download the file and send the file to the computer during the next synchronization with Kaspersky Security Center. Check the operating status of the component by viewing the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Managed Detection and Response** component will be added to the list of Kaspersky Endpoint Security components.

5. **Configuring other components of the application to receive telemetry**

You must enable the following components for Managed Detection and Response to work:

- Kaspersky Security Network (extended mode).
- Behavior Detection.
- Exploit Prevention.
- Web Threat Protection.
- Mail Threat Protection.
- File Threat Protection.
- Network Threat Protection.
- Firewall.
- AMSI Protection.
- Background scan.

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Managed Detection and Response**.
5. Turn on the **Managed Detection and Response ENABLED** toggle.
6. Save your changes.

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Detection and Response** → **Managed Detection and Response (Industrial CyberSecurity)**.
4. Select the **Managed Detection and Response (Industrial CyberSecurity)** check box.
5. Save your changes.

KEA to KES Migration Guide for MDR

Kaspersky Endpoint Security for Windows includes a built-in agent for the Kaspersky Managed Detection and Response solution. You no longer need a separate Kaspersky Endpoint Agent application to work with MDR. All functions of Kaspersky Endpoint Agent will be performed by Kaspersky Endpoint Security.

When you deploy Kaspersky Endpoint Security on computers that have Kaspersky Endpoint Agent installed, Kaspersky Managed Detection and Response solution will continue working with Kaspersky Endpoint Security. In addition, Kaspersky Endpoint Agent will be removed from the computer. The same behavior in the system will occur when you update Kaspersky Endpoint Security to version 11.6.0 or higher.

> Kaspersky Endpoint Security is not compatible with Kaspersky Endpoint Agent. You cannot install both of these applications on the same computer.

The following conditions must be met for Kaspersky Endpoint Security to work as part of Kaspersky Managed Detection and Response:

- Kaspersky Security Center version 13.2 or higher (including Network Agent). In earlier versions of Kaspersky Security Center, it is impossible to activate the Managed Detection and Response feature.
- A background connection between Kaspersky Security Center Web Console and Administration Server is established. For MDR to work with Administration Server via Kaspersky Security Center Web Console, you must establish a new secure connection, a *background connection*.

Steps for migrating [KES+KEA] configuration to [KES+built-in agent] for MDR

1. **Upgrading the Kaspersky Endpoint Security Management Plug-in**

   MDR component can be managed using the Kaspersky Endpoint Security Management Plug-in version 11.6 or higher. Depending on the type of Kaspersky Security Center console you are using, update the management plug-in in the Administration Console (MMC) or the web plug-in in the Web Console.

2. **Migrating policies and tasks**

   Transfer Kaspersky Endpoint Agent settings to Kaspersky Endpoint Security for Windows. The following options are available:

   - A wizard for migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security. A wizard for migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security works only in Web Console

     How to migrate policy and task settings from Kaspersky Endpoint Agent to Kaspersky Endpoint Security in Web Console

     In the main window of the Web Console, select **Operations** → **Migration from Kaspersky Endpoint Agent**.

     This runs the policies and tasks migration wizard. Follow the instructions of the Wizard.

Step 1. Policy migration

The Migration Wizard creates a new policy which merges the settings of Kaspersky Endpoint Security and Kaspersky Endpoint Agent policies. In the policy list, select Kaspersky Endpoint Agent policies whose settings you want to merge with the Kaspersky Endpoint Security policy. Click the Kaspersky Endpoint Agent policy in order to select the Kaspersky Endpoint Security policy with which you want to merge settings. Make sure you selected the correct policies and go to the next step.

Step 2. Task migration

The Migration Wizard does not support MDR tasks. Skip this step.

Step 3. Wizard completion

Finish the wizard. As a result of the wizard, a new Kaspersky Endpoint Security policy will be created. The policy merges settings from Kaspersky Endpoint Security and Kaspersky Endpoint Agent. The policy is called *<Kaspersky Endpoint Security policy name> & <Kaspersky Endpoint Agent policy name>*. The new policy has the *Inactive* status. To continue, change the statuses of Kaspersky Endpoint Agent and Kaspersky Endpoint Security policies to *Inactive* and activate the new merged policy.

- A standard Policies and tasks batch conversion wizard. The Policies and tasks batch conversion wizard is only available in the Administration Console (MMC). For more details about Policies and tasks batch conversion wizard, please refer to the Kaspersky Security Center Help.

3. **Licensing the MDR functionality**

   To activate Kaspersky Endpoint Security as part of the Kaspersky Managed Detection and Response solution, you need a separate license for Kaspersky Managed Detection and Response Add-on. You can add the key using the *Add key* task. As a result, two keys will be added to the application: *Kaspersky Endpoint Security* and *Kaspersky Managed Detection and Response*.

4. **Installing / Upgrading the Kaspersky Endpoint Security application**

   To migrate MDR functionality during an application installation or upgrade, it is recommended to use the remote installation task. When creating a remote installation task, you need to select MDR component in the installation package settings.

   You can also upgrade the application using the following methods:

   - Using the Kaspersky update service.
   - Locally, by using the Setup Wizard.

   Kaspersky Endpoint Security supports automatically selecting components when upgrading the application on a computer with the Kaspersky Endpoint Agent application installed. The automatic selection of components depends on the permissions of the user account that is upgrading the application.

   If you are upgrading Kaspersky Endpoint Security using the EXE or MSI file under the system account (SYSTEM), Kaspersky Endpoint Security gains access to current licenses of Kaspersky solutions. Therefore, if the computer has Kaspersky Endpoint Agent installed and MDR solution activated, the Kaspersky Endpoint Security installer automatically configures the set of components and selects the MDR component. This makes Kaspersky Endpoint Security switch to using the built-in agent and removes Kaspersky Endpoint Agent. Running the MSI installer under the system account (SYSTEM) is usually performed when upgrading via the Kaspersky update service or when deploying an installation package via Kaspersky Security Center.

   If you are upgrading Kaspersky Endpoint Security using an MSI file under a non-privileged user account, Kaspersky Endpoint Security lacks access to current licenses of Kaspersky solutions. In this case, Kaspersky Endpoint Security automatically selects components based on a set of components of Kaspersky Endpoint Agent. After that Kaspersky Endpoint Security switches to using the built-in agent and removes Kaspersky Endpoint Agent.

Kaspersky Endpoint Security supports upgrading without computer restart. You can select the application upgrade mode in policy properties.

5. **Checking the application operation**

   If after application installation or upgrade, the computer has the *Critical* status in the Kaspersky Security Center console:

   - Make sure that the computer has Network Agent version 13.2 or higher installed.
   - Check the operating status of the built-in agent by viewing the *Report on status of application components*. If a component has the *Not installed* status, install the component using the *Change application components* task. If a component has the *Not covered by license* status, make sure that you have activated the built-in agent functionality.
   - Make sure you accept the Kaspersky Security Network Statement in the new policy of Kaspersky Endpoint Security for Windows.

Endpoint Detection and Response

Kaspersky Endpoint Security for Windows includes a built-in agent for the Kaspersky Endpoint Detection and Response Optimum solution (hereinafter also "EDR Optimum"). Starting with version 11.8.0, Kaspersky Endpoint Security for Windows includes a built-in agent for the Kaspersky Endpoint Detection and Response Expert solution (hereinafter also "EDR Expert"). *Kaspersky Endpoint Detection and Response* is a range of solutions for protecting the corporate IT infrastructure from advanced cyber threats. The functionality of the solutions combines automatic detection of threats with the ability to react to these threats to counteract advanced attacks including new exploits, ransomware, fileless attacks, as well as methods using legitimate system tools. EDR Expert offers more threat monitoring and response functionality than EDR Optimum. For details about the solutions, see the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.

Threat Intelligence tools

Kaspersky Endpoint Detection and Response uses the following Threat Intelligence tools:

- Integration with Kaspersky Threat Intelligence Portal, which contains and displays information about the reputation of files and web addresses.
- Kaspersky Threats database.
- The Kaspersky Security Network (hereinafter also referred to as "KSN") cloud service infrastructure, which provides access to real-time file, website, and software reputation information from the Kaspersky knowledge base. Using data from Kaspersky Security Network ensures faster responses by Kaspersky applications to threats, improves the performance of some protection components, and reduces the likelihood of false positives.
- Cloud Sandbox technology that lets you run detected files in an isolated environment and check their reputation.

Principle of operation of the solution

Kaspersky Endpoint Detection and Response reviews and analyses threat development and provides *security personnel* or the *Administrator* with information about the potential attack that is necessary for a timely response. Kaspersky Endpoint Detection and Response displays alert details in a separate window. An *alert* is an event in the corporate IT infrastructure that the application has identified as unusual or suspicious and that can pose a security threat for the corporate IT infrastructure. *Alert Details* is a tool for viewing the entirety of collected information about a detected threat. Alert details include, for example, the history of files appearing on the computer. For details about managing alert details, refer to the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.

Support for previous versions of Kaspersky Endpoint Security

If you are using Kaspersky Endpoint Security 11.2.0–11.6.0 for interoperability with Kaspersky Endpoint Detection and Response Optimum, the application includes Kaspersky Endpoint Agent. You can install Kaspersky Endpoint Agent side-by-side with Kaspersky Endpoint Security. In Kaspersky Endpoint Security 11.9.0 the Kaspersky Endpoint Agent distribution package is no longer part of the Kaspersky Endpoint Security distribution kit.

> The Kaspersky Endpoint Detection and Response Expert solution does not support interoperability with Kaspersky Endpoint Agent. The Kaspersky Endpoint Detection and Response Expert solution uses Kaspersky Endpoint Security with built-in agent (version 11.8.0 and later).

Integration of the built-in agent with EDR Optimum / EDR Expert

To set up integration with Kaspersky Endpoint Detection and Response, you must add the Endpoint Detection and Response Optimum component or the Endpoint Detection and Response Expert (cloud) component and configure Kaspersky Endpoint Security.

> The Endpoint Detection and Response Optimum, Endpoint Detection and Response Expert (cloud), and Endpoint Detection and Response Expert (on-premises) components are not compatible with each other.

The following conditions must be fulfilled for Endpoint Detection and Response to work:

- Kaspersky Security Center version 13.2 or higher. In earlier versions of Kaspersky Security Center, it is impossible to activate the Endpoint Detection and Response feature.
- Kaspersky Endpoint Detection and Response management plug-in.

  Starting from Kaspersky Endpoint Security version 12.6 the display of alert details has been moved from Kaspersky Endpoint Security management plug-in to EDR management plug-in. The EDR management plug-in is a single plug-in for working with agents on Windows, Mac and Linux operating systems. Now, when working with EDR Optimum, you will need Kaspersky Endpoint Security management plug-in to create threat response tasks and EDR management plug-in to view alert details.
- The Endpoint Detection and Response Optimum component as part of Kaspersky Endpoint Security supports interaction with the Kaspersky Endpoint Detection and Response Optimum 2.0 solution. Interaction with Kaspersky Endpoint Detection and Response Optimum version 1.0 is not supported.

- EDR Optimum can be managed in Kaspersky Security Center Web Console and Kaspersky Security Center Cloud Console.

  EDR Expert can be managed only using the Kaspersky Security Center Cloud Console. You cannot manage this functionality using the Administration Console (MMC).

- The application is activated and the functionality is covered by the license.

- The Endpoint Detection and Response component is turned on.

- Application components that Endpoint Detection and Response depends on are enabled and operational. Endpoint Detection and Response depends on the following components:

  - File Threat Protection.
  - Web Threat Protection.
  - Mail Threat Protection.
  - Exploit Prevention.
  - Behavior Detection.
  - Host Intrusion Prevention.
  - Remediation Engine.
  - Adaptive Anomaly Control.

Integration with Kaspersky Endpoint Detection and Response involves the following steps:

1. **Installing Endpoint Detection and Response components**

   You can select the Endpoint Detection and Response Optimum component or the Endpoint Detection and Response Expert (cloud) component during installation or upgrade, as well as using the *Change application components* task.

   > You must restart your computer to finish upgrading the application with the new components.

2. **Activating Kaspersky Endpoint Detection and Response**

   You can acquire a license to use Kaspersky Endpoint Detection and Response in the following ways:

   - Endpoint Detection and Response functionality is included in the Kaspersky Endpoint Security for Windows license.

     The functionality is available immediately after the activation of Kaspersky Endpoint Security for Windows.

   - Purchasing a separate license for EDR Optimum or EDR Expert (Kaspersky Endpoint Detection and Response Add-on).

     The functionality becomes available after adding a separate key for Kaspersky Endpoint Detection and Response. As a result, two keys are added on the computer: a key for Kaspersky Endpoint Security and a key for Kaspersky Endpoint Detection and Response.

     Licensing for the stand-alone Endpoint Detection and Response functionality is the same as the licensing of Kaspersky Endpoint Security.

Make sure that the EDR Optimum or EDR Expert functionality is included in the license and is running in the local interface of the application.

For more information about the EDR Optimum End User License Agreement, refer to the Kaspersky Endpoint Detection and Response Optimum Help.

3 Enabling Endpoint Detection and Response components

You can enable or disable the component in Kaspersky Endpoint Security for Windows policy settings.

How to enable or disable the Endpoint Detection and Response component in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response**.
5. Turn on the **Endpoint Detection and Response ENABLED** toggle.
6. To apply the policy to computers, close the padlock icons and save your changes.

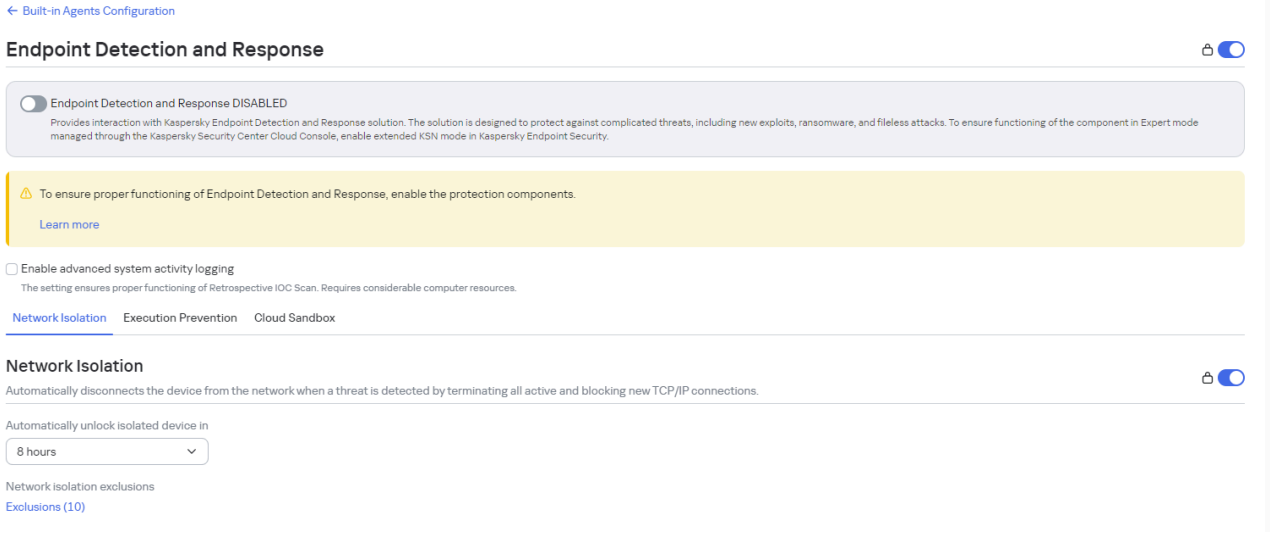

EDR integration settings

The Kaspersky Endpoint Detection and Response component is enabled. Check the operating status of the component by viewing the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Endpoint Detection and Response Optimum** or **Endpoint Detection and Response Expert (cloud)** component is added to the list of Kaspersky Endpoint Security components.

4 Enabling data transfer to Administration Server

To enable all the Endpoint Detection and Response features, data transfer must be enabled for the following types of data:

- Quarantine file data.

  The data are required to obtain information about files quarantined on a computer through Web Console. For example, you can download a file from quarantine for analysis in Web Console.

- Threat development chain data.

  The data are required to obtain information about threats detected on a computer in Web Console. You can view alert details and take response actions in Web Console.

How to enable data transfer to the Administration Server in Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **KSC Integration**.
5. In the **Data transfer to Administration Server** block, click the **Advanced settings** link.
6. In the window that opens, select the following check boxes:
   - **About Quarantine files**.
   - **About a threat development chain**.
7. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

Scan for indicators of compromise (standard task)

An *Indicator of Compromise (IOC)* is a set of data about an object or activity that indicates unauthorized access to the computer (compromise of data). For example, many unsuccessful attempts to sign in to the system can constitute an Indicator of Compromise. The *IOC Scan* task allows finding Indicators of Compromise on the computer and taking threat response measures.

Kaspersky Endpoint Security searches for indicators of compromise using IOC files. *IOC files* are files containing the sets of indicators that the application tries to match to count a detection. IOC files must conform to the OpenIOC standard.

IOC Scan task run mode

Kaspersky Endpoint Detection and Response lets you create standard IOC Scan tasks to detect compromised data. *Standard IOC scan task* is a group or local task that is created and configured manually in the Web Console. Tasks are run using IOC files prepared by the user. If you want to add an indicator of compromise manually, please read the requirements for IOC files.

The file that you can download by clicking the link below, contains a table with the full list of IOC terms of the OpenIOC standard.

DOWNLOAD THE IOC_TERMS.XLSX FILE

Kaspersky Endpoint Security also supports stand-alone IOC scan tasks when the application is used as part of the Kaspersky Sandbox solution.

Creating IOC file

Starting with Kaspersky Endpoint Security 12.10 for Windows, you can create IOC files directly in the task settings. To create an IOC file, you must prepare a TXT file with a list of indicators of compromise. You can add lists of the following objects as indicators of compromise:

- File hashes (MD5 / SHA256).

  The application prepares an IOC file with a FileItem/Md5sum or FileItem/Sha256sum scan scope.

- IP addresses (IPv4, IPv6).

  The application prepares an IOC file with a PortItem/RemoteIP scan scope.

- DNS names.

  The application prepares an IOC file with a DnsEntryItem/RecordName scan scope.

How to create IOC file in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Tasks**.

   The list of tasks opens.

2. Select the **IOC Scan** task.

   The task properties window opens. If necessary, create the **IOC Scan** task.

3. Select the **Application settings** tab.

4. Go to the **Threat Scan** section.

5. Click **Redefine IOC files**.

6. This opens the form for creating an IOC file:

   a. Under **IOC files source**, select **Generate from file**.

   b. Enter the name for the IOC file.

   c. Select a TXT file with a list of indicators of compromise.

   d. Select the type of the IOC file: **DNS names**, **File hashes**, **IP addresses**.

   e. Click **Upload**.

   Kaspersky Endpoint Security adds IOC files to the IOC collection. If necessary, you can temporarily exclude IOC files from the task scope.

7. Save your changes.

Creating an IOC Scan task

You can create *IOC Scan* tasks manually:

- In alert details (only for EDR Optimum).

  Alert Details is a tool for viewing the entirety of collected information about a detected threat. Alert details include, for example, the history of files appearing on the computer. For details about managing alert details, refer to the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.

- Using the Task Wizard.

> The *IOC Scan* group task cannot be run if integration with Kaspersky Endpoint Detection and Response Expert (on-premises) or Kaspersky Endpoint Detection and Response Expert (cloud) is configured on the computers being scanned. In this case, we recommend using the *IOC Scan* response action to search for indicators of compromise. For more details, please refer to the Kaspersky Endpoint Detection and Response Expert (on-premises) help.

> You can configure the task for EDR Optimum in Web Console and Cloud Console. Task settings for EDR Expert are available only in Cloud Console.

To create an IOC Scan task:

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **IOC Scan**.

   c. In the **Task name** field, enter a brief description.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Go to the next step.

5. Enter the account credentials of the user whose rights you want to use to run the task. Go to the next step.

   > By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

   The system account (SYSTEM) does not have permission to perform the *IOC Scan* task on network drives. If you want to run the task for a network drive, select the account of a user that has access to that drive.

For standalone IOC Scan tasks on network drives, in the task properties you need to manually select the user account that has access to this drive.

6. Finish the wizard.

   A new task will be displayed in the list of tasks.

7. Click the new task.

   The task properties window opens.

8. Select the **Application settings** tab.

9. Go to the **Threat Scan** section.

10. Upload the IOC files to search for indicators of compromise.

    After you upload the IOC files, the application displays summary information about the file, including the list of indicators that did not pass the check. After uploading IOC files, you can manually edit the files in the built-in editor directly in task properties. Kaspersky Endpoint Security supports editing IOC files that are compliant with the OpenIOC 1.1 standard. It is not possible to modify the content of IOC files compliant with OpenIOC version 1.0.

    Kaspersky Endpoint Security adds IOC files to the IOC collection. If necessary, you can temporarily exclude IOC files from the task scope.

    Adding or removing IOC files after running the task is not recommended. This can cause the IOC scan results to display incorrectly for prior runs of the task. To search indicators of compromise by new IOC files, it is recommended to add new tasks.

11. If necessary, select the **Retrospective IOC Scan** check box. *Retrospective IOC Scan* is a mode of the *IOC Scan* task in which Kaspersky Endpoint Security scans for indicators of compromise using data for a certain time period. This mode is intended for searching indicators of compromise by the telemetry of the protected computer such as network activity, processes, files, and other telemetry. Kaspersky Endpoint Security analyzes data in operating system logs and browser logs on the computer. The Retrospective IOC Scan analyzes logs of the following browsers: Google Chrome, Mozilla Firefox, Microsoft Edge (version 79 or later).

12. Configure actions on IOC detection:

    - **Isolate device from the network**. If this option is selected, Kaspersky Endpoint Security isolates the computer from the network to prevent the threat from spreading. You can configure the duration of the isolation in Endpoint Detection and Response component settings.

      If this check box is cleared, you can isolate the computer from the network after running the task manually. If the *IOC Scan* task detects an IOC, you can isolate the computer from the network directly from the IOC (properties of the *IOC Scan* → **Application settings** → **IOC Scan results** task). Kaspersky Endpoint Security also allows immediately managing additional settings: Network isolation disablement period and Network isolation exclusions.

    - **Move copy to Quarantine, delete object**. If this option is selected, Kaspersky Endpoint Security deletes the malicious object found on the computer. Before deleting the object, Kaspersky Endpoint Security creates a backup copy in case the object needs to be restored later. Kaspersky Endpoint Security moves the backup copy to Quarantine.

If this check box is cleared, you can quarantine the file manually after running the task manually. If the *IOC Scan* task detects a file that can compromise data, you can quarantine this file directly from IOC Scan results (**Application settings** → **IOC Scan results**). As a result, Kaspersky Endpoint Security starts the task creation wizard with preset data of the detected file. You only need to manage additional task settings, for example, set up the task schedule.

If necessary, select the **Apply to system critical objects** check box. System Critical Objects (SCOs) include files that the operating system requires to function.

> We do not recommend applying actions to SCO files. This can cause the operating system to become unstable or fail to boot.

- **Run Critical Areas Scan**. If this option is selected, Kaspersky Endpoint Security runs the *Critical Areas Scan* task. By default, Kaspersky Endpoint Security scans the kernel memory, running processes, and disk boot sectors.

13. Go to the **Advanced** section.

14. Select data types (IOC documents) that must be analyzed as part of the task.

> Kaspersky Endpoint Security automatically selects data types (IOC documents) for the *IOC Scan* task in accordance with the content of loaded IOC files. It is not recommended to deselect data types.

You can additionally configure scan scopes for the following data types:

- **Files - FileItem**. Set an IOC scan scope on the computer using preset scopes.

  By default, Kaspersky Endpoint Security scans for IOCs only in important areas of the computer, such as the Downloads folder, the desktop, the folder with temporary operating system files, etc. You can also manually add the scan scope.

- **Windows Event Log - EventLogItem**. Enter the time period when the events were logged. You can also select which Windows event logs must be used for IOC scanning. By default, the following event logs are selected: application event log, system event log, and security event log.

  > For the EventLogItem\source IOC term, use the **Provider Name** value from the XML schema of the event.

- **Windows Registry - RegistryItem**. Configure the IOC Scan scope in the registry.

  By default, Kaspersky Endpoint Security scans a set of registry keys.

15. In the task properties window, select the **Schedule** tab.

16. Configure the task schedule.

> Wake-on-LAN is not available for this task. Make sure the computer is turned on to run the task.

17. Save your changes.

18. Select the check box next to the task.

19. Click **Start**.

As a result, Kaspersky Endpoint Security runs the search for indicators of compromise on the computer. You can view the results of the task in task properties in the **Results** section. You can view the information about detected indicators of compromise in the task properties: **Application settings** → **IOC Scan results**. In IOC Scan results, you can also manually quarantine the detected file or isolate the computer from the network.

Kaspersky Endpoint Security looks for duplicates among records created for the same IOC file and keeps only unique records in task results. Duplicates are records of the same type that have the same values of all compared fields. The application also may not create a record if it lacks a value in one or more field (see the table below).

Type	Compared fields	Condition for not creating a record
FileItem	• FullPath • Md5sum • Sha256sum • PID • UPID • ImagePath	• Missing value of the FullPath, Md5sum, Sha256sum fields. • Missing values of the FullPath field and identical values of the Md5sum, Sha256sum fields.
RegistryItem	• Hive • KeyPath • ValueName • Text • Type	Missing value of at least one of the following fields: Hive, KeyPath, ValueName.
ProcessItem	• startTime • PID	Missing values of the startTime or PID fields.

The **Alert Details** window may display RegistryItem records with identical field values. Such records are not duplicates because they have different values of the Text field, which is not displayed in the interface.

IOC scan results are kept for 30 days. After this period, Kaspersky Endpoint Security automatically deletes the oldest entries.

Extended telemetry for IOC Scan

We recommend enabling extended telemetry on the computer for retrospective IOC scanning. Extended telemetry improves the accuracy of IOC detection, but uses more resources of the computer.

Extended telemetry includes the support of the following additional terms:

- FileItem/Md5sum
- FileItem/Sha256sum
- FileItem/SizeInBytes
- FileItem/Created
- FileItem/Modified
- FileItem/Changed

- FileItem/Accessed
- FileItem/FileAttributes

If extended telemetry is disabled, Kaspersky Endpoint Security may rotate the information about detected indicators of compromise.

To enable extended telemetry:

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response**.
5. Select the **Enable advanced system activity logging** check box.
6. Save your changes.

Move file to Quarantine

When reacting to threats, Kaspersky Endpoint Detection and Response can create *Move file to Quarantine* tasks. This is necessary to minimize the consequences of the threat. *Quarantine* is a special local storage on the computer. The user can quarantine files that the user considers dangerous for the computer. Quarantined files are stored in an encrypted state and do not threaten the security of the device. Kaspersky Endpoint Security uses the Quarantine only when integrated with Kaspersky Detection and Response solutions. In other cases Kaspersky Endpoint Security places the relevant file in Backup. For details on managing Quarantine as part of solutions, please refer to the Kaspersky Sandbox Help, Kaspersky Endpoint Detection and Response Optimum Help, Kaspersky Endpoint Detection and Response Expert Help, Kaspersky Anti Targeted Attack Platform Help, and Kaspersky Endpoint Detection and Response Expert (on-premises) Help.

You can create *Move file to Quarantine* tasks in the following ways:

- In alert details (only for EDR Optimum).

  Alert Details is a tool for viewing the entirety of collected information about a detected threat. Alert details include, for example, the history of files appearing on the computer. For details about managing alert details, refer to the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.
- Using the Task Wizard.

  You must enter the file path or hash (SHA256 or MD5), or both the file path and the file hash.
- In the *IOC Scan* task settings.

  If the *IOC Scan* task detects a file that can compromise data, you can quarantine this file directly from IOC Scan results (**Application settings** → **IOC Scan results**). As a result, Kaspersky Endpoint Security starts the task creation wizard with preset data of the detected file. You only need to manage additional task settings, for example, set up the task schedule.

The *Move file to Quarantine* task has the following limitations:

1. The file size must not exceed 100 MB.
2. You cannot delete files that are required for operation of Kaspersky Endpoint Security for Windows:
   - Files in the scope of the Kaspersky Endpoint Security for Windows self-defense technology
   - Files digitally signed by Kaspersky
3. You can configure the task for EDR Optimum in Web Console and Cloud Console. Task settings for EDR Expert are available only in Cloud Console.
4. You cannot scan an object quarantined as a result of the *Move file to Quarantine* task.

To create a Move file to Quarantine task:

1. In the main window of the Web Console, select **Tasks**.
   The list of tasks opens.
2. Click **Add**.
   The Task Wizard starts.
3. Configure the task settings:
   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.
   b. In the **Task type** drop-down list, select **Move file to Quarantine**.
   c. In the **Task name** field, enter a brief description.
   d. In the **Devices to which the task will be assigned** block, select the task scope.
4. Select devices according to the selected task scope option. Click **Next**.
5. Enter the account credentials of the user whose rights you want to use to run the task. Click **Next**.

   By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

6. Finish the wizard by clicking the **Finish** button.
   A new task will be displayed in the list of tasks.
7. Click the new task.
   The task properties window opens.
8. Select the **Application settings** tab.
9. If necessary, select the **Apply to system critical objects** check box.
   System Critical Objects (SCOs) include files that the operating system requires to function.

> We do not recommend applying actions to SCO files. This can cause the operating system to become unstable or fail to boot.

10. In the list of files, click **Add**.

    The file adding wizard starts.

11. To add the file, you must enter the full path to the file, or both file hash and the path.

    > If the file is located on a network drive, enter the file path starting with `\\`, and not the drive letter. For example, `\\server\shared_folder\file.exe`. If the file path contains a network drive letter, you can get a *File not found* error.

12. In the task properties window, select the **Schedule** tab.

13. Configure the task schedule.

    > Wake-on-LAN is not available for this task. Make sure the computer is turned on to run the task.

14. Save your changes.

15. Select the check box next to the task.

16. Click **Start**.

    As a result, Kaspersky Endpoint Security moves the file to Quarantine.

If the file is locked by a different process, the task is displayed as Done, but the file itself is quarantined only after the computer is restarted. After restarting the computer, confirm that the file is deleted.

If the file is locked by a different process, the task is displayed as *Completed*, but the file itself is quarantined only after the computer is restarted. After restarting the computer, confirm that the file is deleted.

The *Move file to Quarantine* task can finish with the *Access denied* error if you are trying to quarantine an executable file that is currently running. Create a terminate process task for the file and try again.

The *Move file to Quarantine* task can finish with the *Not enough space in Quarantine storage* error if you are trying to quarantine a file that is too large. Empty the Quarantine or make Quarantine larger. Then try again.

You can restore a file from Quarantine or empty the Quarantine using Web Console. You can restore objects locally on the computer using the command line.

Get file

You can get files from user computers. For example, you can configure getting an event log file created by a third-party application. As a result of the execution of the task, a file copy is saved in Quarantine. *Quarantine* is a special local storage on the computer. You can download this file from Quarantine to your computer using Web Console (**Operations** → **Repositories** → **Quarantine**). On the user's computer, the file remains in its original folder.

The file size must not exceed 2 GB.

You can configure the task for EDR Optimum in Web Console and Cloud Console. Task settings for EDR Expert are available only in Cloud Console.

To create a Get file task:

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Get file**.

   c. In the **Task name** field, enter a brief description.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Click **Next**.

5. Enter the account credentials of the user whose rights you want to use to run the task. Click **Next**.

   By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

6. Finish the wizard by clicking the **Finish** button.

   A new task will be displayed in the list of tasks.

7. Click the new task.

   The task properties window opens.

8. Select the **Application settings** tab.

9. In the list of files, click **Add**.

   The file adding wizard starts.

10. To add the file, you must enter the full path to the file, or both file hash and the path.

    If the file is located on a network drive, enter the file path starting with `\\`, and not the drive letter. For example, `\\server\shared_folder\file.exe`. If the file path contains a network drive letter, you can get a *File not found* error.

11. In the task properties window, select the **Schedule** tab.

12. Configure the task schedule.

    Wake-on-LAN is not available for this task. Make sure the computer is turned on to run the task.

13. Save your changes.

14. Select the check box next to the task.

15. Click **Start**.

    As a result, Kaspersky Endpoint Security creates a copy of the file and moves that copy to Quarantine. You can download the file from Quarantine in Web Console.

Delete file

You can remotely delete files using the *Delete file* task. For example, you can remotely delete a file when responding to threats.

You cannot delete files that are required for operation of Kaspersky Endpoint Security for Windows:

- Files in the scope of the Kaspersky Endpoint Security for Windows self-defense technology
- Files digitally signed by Kaspersky

You can configure the task for EDR Optimum in Web Console and Cloud Console. Task settings for EDR Expert are available only in Cloud Console.

To create a Delete file task:

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Delete file**.

c. In the **Task name** field, enter a brief description.

d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Click **Next**.

5. Enter the account credentials of the user whose rights you want to use to run the task. Click **Next**.

   By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

6. Finish the wizard by clicking the **Finish** button.

   A new task will be displayed in the list of tasks.

7. Click the new task.

   The task properties window opens.

8. Select the **Application settings** tab.

9. To add the file, you must enter the full path to the file, or both file hash and the path.

   If the file is located on a network drive, enter the file path starting with `\\`, and not the drive letter. For example, `\\server\shared_folder\file.exe`. If the file path contains a network drive letter, you can get a *File not found* error.

10. If necessary, select the **Apply to system critical objects** check box.

    System Critical Objects (SCOs) include files that the operating system requires to function.

    We do not recommend applying actions to SCO files. This can cause the operating system to become unstable or fail to boot.

11. In the task properties window, select the **Schedule** tab.

12. Configure the task schedule.

    Wake-on-LAN is not available for this task. Make sure the computer is turned on to run the task.

13. Save your changes.

14. Select the check box next to the task.

15. Click **Start**.

    As a result, Kaspersky Endpoint Security deletes the file from the computer. If the file is locked by a different process, the task is displayed as *Done*, but the file itself is deleted only after the computer is restarted. After restarting the computer, confirm that the file is deleted.

The *Delete file* task can finish with the *Access denied or file not found* error if you are trying to delete an executable file that is currently running. Create a terminate process task for the file and try again.

Process start

You can remotely run files using the *Process start* task. For example, you can remotely run an utility that creates the computer configuration file. Next you can use the *Get file* task to receive the created file in Kaspersky Security Center Web Console.

You can configure the task for EDR Optimum in Web Console and Cloud Console. Task settings for EDR Expert are available only in Cloud Console.

To create a Process start task:

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Process start**.

   c. In the **Task name** field, enter a brief description.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Click **Next**.

5. Enter the account credentials of the user whose rights you want to use to run the task. Click **Next**.

   By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

6. Finish the wizard by clicking the **Finish** button.

   A new task will be displayed in the list of tasks.

7. Click the new task.

8. The task properties window opens.

9. Select the **Application settings** tab.

10. Enter the process start command.

Suppose you want to run an utility (`utility.exe`) that saves the information about the computer's configuration to a file named `conf.txt` in the current folder (by default). The utility is in the `C:\Users\admin\Diagnostic\` folder. You must save the configuration file in the `C:\Users\admin\Documents\Configuration` folder. Enter the following values:

- **Executable command** – `C:\Users\admin\Diagnostic\utility.exe`
- **Command line arguments (optional)** – `/R conf.txt`
- **Path to the working folder (optional)** – `C:\Users\admin\Documents\Configuration`

11. In the task properties window, select the **Schedule** tab.
12. Configure the task schedule.

    Wake-on-LAN is not available for this task. Make sure the computer is turned on to run the task.

13. Save your changes.
14. Select the check box next to the task.
15. Click **Start**.

    As a result, Kaspersky Endpoint Security runs the command in silent mode and starts the process. You can view the results of the task in task properties in the **Execution results** section.

Terminate process

You can remotely terminate processes using the *Terminate process* task. For example, you can remotely terminate an Internet speed testing utility that was started using the *Run process* task.

If you want to prohibit running a file, you can configure the Execution prevention component. You can prohibit the execution of executable files, scripts, office format files.

The *Terminate process* task has the following limitations:

You cannot terminate file processes that are required for operation of Kaspersky Endpoint Security for Windows:

- Files in the scope of the Kaspersky Endpoint Security for Windows self-defense technology
- Files digitally signed by Kaspersky

You can configure the task for EDR Optimum in Web Console and Cloud Console. Task settings for EDR Expert are available only in Cloud Console.

To create a Terminate process task:

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click **Add**.

   The Task Wizard starts.

3. Configure the task settings:

   a. In the **Application** drop-down list, select **Kaspersky Endpoint Security for Windows 14.2**.

   b. In the **Task type** drop-down list, select **Terminate process**.

   c. In the **Task name** field, enter a brief description.

   d. In the **Devices to which the task will be assigned** block, select the task scope.

4. Select devices according to the selected task scope option. Click **Next**.

5. Enter the account credentials of the user whose rights you want to use to run the task. Click **Next**.

   By default, Kaspersky Endpoint Security starts the task as the system user account (SYSTEM).

6. Finish the wizard by clicking the **Finish** button.

   A new task will be displayed in the list of tasks.

7. Click the new task.

   The task properties window opens.

8. Select the **Application settings** tab.

9. If necessary, select the **Apply to system critical objects** check box.

   System Critical Objects (SCOs) include files that the operating system requires to function.

   We do not recommend applying actions to SCO files. This can cause the operating system to become unstable or fail to boot.

10. To complete the process, you must select the file that you want to terminate. You can select a file in one of the following ways:

    - Enter the full name to the file.
    - Enter the hash of the file and the path to the file.
    - Enter the PID of the process (only for local tasks).
    - If the file is located on a network drive, enter the file path starting with `\\`, and not the drive letter. For example, `\\server\shared_folder\file.exe`. If the file path contains a network drive letter, you can get a *File not found* error.

    If the file is located on a network drive, enter the file path starting with `\\`, and not the drive letter. For example, `\\server\shared_folder\file.exe`. If the file path contains a network drive letter, you can get a *File not found* error.

11. In the task properties window, select the **Schedule** tab.

12. Configure the task schedule.

    Wake-on-LAN is not available for this task. Make sure the computer is turned on to run the task.

13. Click **Save**.

14. Select the check box next to the task.

15. Click **Start**.

    As a result, Kaspersky Endpoint Security terminates the process on the computer. For example, if a GAME application is running, and you terminate the game.exe process, the application is closed without saving data. You can view the results of the task in task properties in the **Results** section.

Execution prevention

Execution prevention allows managing the running of executable files and scripts, as well as opening office format files. In this way, you can, for example, prevent the execution of applications that you consider insecure. As a result, the spreading of the threat can be stopped. Execution prevention supports a set of office file extensions and a set of script interpreters.

Execution prevention rule

Execution prevention manages user access to files with execution prevention rules. *Execution prevention rule* is a set of criteria that the application takes into account when reacting to an object execution, for example when blocking object execution. The application identifies files by their paths or checksums calculated using MD5 and SHA256 hashing algorithms.

You can create Execution prevention rules:

- In alert details (only for EDR Optimum).

  Alert Details is a tool for viewing the entirety of collected information about a detected threat. Alert details include, for example, the history of files appearing on the computer. For details about managing alert details, refer to the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.

- Using a group policy or local application settings.

  You must enter the file path or hash (SHA256 or MD5), or the folder path and the file hash.

You can also manage Execution prevention locally using the command line.

Execution prevention has the following limitations:

1. Prevention rules do not cover files on CDs or in ISO images. The application does not block execution or opening of these files.
2. You cannot apply a prevention rule to files that are required for operation of Kaspersky Endpoint Security for Windows:
   - Files in the scope of the Kaspersky Endpoint Security for Windows self-defense technology
   - Files digitally signed by Kaspersky
3. It is not recommended to create more than 5000 run prevention rules, as this can cause system instability.

Execution prevention rule modes

The Execution prevention component can work in two modes:

- **Statistics only**

  In this mode, Kaspersky Endpoint Security publishes an event about attempts to run executable objects or open documents that match prevention rule criteria to the Windows event log and Kaspersky Security Center, but does not block the attempt to run or open the object or document. This mode is selected by default.

- **Active**

  In this mode, the application blocks the execution of objects or opening of documents that match prevention rule criteria. The application also publishes an event about attempts to execute objects or open documents to the Windows event log and Kaspersky Security Center event log.

Managing Execution prevention

You can configure the component settings only in the Web Console.

To prevent execution:

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response**.
5. Select the **Execution Prevention** tab.
6. Turn on the **Execution Prevention ENABLED** toggle.

7. In the **Action on execution or opening of forbidden object** block, select the component operating mode:

- **Block and add to event log**. In this mode, the application blocks the execution of objects or opening of documents that match prevention rule criteria. The application also publishes an event about attempts to execute objects or open documents to the Windows event log and Kaspersky Security Center event log.

  If necessary, select the **Apply to system critical objects** check box. System Critical Objects (SCOs) include files that the operating system requires to function.

  > We do not recommend applying actions to SCO files. This can cause the operating system to become unstable or fail to boot.

- **Add to event log**. In this mode, Kaspersky Endpoint Security publishes an event about attempts to run executable objects or open documents that match prevention rule criteria to the Windows event log and Kaspersky Security Center, but does not block the attempt to run or open the object or document. This mode is selected by default.

8. Create a list of execution prevention rules:

   a. Click **Add**.

   b. This opens a window; in this window, enter the name of the execution prevention rule (for example, *Application A*).

   c. In the **Type** drop-down list, select the object that you want to block: **Executable file**, **Script**, **Microsoft Office document**.

      If you select a wrong object type, Kaspersky Endpoint Security does not block the file or script.

   d. To add the file, you must enter the hash of the file (SHA256 or MD5), the full path to the file, or the hash and the folder path.

      > If the file is located on a network drive, enter the file path starting with `\\`, and not the drive letter. For example, `\\server\shared_folder\file.exe`. If the file path contains a network drive letter, Kaspersky Endpoint Security does not block the file or script.

      Execution prevention supports a set of office file extensions and a set of script interpreters.

9. Save your changes.

As a result, Kaspersky Endpoint Security blocks the execution of objects: running executable files and scripts, opening office format files. You can, however, for example, open a script file in a text editor even if running the script is prevented. When blocking the execution of an object, Kaspersky Endpoint Security displays a standard notification (see figure below) if notifications are enabled in application settings.

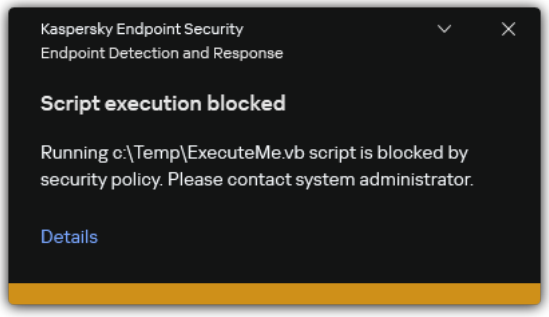

Execution prevention notification

Computer network isolation

Computer network isolation allows automatically isolating a computer from the network in response to the detection of an indicator of compromise (IOC) – this is the *automatic mode*. You can turn on Network isolation manually while you are investigating the detected threat – this is the *manual mode*.

When Network isolation is turned on, the application severs all active connections and blocks all new TCP/IP network connections on the computer except the following connections:

- Connections listed in Network isolation exclusions.
- Connections initiated by Kaspersky Endpoint Security services.
- Connections initiated by the Kaspersky Security Center Network Agent.
- Connections to the SVM and the Integration Server if the application is being used in Light Agent mode.
- Connections to KSN when integrating the application with Kaspersky Managed Detection and Response.

You can configure the component settings only in the Web Console.

Automatic Network isolation mode

You can configure Network isolation to be turned on automatically in response to an IOC detection. You can configure the automatic Network isolation mode with a group policy.

How to configure Network isolation to be turned on automatically in response to an IOC detection

1. In the main window of the Web Console, select **Asset management** → **Tasks**.

   The list of tasks opens.

2. Click the **IOC Scan** task of Kaspersky Endpoint Security.

The task properties window opens.

If necessary, create the *IOC Scan* task.

3. Select the **Application settings** tab.

4. Select the **Response settings** section.

5. In the **Configure response actions on IOC detection** block, select **Alert and response** and select the **Isolate device from the network** check box.

6. Save your changes.

As a result, when an IOC is detected, the application isolates the computer from the network to prevent the threat from spreading.

You can configure automatic Network isolation to be disabled after a certain period of time. By default, the application turns off Network isolation after 8 hours have passed from the time when it was turned on. You can also turn off Network isolation manually (see the instructions below). After turning off network isolation, the computer can use the Network without restrictions.

How to configure the delay for turning off Network isolation of a computer in automatic mode

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response**.

5. Select the **Network Isolation** tab.

6. Select the delay for turning off Network isolation.

7. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

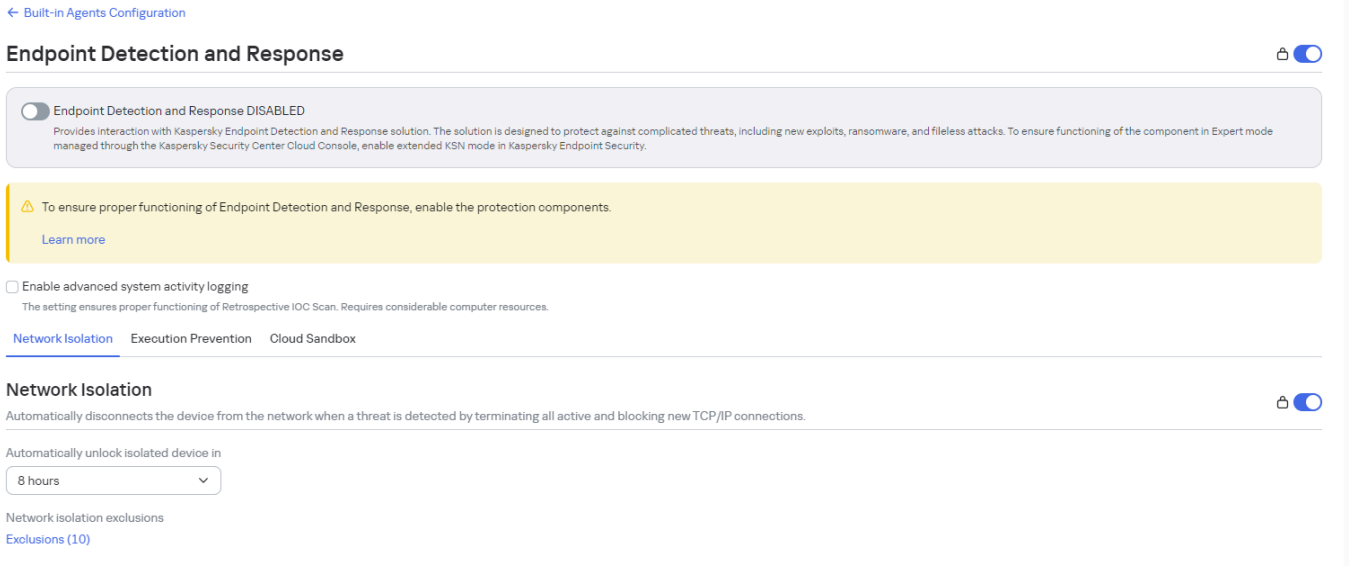

EDR integration settings

Manual Network isolation mode

You can manually turn Network isolation on and off. You can configure the manual Network isolation mode using the computer properties in the Kaspersky Security Center console.

You can turn on Network isolation:

- In alert details (only for EDR Optimum).

  Alert Details is a tool for viewing the entirety of collected information about a detected threat. Alert details include, for example, the history of files appearing on the computer. For details about managing alert details, refer to the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.

- Using local application settings.

- In the *IOC Scan* task settings.

  If the *IOC Scan* task detects an IOC, you can isolate the computer from the network directly from the IOC (properties of the *IOC Scan* → **Application settings** → **IOC Scan results** task). Kaspersky Endpoint Security also allows immediately managing additional settings: Network isolation disablement period and Network isolation exclusions.

How to turn on Network isolation of a computer manually

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Select the computer for which you want to configure local application settings.

   This opens the computer properties.
3. Select the **Applications** tab.
4. Click **Kaspersky Endpoint Security for Windows 14.2**.

   This opens the local application settings.
5. Select the **Application settings** tab.
6. Go to **Detection and Response** → **Endpoint Detection and Response**.
7. In the **Network isolation** block, click **Isolate computer from the network**.

You can configure automatic Network isolation to be disabled after a certain period of time. By default, the application turns off Network isolation after 8 hours have passed from the time when it was turned on. After turning off network isolation, the computer can use the Network without restrictions.

How to configure the delay for turning off Network isolation of a computer in manual mode

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Select the computer for which you want to configure local application settings.

   This opens the computer properties.
3. Select the **Tasks** tab.

   This displays the list of tasks available on the computer.

4. Select the **Network Isolation** task.

5. Select the **Application settings** tab.

6. This opens a window; in this window, select the delay for turning off Network isolation.

7. Save your changes.

How to turn off Network isolation of a computer manually

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.

2. Select the computer for which you want to configure local application settings.

   This opens the computer properties.

3. Select the **Applications** tab.

4. Click **Kaspersky Endpoint Security for Windows 14.2**.

   This opens the local application settings.

5. Select the **Application settings** tab.

6. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response**.

7. In the **Network Isolation** block, click **Unblock computer isolated from the network**.

You can also disable Network isolation locally using the command line.

Starting with Kaspersky Endpoint Security 12.10 for Windows, you can manage the Network Isolation in the alert details. Additionally, in the alert details you can specify the computer Network Isolation time period. For details about managing alert details, refer to the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.

Network isolation exclusions

You can configure Network isolation exclusions. Network connections that match the rules are not blocked on the computer when Network isolation is turned on.

To configure Network isolation exclusions, you can use a list of *standard network profiles*. By default, exclusions include network profiles containing rules that ensure uninterrupted operation of devices with the DNS/DHCP server and DNS/DHCP client roles. You can also modify the settings of standard network profiles or define exclusions manually (see instructions below).

Exclusions specified in policy properties are applied only if Network isolation is turned on automatically in response to a detected threat. Exclusions specified in computer properties are applied only if Network isolation is turned on manually in computer properties in the Kaspersky Security Center console or in alert details.

An active policy does not prevent applying exclusions from Network isolation configured in computer properties because these parameters have different usage scenarios.

How to add a Network isolation exclusion in automatic mode

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response**.
5. Select the **Network Isolation** tab.
6. In the **Network isolation exclusions** block, click **Exclusions**.
7. This opens a window; in this window, click **Add** → **Add from profile** and select standard network profiles for configuring exclusions.

   Network isolation exclusions from the profile are added to the list of Network isolation exclusions. You can view the properties of network connections. If necessary, you can modify network connection settings.
8. If necessary, add a Network isolation exclusion manually. To do so, in the window with the list of exclusions, click **Add** → **Add** and manually edit network connection settings.
9. Save your changes.

How to add a Network isolation exclusion in manual mode

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.
2. Select the computer for which you want to configure local application settings.

   This opens the computer properties.
3. Select the **Tasks** tab.

   This displays the list of tasks available on the computer.
4. Select the **Network isolation** task.
5. Select the **Application settings** tab.
6. This opens a window; in this window, click **Exclusions**.
7. This opens a window; in this window, click **Add from profile** and select standard network profiles for configuring exclusions.

   Network isolation exclusions from the profile are added to the list of Network isolation exclusions. You can view the properties of network connections. If necessary, you can modify network connection settings.
8. If necessary, add a Network isolation exclusion manually. To do so, in the window with the list of exclusions, click **Add** and manually edit network connection settings.
9. Save your changes.

You can also view the Network isolation exclusion list locally using the command line. In this case, the computer must be isolated.

Starting with Kaspersky Endpoint Security 12.10 for Windows, you can add the Network isolation exclusions in the alert details. For details about managing alert details, refer to the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.

Cloud Sandbox

Cloud Sandbox is a technology that lets you detect advanced threats on a computer. Kaspersky Endpoint Security automatically forwards detected files to Cloud Sandbox for analysis. Cloud Sandbox runs these files in an isolated environment to identify malicious activity and decides on their reputation. Data on these files is then sent to Kaspersky Security Network. Therefore, if Cloud Sandbox has detected a malicious file, Kaspersky Endpoint Security will perform the appropriate action to eliminate this threat on all computers where this file is detected.

For Cloud Sandbox to operate, you must enable the use of Kaspersky Security Network.

If you are using Kaspersky Private Security Network, Cloud Sandbox technology is not available.

Cloud Sandbox technology is permanently enabled and is available to all Kaspersky Security Network users regardless of the type of license they are using. If you have already deployed Endpoint Detection and Response Optimum solution, you can enable a separate counter for threats detected by Cloud Sandbox. You can use this counter to compile statistics when analyzing detected threats. Kaspersky Endpoint Security indicates the Cloud Sandbox threat detection technology in the *Report on threats* in the Kaspersky Security Center console.

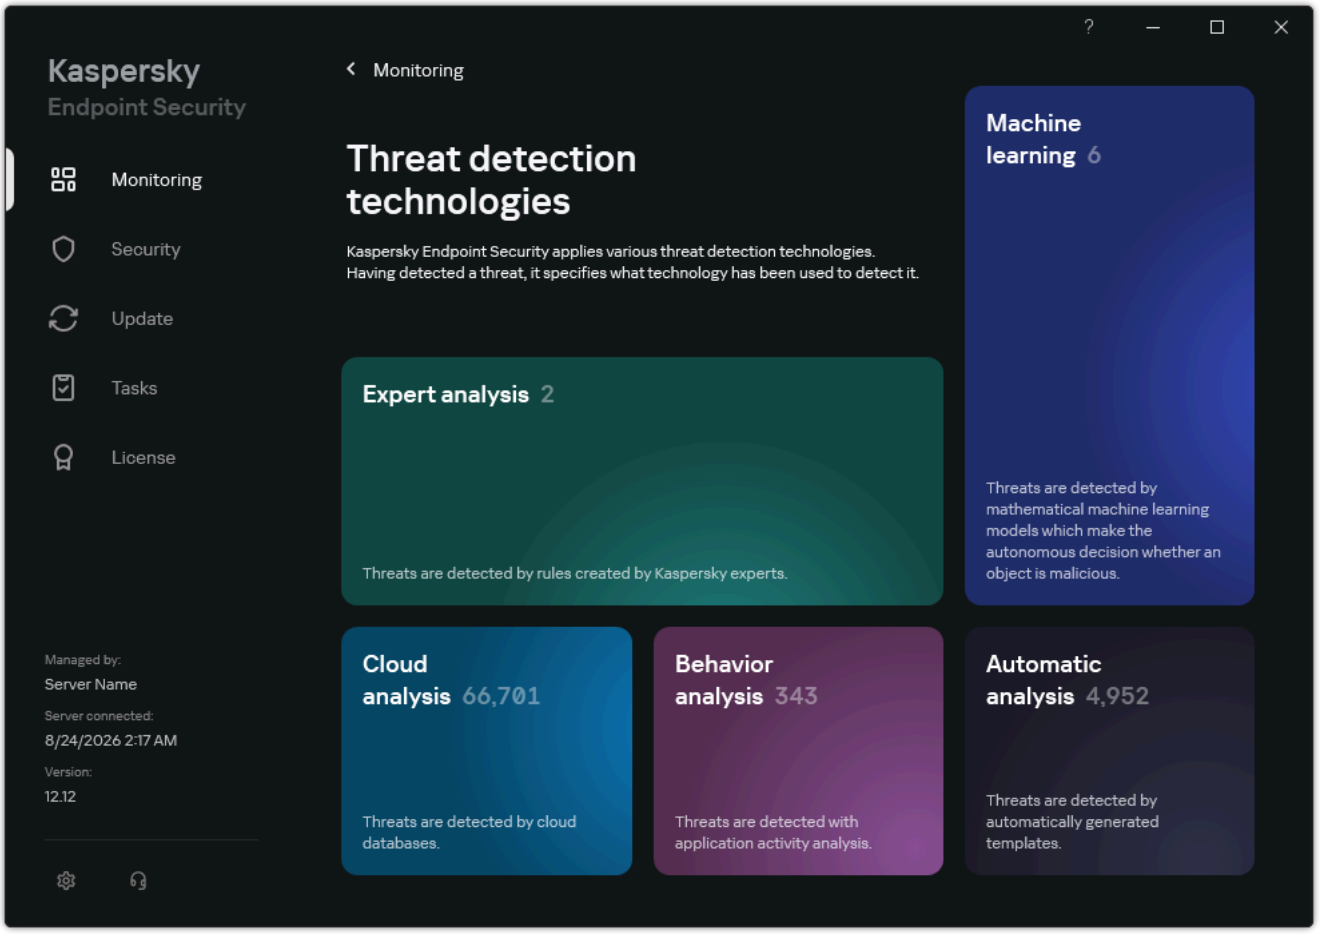

Threat counters

To enable the Cloud Sandbox counter:

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response**.
5. Select the **Cloud Sandbox** tab.
6. Turn on the **Cloud Sandbox ENABLED** toggle.
7. To apply the policy to computers, close the padlock icons and save your changes.

Whenever there is a threat, Kaspersky Endpoint Security activates the counter for threats detected using Cloud Sandbox in the main application window under **Threat detection technologies**. Kaspersky Endpoint Security will also indicate the Cloud Sandbox threat detection technology in the *Report on threats* in the Kaspersky Security Center console.

Endpoint Detection and Response policy section

KEA to KES Migration Guide for EDR Optimum

Kaspersky Endpoint Security for Windows includes a built-in agent for the Kaspersky Endpoint Detection and Response Optimum solution. You no longer need a separate Kaspersky Endpoint Agent application to work with EDR Optimum. All functions of Kaspersky Endpoint Agent will be performed by Kaspersky Endpoint Security.

When you deploy Kaspersky Endpoint Security on computers that have Kaspersky Endpoint Agent installed, Kaspersky Endpoint Detection and Response Optimum solution will continue working with Kaspersky Endpoint Security. In addition, Kaspersky Endpoint Agent will be removed from the computer. The same behavior in the system will occur when you update Kaspersky Endpoint Security to version 11.7.0 or higher.

Kaspersky Endpoint Security is not compatible with Kaspersky Endpoint Agent. You cannot install both of these applications on the same computer.

The following conditions must be met for Kaspersky Endpoint Security to work as part of Kaspersky Endpoint Detection and Response Optimum:

- Kaspersky Endpoint Detection and Response Optimum version 2.0 or higher.
- Kaspersky Security Center version 13.2 or higher (including Network Agent). In earlier versions of Kaspersky Security Center, it is impossible to activate the EDR Optimum feature.
- EDR Optimum can be managed only using the Kaspersky Security Center Web Console.

- Data transfer to Administration Server is enabled. The data are required to obtain information about files quarantined on a computer through Web Console.
- A background connection between Kaspersky Security Center Web Console and Administration Server is established. For EDR Optimum to work with Administration Server via Kaspersky Security Center Web Console, you must establish a new secure connection, a *background connection*.

Steps for migrating [KES+KEA] configuration to [KES+built-in agent] for EDR Optimum

1. **Upgrading the Kaspersky Endpoint Security web plug-in**

   EDR Optimum component can be managed using the Kaspersky Endpoint Security Web Plug-in version 11.7.0 or higher.

2. **Migrating policies and tasks**

   Transfer Kaspersky Endpoint Agent settings to Kaspersky Endpoint Security for Windows. To do this, use the wizard for migrating from Kaspersky Endpoint Agent in the Web Console.

   How to migrate policy and task settings from Kaspersky Endpoint Agent to Kaspersky Endpoint Security in Web Console

   In the main window of the Web Console, select **Operations** → **Migration from Kaspersky Endpoint Agent**.

   This runs the policies and tasks migration wizard. Follow the instructions of the Wizard.

Step 1. Policy migration

The Migration Wizard creates a new policy which merges the settings of Kaspersky Endpoint Security and Kaspersky Endpoint Agent policies. In the policy list, select Kaspersky Endpoint Agent policies whose settings you want to merge with the Kaspersky Endpoint Security policy. Click the Kaspersky Endpoint Agent policy in order to select the Kaspersky Endpoint Security policy with which you want to merge settings. Make sure you selected the correct policies and go to the next step.

Step 2. Task migration

The Migration Wizard creates new tasks for Kaspersky Endpoint Security. In the task list, select Kaspersky Endpoint Agent tasks which you want to create for Kaspersky Endpoint Security policy. Go to the next step.

Step 3. Wizard completion

Finish the wizard. As a result, the wizard does the following:

- Creates a new Kaspersky Endpoint Security policy.

The policy merges settings from Kaspersky Endpoint Security and Kaspersky Endpoint Agent. The policy is called *<Kaspersky Endpoint Security policy name> & <Kaspersky Endpoint Agent policy name>*. The new policy has the *Inactive* status. To continue, change the statuses of Kaspersky Endpoint Agent and Kaspersky Endpoint Security policies to *Inactive* and activate the new merged policy.

> After migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security for Windows, please make sure that the new policy has the functionality for data transfer to the Administration Server (quarantine file data and threat development chain data) set up. Data transfer parameter values are not migrated from a Kaspersky Endpoint Agent policy.

- Creates new Kaspersky Endpoint Security tasks.

  New tasks are copies of Kaspersky Endpoint Agent tasks. At the same time, the Wizard leaves Kaspersky Endpoint Agent tasks unchanged.

3. **Licensing the EDR Optimum functionality**

   If you use a common Kaspersky Endpoint Detection and Response Optimum or Kaspersky Optimum Security license to activate Kaspersky Endpoint Security for Windows and Kaspersky Endpoint Agent, EDR Optimum functionality will be activated automatically after upgrading the application to version 11.7.0 or higher. You do not need to do anything else.

   If you use a stand-alone Kaspersky Endpoint Detection and Response Optimum Add-on license to activate EDR Optimum functionality, you must make sure that the EDR Optimum key is added to the Kaspersky Security Center repository and the automatic license key distribution functionality is enabled. After you upgrade the application to version 11.7.0 or higher, EDR Optimum functionality is activated automatically.

   If you use a Kaspersky Endpoint Detection and Response Optimum or Kaspersky Optimum Security license to activate Kaspersky Endpoint Agent, and a different license to activate Kaspersky Endpoint Security for Windows, you must replace the Kaspersky Endpoint Security for Windows key with the common Kaspersky Endpoint Detection and Response Optimum or Kaspersky Optimum Security key. You can replace the key using the *Add key* task.

4. **Installing / Upgrading the Kaspersky Endpoint Security application**

   To migrate EDR Optimum functionality during an application installation or upgrade, it is recommended to use the remote installation task. When creating a remote installation task, you need to select EDR Optimum component in the installation package settings.

   You can also upgrade the application using the following methods:

   - Using the Kaspersky update service.
   - Locally, by using the Setup Wizard.

   Kaspersky Endpoint Security supports automatically selecting components when upgrading the application on a computer with the Kaspersky Endpoint Agent application installed. The automatic selection of components depends on the permissions of the user account that is upgrading the application.

   If you are upgrading Kaspersky Endpoint Security using the EXE or MSI file under the system account (SYSTEM), Kaspersky Endpoint Security gains access to current licenses of Kaspersky solutions. Therefore, if the computer has, for example, Kaspersky Endpoint Agent installed and the EDR Optimum solution activated, the Kaspersky Endpoint Security installer automatically configures the set of components and selects the EDR Optimum component. This makes Kaspersky Endpoint Security switch to using the built-in agent and removes Kaspersky Endpoint Agent. Running the MSI installer under the system account (SYSTEM) is usually performed when upgrading via the Kaspersky update service or when deploying an installation package via Kaspersky Security Center.

If you are upgrading Kaspersky Endpoint Security using an MSI file under a non-privileged user account, Kaspersky Endpoint Security lacks access to current licenses of Kaspersky solutions. In this case, Kaspersky Endpoint Security automatically selects components based on Kaspersky Endpoint Agent configuration. After that Kaspersky Endpoint Security switches to using the built-in agent and removes Kaspersky Endpoint Agent.

Kaspersky Endpoint Security supports upgrading without computer restart. You can select the application upgrade mode in policy properties.

5. **Checking the application operation**

   If after application installation or upgrade, the computer has the *Critical* status in the Kaspersky Security Center console:

   - Make sure that the computer has Network Agent version 13.2 or higher installed.
   - Check the operating status of the built-in agent by viewing the *Report on status of application components*. If a component has the *Not installed* status, install the component using the *Change application components* task. If a component has the *Not covered by license* status, make sure that you have activated the built-in agent functionality.
   - Make sure you accept the Kaspersky Security Network Statement in the new policy of Kaspersky Endpoint Security for Windows.

Kaspersky Sandbox

Kaspersky Endpoint Security for Windows includes a built-in agent for integration with Kaspersky Sandbox solution. The *Sandbox* component detects and automatically blocks advanced threats on computers. Sandbox analyzes object behavior to detect malicious activity and activity characteristic of targeted attacks on the IT infrastructure of the organization. Sandbox analyzes and scans objects on special servers with deployed virtual images of Microsoft Windows operating systems (the Sandbox servers). For details about the solution, please refer to the Kaspersky Sandbox Help and Kaspersky Anti Targeted Attack Platform Help.

Integration of the built-in agent with Kaspersky Sandbox

Adding the Sandbox component is required for integration with Kaspersky Sandbox. You can select the Sandbox component during installation or upgrade, as well as using the *Change application components* task.

To use the component, the following conditions must be met:

- Kaspersky Security Center 13.2. Earlier versions of Kaspersky Security Center do not allow the creation of standalone IOC Scan tasks for threat response.
- The component can be managed only using the Web Console. You cannot manage this component using the Administration Console (MMC).
- The application is activated and the functionality is covered by the license.
- Data transfer to Administration Server is enabled.

  To use all the features of Kaspersky Sandbox, make sure quarantine file data transfer is enabled. The data are required to obtain information about files quarantined on a computer through Web Console. For example, you can download a file from quarantine for analysis in Web Console.

How to enable data transfer to the Administration Server in Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **KSC Integration**.
5. In the **Data transfer to Administration Server** block, select the **About Quarantine files** check box.
6. Save your changes.

- A background connection between Kaspersky Security Center Web Console and Administration Server is established

  For Kaspersky Sandbox to work with Administration Server via Kaspersky Security Center Web Console, you must establish a new secure connection, a *background connection*. For details about the integration of Kaspersky Security Center with other Kaspersky solutions, refer to the Kaspersky Security Center Help.

  Establishing a background connection in Web Console

  1. In the main window of the Web Console, select **Settings** → **Integration**.
  2. Go to the **Integration** section.
  3. Turn on the **Background connection for integration Enabled** toggle.
  4. Save your changes.

  If a background connection between Kaspersky Security Center Web Console and Administration Server is not established, stand-alone IOC scan tasks cannot be created as part of Threat Response.

- To configure a trusted connection with the Sandbox server, you must prepare a TLS certificate. You must then add the certificate to the computer by using a policy. You also need to add the certificate to the Sandbox server.

  > Two-way authentication using a crypto-container is not available for Kaspersky Sandbox.

  You can add a TLS certificate in Web Console or locally using the command line.

- The Kaspersky Sandbox component is enabled.
- Application components that ensure the operation of Sandbox are enabled and operational. The following components ensure the operation of Sandbox:
  - File Threat Protection.
  - Host Intrusion Prevention.
  - Firewall.

- AMSI Protection.
- Background scan.

To enable or disable the integration with Kaspersky Sandbox:

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Sandbox**.
5. Use the **Integration with Sandbox ENABLED** toggle to enable or disable the component.
6. In the **Integration mode** block, select the component operating mode: **Kaspersky Sandbox**.
7. Click the **Connection settings** link.

   This opens the Sandbox server connection settings window.
8. In the **Server TLS certificate** block, click **Upload** and select the TLS certificate file.

   Kaspersky Endpoint Security can only have one TLS certificate for a Sandbox server. If you have added a TLS certificate before, that certificate is revoked. Only the last added certificate is used.
9. Configure advanced connection settings for Sandbox servers:
   - **Timeout (msec)**. Connection timeout for the Sandbox server. After the configured timeout elapses, Kaspersky Endpoint Security sends a request to the next server. You can increase the connection timeout for the server if your connection speed is low or if the connection is unstable. The recommended request timeout is 0.5 seconds or less.
   - **Request queue**. Size of the request queue folder. When sending multiple objects for scanning in Sandbox, Kaspersky Endpoint Security creates a request queue. By default, the size of the request queue folder is limited to 100 MB. After the maximum size is reached, Sandbox stops adding new requests to the queue and sends the corresponding event to Kaspersky Security Center. You can configure the size of the request queue folder depending on your server configuration.
10. In the **Connection to Sandbox servers** block, click the **Add** button.
11. This opens a window; in that window, enter the Sandbox server address (IPv4, IPv6, DNS) and port.

    For details about deploying virtual images and configuring Sandbox servers, refer to the Kaspersky Sandbox Help.
12. Save your changes.

As a result, Kaspersky Endpoint Security verifies the TLS certificate. If the certificate is successfully verified, Kaspersky Endpoint Security uploads the certificate file to the computer during the next synchronization with Kaspersky Security Center. If you have added two TLS certificates, Kaspersky Sandbox will use the latest certificate to establish a trusted connection. Check the operating status of the component by viewing the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Sandbox** component will be added to the list of Kaspersky Endpoint Security components.

You can enable or disable the integration with Kaspersky Sandbox in Web Console or locally using the command line.

Kaspersky Endpoint Security saves information about the functioning of the Kaspersky Sandbox component to a report. The report also contains information about errors. If you get an error with a description fitting the `Error code: XXX` format (for example, `0xa67b01f4`), contact Technical Support.

Scan for indicators of compromise (stand-alone task)

An *Indicator of Compromise (IOC)* is a set of data about an object or activity that indicates unauthorized access to the computer (compromise of data). For example, many unsuccessful attempts to sign in to the system can constitute an Indicator of Compromise. The *IOC Scan* task allows finding Indicators of Compromise on the computer and taking threat response measures.

Kaspersky Endpoint Security searches for indicators of compromise using IOC files. *IOC files* are files containing the sets of indicators that the application tries to match to count a detection. IOC files must conform to the OpenIOC standard. Kaspersky Endpoint Security automatically generates IOC files for Kaspersky Sandbox.

IOC Scan task run mode

The application creates stand-alone IOC scan tasks for Kaspersky Sandbox. *Stand-alone IOC scan task* is a group task that is automatically created when reacting to a threat detected by Kaspersky Sandbox. Kaspersky Endpoint Security automatically generates the IOC file. Custom IOC files are not supported. Tasks are automatically deleted 30 days after the creation time. For more details about stand-alone IOC scan tasks, refer to the Kaspersky Sandbox Help.

IOC Scan task settings

Kaspersky Sandbox may create and run *IOC Scan* tasks automatically when reacting to threats.

You can configure the settings only in the Web Console.

You need Kaspersky Security Center 13.2 for stand-alone IOC scan tasks of Kaspersky Sandbox to work.

To change the settings of the IOC Scan task:

1. In the main window of the Web Console, select **Tasks**.

   The list of tasks opens.

2. Click the **IOC Scan** task of Kaspersky Endpoint Security.

   The task properties window opens.

3. Select the **Application settings** tab.

4. Go to the **IOC Scan settings** section.

5. Configure actions on IOC detection:

   - **Move copy to Quarantine, delete object**. If this option is selected, Kaspersky Endpoint Security deletes the malicious object found on the computer. Before deleting the object, Kaspersky Endpoint Security creates a backup copy in case the object needs to be restored later. Kaspersky Endpoint Security moves the backup copy to Quarantine.

   - **Run Critical Areas Scan**. If this option is selected, Kaspersky Endpoint Security runs the *Critical Areas Scan* task. By default, Kaspersky Endpoint Security scans the kernel memory, running processes, and disk boot sectors.

   - **Run only when the computer is idle**. Postponed start of the task when computer resources are busy. Kaspersky Endpoint Security starts the scan task if the computer is locked or if the screen saver is on. If you have interrupted the execution of the task, for example by unlocking the computer, Kaspersky Endpoint Security automatically runs the task, continuing from the point where it was interrupted. This schedule option lets you conserve computer resources when the computer is being used.

6. Save your changes.

   You can view the results of the task in task properties in the **Results** section. You can view the information about detected indicators of compromise in the task properties: **Application settings** → **IOC Scan results**.

IOC scan results are kept for 30 days. After this period, Kaspersky Endpoint Security automatically deletes the oldest entries.

KEA to KES Migration Guide for Kaspersky Sandbox

Kaspersky Endpoint Security for Windows includes a built-in agent for the Kaspersky Sandbox solution. You no longer need a separate Kaspersky Endpoint Agent application to work with Kaspersky Sandbox. All functions of Kaspersky Endpoint Agent will be performed by Kaspersky Endpoint Security.

When you deploy Kaspersky Endpoint Security on computers that have Kaspersky Endpoint Agent installed, Kaspersky Sandbox solution will continue working with Kaspersky Endpoint Security. In addition, Kaspersky Endpoint Agent will be removed from the computer. The same behavior in the system will occur when you update Kaspersky Endpoint Security to version 11.7.0 or higher.

Kaspersky Endpoint Security is not compatible with Kaspersky Endpoint Agent. You cannot install both of these applications on the same computer.

The following conditions must be met for Kaspersky Endpoint Security to work as part of Kaspersky Sandbox:

- Kaspersky Sandbox version 2.0 or higher.

- Kaspersky Security Center version 13.2 or higher (including Network Agent). In earlier versions of Kaspersky Security Center, it is impossible to activate the Kaspersky Sandbox feature.

- Kaspersky Sandbox can be managed only using the Kaspersky Security Center Web Console.

- Data transfer to Administration Server is enabled. The data are required to obtain information about files quarantined on a computer through Web Console.
- A background connection between Kaspersky Security Center Web Console and Administration Server is established. For Kaspersky Sandbox to work with Administration Server via Kaspersky Security Center Web Console, you must establish a new secure connection, a *background connection*.

Steps for migrating [KES+KEA] configuration to [KES+built-in agent] for Kaspersky Sandbox

1. **Upgrading the Kaspersky Endpoint Security web plug-in**

   Kaspersky Sandbox component can be managed using the Kaspersky Endpoint Security Web Plug-in version 11.7.0 or higher.

2. **Migrating policies and tasks**

   Transfer Kaspersky Endpoint Agent settings to Kaspersky Endpoint Security for Windows. To do this, use the wizard for migrating from Kaspersky Endpoint Agent in the Web Console.

   How to migrate policy and task settings from Kaspersky Endpoint Agent to Kaspersky Endpoint Security in Web Console

   In the main window of the Web Console, select **Operations** → **Migration from Kaspersky Endpoint Agent**.

   This runs the policies and tasks migration wizard. Follow the instructions of the Wizard.

Step 1. Policy migration

The Migration Wizard creates a new policy which merges the settings of Kaspersky Endpoint Security and Kaspersky Endpoint Agent policies. In the policy list, select Kaspersky Endpoint Agent policies whose settings you want to merge with the Kaspersky Endpoint Security policy. Click the Kaspersky Endpoint Agent policy in order to select the Kaspersky Endpoint Security policy with which you want to merge settings. Make sure you selected the correct policies and go to the next step.

Step 2. Task migration

The Migration Wizard creates new tasks for Kaspersky Endpoint Security. In the task list, select Kaspersky Endpoint Agent tasks which you want to create for Kaspersky Endpoint Security policy. Go to the next step.

Step 3. Wizard completion

Finish the wizard. As a result, the wizard does the following:

- Creates a new Kaspersky Endpoint Security policy.

The policy merges settings from Kaspersky Endpoint Security and Kaspersky Endpoint Agent. The policy is called *<Kaspersky Endpoint Security policy name> & <Kaspersky Endpoint Agent policy name>*. The new policy has the *Inactive* status. To continue, change the statuses of Kaspersky Endpoint Agent and Kaspersky Endpoint Security policies to *Inactive* and activate the new merged policy.

> After migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security for Windows, please make sure that the new policy has the functionality for data transfer to the Administration Server (quarantine file data and threat development chain data) set up. Data transfer parameter values are not migrated from a Kaspersky Endpoint Agent policy.

- Creates new Kaspersky Endpoint Security tasks.

  New tasks are copies of Kaspersky Endpoint Agent tasks. At the same time, the Wizard leaves Kaspersky Endpoint Agent tasks unchanged.

3. **Licensing the Kaspersky Sandbox functionality**

   To activate Kaspersky Endpoint Security as part of the Kaspersky Sandbox solution, you need a separate license for Kaspersky Sandbox Add-on. You can add the key using the *Add key* task. As a result, two keys will be added to the application: *Kaspersky Endpoint Security* and *Kaspersky Sandbox*.

4. **Installing / Upgrading the Kaspersky Endpoint Security application**

   To migrate Kaspersky Sandbox functionality during an application installation or upgrade, it is recommended to use the remote installation task. When creating a remote installation task, you need to select Kaspersky Sandbox component in the installation package settings.

   You can also upgrade the application using the following methods:

   - Using the Kaspersky update service.
   - Locally, by using the Setup Wizard.

   Kaspersky Endpoint Security supports automatically selecting components when upgrading the application on a computer with the Kaspersky Endpoint Agent application installed. The automatic selection of components depends on the permissions of the user account that is upgrading the application.

   If you are upgrading Kaspersky Endpoint Security using the EXE or MSI file under the system account (SYSTEM), Kaspersky Endpoint Security gains access to current licenses of Kaspersky solutions. Therefore, if the computer has, for example, Kaspersky Endpoint Agent installed and the Kaspersky Sandbox solution activated, the Kaspersky Endpoint Security installer automatically configures the set of components and selects the Kaspersky Sandbox component. This makes Kaspersky Endpoint Security switch to using the built-in agent and removes Kaspersky Endpoint Agent. Running the MSI installer under the system account (SYSTEM) is usually performed when upgrading via the Kaspersky update service or when deploying an installation package via Kaspersky Security Center.

   If you are upgrading Kaspersky Endpoint Security using an MSI file under a non-privileged user account, Kaspersky Endpoint Security lacks access to current licenses of Kaspersky solutions. In this case, Kaspersky Endpoint Security automatically selects components based on Kaspersky Endpoint Agent configuration. After that Kaspersky Endpoint Security switches to using the built-in agent and removes Kaspersky Endpoint Agent.

   > Kaspersky Endpoint Security supports upgrading without computer restart. You can select the application upgrade mode in policy properties.

5. **Checking the application operation**

If after application installation or upgrade, the computer has the *Critical* status in the Kaspersky Security Center console:

- Make sure that the computer has Network Agent version 13.2 or higher installed.
- Check the operating status of the built-in agent by viewing the *Report on status of application components*. If a component has the *Not installed* status, install the component using the *Change application components* task. If a component has the *Not covered by license* status, make sure that you have activated the built-in agent functionality.
- Make sure you accept the Kaspersky Security Network Statement in the new policy of Kaspersky Endpoint Security for Windows.

Kaspersky Anti Targeted Attack Platform

Kaspersky Endpoint Security for Windows supports working with the Kaspersky Anti Targeted Attack Platform solution. *Kaspersky Anti Targeted Attack Platform* is a solution designed for timely detection of sophisticated threats such as targeted attacks, advanced persistent threats (APT), zero-day attacks, and others. Kaspersky Anti Targeted Attack Platform includes three functional units:

- Kaspersky Anti Targeted Attack Platform (*KATA*)
- Kaspersky Endpoint Detection and Response (*EDR (KATA)*)
- Network Detection and Response (*NDR (KATA)*)

You can purchase all functional units or individual functional units separately. For details about the solution, please refer to the Kaspersky Anti Targeted Attack Platform Help. The application includes built-in agents for EDR, NDR components. The application also supports working with the Sandbox component that is part of KATA.

Threat Intelligence tools

Kaspersky Endpoint Detection and Response uses the following Threat Intelligence tools:

- Integration with Kaspersky Threat Intelligence Portal, which contains and displays information about the reputation of files and web addresses.
- Kaspersky Threats database.
- The Kaspersky Security Network (hereinafter also referred to as "KSN") cloud service infrastructure, which provides access to real-time file, website, and software reputation information from the Kaspersky knowledge base. Using data from Kaspersky Security Network ensures faster responses by Kaspersky applications to threats, improves the performance of some protection components, and reduces the likelihood of false positives.

Principle of operation of the solution

Kaspersky Endpoint Security is installed on individual computers on the corporate IT infrastructure and continuously monitors processes, open network connections, and files being modified. Information about events on the computer (telemetry data) is sent to the Kaspersky Anti Targeted Attack Platform server. In this case, Kaspersky Endpoint Security also sends information to the Kaspersky Anti Targeted Attack Platform server about threats discovered by the application as well as information about processing results for these threats.

The EDR (KATA) and NDR (KATA) integration is configured in the Kaspersky Security Center console. The built-in agent is then managed using the Kaspersky Anti Targeted Attack Platform console, including running tasks, managing quarantined objects, viewing reports, and other actions.

Kaspersky Endpoint Security configurations for working with EDR / NDR (KATA)

The following configurations can be used for working with EDR / NDR (KATA):

- **[KES+built-in agent]**. In this configuration, Kaspersky Endpoint Security acts as both the application that ensures the security of the computer and the application for working with EDR / NDR (KATA). The built-in agent for EDR (KATA) is available in Kaspersky Endpoint Security 12.1 for Windows or later. The built-in agent for NDR (KATA) is available in Kaspersky Endpoint Security 12.7 for Windows or later.

- **[third-party EPP+EDR Agent]**. In this configuration, the security of the IT infrastructure is provided by the third-party Endpoint Protection Platform (EPP). The interaction with EDR / NDR (KATA) is provided by Kaspersky Endpoint Security in the Endpoint Detection and Response Agent (EDR Agent) configuration. In this configuration, EDR Agent is compatible with third-party EPP applications. EDR Agent for EDR (KATA) is available in Kaspersky Endpoint Security 12.3 for Windows or later. EDR Agent for NDR (KATA) is available in Kaspersky Endpoint Security 12.7 for Windows or later.

Support for previous versions of Kaspersky Endpoint Security

If you are using Kaspersky Endpoint Security 11.2.0 – 11.8.0 for interoperability with Kaspersky Anti Targeted Attack Platform (EDR), the application includes Kaspersky Endpoint Agent. You can install Kaspersky Endpoint Agent side-by-side with Kaspersky Endpoint Security.

If you are using Kaspersky Endpoint Security 11.9.0 – 12.0, you need to install Kaspersky Endpoint Agent separately because starting from Kaspersky Endpoint Security 11.9.0 the Kaspersky Endpoint Agent distribution package is no longer part of the Kaspersky Endpoint Security distribution kit.

Integration of the built-in agent with EDR / NDR (KATA)

For integration with EDR / NDR (KATA), you must add the relevant component: Endpoint Detection and Response (KATA) or Network Detection and Response (KATA). You can select components for integration with EDR / NDR (KATA) when installing or upgrading the application, as well as using the *Change application components* task.

Starting with version 12.11 of Kaspersky Endpoint Security for Windows, the EDR (KATA) component has been renamed to **Endpoint Detection and Response Expert (version 8.0 or later)**. In this version of the application, the component is compatible with Kaspersky Anti Targeted Attack Platform 7.1 and earlier versions, as well as Kaspersky Endpoint Detection and Response Expert (on-premises).

The Endpoint Detection and Response Optimum, Endpoint Detection and Response Expert (cloud), and Endpoint Detection and Response Expert (on-premises) components are not compatible with each other.

To use EDR / NDR (KATA), the following conditions must be met:

- EDR (KATA): Kaspersky Anti Targeted Attack Platform versions 5.0–7.1.
- NDR (KATA): Kaspersky Anti Targeted Attack Platform version 7.0 or higher.
- EDR (KATA): Kaspersky Endpoint Security for Windows 12.1 or later. For more details about the compatibility of KATA with different versions of Kaspersky Endpoint Security, refer to the Kaspersky Anti Targeted Attack Platform Help.
- NDR (KATA): Kaspersky Endpoint Security for Windows 12.7 or later.
- Kaspersky Security Center version 14.2 or higher. In earlier versions of Kaspersky Security Center, it is impossible to activate the EDR / NDR (KATA) functionality.
- The application is activated and the functionality is covered by the license.
- The Endpoint Detection and Response (KATA) and Network Detection and Response (KATA) components are enabled.
- Application components that ensure the operation of EDR / NDR (KATA) are enabled and operational. The following components ensure the operation of EDR / NDR (KATA):
  - File Threat Protection.
  - Web Threat Protection.
  - Mail Threat Protection.
  - Exploit Prevention.
  - Behavior Detection.
  - Host Intrusion Prevention.
  - AMSI Protection.

- Background scan.
- Kaspersky Security Network.

https://www.youtube.com/watch?v=cZzgtBoeC7k

https://www.youtube.com/watch?v=gd-rySv0ThQ

Integration with Endpoint Detection and Response (KATA) involves the following steps:

1. **Installing the Endpoint Detection and Response (KATA) and Network Detection and Response (KATA) components**

   You can select EDR (KATA) and NDR (KATA) components during installation or upgrade, as well as using the *Change application components* task.

   > You must restart your computer to finish upgrading the application with the new components.

2. **Activating Endpoint Detection and Response (KATA) and Network Detection and Response (KATA)**

   You need to purchase a separate license for EDR (KATA) and NDR (KATA) (for example, Kaspersky Endpoint Detection and Response (KATA) Add-on).

   The functionality becomes available after adding a separate key that covers EDR (KATA) and NDR (KATA) functionality. As a result, multiple keys are added on the computer: a key for Kaspersky Endpoint Security and keys for Kaspersky Endpoint Detection and Response (KATA) and Network Detection and Response (KATA).

   Licensing for the stand-alone EDR (KATA) and NDR (KATA) functionality is the same as the licensing of Kaspersky Endpoint Security.

   Make sure that both the EDR (KATA) and the NDR (KATA) functionality is included in the license and is running in the local interface of the application.

3 Connecting to Central Node

Kaspersky Anti Targeted Attack Platform requires establishing a trusted connection between Kaspersky Endpoint Security and the Central Node component. To configure a trusted connection, you must use a TLS certificate. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). Then you must add the TLS certificate to Kaspersky Endpoint Security (see instructions below).

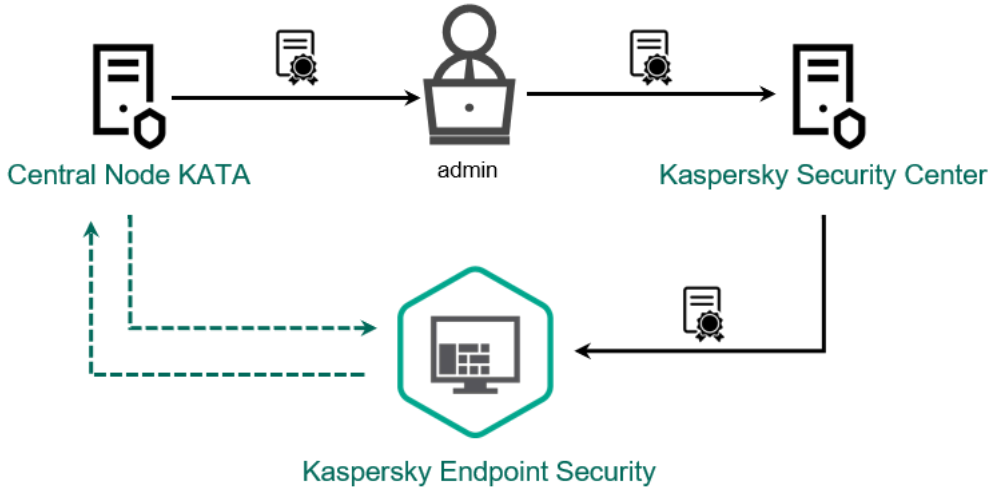

Adding a TLS certificate to Kaspersky Endpoint Security

By default, Kaspersky Endpoint Security only checks the TLS certificate of Central Node. To make the connection more secure, you can additionally enable the verification of the computer on Central Node (two-way authentication). To enable this verification, you must turn on two-way authentication in Central Node and Kaspersky Endpoint Security settings. To use two-way authentication, you will also need a crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help).

How to connect a Kaspersky Endpoint Security computer to Central Node using the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Detection and Response** and select the component that you want to configure: **Endpoint Detection and Response Expert (on-premises)** or **Network Detection and Response (KATA)**.
5. Select the corresponding check box: **Endpoint Detection and Response Expert (version 7.1 or earlier)** or **Network Detection and Response (KATA)**.
6. Click **Server connection settings**.
7. Configure the server connection:
   - **Timeout (sec)**. Maximum Central Node server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different Central Node server.
   - **Server TLS certificate**. TLS certificate for establishing a trusted connection with the Central Node server. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help).

- **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

  The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

8. Click **OK**.

9. Add Central Node servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

   You can add multiple Central Node server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

10. If necessary, configure telemetry.

11. To apply the policy to computers, close the padlock icons and save your changes.

How to connect a Kaspersky Endpoint Security computer to Central Node using the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to the **Built-in Agents Configuration** section and select the component that you want to configure: **Endpoint Detection and Response Expert (on-premises)** or **Network Detection and Response (KATA)**.

5. Turn on the corresponding toggle switch: **Endpoint Detection and Response Expert (on-premises) ENABLED** or **Network Detection and Response (KATA) ENABLED**.

6. To configure EDR (KATA), select **Endpoint Detection and Response Expert (version 7.1 or earlier)** from the list of solutions.

7. Click **Connection settings**.

8. Configure the server connection:

   - **Timeout (sec)**. Maximum Central Node server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different Central Node server.

   - **Server certificate**. TLS certificate for establishing a trusted connection with the Central Node server. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help).

- **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

  > The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

9. Click **OK**.

10. Add Central Node servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

    You can add multiple Central Node server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

11. If necessary, configure telemetry.

12. To apply the policy to computers, close the padlock icons and save your changes.

You can also add a TLS certificate locally using the command line.

As a result, the computer is added on the Kaspersky Anti Targeted Attack Platform console. Check the operating status of the components by viewing the *Report on status of application components*. You can also view the operating status of components in reports in the local interface of Kaspersky Endpoint Security. **Endpoint Detection and Response Expert (version 8.0 or later)** and **Network Detection and Response (KATA)** components will be added to the list of Kaspersky Endpoint Security components.

> You can check the status of components in the Kaspersky Security Center console in computer properties in the **Components** section. Consider the following when checking the status of the component in the console. If the component is not installed and the functionality is not covered by your license, the console displays the **Not supported by license** status instead of **Not installed**.

Starting with Kaspersky Endpoint Security 12.6 for Windows, you can monitor the status of EDR (KATA) component in Kaspersky Security Center Administration Console (MMC). The current status of the component is displayed in computer properties in the **Endpoint Sensor status** column (*Running*, *Starting*, *Stopped*, *Paused*, *Failed*, *Unknown*). The Web Console does not display the status of the Endpoint Sensor.

Configuring EDR (KATA) telemetry

Telemetry is a list of events that have occurred on the protected computer. Kaspersky Endpoint Security analyzes telemetry data and sends it to Kaspersky Anti Targeted Attack Platform during synchronization. Telemetry events arrive on the server almost continuously. Kaspersky Endpoint Security initiates synchronization with the server when any of the following conditions are satisfied:

- Synchronization interval has run out.
- The number of events in the buffer exceeds the upper limit.

Therefore, by default, the application synchronizes every 30 seconds or whenever the buffer holds 1024 events. You can configure the synchronization behavior in the Kaspersky Endpoint Security policy and select optimum values to match your network load (see instructions below).

If there is no connection between Kaspersky Endpoint Security and the server, the application queues new events. When the connection is restored, Kaspersky Endpoint Security sends queued events to the server in proper order. To avoid overloading the server, Kaspersky Endpoint Security may skip some events. To enable this, you can optimize event transmission settings, for example, to set a maximum events-per-hour value (see instructions below).

If you are using Kaspersky Anti Targeted Attack Platform together with another solution which also uses telemetry, you can turn off telemetry for KATA (EDR) (see instructions below). This lets you optimize server load for these solutions. For example, if you have the Managed Detection and Response solution and KATA (EDR) deployed, you can use MDR telemetry and create Threat Response tasks in KATA (EDR).

How to configure telemetry in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Policies**.

3. Select the necessary policy and double-click to open the policy properties.

4. In the policy window, select **Detection and Response** and select the component that you want to configure: **Endpoint Detection and Response Expert (on-premises)** or **Network Detection and Response (KATA)**.

5. Configure the **Send sync request to KATA server every (min)** setting. Frequency of synchronization requests sent to the server. During synchronization, Kaspersky Endpoint Security sends information about modified application settings and tasks.

6. Make sure the **Send telemetry to KATA** check box is selected.

7. If necessary, configure the synchronization with the server settings in the **Data transmission settings** block:

   - **Maximum event transmission delay (sec)**. The application synchronizes with the server to send events after the synchronization interval expires. The default setting is 30 seconds.

   - **Maximum number of event packages**. The application synchronizes with the server when the buffer is filled with events. The default setting is 1024 events.

8. If necessary, select the **Enable request throttling** check box in the **Request throttling** block.

   This feature helps optimize the load on the server. If this functionality is enabled, the application restricts the event transmission. If the number of events exceeds the configured limits, Kaspersky Endpoint Security stops sending events.

9. Configure optimization settings for sending events to the server:

   - **Maximum number of events per hour**. The application analyzes the telemetry data stream and restricts the sending of events if the event stream exceeds the configured events-per-hour limit. Kaspersky Endpoint Security resumes sending events after an hour. The default setting is 3000 events per hour. If the application is installed on a server, the telemetry data stream is higher. For servers, it is recommended to increase the value to 60 000 events per hour.

   - **Percentage of event limit excess**. The application sorts events by type (for example, "changes in the registry" events) and restricts transmission of events if the ratio of events of the same type to the total number of events exceeds the configured limit in percent. Kaspersky Endpoint Security resumes sending events when the ratio of other events to the total number of events becomes big enough again. The default setting is 15 %.

10. To apply the policy to computers, close the padlock icons and save your changes.

How to configure telemetry in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response Expert (on-premises)**.

5. To configure EDR (KATA), select **Endpoint Detection and Response Expert (version 7.1 or earlier)** from the list of solutions.

6. Make sure that the **Send telemetry to KATA servers** check box is selected in the **Data transmission settings** block.

7. Configure the **Send sync request to server every (min)** setting. Frequency of synchronization requests sent to the server. During synchronization, Kaspersky Endpoint Security sends information about modified application settings and tasks.

8. Make sure the **Send telemetry to KATA servers** check box is selected.

9. If necessary, configure the synchronization with the server settings in the **Data transmission settings** block:

   - **Maximum event transmission delay (sec)**. The application synchronizes with the server to send events after the synchronization interval expires. The default setting is 30 seconds.

   - **Maximum number of event packages**. The application synchronizes with the server when the buffer is filled with events. The default setting is 1024 events.

10. If necessary, select the **Enable request throttling** check box in the **Request throttling** block.

    This feature helps optimize the load on the server. If this functionality is enabled, the application restricts the event transmission. If the number of events exceeds the configured limits, Kaspersky Endpoint Security stops sending events.

11. Configure optimization settings for sending events to the server:

    - **Maximum number of events per hour**. The application analyzes the telemetry data stream and restricts the sending of events if the event stream exceeds the configured events-per-hour limit. Kaspersky Endpoint Security resumes sending events after an hour. The default setting is 3000 events per hour. If the application is installed on a server, the telemetry data stream is higher. For servers, it is recommended to increase the value to 60 000 events per hour.

    - **Percentage of event limit excess**. The application sorts events by type (for example, "changes in the registry" events) and restricts transmission of events if the ratio of events of the same type to the total number of events exceeds the configured limit in percent. Kaspersky Endpoint Security resumes sending events when the ratio of other events to the total number of events becomes big enough again. The default setting is 15 %.

12. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to the **KATA integration** → **Telemetry exclusions** section.

5. Under **Data transmission settings**, select the **Use exclusions** check box.

6. Click **Add** and configure the exclusions:

   Criteria are combined with the logical *AND*.

   - **Path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. For the exclusion to work, the path to the file must be specified.

   - **Command line**. Command used to run the object.

   - **Description**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource.

     For more details on the VersionInfo resource, please visit the Microsoft website.

   - **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource.

   - **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource.

   - **MD5**. MD5 hash of the file.

- **SHA256**. SHA256 hash of the file.
- **Event types**. For the exclusion to work, you must select at least one event type.

7. Save your changes.

1. In the Kaspersky Security Center Administration Console tree, select **Tasks**.
   The list of tasks opens.
2. Click **New task**.

The Task Wizard starts. Follow the instructions of the Wizard.

Step 1. Selecting task type

1. Select **Kaspersky Endpoint Security for Windows (14.2)** → **Update rollback**.

Step 2. Selecting the devices to which the task will be assigned

Select the computers on which the task will be performed. The following options are available:

- Assign the task to an administration group. In this case, the task is assigned to computers included in a previously created administration group.
- Select computers detected by the Administration Server in the network: *unassigned devices*. The specific devices can include devices in administration groups as well as unassigned devices.
- Specify device addresses manually, or import addresses from a list. You can specify NetBIOS names, IP addresses, and IP subnets of devices to which you want to assign the task.

Step 3. Configuring a task start schedule

Configure the task schedule, for example, manually.

Step 4. Defining the task name

Enter a name for the task.

Step 7. Completing task creation

Finish the wizard. If necessary, select the **Run the task after the wizard finishes** check box. You can monitor the progress of the task in the task properties.

EDR (KATA) Telemetry exclusions

To improve performance and optimize data transmission to the Telemetry server, you can configure telemetry exclusions. For example, you can choose not to send network communications data for individual applications.

How to create a telemetry exclusion in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Exclusions and object types**.
4. In the **Telemetry settings** → **EDR (KATA) / NDR (KATA) telemetry** block, click the **Settings** button.
5. In the window that opens, configure telemetry exclusions (see the table below).

   The application combines exclusion conditions with the logical AND. To create a rule, you must specify a value in the **Full path** field and select at least one event type in the **Use for the following event types** list.
6. Save your changes.

How to create a telemetry exclusion in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Telemetry Settings**.
5. Select the **EDR (KATA) / NDR (KATA) telemetry** tab.
6. In the window that opens, configure telemetry exclusions (see the table below).

   The application combines exclusion conditions with the logical AND. To create a rule, you must specify a value in the **Full path** field and select at least one event type.
7. Save your changes.

Parameter	Description
Excluded processes	**Optimize the telemetry size to send**. Kaspersky Endpoint Security allows optimizing the amount of transmitted data and excluding events with certain codes from telemetry: code 102 (basic communications) and 8 (network activity of the process) for the Microsoft SMB protocol, the WinRM service, and the klnagent.exe process of the Network Agent, as well as extended information about the types of network packets for all types of network protocols. Kaspersky Endpoint Security combines rule triggering criteria with a logical AND. **Process** and **Parent process**: • **Full path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. • **Command line text**. Command used to run the file. • **Description**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource. • **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource. • **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource. • **File checksums**. MD5 and SHA256. You can also select a file manually, and the application will automatically fill out the fields from the selected file. In 64-bit operating systems, you must manually enter the parameters of the 64-bit version of the executable file of a process from the `C:\windows\system32` folder because the application populates the executable file parameter fields with data from the properties of the 32-bit version of the same executable file in the `C:\windows\syswow64` folder. For example, if you select `C:\windows\system32\cmd.exe`, the plug-in displays the parameters of `C:\windows\syswow64\cmd.exe`. Such behavior is dictated by peculiarities of the operating system. **Use for the following event types**: • **File modification**. • **Network events**. • **Process: console interactive input**. • **Module loaded**. • **Registry modified**. • **DNS logs**. • **Process access**. • **Code injection**. • **WMI query**. • **Pipe**. • **LDAP**. • **AMSI**.
Excluded network communications	**Rule name**. **Direction**. **Protocol**. **Raw socket**. **Protocol number**. **TLS certificate**. **Local port or range**. **Remote port or range**. **Local address**. The network address of the computer for which Kaspersky Endpoint Security is excluding telemetry from network traffic. **Remote address**. The network address of the computer for which Kaspersky Endpoint Security is excluding telemetry from network traffic. Only the IPv4 format is supported for IP addresses. **Applications**. List of executable files of applications for which Kaspersky Endpoint Security is excluding EDR telemetry from network traffic.

Parameter	Description
Excluded file operations	**Rule name**. **File name or mask**. Name or mask of a file or folder; Kaspersky Endpoint Security applies the exclusion rule when this file or folder is accessed. Kaspersky Endpoint Security supports the `*` and `?` characters when entering a mask. **Operation type**. **Previous path**. Kaspersky Endpoint Security combines rule triggering criteria with a logical AND. **Process** and **Parent process**: • **Full path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. • **Command line text**. Command used to run the file. • **Description**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource. • **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource. • **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource. • **File checksums**. MD5 and SHA256. You can also select a file manually, and the application will automatically fill out the fields from the selected file. In 64-bit operating systems, you must manually enter the parameters of the 64-bit version of the executable file of a process from the `C:\windows\system32` folder because the application populates the executable file parameter fields with data from the properties of the 32-bit version of the same executable file in the `C:\windows\syswow64` folder. For example, if you select `C:\windows\system32\cmd.exe`, the plug-in displays the parameters of `C:\windows\syswow64\cmd.exe`. Such behavior is dictated by peculiarities of the operating system.
Excluded DNS operations	**Rule name**. Kaspersky Endpoint Security combines rule triggering criteria with a logical AND. **Process** and **Parent process**: • **Full path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. • **Command line text**. Command used to run the file. • **Description**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource. • **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource. • **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource. • **File checksums**. MD5 and SHA256. You can also select a file manually, and the application will automatically fill out the fields from the selected file. In 64-bit operating systems, you must manually enter the parameters of the 64-bit version of the executable file of a process from the `C:\windows\system32` folder because the application populates the executable file parameter fields with data from the properties of the 32-bit version of the same executable file in the `C:\windows\syswow64` folder. For example, if you select `C:\windows\system32\cmd.exe`, the plug-in displays the parameters of `C:\windows\syswow64\cmd.exe`. Such behavior is dictated by peculiarities of the operating system. **DNS**: • **DNS server IP address**. • **Query options**. • **Status**. • **Domain name**. • **Settings type ID**. • **Response data**.

Parameter	Description
Excluded LDAP operations	**Rule name**. **LDAP search scope**. **Filter**. **Distinguished name for LDAP objects search**. **Object attributes**. Kaspersky Endpoint Security combines rule triggering criteria with a logical AND. **Process** and **Parent process**: • **Full path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. • **Command line text**. Command used to run the file. • **Description**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource. • **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource. • **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource. • **File checksums**. MD5 and SHA256. You can also select a file manually, and the application will automatically fill out the fields from the selected file. In 64-bit operating systems, you must manually enter the parameters of the 64-bit version of the executable file of a process from the `C:\windows\system32` folder because the application populates the executable file parameter fields with data from the properties of the 32-bit version of the same executable file in the `C:\windows\syswow64` folder. For example, if you select `C:\windows\system32\cmd.exe`, the plug-in displays the parameters of `C:\windows\syswow64\cmd.exe`. Such behavior is dictated by peculiarities of the operating system.
Excluded process access queries	**Rule name**. **Operation type**. **Requested access to the process**. **Call stack trace**. Kaspersky Endpoint Security combines rule triggering criteria with a logical AND. **Process**, **Parent process**, **File of the target process**, **Handle to the source process** and **Handle to the target process**. • **Full path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. • **Command line text**. Command used to run the file. • **Specify rule triggering criteria and the event types to use this rule for**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource. • **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource. • **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource. • **File checksums**. MD5 and SHA256. You can also select a file manually, and the application will automatically fill out the fields from the selected file. In 64-bit operating systems, you must manually enter the parameters of the 64-bit version of the executable file of a process from the `C:\windows\system32` folder because the application populates the executable file parameter fields with data from the properties of the 32-bit version of the same executable file in the `C:\windows\syswow64` folder. For example, if you select `C:\windows\system32\cmd.exe`, the plug-in displays the parameters of `C:\windows\syswow64\cmd.exe`. Such behavior is dictated by peculiarities of the operating system.

Parameter	Description
Excluded code injections	**Rule name**. **Access method**. **Call stack**. **Modified command line**. **Injection address**. **Injected DLL name**. Kaspersky Endpoint Security combines rule triggering criteria with a logical AND. **Process** and **Parent process**: • **Full path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. • **Command line text**. Command used to run the file. • **Description**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource. • **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource. • **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource. • **File checksums**. MD5 and SHA256. You can also select a file manually, and the application will automatically fill out the fields from the selected file. In 64-bit operating systems, you must manually enter the parameters of the 64-bit version of the executable file of a process from the `C:\windows\system32` folder because the application populates the executable file parameter fields with data from the properties of the 32-bit version of the same executable file in the `C:\windows\syswow64` folder. For example, if you select `C:\windows\system32\cmd.exe`, the plug-in displays the parameters of `C:\windows\syswow64\cmd.exe`. Such behavior is dictated by peculiarities of the operating system.
Excluded WMI queries	**Rule name**. **WMI operation type**. **Remote query**. **Name of a computer that executed a WMI command**. **WMI user account**. **Executed WMI command**. **WMI namespace**. **WMI event consumer filter**. **Name of the created WMI event consumer**. **Source code of a WMI event consumer**. Kaspersky Endpoint Security combines rule triggering criteria with a logical AND. **Process** and **Parent process**: • **Full path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. • **Command line text**. Command used to run the file. • **Description**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource. • **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource. • **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource. • **File checksums**. MD5 and SHA256. You can also select a file manually, and the application will automatically fill out the fields from the selected file. In 64-bit operating systems, you must manually enter the parameters of the 64-bit version of the executable file of a process from the `C:\windows\system32` folder because the application populates the executable file parameter fields with data from the properties of the 32-bit version of the same executable file in the `C:\windows\syswow64` folder. For example, if you select `C:\windows\system32\cmd.exe`, the plug-in displays the parameters of `C:\windows\syswow64\cmd.exe`. Such behavior is dictated by peculiarities of the operating system.

Parameter	Description
Excluded pipe operations	**Rule name**. **Pipe name**. **Operation type**. Kaspersky Endpoint Security combines rule triggering criteria with a logical AND. **Process** and **Parent process**: • **Full path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. • **Command line text**. Command used to run the file. • **Description**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource. • **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource. • **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource. • **File checksums**. MD5 and SHA256. You can also select a file manually, and the application will automatically fill out the fields from the selected file. In 64-bit operating systems, you must manually enter the parameters of the 64-bit version of the executable file of a process from the `C:\windows\system32` folder because the application populates the executable file parameter fields with data from the properties of the 32-bit version of the same executable file in the `C:\windows\syswow64` folder. For example, if you select `C:\windows\system32\cmd.exe`, the plug-in displays the parameters of `C:\windows\syswow64\cmd.exe`. Such behavior is dictated by peculiarities of the operating system.
Excluded registry changes	**Rule name**. **Operation type**. **Path**. **Value name**. **Value**. **Full name of a registry file**. Kaspersky Endpoint Security combines rule triggering criteria with a logical AND. **Process** and **Parent process**: • **Full path**. Full path to the file including its name and extension. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. • **Command line text**. Command used to run the file. • **Description**. Value of the FileDescription parameter from a RT_VERSION (VersionInfo) resource. • **Original file name**. Value of the OriginalFilename parameter from a RT_VERSION (VersionInfo) resource. • **Version**. Value of the FileVersion parameter from a RT_VERSION (VersionInfo) resource. • **File checksums**. MD5 and SHA256. You can also select a file manually, and the application will automatically fill out the fields from the selected file. In 64-bit operating systems, you must manually enter the parameters of the 64-bit version of the executable file of a process from the `C:\windows\system32` folder because the application populates the executable file parameter fields with data from the properties of the 32-bit version of the same executable file in the `C:\windows\syswow64` folder. For example, if you select `C:\windows\system32\cmd.exe`, the plug-in displays the parameters of `C:\windows\syswow64\cmd.exe`. Such behavior is dictated by peculiarities of the operating system.
Excluded operations with devices	**Rule name**. **Device type**. **Device ID**. **Device name**.

Example 1. Excluded processes

To exclude third-party application (process) events from telemetry, open the EDR telemetry exclusions window on the **Excluded processes** tab and add the executable file of the application.

Kaspersky Endpoint Security combines rule triggering criteria with a logical AND.

Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. For example:

- `C:\Program Files\*\notepad++.exe`
- `%ProgramFiles(x86)%\Notepad++\notepad++.exe`

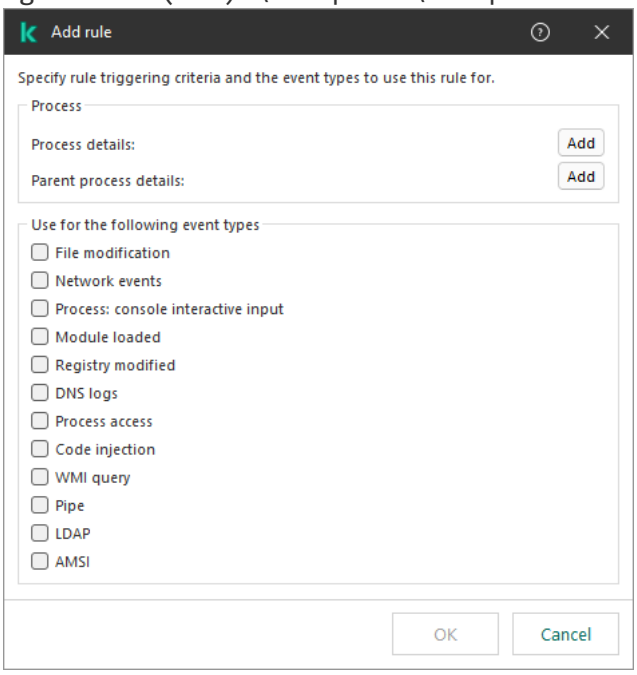

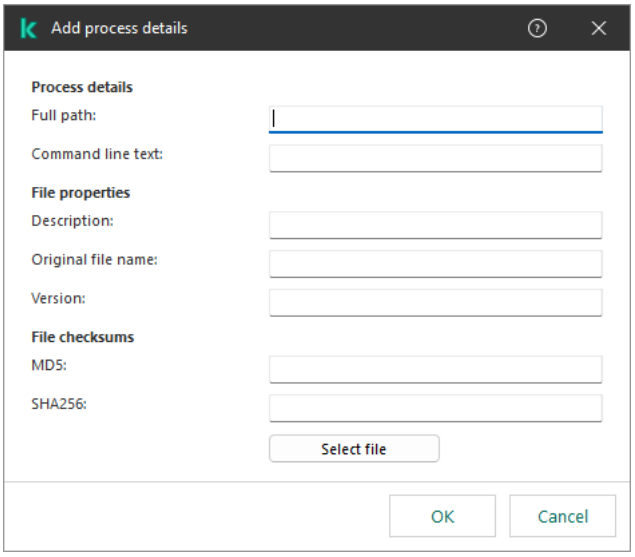

Excluding a process

Example 1. File modification

If you often edit scripts in the Notepad++ application and you want to exclude the modification events for the corresponding scripts, add the Notepad++ executable file to telemetry exclusions.

Specify the settings as follows:

- **Full path**: `C:\Program Files\Notepad++\notepad++.exe`.
- **SHA256**: 64F7A36C01E79CD4B041E8A8607DFF06D5B606D36E3DFF9CFB5FFFA22D14D34.
- **Use for the following event types**: File modification.

Example 2. Network events

If you use the WinSCP application to manage files on a remote server and you want to exclude network events, add the WinSCP executable file to telemetry exclusions.

Specify the settings as follows:

- **Full path**: `C:\Program Files (x86)\WinSCP\WinSCP.exe`.
- **SHA256**: 47204338f0e092057024c9186f228c02417e917777f3e841d52b58251a956a74 (optional).
- **Use for the following event types**: Network events.

Example 2. Excluded network communications

To exclude remote service connection events from telemetry, open the EDR telemetry exclusions window on the **Excluded network communications** tab and add connection settings: protocol, port, direction, IP address, TLS certificate, and others.

Kaspersky Endpoint Security combines rule triggering criteria with a logical AND.

> You cannot specify a subnet address (for example, 10.28.0.0/24). The application only allows specifying one IP address (for example, 10.28.0.105).

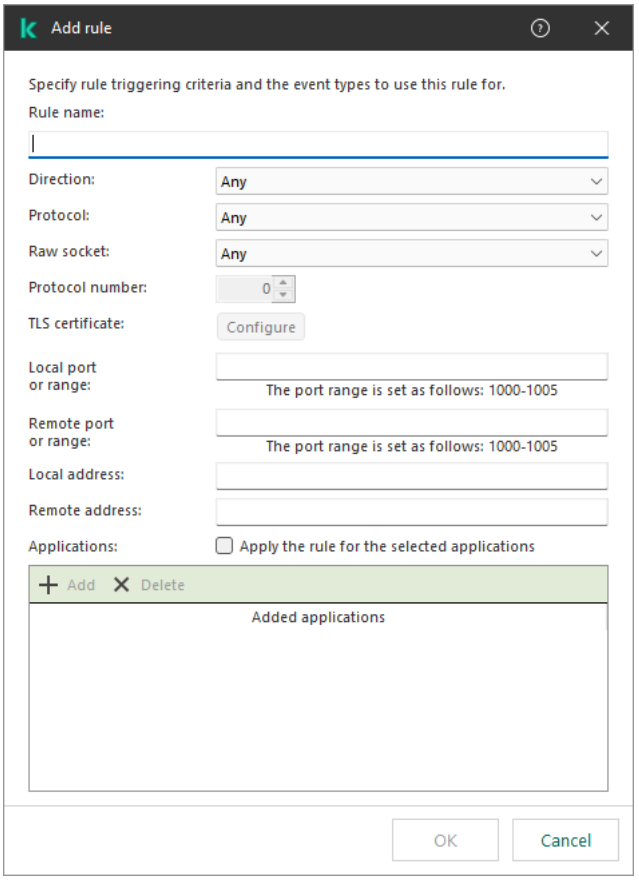

Network communication exclusion

If you use a corporate web server and you want to exclude browser events when connecting to that web server, add the IP address of the server and the executable file of the browser to telemetry exclusions.

Specify the settings as follows:

- **Protocol**: TCP.
- **Remote port or range**: 443.
- **Remote address**: 10.28.0.105.
- **Applications**: `C:\Program Files (x86)\Google\Chrome\Application\chrome.exe`; `C:\Program Files (x86)\Microsoft\Edge\Application\msedge.exe`.

Example 3. Excluded file operations

To exclude events involving operations with trusted files from telemetry, open the EDR telemetry exclusions window on the **Excluded file operations** tab and add the trusted file.

Kaspersky Endpoint Security combines rule triggering criteria with a logical AND.

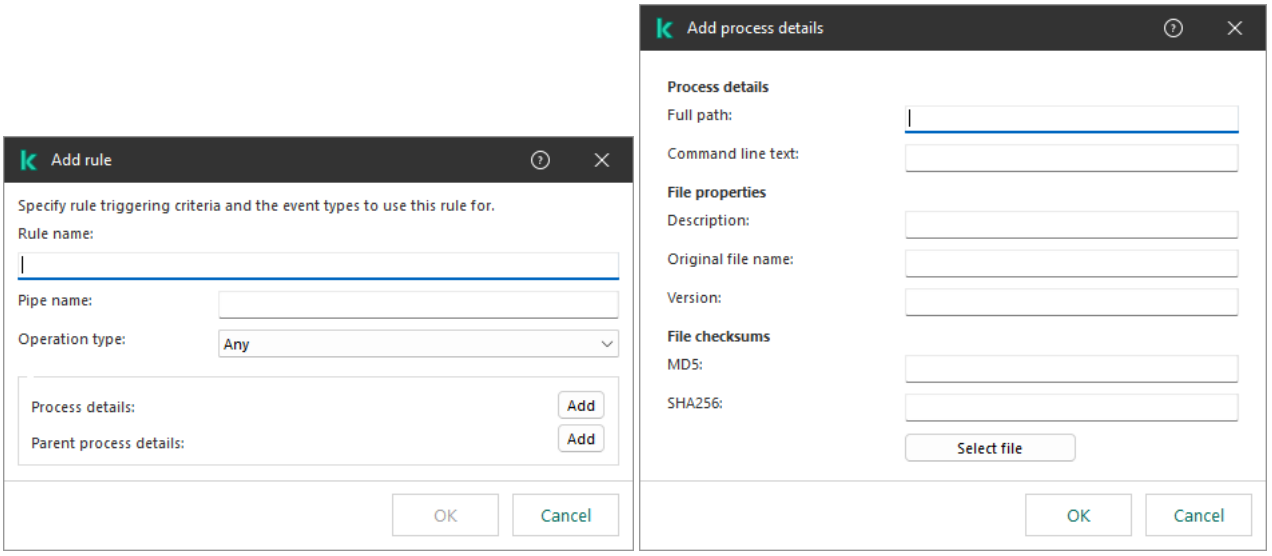

Excluding file operations

If an application writes to a log and you want to exclude log file modification events, add the log file and the executable file of the application from telemetry.

Specify the settings as follows:

- **File name or mask**: `C:\Apache24\logs\error.log`.
- **Operation type**: File modification.
- **Full path**: `C:\Apache24\bin\httpd.exe`.
- **SHA256**: 64F7A36C01E79CD4B041E8A8607DFF06D5B606D36E3DFF9CFB5FFFA22D14D34.

Example 4. Excluded registry modifications

To exclude registry modification events from telemetry, open the EDR telemetry exclusions window on the **Excluded registry changes** tab and add a registry key.

Kaspersky Endpoint Security combines rule triggering criteria with a logical AND.

If an application frequently modifies its registry values and you want to exclude these registry modification events from telemetry, add the registry key and the executable file of the application to telemetry exclusions.

Specify the settings as follows:

- **Operation type**: Modify.
- **Path**: HKEY_LOCAL_MACHINE\SOFTWARE\SimonTatham\PuTTY64.
- **Full path**: `C:\Program Files\PuTTY\putty.exe`.
- **SHA256**: 64F7A36C01E79CD4B041E8A8607DFF06D5B606D36E3DFF9CFB5FFFA22D14D34.

KATA Sandbox

Kaspersky Anti Targeted Attack Platform includes the Sandbox (KATA Sandbox) component. *Sandbox* is a technology that lets you detect advanced threats on a computer. Sandbox analyzes object behavior to detect malicious activity and activity characteristic of targeted attacks on the IT infrastructure of the organization. Sandbox analyzes and scans objects on special servers with deployed virtual images of Microsoft Windows operating systems (the Sandbox servers). For details about the solution, please refer to the Kaspersky Anti Targeted Attack Platform Help.

> To activate KATA Sandbox, you need a license key that includes KATA or KEDR functionality. For details about available functionalities, refer to the Kaspersky Anti Targeted Attack Platform Help.

KATA Sandbox allows scanning files in the following modes:

- *Manually*. The user manually submits the file for scanning from the context menu (**Send to Sandbox**). When sending a file to Sandbox, the application also scans the file using anti-virus databases.
- *Automatically*. The application automatically detects objects and submits them to Sandbox for scanning.

After the file is sent to Sandbox, the file remains accessible to the user. Kaspersky Endpoint Security logs the corresponding event and sends the event to Kaspersky Security Center and the Kaspersky Anti Targeted Attack Platform console. If Sandbox detects malicious activity, Kaspersky Endpoint Security performs a Threat Response action automatically (for example, it deletes the object and initiates a Critical Areas Scan).

For KATA Sandbox to operate in manual mode, Kaspersky Anti Targeted Attack Platform 7.0 or later must be deployed. For KATA Sandbox to operate in automatic mode, Kaspersky Anti Targeted Attack Platform 8.0 or later must be deployed.

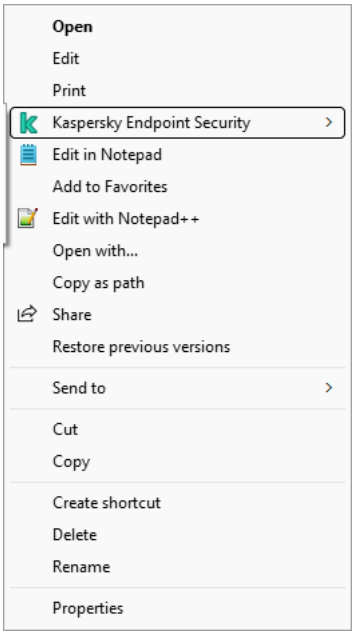

Scanning in KATA Sandbox from the context menu

Integration of the built-in agent with KATA Sandbox

Adding the Sandbox component is required for integration with KATA Sandbox. You can select the Sandbox component during installation or upgrade, as well as using the *Change application components* task.

To send files for scanning, you must enable the integration with KATA Sandbox and add a Central Node server that are deployed inside the solution. The component can be managed only using the Kaspersky Security Center Web Console. You cannot manage this component using the Administration Console (MMC).

To enable or disable the integration with KATA Sandbox:

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Sandbox**.
5. Use the **Integration with Sandbox ENABLED** toggle to enable or disable the component.

6. Select KATA Sandbox operation mode:

   - **Manually**. The user manually submits the file for scanning from the context menu (**Send to Sandbox**).
   - **Automatically**. The application automatically detects objects and submits them to Sandbox for scanning.
   - **Combined**.

7. Click the **Connection settings** link.

8. Configure the Central Node server connection settings:

   - **Timeout (msec)**. Connection timeout for the Central Node server. After the configured timeout elapses, Kaspersky Endpoint Security sends a request to the next server. You can increase the connection timeout for the server if your connection speed is low or if the connection is unstable. The recommended request timeout is 0.5 seconds or less.
   - **Request queue**. Size of the request queue folder. When sending multiple objects for scanning in Sandbox, Kaspersky Endpoint Security creates a request queue. By default, the size of the request queue folder is limited to 100 MB. After the maximum size is reached, Sandbox stops adding new requests to the queue and sends the corresponding event to Kaspersky Security Center. You can configure the size of the request queue folder depending on your server configuration.
   - **Server TLS certificate**. To configure a trusted connection with the Central Node server, you must prepare a TLS certificate. You must then add the certificate to the computer by using a policy. You also need to add the certificate to the Central Node server.
   - **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

9. In the **Connection to Sandbox servers** block, click the **Add** button.

10. This opens a window; in that window, enter the Central Node server address (IPv4, IPv6, DNS) and port.

    For details about deploying virtual images and configuring Central Node servers, refer to the Kaspersky Anti Targeted Attack Platform Help.

11. To apply the policy to computers, close the padlock icons and save your changes.

As a result, the Sandbox component is enabled. Check the operating status of the component by viewing the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Sandbox** component will be added to the list of Kaspersky Endpoint Security components.

Configuring Threat Response actions

If Sandbox detects malicious activity, Kaspersky Endpoint Security performs a Threat Response action automatically (for example, it deletes the object and initiates a Critical Areas Scan).

To configure Threat Response actions:

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Built-in Agents Configuration** → **Sandbox**.

5. Select the relevant action in the **Action on threat detection** block:

   - **Move copy to Quarantine, delete object**. If this option is selected, Kaspersky Endpoint Security deletes the malicious object found on the computer. Before deleting the object, Kaspersky Endpoint Security creates a backup copy in case the object needs to be restored later. Kaspersky Endpoint Security moves the backup copy to Quarantine.

   - **Run Critical Areas Scan**. If this option is selected, Kaspersky Endpoint Security runs the *Critical Areas Scan* task. By default, Kaspersky Endpoint Security scans the kernel memory, running processes, and disk boot sectors.

   - **Create IOC Scan task**. If this option is selected, Kaspersky Endpoint Security automatically creates the *IOC Scan (autonomous IOC scan task)*. For this task, you can configure the run mode, scan scope, and action on IOC detection (*Move copy to Quarantine, delete object* or *Run Critical Areas Scan*). To modify other settings of the *IOC Scan* task, go to the task settings.

6. If necessary, configure the *IOC Scan* task settings in the **IOC Scan scope** block.

   - **Critical file areas**. If this option is selected, Kaspersky Endpoint Security does an IOC scan only in critical file areas of the computer: kernel memory and boot sectors.

   - **File areas on system drive of the computer**. If this option is selected, Kaspersky Endpoint Security does an IOC scan on the system drive of the computer.

7. If necessary, configure the *IOC Scan* task settings in the **Run IOC Scan task** block.

   - **Manually**. Run mode in which you can start the *IOC Scan* task manually at a time when it is convenient for you.

   - **Automatically**. Run mode in which Kaspersky Endpoint Security runs the *IOC Scan* task automatically after a threat is detected.

   - **Run only when the computer is idle**. Run mode in which Kaspersky Endpoint Security runs the *IOC Scan* task if the screensaver is active or the screen is locked. If the user unlocks the computer, Kaspersky Endpoint Security pauses the task. This means that the task can take several days to complete.

8. Configure advanced task settings for *IOC Scan*.

9. To apply the policy to computers, close the padlock icons and save your changes.

KEA to KES Migration Guide for EDR (KATA)

Starting with version 12.1, Kaspersky Endpoint Security for Windows includes a built-in agent for managing the Kaspersky Endpoint Detection and Response component as part of the Kaspersky Anti Targeted Attack Platform solution. You no longer need a separate Kaspersky Endpoint Agent application to work with EDR (KATA). All functions of Kaspersky Endpoint Agent will be performed by Kaspersky Endpoint Security. The load on Kaspersky Anti Targeted Attack Platform servers will remain the same.

When you deploy Kaspersky Endpoint Security on computers that have Kaspersky Endpoint Agent installed, Kaspersky Anti Targeted Attack Platform (EDR) solution will continue working with Kaspersky Endpoint Security. In addition, Kaspersky Endpoint Agent will be removed from the computer. The same behavior in the system will occur when you update Kaspersky Endpoint Security to version 12.1 or higher.

Kaspersky Endpoint Security is not compatible with Kaspersky Endpoint Agent. You cannot install both of these applications on the same computer.

The following conditions must be met for Kaspersky Endpoint Security to work as part of Endpoint Detection and Response (KATA):

- Kaspersky Anti Targeted Attack Platform version 5.0 or higher.
- Kaspersky Security Center version 14.2 or higher (including Network Agent). In earlier versions of Kaspersky Security Center, it is impossible to activate the Endpoint Detection and Response (KATA) feature.

Steps for migrating [KES+KEA] configuration to [KES+built-in agent] for EDR (KATA)

1. **Upgrading the Kaspersky Endpoint Security Management Plug-in**

   EDR (KATA) component can be managed using the Kaspersky Endpoint Security Management Plug-in version 12.1 or higher. Depending on the type of Kaspersky Security Center console you are using, update the management plug-in in the Administration Console (MMC) or the web plug-in in the Web Console.

2. **Migrating policies and tasks**

   Transfer Kaspersky Endpoint Agent settings to Kaspersky Endpoint Security for Windows. The following options are available:

   - A wizard for migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security. A wizard for migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security works only in Web Console

     How to migrate policy and task settings from Kaspersky Endpoint Agent to Kaspersky Endpoint Security in Web Console

     In the main window of the Web Console, select **Operations** → **Migration from Kaspersky Endpoint Agent**.

     This runs the policies and tasks migration wizard. Follow the instructions of the Wizard.

Step 1. Policy migration

The Migration Wizard creates a new policy which merges the settings of Kaspersky Endpoint Security and Kaspersky Endpoint Agent policies. In the policy list, select Kaspersky Endpoint Agent policies whose settings you want to merge with the Kaspersky Endpoint Security policy. Click the Kaspersky Endpoint Agent policy in order to select the Kaspersky Endpoint Security policy with which you want to merge settings. Make sure you selected the correct policies and go to the next step.

Step 2. Task migration

The Migration Wizard does not support EDR (KATA) tasks. Skip this step.

Step 3. Wizard completion

Finish the wizard. As a result of the wizard, a new Kaspersky Endpoint Security policy will be created. The policy merges settings from Kaspersky Endpoint Security and Kaspersky Endpoint Agent. The policy is called *<Kaspersky Endpoint Security policy name> & <Kaspersky Endpoint Agent policy name>*. The new policy has the *Inactive* status. To continue, change the statuses of Kaspersky Endpoint Agent and Kaspersky Endpoint Security policies to *Inactive* and activate the new merged policy.

The migration wizard in Web Console skips the following policy settings and does not migrate them:

- Settings modification prohibition **Connection settings** ("lock").

  By default, settings can be modified (the "lock" is open). Therefore the settings are not applied on the computer. You must prohibit the modification of settings and close the "lock".

- Crypto-container.

  If you are using two-way authentication for connecting to Central Node servers, you must re-add the crypto-container.

As the Migration Wizard does not migrate these settings, you may encounter errors when connecting the computer to Central Node servers. To fix the errors, you need to go to the policy properties and configure the connection settings.

- A standard Policies and tasks batch conversion wizard. The Policies and tasks batch conversion wizard is only available in the Administration Console (MMC). For more details about Policies and tasks batch conversion wizard, please refer to the Kaspersky Security Center Help.

To make sure Kaspersky Endpoint Security works correctly on servers, it is recommended to add files important for the server's functioning to the trusted zone. For SQL servers, you must add MDF and LDF database files. For Microsoft Exchange servers, you must add CHK, EDB, JRS, LOG, and JSL files. You may use masks, for example, `C:\Program Files (x86)\Microsoft SQL Server\*.mdf`.

Starting with Kaspersky Endpoint Security 12.6 for Windows, scan exclusions and trusted applications are added to the trusted zone. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers.

EDR telemetry exclusions do not migrate from the Kaspersky Endpoint Agent policy to the Kaspersky Endpoint Security policy. Kaspersky Endpoint Security has its own exclusion tools - trusted applications. The operation of Kaspersky Endpoint Security is optimized so that the absence of individual EDR telemetry exclusions will not cause any additional load on your computer in comparison with Kaspersky Endpoint Agent. Kaspersky Endpoint Security uses telemetry not only for EDR (KATA), but also for the operation of application protection components. Therefore, there is no need to transfer individual EDR telemetry exclusions. If you experience a decrease in computer performance, check the application's operation (see step 7 Checking performance).

3. **Licensing the EDR (KATA) functionality**

   To activate Kaspersky Endpoint Security as part of the Kaspersky Anti Targeted Attack Platform solution, you need a separate license for Kaspersky Endpoint Detection and Response (KATA) Add-on. You can add the key using the *Add key* task. As a result, two keys will be added to the application: *Kaspersky Endpoint Security* and *Kaspersky Endpoint Detection and Response (KATA)*.

   Licensing Kaspersky Endpoint Detection and Response (KATA) Add-on on computers with previously activated EDR Optimum or EDR Expert features involves the following special considerations:

   - If you are using a *key file* for licensing Kaspersky Endpoint Security with EDR Optimum or EDR Expert features, you cannot add a separate key for Kaspersky Endpoint Detection and Response (KATA) Add-on. You can either switch to using an activation code for licensing, or contact your service provider to obtain a new key file for activating Kaspersky Endpoint Security and EDR features. The service provider will provide one or more key files for licensing.
   - If you are using a *key file* for licensing Kaspersky Endpoint Security without EDR Optimum or EDR Expert features, you can add a separate key for Kaspersky Endpoint Detection and Response (KATA) Add-on without having key files reissued.
   - If you are using an *activation code* for licensing, Kaspersky activation server will automatically reissue the keys, and EDR (KATA) features will become available automatically. In this case, EDR Optimum and EDR Expert will be disabled.
   - Kaspersky Endpoint Security allows you to add up to two active keys: Kaspersky Endpoint Security key and Add-on type key. You can also add up to two reserve keys. One Kaspersky Endpoint Security reserve key and one Add-on type reserve key.

4. **Installing / Upgrading the Kaspersky Endpoint Security application**

   To migrate EDR (KATA) functionality during an application installation or upgrade, it is recommended to use the remote installation task. When creating a remote installation task, you need to select EDR (KATA) component in the installation package settings.

   You can also upgrade the application using the following methods:

   - Using the Kaspersky update service.
   - Locally, by using the Setup Wizard.

   Kaspersky Endpoint Security supports automatically selecting components when upgrading the application on a computer with the Kaspersky Endpoint Agent application installed. The automatic selection of components depends on the permissions of the user account that is upgrading the application.

If you are upgrading Kaspersky Endpoint Security using the EXE or MSI file under the system account (SYSTEM), Kaspersky Endpoint Security gains access to current licenses of Kaspersky solutions. Therefore, if the computer has Kaspersky Endpoint Agent installed and EDR (KATA) solution activated, the Kaspersky Endpoint Security installer automatically configures the set of components and selects the EDR (KATA) component. This makes Kaspersky Endpoint Security switch to using the built-in agent and removes Kaspersky Endpoint Agent. Running the MSI installer under the system account (SYSTEM) is usually performed when upgrading via the Kaspersky update service or when deploying an installation package via Kaspersky Security Center.

If you are upgrading Kaspersky Endpoint Security using an MSI file under a non-privileged user account, Kaspersky Endpoint Security lacks access to current licenses of Kaspersky solutions. In this case, Kaspersky Endpoint Security automatically selects components based on a set of components of Kaspersky Endpoint Agent. After that Kaspersky Endpoint Security switches to using the built-in agent and removes Kaspersky Endpoint Agent.

> Kaspersky Endpoint Security supports upgrading without computer restart. You can select the application upgrade mode in policy properties.

5. **Checking the application operation**

   If after application installation or upgrade, the computer has the *Critical* status in the Kaspersky Security Center console:

   - Make sure that the computer has Network Agent version 13.2 or higher installed.
   - Check the operating status of the built-in agent by viewing the *Report on status of application components*. If a component has the *Not installed* status, install the component using the *Change application components* task. If a component has the *Not covered by license* status, make sure that you have activated the built-in agent functionality.
   - Make sure you accept the Kaspersky Security Network Statement in the new policy of Kaspersky Endpoint Security for Windows.

6. **Checking the connection to Kaspersky Anti Targeted Attack Platform server**

   Check the connection to Kaspersky Anti Targeted Attack Platform server. To do so:

   1. Check that you have a valid certificate.
   2. Check the server connection settings.
   3. Check the event log.

      If a connection to the server is established, the application sends the event *Successful connection to the EDR Expert server*. If there is no successful connection event and there are no events with connection errors, check the event log settings and enable event sending for Endpoint Detection and Response (KATA).

> The server connection status does not affect the computer status in the Kaspersky Security Center console. Therefore, if there is no connection to the server, the computer can still have the *OK* status. Check the event log to verify the connection to the server.

7. **Checking performance**

   If your computer's performance has slowed down after installing or updating an application, you can optimize data transfer. To do so:

   1. Disable the EDR (KATA) component and check that the performance degradation is due to EDR (KATA).
   2. For trusted applications, turn off telemetry collection on console input operations (enabled by default).

3. Add applications that reduce computer performance to the list of trusted applications.

4. Contact Kaspersky Technical Support. Support experts will help you to configure telemetry filtering in Kaspersky Anti Targeted Attack Platform. This will reduce the amount of traffic. If your computer performance is affected by a certain application, attach the distribution package of that application to the request.

Endpoint Detection and Response Expert (on-premises)

Kaspersky Endpoint Security for Windows supports integration with the Kaspersky Endpoint Detection and Response Expert (on-premises) solution. *Kaspersky Endpoint Detection and Response Expert (on-premises)* is an enterprise cybersecurity solution that includes Kaspersky applications that allow an organization to defend against most types of cyber risks and cover the most important threat propagation scenarios. EDR Expert (on-premises) components are deployed on the Open Single Management Platform (OSMP). This platform runs cross-platform scenarios in a single interface and allows integrating Kaspersky applications with third-party applications into a comprehensive security system.

One of the central elements of the solution is *SIEM*. SIEM tracks events coming from all components and correlates these events with each other using vendor and user-defined rules. EDR Expert (on-premises) looks at logs and telemetry received from the corporate infrastructure to automatically detect attacks and allows investigating incidents using a unified investigation graph which combines all events collected in EDR Expert (on-premises), including events from Kaspersky applications and third-party information security products.

For response to advanced incidents, EDR Expert (on-premises) uses preset and user-defined scenarios. You can also use response actions from third-party applications and response scenarios that involve multiple applications.

Threat Intelligence tools

Kaspersky Endpoint Detection and Response uses the following Threat Intelligence tools:

- Integration with Kaspersky Threat Intelligence Portal, which contains and displays information about the reputation of files and web addresses.
- Kaspersky Threats database.
- The Kaspersky Security Network (hereinafter also referred to as "KSN") cloud service infrastructure, which provides access to real-time file, website, and software reputation information from the Kaspersky knowledge base. Using data from Kaspersky Security Network ensures faster responses by Kaspersky applications to threats, improves the performance of some protection components, and reduces the likelihood of false positives.

Principle of operation of the solution

Kaspersky Endpoint Security is installed on individual computers on the corporate IT infrastructure and continuously monitors processes, open network connections, and files being modified.

When installed in standard mode in the VDI infrastructure, Kaspersky Endpoint Security supports integration with EDR Expert (on-premises). However, the operability of the other functionalities of the application is not guaranteed. To protect virtual machines in the VDI infrastructure, we recommend using Kaspersky Endpoint Security in Light Agent mode.

Information about events on the computer (telemetry) is sent to the EDR Expert (on-premises) server. In this case, Kaspersky Endpoint Security also sends information about threats discovered by the application as well as information about processing results for these threats to the telemetry collection servers.

The EDR Expert (on-premises) integration is configured in the Kaspersky Security Center console. The built-in agent is then managed using the Open Single Management Platform (OSMP), including running tasks, managing quarantined objects, viewing reports, and other actions.

Kaspersky Endpoint Security configurations for working with EDR Expert (on-premises)

The following configurations can be used for working with EDR Expert (on-premises):

- **[KES+built-in agent]**. In this configuration, Kaspersky Endpoint Security acts as both the application that ensures the security of the computer and the application for working with EDR Expert (on-premises). The built-in agent for EDR Expert (on-premises) is available in Kaspersky Endpoint Security 12.11 for Windows or later.

- **[third-party EPP+EDR Agent]**. In this configuration, the security of the IT infrastructure is provided by the third-party Endpoint Protection Platform (EPP). The interaction with EDR Expert (on-premises) is provided by Kaspersky Endpoint Security in the Endpoint Detection and Response Agent (EDR Agent) configuration. In this configuration, EDR Agent is compatible with third-party EPP applications. EDR Agent for EDR Expert (on-premises) is available in Kaspersky Endpoint Security 12.11 for Windows or later.

Integration of the built-in agent with EDR Expert (on-premises)

To integrate with Kaspersky Endpoint Detection and Response Expert (on-premises) solution, you must add the Endpoint Detection and Response Expert (on-premises) component, and configure Kaspersky Endpoint Security.

> The Endpoint Detection and Response Optimum, Endpoint Detection and Response Expert (cloud), and Endpoint Detection and Response Expert (on-premises) components are not compatible with each other.

The following conditions must be fulfilled for Endpoint Detection and Response Expert (on-premises) to work:

- OSMP (Open Single Management Platform) is installed.

- The application is activated and the functionality is covered by the license.

- The Endpoint Detection and Response Expert (on-premises) component is turned on.

- Application components that ensure the operation of EDR Expert (on-premises) are enabled and operational. The following components ensure the operation of EDR Expert (on-premises):

  - File Threat Protection.

  - Web Threat Protection.

  - Mail Threat Protection.

  - Exploit Prevention.

- Behavior Detection.
- Host Intrusion Prevention.
- Remediation Engine.
- Adaptive Anomaly Control.

Setting up EDR Expert (on-premises) Integration involves the following steps:

1. **Installing the EDR Expert (on-premises) component**

   You can select the EDR Expert (on-premises) component during installation or upgrade, as well as using the *Change application components* task.

   > You must restart your computer to finish upgrading the application with the new component.

2. **Activating Kaspersky Endpoint Detection and Response Expert (on-premises)**

   You need to purchase a separate license for EDR Expert (on-premises) (Kaspersky Endpoint Detection and Response Expert (on-premises) Add-on).

   The functionality becomes available after adding a separate key for Kaspersky Endpoint Detection and Response Expert (on-premises). As a result, two keys are added on the computer: a key for Kaspersky Endpoint Security and a key for Kaspersky Endpoint Detection and Response Expert (on-premises).

   Licensing for the stand-alone Endpoint Detection and Response Expert (on-premises) functionality is the same as the licensing of Kaspersky Endpoint Security.

   Make sure that the EDR Expert (on-premises) functionality is included in the license and is running in the local interface of the application.

3. **Connecting to telemetry collection server and response server**

   Kaspersky Endpoint Detection and Response Expert (on-premises) requires a trusted connection between Kaspersky Endpoint Security and two servers:

   - A *telemetry collection server* is a server that is part of a SIEM solution that collects, normalizes, correlates, analyzes, and stores information about events occurring on the computer.
   - A *response server* is a server for receiving and scanning data, studying the behavior of objects, and publishing the results of such studies.

   To configure a trusted connection, you must use a TLS certificate. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). Then you must add the TLS certificate to Kaspersky Endpoint Security (see instructions below).

   By default, Kaspersky Endpoint Security only checks the TLS certificate of the servers. To make the connection more secure, you can additionally enable the verification of the computer on the server (two-way authentication). To enable this verification, you must turn on two-way authentication in the server and Kaspersky Endpoint Security settings. To use two-way authentication, you will also need a crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help).

How to connect a Kaspersky Endpoint Security computer to EDR Expert (on-premises) using the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response Expert (on-premises)**.
5. Turn on the **Endpoint Detection and Response Expert (on-premises) ENABLED** toggle.
6. To configure EDR Expert (on-premises), select **Endpoint Detection and Response Expert (version 8.0 or later)** from the list of solutions.
7. Configure the *telemetry collection servers* connection:

   a. In the **Connection to telemetry collection servers** block, click the **Connection settings** link.

   b. Configure the telemetry collection servers connection:

   - **Timeout (sec)**. Maximum server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different server.
   - **Server certificate**. TLS certificate for establishing a trusted connection with the server. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help).
   - **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the server. To use two-way authentication, you need to enable two-way authentication in the server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). After configuring the server settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

     > The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

   c. Click **OK**.

   d. Add telemetry collection servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

   You can add multiple telemetry collection server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

   e. If necessary, configure telemetry.

8. Configure the *response servers* connection:

   a. In the **Connection to response servers** block, configure the **Send sync request to server every (min)** setting. Frequency of synchronization requests sent to the server. During the synchronization, Kaspersky Endpoint Security receives threat response tasks and sends task results.

   b. Click the **Connection settings** link.

   c. Configure the response servers connection:

      - **Timeout (sec)**. Maximum server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different server.

      - **Server certificate**. TLS certificate for establishing a trusted connection with the server. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help).

      - **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the server. To use two-way authentication, you need to enable two-way authentication in the server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). After configuring the server settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.

        The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

   d. Click **OK**.

   e. Add response servers. To do this, specify the server address (IPv4, IPv6) and the port to connect to the server.

      You can add multiple response server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

9. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

You can check the component status by using the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Endpoint Detection and Response Expert (on-premises)** component will be added to the list of Kaspersky Endpoint Security components.

Configuring EDR Expert (on-premises) telemetry settings

Telemetry is a list of events that have occurred on the protected computer. Kaspersky Endpoint Security analyzes telemetry data and sends it to telemetry collection servers during synchronization. For more information about transmitted telemetry events, see the Kaspersky Endpoint Detection and Response Expert (on-premises) Help.

Telemetry events arrive on the server almost continuously. Kaspersky Endpoint Security initiates synchronization with the server when any of the following conditions are satisfied:

- Synchronization interval has run out.
- The number of events in the buffer exceeds the upper limit.

Therefore, by default, the application synchronizes every 30 seconds or whenever the buffer holds 1024 events. You can configure the synchronization behavior in the Kaspersky Endpoint Security policy and select optimum values to match your network load (see instructions below).

If there is no connection between Kaspersky Endpoint Security and the server, the application queues new events. When the connection is restored, Kaspersky Endpoint Security sends queued events to the server in proper order. To avoid overloading the server, Kaspersky Endpoint Security may skip some events. To enable this, you can optimize event transmission settings, for example, to set a maximum events-per-hour value (see instructions below).

To configure telemetry settings, perform the following steps:

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response Expert (on-premises)**.
5. To configure EDR Expert (on-premises), select **Endpoint Detection and Response Expert (version 8.0 or later)** from the list of solutions.
6. Make sure that the **Send telemetry to telemetry collection servers** check box is selected in the **Data transmission settings** block.
7. If necessary, select the **Send telemetry with IOA only** check box. *Indicator of Attack (IOA)* is a rule that contains a description of suspicious behavior in the system that may indicate a targeted attack. The application compares ongoing behavior in the system with these rules and logs events that are indicative of a targeted attack. The application uses the *streaming scan* technology, which allows real time tracking of such events.
8. If necessary, configure the synchronization with the server settings in the **Data transmission settings** block:

   - **Maximum event transmission delay (sec)**. The application synchronizes with the server to send events after the synchronization interval expires. The default setting is 30 seconds.
   - **Maximum number of event packages**. The application synchronizes with the server when the buffer is filled with events. The default setting is 1024 events.
9. If necessary, clear the **Enable request throttling** check box in the **Request throttling** block.

   This feature helps optimize the load on the server. If this functionality is enabled, the application restricts the event transmission. If the number of events exceeds the configured limits, Kaspersky Endpoint Security stops sending events. This option is enabled by default.

10. Configure optimization settings for sending events to the server:

    - **Maximum number of events per hour**. The application analyzes the telemetry data stream and restricts the sending of events if the event stream exceeds the configured events-per-hour limit. Kaspersky Endpoint Security resumes sending events after an hour. The default setting is 3000 events per hour. If the application is installed on a server, the telemetry data stream is higher. For servers, it is recommended to increase the value to 60,000 events per hour.

    - **Percentage of event limit excess**. The application sorts events by type (for example, "changes in the registry" events) and restricts transmission of events if the ratio of events of the same type to the total number of events exceeds the configured limit in percent. Kaspersky Endpoint Security resumes sending events when the ratio of other events to the total number of events becomes big enough again. The default setting is 15 %.

11. In the **Connection to response servers** block, enter a value for the **Send sync request to server every (min)** parameter.

12. Frequency of synchronization requests sent to the server. During synchronization, Kaspersky Endpoint Security sends information about modified application settings and tasks.

13. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

EDR Expert (on-premises) telemetry exclusions

To improve performance and optimize data transmission to the telemetry collection server, you can add telemetry exclusions. For example, you can choose not to send network communications data for individual applications.

> Using too many rules can increase the load on the Telemetry collection server and reduce the computer performance. We recommend adding only necessary rules.

To create a telemetry exclusion in the Web Console and Cloud Console:

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **Telemetry Settings**.

5. Select the **EDR Expert (on-premises) telemetry** tab.

6. In the **General exclusions** block, click the **Add** button.

   The **Add exclusion rule** window opens.

7. If necessary, change the status of the rule. By default, the rule is enabled.

8. Enter a name for the rule.

9. Select the action to be performed when the rule is triggered:

- **Do not collect**. The filtered event will be excluded from the sent telemetry.
- **Exclude IOA**. The IOA rule trigger event will be excluded from the sent telemetry.

10. If the **Exclude IOA** option is selected, specify the IOA rules to be added to exclusions:

- **Exclude all**. When the specified condition is met, the application will exclude events generated based on all IOA rules from the telemetry.
- **Exclude by GUID**. Specify the GUID of the IOA rule. You can specify multiple GUIDs by using `,`. For more details on the IOA rules, please refer to the EDR Expert (on-premises) Help.

11. Specify the filtering condition:

a. Select the field name to be used for filtering.

b. Select an operator (see the table below) and specify the value against which the field value from the event will be compared.

List of conditional operators

Operator	Description
<	If the field value is less than the value specified in the condition, the event will be filtered out.
≤	If the field value is less than or equal to the value specified in the condition, the event will be filtered out.
=	If the value of the field is equal to the value specified in the condition, the event will be filtered out.
≥	If the value of the field is greater than or equal to the value specified in the condition, the event will be filtered out.
>	If the field value is greater than the value specified in the condition, the event will be filtered out.
≠	If the value of the field is not equal to the value specified in the condition, the event will be filtered out.
is like	If the field value matches the mask specified in the condition, the event will be filtered out. The application supports the `*` and `?` characters when entering a mask:
is not like	If the field value does not match the mask specified in the condition, the event will be filtered out. The application supports the `*` and `?` characters when entering a mask:
one of	If the field value matches one of the values in the list specified in the condition, the event is considered filtered.
none of	If the field value does not match any of the values in the list specified in the condition, the event is considered filtered.
is like one of	If the field value matches one of the masks specified in the condition, the event will be filtered out. The application supports the * and ? characters when entering a mask.
is not like one of	If the field value does not match any of the masks specified in the condition, the event will be filtered out. The application supports the * and ? characters when entering a mask.
exists	If the field specified in the condition is present in the event, the event will be filtered out.
not exists	If the field specified in the condition is not present in the event, the event will be filtered out.
contains	If the value specified in the condition is present in the field value, the event will be filtered out.
is equal to	If the value of the field is equal to the value specified in the condition, the event will be filtered out. The scan is case-insensitive.
bitwise AND	If the result of the Bitwise AND (&) operation between the field value and the value specified in the condition is 1, the event will be filtered out.

12. If necessary, you can create complex filter criteria by adding multiple filter conditions and groups of conditions. You can also add nested conditions and condition groups to a condition group. You can use the following operators:

    - **AND** means that the filter selects events that meet all of the specified conditions.
    - **OR** means that the filter selects events that meet one of the specified conditions.
    - **NOT** (to use this operator, select the **Add NOT before** option) means that the filter selects events that do not meet any of the specified conditions.

    Conditions and first-level condition groups are combined with the **AND** operator.

13. If your computer is running the Open Single Management Platform (OSMP), you can scan the filtering rule you created. To run the scan, click the **Check rule** button.

    In the window that opens, a table of events filtered by the created rule will be displayed. For more details, please refer to the EDR Expert (on-premises) Help.

14. If necessary, under **All event types**, add telemetry exclusions by event type.

    a. Click the event type name.

    b. In the window that opens, click the **Set up manually** button.

    c. If necessary, configure telemetry transmission for the selected event type using the **Send event** toggle switch. By default, telemetry transmission is enabled for all event types.

    d. In the **Exclusion rules** block, click the **Add** button.

    The **Add exclusion rule** window opens.

    e. Perform the actions described in steps 7–13 for each rule you add.

15. For some event types, you can also add inclusion rules to expand the telemetry collected:

    a. In the **Inclusion rules** block, click the **Add** button.

    The **Add inclusion rules** window opens.

    b. Enter a name for the rule.

    c. Under **Condition**, enter values for the displayed fields. The type of fields available depends on the selected event.

    > Exclusion rules are prioritized over inclusion rules.

16. To apply the policy to computers, close the padlock icons and save your changes.

Exporting and importing EDR Expert (on-premises) event filters

You can export the list of exclusions to a JSON file. Then you can modify the file to, for example, add a large number of event IDs. You can also use the export/import function to back up the event filters or to migrate the list to a different server.

> Using too many rules can increase the load on the Telemetry collection server and reduce the computer performance. We recommend adding only necessary rules.

How to export and import event filters in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Exclusions and object types**.
5. In the **Telemetry settings** → **EDR Expert (on-premises) telemetry** block, click the **Settings** button.
6. To export the event filters:
   a. Click **Export**.
      In the window that opens, specify the name of the JSON file to which you want to export the event filters, and select the folder in which you want to save this file.
   b. Save the file.
      Kaspersky Endpoint Security exports the event filters to the JSON file.
7. To import the event filters:
   a. Click **Import**.
   b. In the window that opens, select the JSON file from which you want to import the event filters.
   c. Open the file.
      If event filtering rules already exist on the computer, Kaspersky Endpoint Security replaces these when importing.
8. To apply the policy to computers, close the padlock icons and save your changes.

How to export and import event filters in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.

4. Go to **General Settings** → **Telemetry Settings**.

5. Select the **EDR Expert (on-premises) telemetry** tab.

6. To export the event filters:

   a. Click **Export**.

   b. In the window that opens, specify the name of the JSON file to which you want to export the event filters, and select the folder in which you want to save this file.

   c. Save the file.

   Kaspersky Endpoint Security exports the event filters to the JSON file.

7. To import the event filters:

   a. Click **Import**.

   b. In the window that opens, select the JSON file from which you want to import the event filters.

   c. Select how you want event filtering rules to be imported: by adding to existing rules or by discarding existing rules and replacing with new ones.

   d. Open the file.

8. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

You can also export or import event filters on the command line.

Special considerations when using policy profiles to configure integration with EDR Expert (on-premises) and EDR (KATA)

To configure integration with EDR (KATA) for certain administration groups and with EDR Expert (on-premises) for others as part of a single policy, you will need to use policy profiles. You must configure the EDR (KATA) integration settings in the policy properties, and the EDR Expert (on-premises) integration for selected administration groups should be configured in the policy profile properties.

Using policy profiles to configure integration with EDR Expert (on-premises) has the following limitations:

- If you configure integration with EDR Expert (on-premises) in the policy properties, these settings will apply to all administration groups; integration settings from policy profiles will not be applied.

- When using policy profiles to configure integration with EDR Expert (on-premises), you cannot use the Administration Console (MMC) to manage policies. When you open the policy properties in the Administration Console, the EDR Expert (on-premises) integration settings in the policy profiles will be overridden by the settings from the policy, causing the component to function incorrectly. You will need to reset the Endpoint Detection and Response Expert (on-premises) component settings according to the instruction below.

- When using policy profiles to configure integration with EDR Expert (on-premises), you cannot use child policies.

If you already have a policy configured in a previous version of the web plug-in, you must reset the settings for the Endpoint Detection and Response Expert (on-premises) component in order to apply the EDR Expert (on-premises) integration settings to managed devices from the policy profiles.

To reset the component settings:

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response Expert (on-premises)**.
5. Change the operating mode from **Endpoint Detection and Response Expert (version 7.1 or earlier)** to **Endpoint Detection and Response Expert (version 8.0 or later) mode**.
6. Switch back to **Endpoint Detection and Response Expert (version 7.1 or earlier)**.
7. Save your changes.

Endpoint Detection and Response Expert (cloud)

Integration of Kaspersky Endpoint Security with Kaspersky Endpoint Detection and Response Expert (cloud) is temporarily unavailable. This functionality is planned to be supported by the end of 2026. Keep track of our Release Notes to be aware of application upgrades and new features.

Kaspersky Endpoint Security supports integration with the Kaspersky Endpoint Detection and Response Expert (cloud) solution. *Kaspersky Endpoint Detection and Response Expert (cloud)* is a cloud-based enterprise cybersecurity solution that includes Kaspersky applications that allow an organization to defend against most types of cyber risks and cover the most important threat propagation scenarios. EDR Expert (cloud) components are deployed on the Open Single Management Platform (OSMP). This platform runs cross-platform scenarios in a single interface and allows integrating Kaspersky applications with third-party applications into a comprehensive security system.

One of the central elements of the solution is *SIEM*. SIEM tracks events coming from all components and correlates these events with each other using vendor and user-defined rules. EDR Expert (cloud) looks at logs and telemetry received from the corporate infrastructure to automatically detect attacks and allows investigating incidents using a unified investigation graph which combines all events collected in EDR Expert (cloud), including events from Kaspersky applications and third-party information security products.

For response to advanced incidents, EDR Expert (cloud) uses preset and user-defined scenarios. You can also use response actions from third-party applications and response scenarios that involve multiple applications.

Threat Intelligence tools

Kaspersky Endpoint Detection and Response uses the following Threat Intelligence tools:

- Integration with Kaspersky Threat Intelligence Portal, which contains and displays information about the reputation of files and web addresses.
- Kaspersky Threats database.
- The Kaspersky Security Network (hereinafter also referred to as "KSN") cloud service infrastructure, which provides access to real-time file, website, and software reputation information from the Kaspersky knowledge base. Using data from Kaspersky Security Network ensures faster responses by Kaspersky applications to threats, improves the performance of some protection components, and reduces the likelihood of false positives.

Principle of operation of the solution

Kaspersky Endpoint Security is installed on individual computers on the corporate IT infrastructure and continuously monitors processes, open network connections, and files being modified.

Information about events on the computer (telemetry) is sent to the EDR Expert (cloud) server. In this case, Kaspersky Endpoint Security also sends information about threats discovered by the application as well as information about processing results for these threats to the telemetry collection servers.

The EDR Expert (cloud) integration is configured in the Kaspersky Security Center console. The built-in agent is then managed using the Open Single Management Platform (OSMP), including running tasks, managing quarantined objects, viewing reports, and other actions.

Integration of the built-in agent with EDR Expert (cloud)

To set up integration with the Kaspersky Endpoint Detection and Response (cloud) solution, you must install the Endpoint Detection and Response Expert (cloud) component and configure Kaspersky Endpoint Security.

> The Endpoint Detection and Response Optimum, Endpoint Detection and Response Expert (cloud), and Endpoint Detection and Response Expert (on-premises) components are not compatible with each other.

EDR Expert (cloud) operating conditions

For EDR Expert (cloud) to work, the following conditions must be met:

- The Kaspersky Endpoint Detection and Response Expert (cloud) infrastructure is available in your region. For information on the availability of the EDR Expert (cloud) infrastructure in your region, please contact Technical Support.
- OSMP (Open Single Management Platform) is installed.
- Kaspersky Endpoint Security installed in standard mode.
- The Kaspersky Endpoint Security application is activated and the functionality is covered by the license.
- You have accepted the terms of the Kaspersky Endpoint Detection and Response Expert (cloud) Data Processing Agreement.
- The Endpoint Detection and Response Expert (cloud) component is enabled.
- Application components that ensure the operation of EDR Expert (cloud) are enabled and operational:
  - File Threat Protection.
  - Web Threat Protection.
  - Mail Threat Protection.
  - Exploit Prevention.
  - Behavior Detection.
  - Host Intrusion Prevention.
  - Remediation Engine.
  - Adaptive Anomaly Control.

Steps for integrating with EDR Expert (cloud)

Setting up EDR Expert (cloud) Integration involves the following steps:

1. **Installing the Endpoint Detection and Response Expert (cloud) component**

   You can select the Endpoint Detection and Response Expert (cloud) component during installation or upgrade, as well as using the *Change application components* task.

   > You must restart your computer to finish upgrading the application with the new component.

2. **Activating Kaspersky Endpoint Detection and Response Expert (cloud)**

You need to purchase a separate license for Kaspersky Endpoint Detection and Response Expert (cloud).

The functionality becomes available after adding a separate key for Kaspersky Endpoint Detection and Response Expert (cloud). As a result, two keys are added on the computer: a key for Kaspersky Endpoint Security and a key for Kaspersky Endpoint Detection and Response Expert (cloud).

Licensing for the stand-alone Endpoint Detection and Response Expert (cloud) functionality is the same as the licensing of Kaspersky Endpoint Security.

Make sure that the EDR Expert (cloud) functionality is included in the license and is running in the local interface of the application.

3. **Connecting to telemetry collection server and response server**

Kaspersky Endpoint Detection and Response Expert (cloud) requires a trusted connection between Kaspersky Endpoint Security and two servers:

- A *telemetry collection server* is a server that is part of a SIEM solution that collects, normalizes, correlates, analyzes, and stores information about events occurring on the computer.
- A *response server* is a server for receiving and scanning data, studying the behavior of objects, and publishing the results of such studies.

How to connect a Kaspersky Endpoint Security computer to EDR Expert (cloud) using the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response Expert (cloud)**.
5. Enable the component using the **Endpoint Detection and Response Expert (cloud) DISABLED** toggle switch.
6. If the current policy is a child policy and the parent policy prohibits changes to the EDR Expert (cloud) integration settings (closed "padlock"), you can configure setting inheritance in the **Inheritance** section:
   - **Inherit connection settings from the policy** (default value). The connection settings will be inherited from the parent policy. You will not be able to edit the settings.
   - **Use custom connection settings**. You can configure the connection settings manually.
7. The **Response server** tab displays the fully qualified domain name and port of the response server, which are retrieved automatically. If the security policy in your infrastructure does not allow you to connect directly to EDR Expert (cloud) servers, you can set up a connection via a TCP tunnel:

   a. Select the **Use a TCP tunnel for response** check box.

   b. Specify the server address (IPv4, IPv6) and the port to connect to the tunnel.
8. If necessary, set the frequency of sending synchronization requests to the server in the **Send sync request to server every (min)** field. During the synchronization, Kaspersky Endpoint Security receives threat response tasks and sends task results.
9. Go to the **Telemetry collection server** tab.

10. Configure the telemetry collection server connection settings:

    a. Click the **Edit** link.

    b. In the window that opens, select the telemetry collection server from the list. The KUMA collector serves as the telemetry collection server in EDR Expert (cloud). For more details, please refer to the Kaspersky Unified Monitoring and Analysis Platform Help.

    If an error occurs while connecting to the telemetry collection server, select a different server. If you are unable to connect to the telemetry collection server, please contact Technical Support.

    c. If necessary, you can configure a connection to the telemetry collection server via a TCP tunnel, just as you would for the response server.

11. To apply the policy to computers, close the padlock icons and save your changes.

You can check the component status by using the *Report on status of application components*. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **Endpoint Detection and Response Expert (cloud)** component will be added to the list of Kaspersky Endpoint Security components.

Configuring EDR Expert (cloud) telemetry settings

Telemetry is a list of events that have occurred on the protected computer. Kaspersky Endpoint Security analyzes telemetry data and sends it to telemetry collection servers during synchronization. Telemetry events arrive on the server almost continuously. Kaspersky Endpoint Security initiates synchronization with the server when any of the following conditions are satisfied:

- Synchronization interval has run out.
- The number of events in the buffer exceeds the upper limit.

Therefore, by default, the application synchronizes every 30 seconds or whenever the buffer holds 1024 events. You can configure the synchronization behavior in the Kaspersky Endpoint Security policy and select optimum values to match your network load (see instructions below).

If there is no connection between Kaspersky Endpoint Security and the server, the application queues new events. When the connection is restored, Kaspersky Endpoint Security sends queued events to the server in proper order. To avoid overloading the server, Kaspersky Endpoint Security may skip some events. To enable this, you can optimize event transmission settings, for example, to set a maximum events-per-hour value (see instructions below).

To configure telemetry settings, perform the following steps:

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Built-in Agents Configuration** → **Endpoint Detection and Response Expert (cloud)**.
5. In the window that opens, select the **Data transmission settings** tab.

6. Make sure the **Sending telemetry ENABLED** check box is selected.

7. If required, enable the **Send telemetry with IOA only** functionality. *Indicator of Attack (IOA)* is a rule that contains a description of suspicious behavior in the system that may indicate a targeted attack. The application compares ongoing behavior in the system with these rules and logs events that are indicative of a targeted attack. The application uses the *streaming scan* technology, which allows real time tracking of such events. By default, the functionality is disabled.

8. If necessary, configure the server synchronization settings:

   - **Maximum event transmission delay (sec)**. The application synchronizes with the server to send events after the synchronization interval expires. The default setting is 30 seconds.

   - **Maximum number of event packages**. The application synchronizes with the server when the buffer is filled with events. The default setting is 1024 events.

9. Go to the **Request throttling** tab.

10. If necessary, disable request throttling using the **Request throttling ENABLED** toggle switch.

    This feature helps optimize the load on the server. If this functionality is enabled, the application restricts the event transmission. If the number of events exceeds the configured limits, Kaspersky Endpoint Security stops sending events. This option is enabled by default.

11. Configure optimization settings for sending events to the server:

    - **Maximum number of events per hour**. The application analyzes the telemetry data stream and restricts the sending of events if the event stream exceeds the configured events-per-hour limit. Kaspersky Endpoint Security resumes sending events after an hour. The default setting is 3000 events per hour. If the application is installed on a server, the telemetry data stream is higher. For servers, it is recommended to increase the value to 60 000 events per hour.

    - **Percentage of event limit excess (%)**. The application sorts events by type (for example, "changes in the registry" events) and restricts transmission of events if the ratio of events of the same type to the total number of events exceeds the configured limit in percent. Kaspersky Endpoint Security resumes sending events when the ratio of other events to the total number of events becomes big enough again. The default setting is 15 %.

12. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

EDR Expert (cloud) telemetry exclusions

To improve performance and optimize data transmission to the telemetry collection server, you can add telemetry exclusions. For example, you can choose not to send network communications data for individual applications.

> Using too many rules can increase the load on the Telemetry collection server and reduce the computer performance. We recommend adding only necessary rules.

To create a telemetry exclusion in the Web Console and Cloud Console:

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Telemetry Settings**.
5. Select the **EDR Expert (cloud) telemetry** tab.
6. In the **General exclusions** block, click the **Add** button.
   The **Add exclusion rule** window opens.
7. If necessary, change the status of the rule. By default, the rule is enabled.
8. Enter a name for the rule.
9. Select the action to be performed when the rule is triggered:
   - **Do not collect**. The filtered event will be excluded from the sent telemetry.
   - **Exclude IOA**. The IOA rule trigger event will be excluded from the sent telemetry.
10. If the **Exclude IOA** option is selected, specify the IOA rules to be added to exclusions:
    - **Exclude all**. When the specified condition is met, the application will exclude events generated based on all IOA rules from the telemetry.
    - **Exclude by GUID**. Specify the GUID of the IOA rule. You can specify multiple GUIDs by using `,`. For more details on the IOA rules, please refer to the EDR Expert (cloud) Help.
11. Specify the filtering condition:
    a. Select the field name to be used for filtering.
    b. Select an operator (see the table below) and specify the value against which the field value from the event will be compared.

List of conditional operators

Operator	Description
<	If the field value is less than the value specified in the condition, the event will be filtered out.
≤	If the field value is less than or equal to the value specified in the condition, the event will be filtered out.
=	If the value of the field is equal to the value specified in the condition, the event will be filtered out.
≥	If the value of the field is greater than or equal to the value specified in the condition, the event will be filtered out.
>	If the field value is greater than the value specified in the condition, the event will be filtered out.
≠	If the value of the field is not equal to the value specified in the condition, the event will be filtered out.
is like	If the field value matches the mask specified in the condition, the event will be filtered out. The application supports the `*` and `?` characters when entering a mask:

Operator	Description
is not like	If the field value does not match the mask specified in the condition, the event will be filtered out. The application supports the `*` and `?` characters when entering a mask:
one of	If the field value matches one of the values in the list specified in the condition, the event is considered filtered.
none of	If the field value does not match any of the values in the list specified in the condition, the event is considered filtered.
is like one of	If the field value matches one of the masks specified in the condition, the event will be filtered out. The application supports the * and ? characters when entering a mask.
is not like one of	If the field value does not match any of the masks specified in the condition, the event will be filtered out. The application supports the * and ? characters when entering a mask.
exists	If the field specified in the condition is present in the event, the event will be filtered out.
not exists	If the field specified in the condition is not present in the event, the event will be filtered out.
contains	If the value specified in the condition is present in the field value, the event will be filtered out.
is equal to	If the value of the field is equal to the value specified in the condition, the event will be filtered out. The scan is case-insensitive.
bitwise AND	If the result of the Bitwise AND (&) operation between the field value and the value specified in the condition is 1, the event will be filtered out.

12. If necessary, you can create complex filter criteria by adding multiple filter conditions and groups of conditions. You can also add nested conditions and condition groups to a condition group. You can use the following operators:

    - **AND** means that the filter selects events that meet all of the specified conditions.
    - **OR** means that the filter selects events that meet one of the specified conditions.
    - **NOT** (to use this operator, select the **Add NOT before** option) means that the filter selects events that do not meet any of the specified conditions.

    Conditions and first-level condition groups are combined with the **AND** operator.

13. To scan the filtering rule you created, click the **Check rule** button.

    In the window that opens, a table of events filtered by the created rule will be displayed. For more details, please refer to the EDR Expert (cloud) Help.

14. If necessary, under **All event types**, add telemetry exclusions by event type.

    a. Click the event type name.

    b. In the window that opens, click the **Set up manually** button.

    c. If necessary, configure telemetry transmission for the selected event type using the **Send event** toggle switch. By default, telemetry transmission is enabled for all event types.

    d. In the **Exclusion rules** block, click the **Add** button.

    The **Add exclusion rule** window opens.

    e. Perform the actions described in steps 7–13 for each rule you add.

15. For some event types, you can also add inclusion rules to expand the telemetry collected:

    a. In the **Inclusion rules** block, click the **Add** button.

    The **Add inclusion rules** window opens.

b. Enter a name for the rule.

c. Under **Condition**, enter values for the displayed fields. The type of fields available depends on the selected event.

Exclusion rules are prioritized over inclusion rules.

16. To apply the policy to computers, make sure that the padlocks are closed (🔒) and save your changes.

How to export or import EDR Expert (cloud) event filters

You can export the list of exclusions to a JSON file. Then you can modify the file to, for example, add a large number of event IDs. You can also use the export/import function to back up the event filters or to migrate the list to a different server.

Using too many rules can increase the load on the Telemetry collection server and reduce the computer performance. We recommend adding only necessary rules.

To export or import event filters in the Web Console:

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **Telemetry Settings**.

5. Select the **EDR Expert (cloud) telemetry** tab.

6. To export the event filters:

   a. Click **Export**.

   b. In the window that opens, specify the name of the JSON file to which you want to export the event filters, and select the folder in which you want to save this file.

   c. Save the file.

   Kaspersky Endpoint Security exports the event filters to the JSON file.

7. To import the event filters:

   a. Click **Import**.

   b. In the window that opens, select the JSON file from which you want to import the event filters.

c. Select how you want event filtering rules to be imported: by adding to existing rules or by discarding existing rules and replacing with new ones.

d. Open the file.

8. To apply the policy to computers, make sure that the padlocks are closed (🔒) and save your changes.

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **Telemetry Settings**.

5. Select the **EDR Expert (cloud) telemetry** tab.

6. To export the event filters:

   a. Click **Export**.

   b. In the window that opens, specify the name of the JSON file to which you want to export the event filters, and select the folder in which you want to save this file.

   c. Save the file.

   Kaspersky Endpoint Security exports the event filters to the JSON file.

7. To import the event filters:

   a. Click **Import**.

   b. In the window that opens, select the JSON file from which you want to import the event filters.

   c. Select how you want event filtering rules to be imported: by adding to existing rules or by discarding existing rules and replacing with new ones.

   d. Open the file.

8. To apply the policy to computers, make sure that the padlocks are closed (🔒) and save your changes.

Managing Quarantine

Quarantine is a special local storage on the computer. The user can quarantine files that the user considers dangerous for the computer. Quarantined files are stored in an encrypted state and do not threaten the security of the device. Kaspersky Endpoint Security uses the Quarantine only when integrated with Kaspersky Detection and Response solutions. In other cases Kaspersky Endpoint Security places the relevant file in Backup. For details on managing Quarantine as part of solutions, please refer to the Kaspersky Sandbox Help, Kaspersky Endpoint Detection and Response Optimum Help, Kaspersky Endpoint Detection and Response Expert Help, Kaspersky Anti Targeted Attack Platform Help, and Kaspersky Endpoint Detection and Response Expert (on-premises) Help.

Kaspersky Endpoint Security uses the system account (SYSTEM) to quarantine files.

You can configure quarantine settings only in the Kaspersky Security Center Console. You can also use Kaspersky Security Center Console to manage quarantined objects (restore, delete, add, etc). Locally, on the computer, you can only restore the object using the command line.

Configuring the maximum Quarantine size

By default, the size of the Quarantine is limited to 1024 MB. When Quarantine reaches maximum size, Kaspersky Endpoint Security stops sending the files and generates the *Not enough space in Quarantine storage* event. To prevent the quarantine from running out of disk space, you can set a threshold at which Kaspersky Endpoint Security generates a *Quarantine storage is almost out of space* event. You cannot configure a retention period for quarantined files to have them automatically removed.

If the Kaspersky Anti Targeted Attack Platform (EDR) solution is deployed in your organization, we recommend increasing the size of Quarantine. When doing a YARA scan, the application may encounter a large memory dump. If the size of the memory dump exceeds the size of Quarantine, the YARA scan finishes with an error and the memory dump is not quarantined. We recommend setting the size of Quarantine equal to the total size of the RAM on the computer (for example, 8 GB) or disabling the size limit of Quarantine.

How to configure the maximum quarantine size in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Reports and Storage**.
4. In the **Quarantine** block configure the Quarantine size:
   - **Limit the size of Quarantine to N MB**. If the check box is selected, the maximum Quarantine size is limited to the defined value. By default, the maximum size is 1024 MB. When Quarantine reaches maximum size, Kaspersky Endpoint Security sends the *Not enough space in Quarantine storage* event to Kaspersky Security Center and publishes the event in Windows Event Log. Meanwhile the application stops quarantining new objects. You must empty the Quarantine manually.

     If the check box is cleared, the Quarantine size is limited by the free disk space available.
   - **Notify when the Quarantine storage reaches N percent**. Threshold value of the Quarantine. For example, you can set the Quarantine threshold to 50%. When Quarantine reaches the threshold, Kaspersky Endpoint Security sends the corresponding event to Kaspersky Security Center and publishes the event in Windows Event Log. Meanwhile the application continues quarantining new objects.

     If this check box is cleared, the application does not generate events when the quarantine threshold is reached.
5. Save your changes.

How to configure the maximum Quarantine size in the Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.

4. Go to **General Settings** → **Reports and Storage**.

5. In the **Quarantine** block configure the Quarantine size:

   - **Limit the size of Quarantine**. If the check box is selected, the Quarantine size is limited to the specified value. If the check box is cleared, the Quarantine size is limited by the free disk space available. This may be necessary for YARA scanning because the application can save a large memory dump file.

   - **Maximum size of Quarantine (MB)**. If the check box is selected, the maximum Quarantine size is limited to the defined value. By default, the maximum size is 1024 MB. When Quarantine reaches maximum size, Kaspersky Endpoint Security sends the *Not enough space in Quarantine storage* event to Kaspersky Security Center and publishes the event in Windows Event Log. Meanwhile the application stops quarantining new objects. You must empty the Quarantine manually.

     If the check box is cleared, the Quarantine size is limited by the free disk space available.

   - **Notify when the Quarantine storage reaches (%)**. Threshold value of the Quarantine. For example, you can set the Quarantine threshold to 50%. When Quarantine reaches the threshold, Kaspersky Endpoint Security sends the corresponding event to Kaspersky Security Center and publishes the event in Windows Event Log. Meanwhile the application continues quarantining new objects.

6. Save your changes.

Sending data about quarantined files to Kaspersky Security Center

To perform actions with quarantined objects in Web Console, you must enable the sending of quarantined files data to the Administration Server. For example, you can download a file from quarantine for analysis in Web Console. The sending of quarantined files data must be enabled for all functionality of Kaspersky Sandbox and Kaspersky Endpoint Detection and Response to work.

How to enable the transfer of quarantined files data in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **General settings** → **Reports and Storage**.

4. In the **Data transfer to Administration Server** block, click the **Settings** button.

5. In the window that opens, select the **Quarantine files** check box.

6. Save your changes.

How to enable the transfer of quarantined files data in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **KSC Integration**.

5. In the **Data transfer to Administration Server** block, select the **About Quarantine files** check box.

6. Save your changes.

As a result, you can view a list of files, quarantined on your computer, in the Kaspersky Security Center Console. You can use Kaspersky Security Center Console to manage quarantined objects (restore, delete, add, etc). For more details about working with Quarantine, refer to the Kaspersky Security Center Help.

Restoring files from Quarantine

By default, Kaspersky Endpoint Security restores files to their original folder. If the destination folder has been deleted or the user does not have access rights to that folder, the application places the file in the `%DataRoot%\QB\Restored` folder. Then you must manually move the file to the destination folder.

To restore files from Quarantine:

1. In the main window of the Web Console, select **Operations** → **Repositories** → **Quarantine**.

2. This opens the list of files in Quarantine; in that list, select the files that you want to restore and click **Restore**.

   Kaspersky Endpoint Security restores the file. If the destination folder already has a file with the same name, the application cancels the restoration of the file. The application saves a copy of the file in Quarantine after restoring the file. To delete the file, you must manually clear Quarantine.

Monitoring EDR actions

Kaspersky Endpoint Security for Windows 12.9 introduces the EDR action monitoring center. The *EDR action monitoring center* is a console in which you can view the Threat Response history for all Kaspersky Detection and Response solutions. If your organization has multiple Detection and Response deployed (for example, EDR Optimum and MDR), Kaspersky Endpoint Security displays Threat Response history for all solutions. This lets you analyze the performance of Detection and Response solutions on a separate computer and optimize the settings of these solutions.

The monitoring center provides the following information:

- Information about Threat Response tasks (for example, the *Terminate process* task)

- Changes of Network isolation and Execution prevention rules

If threat response encounters an error related to access to a network share, such an error is omitted from the displayed Threat Response history.

To navigate to the EDR action monitoring center:

1. In the main window of the Web Console, select **Asset management** → **Assets (Devices)**.

2. Select the computer for which you want to configure local application settings.

   This opens the computer properties.

3. Select the **Applications** tab.

4. Click **Kaspersky Endpoint Security for Windows 14.2**.

   This opens the local application settings.

5. Select the **Application settings** tab.

6. Go to **Detection and Response** → **Response history**.

This opens the EDR action monitoring center console. You can use the console to view Threat Response task statuses, task duration, rule changes, and initiator details.

Kaspersky Unified Monitoring and Analysis Platform (KUMA)

Kaspersky Endpoint Security for Windows supports the Kaspersky Unified Monitoring and Analysis Platform solution. *Kaspersky Unified Monitoring and Analysis Platform (KUMA)* is a security information and event management (SIEM) solution for the IT infrastructure of organizations. KUMA allows detecting, analyzing, and mitigating security threats before they can cause harm.

Kaspersky Endpoint Security is installed on individual computers on the corporate IT infrastructure and continuously monitors processes, open network connections, and files being modified. Information about events on the computer (telemetry) is sent to the Kaspersky Unified Monitoring and Analysis Platform (KUMA) server. In its console, KUMA displays events as a list without markup, similar to the Windows event log.

Kaspersky Endpoint Security does not provide all functionality of an agent for KUMA. The application only sends events to KUMA without markup. To access all KUMA functionality, you need to purchase a license and deploy the solution in accordance with the KUMA Administrator's guide.

Integration of Kaspersky Endpoint Security with KUMA

Setting up integration of KES with KUMA involves the following steps:

1. In the KUMA console, add a collector.
2. In the KUMA console, configure a connector for the collector to receive events from KES.
3. In the KUMA console, enable two-way authentication (optional).
4. In the Kaspersky Endpoint Security for Windows policy, configure the settings for connecting KES to KUMA.
5. In the KUMA console, make sure that events from KES end up in the correct tenant and are processed by the correct correlation rules.

Preparation for the integration of KES with KUMA

To use KUMA, the following conditions must be met:

- Kaspersky Security Center version 14.2 or higher. In earlier versions of Kaspersky Security Center, it is impossible to activate the KUMA integration functionality.
- The application is activated and the functionality is covered by the license.
- The KUMA integration component is enabled.

Preparation for the integration of KES with KUMA involves the following steps:

1. **Installing the KUMA integration component**

   You can select the KUMA integration component when installing or upgrading the application, as well as using the *Change application components* task.

   > You must restart your computer to finish upgrading the application with the new component.

2. **KUMA activation**

   > In addition to a Kaspersky Endpoint Security application license (for example, Kaspersky Endpoint Security for Business Standard), you need a separate license for the integration of Kaspersky Endpoint Security with KUMA (Kaspersky Endpoint Security for Windows KUMA Integration Add-on).

   > If you are installing the application in EDR Agent mode, you need a license for integrating Kaspersky Endpoint Security with KUMA and a Kaspersky Anti Targeted Attack Platform (KATA) license or a Kaspersky Managed Detection and Response (MDR) license. You cannot deploy EDR Agent for KUMA only.

   The functionality becomes available after adding the separate KUMA key. As a result, there will be another active key on the computer for Kaspersky Endpoint Security integration with KUMA.

   Licensing for the stand-alone KUMA functionality is the same as the licensing of Kaspersky Endpoint Security.

   Make sure that the KUMA functionality is included in the license and is working in the local interface of the application.

Connecting KES to KUMA

To connect the computer with the Kaspersky Endpoint Security application to the KUMA solution:

1. In KUMA console, add a collector with connectors of the **tcp**, **udp**, or **http** type and specify the basic network settings of the connection. For details about managing connectors, please refer to the Kaspersky Unified Monitoring and Analysis Platform Help.

2. In the Kaspersky Endpoint Security policy, add KUMA collector addresses and specify network settings of the connection.

How to connect a Kaspersky Endpoint Security computer to KUMA using the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Policies**.

3. Select the necessary policy and double-click to open the policy properties.

4. In the policy window, select **KUMA Integration**.

5. Select the **KUMA Integration** check box.

6. In the **Integration settings** block, select the **$IsKUMATelemetry ? "Enable Windows events transmission to a KUMA server": "Enable Windows events transmission to a SIEM server** check box.

7. Add KUMA servers:

   a. Click **Add**.

   This opens the form in which you can add KUMA servers.

   b. Select the protocol for connecting to the KUMA server: **HTTP / HTTPS**, **TCP**, **UDP**.

   The protocol for connecting to the collector in Kaspersky Endpoint Security must match the connector type in KUMA: **http**, **tcp**, or **udp**.

   > When using the UDP protocol, data may be lost due to traffic loss inherent to the protocol.

   c. Enter the server address (IPv4, IPv6, FQDN) and the port to connect to the server (by default, port 443 is specified).

   When entering the server address, consider the following:

   - **TCP**:
     - **Without TLS**. You can specify either the IP address or the FQDN of the server.
     - **With TLS**. You must specify only the FQDN of the server.
   - **HTTP / HTTPS**:
     - **Without TLS**. You must explicitly specify the HTTP protocol in the server address (for example, `http://server.com` or `http://10.10.10.100`).
     - **With TLS**. You do not have to specify the protocol (for example, `https://server.com` or `server.com`).
   - **UDP**. The UDP protocol does not support TLS encryption. You can specify either the IP address or the FQDN of the server.

   You can view the server address in connector properties in the KUMA console. For more information about KUMA connectors, see the Kaspersky Unified Monitoring and Analysis Platform Help.

   d. Click **OK**.

   Kaspersky Endpoint Security connects to the first KUMA server in the list. If the connection fails, Kaspersky Endpoint Security connects to the second KUMA server in the list and so on.

8. If necessary, configure the **Maximum event transmission delay (sec)** setting in the **Data transmission settings** block. When the specified time runs out, Kaspersky Endpoint Security tries to connect to the same collector or connects to the next collector in the list if there are multiple collectors. The default setting is 30 seconds.

9. To apply the policy to computers, close the padlock icons and save your changes.

How to connect a Kaspersky Endpoint Security computer to KUMA using the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Built-in Agents Configuration** → **KUMA Integration**.

5. Turn on the **KUMA Integration ENABLED** toggle.

6. Add KUMA servers:

   a. Click **Add**.

   This opens the form in which you can add KUMA servers.

   b. Select the protocol for connecting to the KUMA server: **HTTP/HTTPS**, **TCP**, **UDP**.

   The protocol for connecting to the collector in Kaspersky Endpoint Security must match the connector type in KUMA: **http**, **tcp**, or **udp**.

   > When using the UDP protocol, data may be lost due to traffic loss inherent to the protocol.

   c. Enter the server address (IPv4, IPv6, FQDN) and the port to connect to the server (by default, port 443 is specified).

   When entering the server address, consider the following:

   - **TCP**:
     - **Without TLS**. You can specify either the IP address or the FQDN of the server.
     - **With TLS**. You must specify only the FQDN of the server.
   - **HTTP/HTTPS**:
     - **Without TLS**. You must explicitly specify the HTTP protocol in the server address (for example, `http://server.com` or `http://10.10.10.100`).
     - **With TLS**. You do not have to specify the protocol (for example, `https://server.com` or `server.com`).
   - **UDP**. The UDP protocol does not support TLS encryption. You can specify either the IP address or the FQDN of the server.

   You can view the server address in connector properties in the KUMA console. For more information about KUMA connectors, see the Kaspersky Unified Monitoring and Analysis Platform Help.

   d. Click **OK**.

   Kaspersky Endpoint Security connects to the first KUMA server in the list. If the connection fails, Kaspersky Endpoint Security connects to the second KUMA server in the list and so on.

7. If necessary, configure the **Maximum delay when sending events (sec)** setting in the **Server connection settings** block. When the specified time runs out, Kaspersky Endpoint Security tries to connect to the same collector or connects to the next collector in the list if there are multiple collectors. The default setting is 30 seconds.

8. Save your changes.

You can verify that KUMA integration is configured correctly in the KUMA console (for details see Kaspersky Unified Monitoring and Analysis Platform Help). Check the operating status of the component by viewing the *Report on status of application components* in the Kaspersky Security Center console. You can also view the operating status of a component in reports in the local interface of Kaspersky Endpoint Security. The **KUMA Integration** component will be added to the list of Kaspersky Endpoint Security components.

Establishing a trusted connection between KES and KUMA

You can establish a trusted connection between Kaspersky Endpoint Security and a KUMA collector with a connector of the tcp or http type. A trusted connection cannot be established with a connector of the udp type.

To establish a trusted connection, you need to configure a TLS mode in the connector settings. The following TLS modes are possible:

- **Disabled**: Do not use TLS encryption. This option is selected by default.
- **Enabled**: Use TLS encryption, but without certificate verification.
- **Custom PFX with client authentication**: Use TLS encryption with a PFX secret. In this mode, the client is authenticated with a certificate.

Kaspersky Endpoint Security does not support the **Custom PFX** TLS mode. When integrating KES with KUMA with PFX, user authentication with a password is required.

To configure a trusted connection, you need a TLS certificate—the *CA certificate for the microservice*. You can get a TLS certificate in the KUMA console. For details about downloading TLS certificates, please refer to the Kaspersky Unified Monitoring and Analysis Platform Help. Then you must add the TLS certificate to Kaspersky Endpoint Security (see instructions below).

To make the connection more secure, you can enable additional authentication of the computer in KUMA (two-way authentication). To enable such authentication, you need to create a crypto-container in an external certification authority. A *crypto-container* is a PFX archive with a certificate and a private key in the PKCS#12 format. Then you need to enable two-way authentication in the KUMA settings (TLS mode **Custom PFX with client authentication**), enable two-way authentication in Kaspersky Endpoint Security, and add a PFX archive to the KUMA console and to Kaspersky Endpoint Security.

How to configure a trusted connection between KES and KUMA in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **KUMA Integration**.
5. Select the **KUMA Integration** check box.
6. In the **Settings for connecting to KUMA servers** block, select the **Use TLS encryption** check box.

7. Configure the trusted connection:

   a. Click **Settings for connecting to KUMA servers**.

   b. Configure the server connection:

   - **Timeout (sec)**. Maximum time to wait for a response from the KUMA server (be default, the value is 5 seconds). When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different KUMA server.

   - **Server TLS certificate**. TLS certificate for establishing a trusted connection with the KUMA server. You can get a TLS certificate in the Kaspersky Unified Monitoring and Analysis Platform console (see instructions in the Kaspersky Unified Monitoring and Analysis Platform Help).

     To establish a trusted connection, you need to select the **Enabled** TLS mode in the KUMA console.

   - **Use two-way authentication**. Two-way authentication when establishing a secure connection between KES and KUMA. To use two-way authentication, in the KUMA console, in the connector settings, you must select the **Custom PFX with client authentication** TLS mode (see the connector settings in the Kaspersky Unified Monitoring and Analysis Platform Help). Then you must download a server certificate and set a password to protect the cryptocontainer.

     > The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

   c. Click **OK**.

8. To apply the policy to computers, close the padlock icons and save your changes.

How to configure a trusted connection between KES and KUMA in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Built-in Agents Configuration** → **KUMA Integration**.

5. Turn on the **KUMA Integration ENABLED** toggle.

6. Under **Server connection settings**, turn on the **Use TLS encryption** switch.

7. Configure the trusted connection:

   a. Click **Connection settings**.

   b. Configure the server connection:

   - **Timeout (sec)**. Maximum time to wait for a response from the KUMA server (be default, the value is 5 seconds). When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different KUMA server.

   - **Server TLS certificate**. TLS certificate for establishing a trusted connection with the KUMA server. You can get a TLS certificate in the Kaspersky Unified Monitoring and Analysis Platform console (see instructions in the Kaspersky Unified Monitoring and Analysis Platform Help).

     To establish a trusted connection, you need to select the **Enabled** TLS mode in the KUMA console.

   - **Use two-way authentication**. Two-way authentication when establishing a secure connection between KES and KUMA. To use two-way authentication, in the KUMA console, in the connector settings, you must select the **Custom PFX with client authentication** TLS mode (see the connector settings in the Kaspersky Unified Monitoring and Analysis Platform Help). Then you must download a server certificate and set a password to protect the cryptocontainer.

     > The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

   c. Click **OK**.

8. To apply the policy to computers, close the padlock icons and save your changes.

Enabling telemetry sending to the KUMA server

By default, sending events to the KUMA server is disabled. To ensure KUMA works properly, you must enable telemetry sending. You can select an event source from among the standard logs: *Application*, *Security* or *System*.

How to enable telemetry sending to KUMA in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select **Policies**.

3. Select the necessary policy and double-click to open the policy properties.

4. In the policy window, select **General settings** → **Exclusions and object types**.

5. In the **Telemetry settings** → **KUMA telemetry** block, click the **Settings** button.

6. Select event logs that you want to use as event sources: *Application*, *Security* or *System*.

   In addition to standard logs, you can specify a log of a third-party application.

7. To apply the policy to computers, close the padlock icons and save your changes.

How to enable telemetry sending to KUMA in Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Telemetry Settings**.
5. Select the **KUMA telemetry** tab.
6. Select event logs that you want to use as event sources: *Application*, *Security* or *System*.

   In addition to standard logs, you can specify a log of a third-party application.
7. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

Filtering events to be sent to KUMA

By default, sending events to the KUMA server is disabled. To ensure KUMA works properly, you must enable telemetry sending. You can select an event source from among the standard logs: *Application*, *Security* or *System*. To improve performance and optimize data transmission to the KUMA server, you can manually add or exclude individual events from telemetry. For example you can exclude Sysmon events.

How to create a list of events to be sent to KUMA in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Exclusions and object types**.
5. In the **Telemetry settings** → **KUMA telemetry** block, click the **Settings** button.
6. In the window that is displayed, configure the event filters to be sent to KUMA.

   You can configure event filtering for the standard *Application*, *Security*, *System* logs or manually add another log:

   a. Open the log properties or click the **Add** button and enter the log name.

   b. Select an event sending mode:

   - **Send all events**. In this mode, the application sends all events from the Windows log except events added to exclusion rules.
   - **Send only selected events**. In this mode, the application sends only events added in inclusion rules.

c. Create lists of exclusion rules or inclusion rules for the relevant event sending mode.

To add rules, you need to specify the ID of the event in the Windows event log. You can list multiple event IDs in a rule. To specify multiple event IDs, use the comma character (`,`).

d. If necessary, enable event logging using the check box next to the log name.

7. To apply the policy to computers, close the padlock icons and save your changes.

How to create a list of events to be sent to KUMA in Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.

2. Click the name of the Kaspersky Endpoint Security policy.

The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **Telemetry Settings**.

5. Select the **KUMA telemetry** tab.

6. In the window that is displayed, configure the event filters to be sent to KUMA.

You can configure event filtering for the standard *Application*, *Security*, *System* logs or manually add another log:

a. Open the log properties or click the **Add** button and enter the log name.

b. Select an event sending mode:

- **Send all events**. In this mode, the application sends all events from the Windows log except events added to exclusion rules.

- **Send only selected events**. In this mode, the application sends only events added in inclusion rules.

c. Create lists of exclusion rules or inclusion rules for the relevant event sending mode.

To add rules, you need to specify the ID of the event in the Windows event log. You can list multiple event IDs in a rule. To specify multiple event IDs, use the comma character (`,`).

d. If necessary, enable event logging using the toggle switch next to the log name.

7. To apply the policy to computers, close the padlock icons and save your changes.

Exporting and importing KUMA event filters

You can export the list of exclusions to a JSON file. Then you can modify the file to, for example, add a large number of event IDs. You can also use the export/import function to back up the event filters or to migrate the list to a different server.

Using too many rules can increase the load on the KUMA server and reduce the computer performance. We recommend adding only necessary rules.

How to export and import event filters in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **General settings** → **Exclusions and object types**.
5. In the **Telemetry settings** → **KUMA telemetry** block, click the **Settings** button.
6. To export the event filters:
   a. Select event logs with filters that you want to export.
   b. Click the → **Export** button.
   c. In the window that opens, specify the name of the JSON file to which you want to export the event filters, and select the folder in which you want to save this file.
   d. Save the file.
   Kaspersky Endpoint Security exports the event filters to the JSON file.
7. To import the event filters:
   a. Click the → **Import** button.
   b. In the window that opens, select the JSON file from which you want to import the event filters.
   c. Open the file.
   If event filtering rules already exist on the computer, Kaspersky Endpoint Security replaces these when importing.
8. To apply the policy to computers, close the padlock icons and save your changes.

How to export and import event filters in the Web Console

1. In the main window of the Web Console, select the **Asset management** → **Policies** tab.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Telemetry Settings**.
5. Select the **KUMA telemetry** tab.
6. To export the event filters:
   a. Select event logs with filters that you want to export.
   b. Click the → **Export** button.

c. In the window that opens, specify the name of the JSON file to which you want to export the event filters, and select the folder in which you want to save this file.

d. Save the file.

Kaspersky Endpoint Security exports the event filters to the JSON file.

7. To import the event filters:

a. Click the → **Import** button.

b. In the window that opens, select the JSON file from which you want to import the event filters.

c. Open the file.

If event filtering rules already exist on the computer, Kaspersky Endpoint Security replaces these when importing.

8. To apply the policy to computers, close the padlock icons and save your changes.

You can also export or import event filters on the command line.

KSWS to KES Migration Guide

Starting with version 11.8.0, Kaspersky Endpoint Security for Windows supports the basic functionality of the Kaspersky Security for Windows Server (KSWS) solution. *Kaspersky Security for Windows Server* protects servers running Microsoft Windows operating systems and network attached storages against viruses and other computer security threats which servers and network attached storages are exposed to while exchanging files. For detailed information about how the solution works, please refer to the Kaspersky Security for Windows Server Help. Starting with Kaspersky Endpoint Security 11.8.0, you can migrate from Kaspersky Security for Windows Server to Kaspersky Endpoint Security for Windows and use the same solution for protecting workstations and servers.

Software requirements

Before you begin the migration from KSWS to KES, make sure your server satisfies the hardware and software requirements of Kaspersky Endpoint Security for Windows. The lists of supported operating system versions are different for KES and KSWS. For example, KES does not support servers running Windows Server 2003.

Minimum software requirements for migrating from KSWS to KES:

- Kaspersky Endpoint Security for Windows 12.0.
- Kaspersky Security 11.0.1 for Windows Server.

  If you have an earlier version of Kaspersky Security for Windows Server installed, we recommend upgrading the application to the latest version. The Policies and tasks conversion wizard does not support earlier versions of Kaspersky Security for Windows Server.
- Kaspersky Security Center 14.2

  If you have an earlier version of Kaspersky Security Center installed, update it to 14.2 or later. In this version of Kaspersky Security Center, the Policies and tasks batch conversion wizard lets you migrate policies into a profile rather than into a policy. In this version of Kaspersky Security Center, the Policies and tasks batch conversion wizard also lets you migrate a broader range of policy settings.
- Kaspersky Endpoint Agent 3.10.

  If you have an earlier version of Kaspersky Endpoint Agent installed, we recommend upgrading the application to the latest version. Kaspersky Endpoint Security supports migrating a [KSWS+KEA] configuration to [KES+built-in agent] starting with Kaspersky Endpoint Agent 3.10.

Migration recommendations

When migrating from KSWS to KES, observe the following recommendations:

- Plan the KSWS to KES migration time in advance. Choose a time when servers are operating under the lightest load, for example, during the weekend.
- After the migration, turn on application components gradually. That is, for example, start by enabling the File Threat Protection component alone, then enable other protection components, then enable control components, and so on. At each step, you must make sure the application is working correctly, and monitor the performance of the server. The architecture of KES differs from KSWS, therefore the operating system may also behave differently.
- Carry out the migration gradually. First migrate a single server, then multiple servers, then carry out the migration on all servers of the organization.
- Migrate different types of servers separately. That is, for example, first migrate database servers, then mail servers, and so on.
- Migration on high-load servers involves some special considerations.

Migration steps

Migration from KSWS to KES is performed semi-automatically. This is necessary because of differing architectures of the applications. To migrate policy settings, you must run the Policies and tasks batch conversion wizard (the migration wizard). After migrating policy settings, you must manually configure settings that the migration wizard cannot migrate automatically (for example, Password protection settings). After the migration, it is also recommended to check if the migration wizard correctly migrated all settings.

Migrate from KSWS to KES in the following order:

1. **Migrate KSWS tasks and policies**

   After migrating the policies and tasks, you must perform additional configuration steps. We also recommend to make sure that Kaspersky Endpoint Security provides the necessary level of security after migration from KSWS.

   > The Policies and tasks batch conversion wizard for Kaspersky Security for Windows Server is only available in the Administration Console (MMC). Policy and task settings cannot be migrated in the Web Console and Kaspersky Security Center Cloud Console.

2. **Install Kaspersky Endpoint Security**

   You can install Kaspersky Endpoint Security in the following ways:

   - Installing KES after removing KSWS (recommended).

     > The kavremover utility does not support managing KSWS.

   - Installing KES on top of KSWS.

3. Activate KES with a KSWS key

4. **Confirm that the application is in working order after migration**

   After migrating from KSWS to KES, make sure that the application is operating correctly. Check the status of the server in the console (should be *OK*). Make sure no errors are reported for the application, also check the time of the last connection to the Administration Server, the time of the last database update and the server protection status.

> Pay special attention to the migration of exclusion lists, trusted applications, trusted web addresses, Application Control rules.

Correspondence of KSWS and KES components

When migrating from KSWS to KES, the set of components is migrated only when the application is being installed locally.

Correspondence of Kaspersky Security for Windows Server and Kaspersky Endpoint Security for Windows components

Kaspersky Security for Windows Server component	Kaspersky Endpoint Security for Windows component
Basic functionality	Application kernel
Log Inspection	Log Inspection
Device Control	Device Control
Firewall Management	*(not supported)* KSWS Firewall functions are performed by the system-level Firewall. In KES, a separate component is responsible for the Firewall functionality. After migration, you can configure the Kaspersky Endpoint Security Firewall.
File Integrity Monitor	System Integrity Monitoring
Exploit Prevention	Exploit Prevention
System Tray Icon	*(not supported)* You can configure user interaction in the application interface settings.
Integration with Kaspersky Security Center	Network Agent Connector
Endpoint Agent	*(not supported)* In Kaspersky Endpoint Security 11.9.0 the Kaspersky Endpoint Agent distribution package is no longer part of the Kaspersky Endpoint Security distribution kit. You must download the Kaspersky Endpoint Agent distribution package separately.
Network Threat Protection	Network Threat Protection
Anti-Cryptor	Behavior Detection
Anti-Cryptor for NetApp	*(not supported)*
Traffic Security	Web Threat Protection Mail Threat Protection Web Control
On-Demand Scan	Application kernel
ICAP Network Storage Protection	*(not supported)* Kaspersky Endpoint Security does not support Network-Attached Storages Protection components. If you need these components, you can continue using Kaspersky Security for Windows Server.
RPC Network Storage Protection	*(not supported)* Kaspersky Endpoint Security does not support Network-Attached Storages Protection components. If you need these components, you can continue using Kaspersky Security for Windows Server.

Kaspersky Security for Windows Server component	Kaspersky Endpoint Security for Windows component
Real-Time File Protection	File Threat Protection
Script Monitoring	*(not supported)* Script Monitoring is handled by other components, for example, AMSI Protection.
KSN Usage	Kaspersky Security Network
Applications Launch Control	Application Control
Performance counters	*(not supported)*

Correspondence of KSWS and KES settings

When migrating policies and tasks, KES is configured in accordance with KSWS settings. Settings of application components that KSWS does not have are set to default values.

Application settings

Scalability, interface and scanning settings

Application settings are not supported in Kaspersky Endpoint Security for Windows.

Application settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Scalability settings	*(does not migrate)* Kaspersky Endpoint Security manages all work processes.
Show System Tray Icon	*(does not migrate)* On a client computer, the main window of Kaspersky Endpoint Security and the icon in the Windows notification area are available by default. In the context menu of the icon, the user can perform operations with Kaspersky Endpoint Security. Kaspersky Endpoint Security also displays notifications above the application icon. You can configure user interaction in the application interface settings.
Restore file attributes after scanning	*(does not migrate)* Kaspersky Endpoint Security automatically restores file attributes after scanning a file.
Limit CPU usage for scanning threads	*(does not migrate)* Kaspersky Endpoint Security does not limit CPU usage when scanning. You can configure the task to run when the computer is operating under minimum load.
Folder for temporary files created during scanning	*(does not migrate)* Kaspersky Endpoint Security places the temporary files in the `C:\Windows\Temp` folder.
HSM system settings	*(does not migrate)* Kaspersky Endpoint Security does not support HSM systems.

Security and reliability

KSWS security settings are migrated to the **General settings** section, **Application settings** and **Interface** subsections.

Application security settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Protect application processes from external threats	**Enable Self-Defense** (**Application settings** subsection)
Apply password protection	*(does not migrate)* Kaspersky Endpoint Security has a built-in Password protection feature (see the **Interface** subsection).
Perform task recovery	*(does not migrate)* Kaspersky Endpoint Security only automatically restores *Malware Scan* tasks. Kaspersky Endpoint Security runs other tasks on a schedule.
Do not start scheduled scan tasks	**Postpone scheduled tasks while running on battery power** (**Application settings** subsection)
Stop current scan tasks	*(does not migrate)* When the computer becomes powered by an UPS, Kaspersky Endpoint Security does not stop scan tasks that are already running.

Connection settings

Administration Server interaction settings are migrated to the **General settings** section, **Network settings** and **Application settings** subsections.

Administration Server interaction settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Proxy server settings	**Proxy server settings** (**Network settings** subsection)
Do not use proxy server for local addresses	**Bypass a proxy server for local addresses** (**Network settings** subsection)
Proxy server authentication settings	**Use proxy server authentication** (**Network settings** subsection) The proxy server authentication password is not migrated. After a policy is migrated, the password must be entered manually.
Use Kaspersky Security Center as a proxy server when activating the application	**Use Kaspersky Security Center as proxy server for activation** (**Application settings** subsection)

Run local system tasks

Kaspersky Endpoint Security ignores the settings for running local system tasks of Kaspersky Security for Windows Server. You can configure the use of local KES tasks under **Local Tasks**, **Task management**. You can also configure a schedule for running the *Malware Scan* and *Update of databases and application modules* tasks in the properties of these tasks.

Supplementary

Trusted zone

KSWS trusted zone settings are migrated to the **General settings** section, **Exclusions** subsection.

Trusted zone settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Object to scan (Exclusions)	**Scan exclusions** (Scan exclusions) The methods used by KSWS and KES for selecting objects differ. When migrating, KES supports exclusions defined as individual files or paths to file / folder. If KSWS has exclusions configured as a predefined area or a script URL, such exclusions are not migrated. After migration, you must add such exclusions manually. Exclusions as predefined areas must be configured in the *Malware Scan* task settings. Exclusions as script web addresses must be added to trusted web addresses for Web Threat Protection.
Apply also to subfolders (Exclusions)	**Include subfolders** (Scan exclusions)
Objects to detect (Exclusions)	**Type of detected object** (Scan exclusions)
Exclusion usage scope (Exclusions)	**Protection components** (Scan exclusions) If at least one component is selected in KSWS, KES applies the exclusions to all application components.
Comment (Exclusions)	**Comment** (Scan exclusions)
Trusted process (Trusted process)	**Trusted applications** Trusted process / application selection methods differ in KSWS and KES. When migrating, KES supports trusted applications configured as a path to the executable file or mask. If KSWS has trusted processes configured as a file hash, such trusted processes are not migrated. After migration, you must add such trusted processes manually.
Do not check file backup operations (Trusted process)	**Do not monitor application activity** (Trusted applications)

Removable drives scan

Removable Drives Scan settings are migrated to the **Local Tasks** section, Removable Drives Scan subsection.

Removable Drives Scan settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Scan removable drives on connection via USB	**Action on a removable drive connection**
Scan removable drives if its stored data volume does not exceed (MB)	**Maximum removable drive size**
Scan with security level: • **Maximum protection** • **Recommended** • **Maximum performance**	**Action on a removable drive connection**: • **Maximum protection**. • **Recommended**. KSWS security levels correspond to KES scan modes as follows: • Maximum protection – Maximum protection • Recommended – Recommended • Maximum performance – Recommended

User permissions for application management

Kaspersky Endpoint Security does not support assigning user access permissions for application management and application service management. You can configure access settings for users and user groups for managing the application in Kaspersky Security Center.

User access permissions for Kaspersky Security Service management

Kaspersky Endpoint Security does not support assigning user access permissions for application management and application service management. You can configure access settings for users and user groups for managing the application in Kaspersky Security Center.

Storages

KSWS storage settings are migrated to **General settings** section, Reports and Storage subsection, and to **Essential Threat Protection** section, Network Threat Protection subsection.

Storage settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Backup folder	*(does not migrate)* Kaspersky Endpoint Security saves backup copies of files in the `C:\ProgramData\Kaspersky Lab\KES.14.2\QB` folder.
Maximum Backup size (MB)	**Limit the size of Backup to N MB** (**General settings** → **Reports and Storage** section)
Threshold value for space available (MB)	*(does not migrate)* Kaspersky Endpoint Security logs the *Quarantine storage is almost out of space* event when the 50 % threshold is reached.
Target folder for restoring objects	*(does not migrate)* Kaspersky Endpoint Security restores files to their original folder.
Quarantine folder	*(does not migrate)* Kaspersky Endpoint Security saves backup copies of files in the `C:\ProgramData\Kaspersky Lab\KES.14.2\QB` folder.
Maximum Quarantine size (MB)	*(does not migrate)* Kaspersky Endpoint Security uses Backup to store probably infected objects. During migration, Kaspersky Endpoint Security ignores Quarantine settings.
Threshold value for space available (MB)	*(does not migrate)* Kaspersky Endpoint Security uses Backup to store probably infected objects. During migration, Kaspersky Endpoint Security ignores Quarantine settings.
Target folder for restoring objects	*(does not migrate)* Kaspersky Endpoint Security restores files to their original folder.
Unblock automatically in N	**Block attacking devices for N min** (**Essential Threat Protection** → **Network Threat Protection** section)

Real-time server protection

Real-Time File Protection

KSWS Real-Time File Protection settings are migrated to the **Essential Threat Protection** section, File Threat Protection subsection.

Real-Time File Protection settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Objects protection mode: • **Smart mode** • **When run** • **On access** • **On access and modification**	**Scan mode**: • **Smart mode**. • **On execution**. • **On access**. • **On access and modification**.
Deeper analysis of launching processes	*(does not migrate)* Kaspersky Endpoint Security supports only one analysis mode, the Optimal mode.

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Heuristic analyzer: • **Light** • **Medium** • **Deep**	**Heuristic analysis**: • **Light scan**. • **Medium scan**. • **Deep scan**.
Apply Trusted Zone	*(does not migrate)* Kaspersky Endpoint Security applies the trusted zone to all components. You can configure exclusions in trusted zone settings.
Use KSN for protection	*(does not migrate)* Kaspersky Endpoint Security uses KSN for all application components.
Block access to network shared resources for the hosts that show malicious activity	*(does not migrate)* By default, Kaspersky Endpoint Security blocks access to network shared resources for hosts that show malicious activity.
Launch critical areas scan when active infection is detected	*(does not migrate)* Kaspersky Endpoint Security does not launch the critical areas scan task when active infection is detected.
Use Kaspersky Sandbox for protection	*(does not migrate)* By default, Kaspersky Endpoint Security sends objects for scanning to Kaspersky Sandbox.
Protection scope	**Protection scope**
Schedule settings	*(does not migrate)* Kaspersky Endpoint Security uses its own schedule for pausing File Threat Protection.

KSN Usage

KSWS settings for Kaspersky Security Network are migrated to the **Advanced Threat Protection** section, **Kaspersky Security Network** subsection.

Kaspersky Security Network settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
I confirm that I have fully read, understood, and accept the terms of participation in Kaspersky Security Network	**Kaspersky Security Network Statement** Kaspersky Endpoint Security requests consent to the Kaspersky Security Network Statement when the application is installed, a new policy is created, or Kaspersky Security Network usage is enabled.
Send data about scanned files	*(does not migrate)* Kaspersky Endpoint Security sends data about scanned files automatically if KSN is enabled.
Send data about requested URLs	*(does not migrate)* Kaspersky Endpoint Security sends data about requested URLs automatically if KSN is enabled.
Send Kaspersky Security Network statistics	**Enable extended KSN mode**
Accept the terms of the Kaspersky Managed Protection Statement	*(does not migrate)* Kaspersky Endpoint Security does not include the KMP service.
Action to perform on KSN untrusted objects	*(does not migrate)* You can configure the Action on threat detection in Protection component settings and Scan task settings.
Do not calculate checksum before sending to KSN if file size exceeds N MB	*(does not migrate)* You can configure large file scanning restrictions in Protection component settings and Scan task settings.
Use Kaspersky Security Center as KSN Proxy	**Use Administration Server as a KSN proxy server**
Schedule settings	*(does not migrate)* It is not possible to configure a separate schedule for the component. The component is always on while Kaspersky Endpoint Security is operational.

Traffic Security

KSWS Traffic Security settings are migrated to the **Essential Threat Protection** section, Web Threat Protection and Mail Threat Protection subsection, **Security Controls** section, Web Control subsection, **General settings** section, Network settings subsection.

Traffic Security settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Apply URL-based rules	**Web Control** (**Web Control** subsection) URL-based rules are migrated to separate rules in Kaspersky Endpoint Security.
Apply certificate-based rules	*(does not migrate)* Kaspersky Endpoint Security does not support certificate-based rules.
Apply rules for web traffic category control	**Web Control** (**Web Control** subsection) Blocking rules for web traffic category control are migrated to a single blocking rule in Kaspersky Endpoint Security. Kaspersky Endpoint Security ignores allowing rules for category control. The correspondence of KSWS and KES categories is listed below.
Allow access if the web page can not be categorized	*(does not migrate)* Kaspersky Endpoint Security allows access if the web page can not be categorized.
Allow access to legitimate web resources that can be used to damage a protected device	*(does not migrate)* Kaspersky Endpoint Security allow access to legitimate web resources that can be used to damage the protected device.
Allow access to legitimate advertisement	*(does not migrate)* You can manage access to legitimate advertisement using the *Banners* web resource category in Web Control settings.
Operation mode: • **Driver Interceptor** • **Redirector** • **External Proxy**	*(does not migrate)* Kaspersky Endpoint Security supports only the Driver Interceptor mode.
ICAP-service connection settings	*(does not migrate)* Kaspersky Endpoint Security does not support ICAP Network Storage Protection.
Check safe connections through the HTTPS protocol	**Scan encrypted connections** / **Always scan encrypted connections** mode (**Network settings** subsection)
Use TLS protocol version	*(does not migrate)* Kaspersky Endpoint Security scans encrypted network traffic transmitted over the following protocols: • SSL 3.0. • TLS 1.0, TLS 1.1, TLS 1.2, TLS 1.3. You can additionally block SSL 2.0 connections in encrypted connections scan settings.
Do not trust web-servers with invalid certificate	**Address** (**Network settings** subsection)
Intercept ports (Interception area)	**Monitored ports** (**Network settings** subsection) During migration, KES clears the check boxes **Monitor all ports for the applications from the list recommended by Kaspersky** and **Monitor all ports for specified applications**.
Exclude ports (Interception area)	*(does not migrate)*
Exclude IP addresses (Interception area)	**Configure trusted addresses** (**Network settings** subsection)
Exclude processes (Interception area)	**Configure trusted applications** (**Network settings** subsection) During migration, KES configures the following settings for the trusted application: • The **Do not scan network traffic** check box is selected. KES does not scan network traffic for any remote IP addresses and any ports. • The other check boxes in the trusted application settings are cleared.
Security port	*(does not migrate)*
Use malicious URL database to scan web links	**Check the web address against the database of malicious web addresses** (**Web Threat Protection** subsection)

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Use anti-phishing database to scan web pages	**Check the web address against the database of phishing web addresses** (**Web Threat Protection** subsection)
Use KSN for protection	*(does not migrate)* Kaspersky Endpoint Security uses KSN for all application components.
Use Trusted Zone	*(does not migrate)* Kaspersky Endpoint Security applies the trusted zone to all components. You can configure exclusions in trusted zone settings.
Use heuristic analyzer	**Use heuristic analysis** (**Web Threat Protection** and **Mail Threat Protection** subsections)
Security level	*(does not migrate)* Kaspersky Endpoint Security has its own security levels for Web Threat Protection and Mail Threat Protection components. By default, Kaspersky Endpoint Security sets the recommended security level.
Enable mail threat protection	**Mail Threat Protection** (**Mail Threat Protection** subsection) **Connect Microsoft Outlook extension** **Incoming messages only** (Protection scope) **Scan when receiving** (Email protection)
Schedule settings	*(does not migrate)* It is not possible to configure a separate schedule for the component. The component is always on while Kaspersky Endpoint Security is operational.

Exploit Prevention

KSWS Exploit Prevention settings are migrated to the **Advanced Threat Protection** section, **Exploit Prevention** subsection.

Exploit Prevention settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Prevent vulnerable processes exploit: • **Terminate on exploit** • **Notify only**	**On detecting exploit**: • **Block**. • **Inform**.
Notify about abused processes via Terminal Service	*(does not migrate)* Kaspersky Endpoint Security does not support terminal services.
Prevent vulnerable processes exploit even if Kaspersky Security Service is disabled	*(does not migrate)* Kaspersky Endpoint Security constantly prevents vulnerable process exploits.
Protected processes	**Enable system process memory protection** Kaspersky Endpoint Security does not support selecting protected processes. You can only enable system processes memory protection.
Exploit prevention techniques: • **Apply all available exploit prevention techniques** • **Apply selected exploit prevention techniques**	*(does not migrate)* Kaspersky Endpoint Security applies all available exploit prevention techniques.

Network Threat Protection

KSWS Network Threat Protection settings are migrated to the **Essential Threat Protection** section, **Network Threat Protection** subsection.

Network Threat Protection settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Operation mode: • **Pass-through** • **Only inform about network attacks** • **Block connections when attack is detected**	**Network Threat Protection** If **Pass-through** mode is selected, Network Threat Protection is disabled. If **Only inform about network attacks** mode or **Block connections when attack is detected** mode is selected, Network Threat Protection is enabled. Kaspersky Endpoint Security always works in the **Block connections when attack is detected** mode.
Do not stop traffic analysis when the task is not running	*(does not migrate)* Kaspersky Endpoint Security analyses traffic continuously if the component is enabled.
Do not control excluded IP addresses	**Exclusions**
Schedule settings	*(does not migrate)* It is not possible to configure a separate schedule for the component. The component is always on while Kaspersky Endpoint Security is operational.

Script Monitoring

Kaspersky Endpoint Security does not support the Script Monitoring component. Script Monitoring is handled by other components, for example, AMSI Protection.

Website categories

Kaspersky Endpoint Security does not support all categories of Kaspersky Security for Windows Server. Categories that do not exist in Kaspersky Endpoint Security are not migrated. Therefore, web resource classification rules with unsupported categories are not migrated.

Website categories

Kaspersky Security for Windows Server categories	Kaspersky Endpoint Security for Windows categories
Wargaming	Video games
Abortion	*(does not migrate)*
Lotteries (extended)	Gambling, lotteries, sweepstakes
Alcohol	Alcohol, tobacco, drugs
Anonymous proxy servers	Anonymizers
Anorexia	*(does not migrate)*
Rentals for real estate	*(does not migrate)*
Audio, video and software	Software, audio, video
Banks	Banks
Blogs	Blogs
Military	Weapons, explosives, military
For children	*(does not migrate)*
Discrimination	Violence, intolerance
Home and family	*(does not migrate)*
Hosting and domain services	Internet communication
Pets and animals	*(does not migrate)*
Law and politics	Forbidden by regional laws
Restricted by Roskomnadzor (RF)	Forbidden by laws of the Russian Federation
Restricted by Federal Law 436 (RF)	Forbidden by laws of the Russian Federation
Restricted by RF legislation	Forbidden by laws of the Russian Federation
Restricted by global legislation	Forbidden by regional laws

Kaspersky Security for Windows Server categories	Kaspersky Endpoint Security for Windows categories
Adult dating	Adult content
Internet services	*(does not migrate)*
Sex shops	Adult content
Information technologies	*(does not migrate)*
Casinos, card games	Gambling, lotteries, sweepstakes
Books and writing	*(does not migrate)*
Computer games	Video games
Health and beauty	*(does not migrate)*
Culture and society	*(does not migrate)*
LGBT	Adult content
Lotteries	Gambling, lotteries, sweepstakes
Medicine	*(does not migrate)*
Fashion	*(does not migrate)*
Music	*(does not migrate)*
Drugs	Alcohol, tobacco, drugs
Violence	Violence, intolerance
Discontent	*(does not migrate)*
Illegal drugs	Alcohol, tobacco, drugs
Hate and discrimination	Violence, intolerance
Obscene vocabulary	Profanity, obscenity
Lingerie	Adult content
News	News media
Nudism	Adult content
Education	*(does not migrate)*
Online shopping	Online stores
All communication media	Internet communication
Payment by credit cards	Payment systems
Online shopping (own payment system)	Online stores
Online encyclopedias	*(does not migrate)*
Online banking	Banks
Weapons	Weapons, explosives, military
Fishing and hunting	*(does not migrate)*
Payment systems	Payment systems
Job search	Job search
Search engines	*(does not migrate)*
Police decision (JP)	Forbidden by Police of Japan
Trusted by KPSN	*(does not migrate)*
Untrusted by KPSN	*(does not migrate)*
Porn	Adult content
Media hosting and streaming	News media
Web Mail	Web-based email

Kaspersky Security for Windows Server categories	Kaspersky Endpoint Security for Windows categories
Traveling	*(does not migrate)*
TV and radio	News media
Teasers and ads services	Banners
Religion	Religions, religious associations
Restaurants, cafe and food	*(does not migrate)*
Dating sites	Dating sites
Sex education	Adult content
Social networks	Social networks
Sport	*(does not migrate)*
Betting	Gambling, lotteries, sweepstakes
Suicide	Violence, intolerance
Tobacco	Alcohol, tobacco, drugs
Torrents	Torrents
Mentioned in Federal list of extremists (RF)	Forbidden by laws of the Russian Federation
File sharing	File sharing
Pharmacy	*(does not migrate)*
Hobby and entertainment	*(does not migrate)*
Chats and forums	Chats, forums, IM
Schools and universities pages	*(does not migrate)*
Astrology and esoterica	*(does not migrate)*
Extremism and racism	Violence, intolerance
E-commerce	Online stores
Erotic	Adult content
Humor	*(does not migrate)*

Local activity control

Applications Launch Control

KSWS Application Control settings are migrated to the **Security Controls** section, Application Control subsection.

Applications Launch Control settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Operation mode: • **Statistics only** • **Active**	**Action** (Application Control): • **Test rules**. • **Apply rules**.
Repeat action taken for the first file launch on all the subsequent launches for this file	*(does not migrate)* Kaspersky Endpoint Security scans the application every time it attempts to run.

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Deny the command interpreters launch with no command to execute	*(does not migrate)* Kaspersky Endpoint Security allows running command interpreters if they are not prohibited by Application Control.
Rules	**Application Control rules** *(supported with limitations)* Kaspersky Endpoint Security 11.11.0 introduces support for migrating Applications Launch Control rules. The Applications Launch Control rule migration functionality has some limitations. By default, KSWS Applications Launch Control includes two rules: • **Allow scripts and MSI by OS-trusted certificate** • **Allow executable by OS-trusted certificate** If at least one source KSWS rule has the **Allow** type, during the migration KES creates a new allowing rule, **Applications with trusted root certificates**. That is, KES Application Control uses a single rule to allow running trusted scripts, MSI packages, and executable files. If both source KSWS rules have the **Deny** type, KES does not add rules for managing applications with trusted root certificates.
Apply rules to executable files	*(does not migrate)* Rule application scope cannot be configured in KES Application Control settings. KES Application Control applies rules to all types of files: executable files, scripts, and MSI packages. If all file types are included in the rule application scope in KSWS, during migration KES carries over the KSWS rules. If some file type is excluded from the rule application scope in KSWS, during migration KES also carries over KSWS rules, but **Test rules** is selected as the Application Control action.
Monitor loading of DLL modules	**Monitor loading of DLL modules (significantly increases the load on the system)**
Apply rules to scripts and MSI packages	*(does not migrate)* Rule application scope cannot be configured in KES Application Control settings. KES Application Control applies rules to all types of files: executable files, scripts, and MSI packages. If all file types are included in the rule application scope in KSWS, during migration KES carries over the KSWS rules. If some file type is excluded from the rule application scope in KSWS, during migration KES carries over KSWS rules, but **Test rules** is selected as the Application Control action.
Deny applications untrusted by KSN	*(does not migrate)* Kaspersky Endpoint Security does not take into account the reputation of applications and allows or denies running applications in accordance with rules.
Allow applications trusted by KSN	During the migration, KES adds a new allowing rule. The **Other Software\Applications, trusted according to reputation in KSN** KL category is specified as the rule triggering condition.
Users and / or user groups allowed to run applications trusted by KSN	**Users and their rights** in an Application Control allow rule that includes the KL category **Other Software\Applications, trusted according to reputation in KSN**.
Automatically allow software distribution via applications and packages listed	Software Distribution Control in KSWS and KES works differently. During the migration, KES adds new allowing rules for applications that have automatic software distribution allowed. The file hash is specified as the rule triggering condition.
Always allow software distribution via Windows Installer	Software Distribution Control in KSWS and KES works differently. During the migration, KES adds new allowing rules for applications that have automatic software distribution allowed (**Software distribution applications and packages allowed**). The file hash is specified as the rule triggering condition. In account properties **Trusted Updaters** check box is selected.
Always allow software distribution via SCCM using the Background Intelligent Transfer Service	*(does not migrate)*
Software distribution applications and packages allowed	Software Distribution Control in KSWS and KES works differently. During the migration, KES adds new allowing rules for applications that have automatic software distribution allowed. The file hash is specified as the rule triggering condition. In account properties **Trusted Updaters** check box is selected.
Schedule settings	*(does not migrate)* If a schedule is configured for the component in KSWS settings, the Application Control component is enabled upon migration. If a schedule is not configured for the component in KSWS settings, Application Control is disabled upon migration. It is not possible to configure a separate schedule for the component. The component is always on while Kaspersky Endpoint Security is operational.

Device Control

KSWS Device Control settings are migrated to the **Security Controls** section, **Device Control** subsection.

Device Control settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Operation mode: • **Active** • **Statistics only**	*(does not migrate)* Application Control operates in the *Active* mode. Device connection statistics is continuously provided by Audit.
Allow using all external devices when the Device Control task is not running	*(does not migrate)* Device Control is always on while Kaspersky Endpoint Security is running.
Device Control rules	**Trusted devices** During migration, Kaspersky Endpoint Security ignores disabled KSWS rules.
Schedule settings	*(does not migrate)* Kaspersky Endpoint Security uses its own schedule for gaining access to certain device types.

Network-Attached Storages Protection

RPC Network Storage Protection

Kaspersky Endpoint Security does not support Network-Attached Storages Protection components. If you need these components, you can continue using Kaspersky Security for Windows Server.

ICAP Network Storage Protection

Kaspersky Endpoint Security does not support Network-Attached Storages Protection components. If you need these components, you can continue using Kaspersky Security for Windows Server.

Anti-Cryptor for NetApp

Kaspersky Endpoint Security does not support Anti-Cryptor for NetApp. Anti-Cryptor functionality is provided by other application components, such as Behavior Detection.

Network activity control

Firewall Management

Kaspersky Endpoint Security does not support KSWS Firewall Management. KSWS Firewall functions are performed by the system-level Firewall. After migration, you can configure the Kaspersky Endpoint Security Firewall.

Anti-Cryptor

Network Anti-Cryptor settings are migrated to the **Advanced Threat Protection** section, **Behavior Detection** subsection.

Anti-Cryptor settings

KSWS settings	KES settings
Operation mode: • **Statistics only** • **Active**	**Upon detection of external encryption of shared folders**: • **Inform**. • **Block**.

KSWS settings	KES settings
Heuristic analyzer	*(does not migrate)* Kaspersky Endpoint Security does not use Heuristic Analysis for Behavior Detection.
Configuration of protection scope: • **All shared network folders on the protected device** • **Only specified shared folders**	*(does not migrate)* Kaspersky Endpoint Security prevents encryption of all shared network folders of the protected computer.
Exclusions	*(does not migrate)* Kaspersky Endpoint Security has its own exclusions for the Behavior Detection component. You can manually add exclusions after migration.
Schedule settings	*(does not migrate)* It is not possible to configure a separate schedule for the component. The component is always on while Kaspersky Endpoint Security is operational.

System Inspection

File Integrity Monitor

File Integrity Monitor settings from KSWS are migrated to the **Security Controls** section, **System Integrity Monitoring** subsection.

File Integrity Monitor settings

KSWS settings	KES settings
Log information about file operations that appear during the monitor interruption period	*(does not migrate)* Kaspersky Endpoint Security does not log events for file operations performed during the monitor interruption period.
Block attempts to compromise the USN log	*(does not migrate)* Kaspersky Endpoint Security does not block attempts to compromise the USN log.
Monitoring scope	**Monitoring scope** → **File** *(supported with limitations)* Disabled monitoring scope records are not migrated to KES. Kaspersky Endpoint Security adds only enabled records to the monitoring scope.
Trusted users	**Trusted users and / or user groups**
File operation markers	**File operation markers**
Calculate checksum for the file if possible	**Hashing**
Exclusions	**Exclusions** → **File**

Log Inspection

KSWS Log Inspection settings are migrated to the **Security Controls** section, **Log Inspection** subsection.

Log Inspection settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Apply custom rules for log inspection	*(does not migrate)* Kaspersky Endpoint Security applies all enabled custom rules.
Custom rules	**Custom rules** The **A service was installed in the system (for Server 2003 OS)** predefined rule is not migrated to KES.
Apply predefined rules for log inspection	*(does not migrate)* Kaspersky Endpoint Security applies all enabled predefined rules.
Predefined rules	**Predefined rules**

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Password brute-force detection	**Brute-force attack detection**
Network logon detection	**Network logon detection**
Exclusions (IP addresses)	**Exclusions** (IP address)
Exclusions (users)	**Exclusions** (Users)
Schedule settings	*(does not migrate)* It is not possible to configure a separate schedule for the component. The component is always on while Kaspersky Endpoint Security is operational.

Logs and notifications

Task logs

KSWS Logs settings are migrated to the **General settings** section, Interface and Reports and Storage subsections.

Logs settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Event logging	**Notifications** (**Interface** subsection)
Logs folder	*(does not migrate)* Kaspersky Endpoint Security saves reports in the `C:\ProgramData\Kaspersky Lab\KES.14.2\Report` folder.
Remove task logs older than N day(s)	*(does not migrate)* You can configure the storage period for KES reports under **General settings**, **Reports and Storage**.
Remove from the audit log events N day(s)	*(does not migrate)* Kaspersky Endpoint Security applies report storage limitations to all reports including system audit reports.
SIEM Integration	*(does not migrate)* You can configure SIEM integration in Kaspersky Security Center.

Event notifications

KSWS Notifications settings are migrated to the **General settings** section, Interface subsection.

Notifications settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Notifications	**Notifications**
Notify users: • **By using terminal service** • **By using Windows Messenger Service command**	*(does not migrate)* Kaspersky Endpoint Security does not support modifying notification text. Kaspersky Endpoint Security displays standard notifications.
Notify administrators: • **By using Windows Messenger Service command** • **By running executable file** • **By sending email**	Only email notification settings are migrated to Kaspersky Endpoint Security – **Email notification settings** (**Notifications** block). Other methods of notifying administrators are not supported.
Application database is out of date	**Send the "Databases out of date" notification if databases were not updated**

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Application database is extremely out of date	**Send the "Databases extremely out of date" notification if databases were not updated**
Critical areas scan has not been performed for a long time	*(does not migrate)* Kaspersky Endpoint Security generates a missed Critical Areas Scan event after three days.

Interaction with Administration Server

KSWS Administration Server interaction settings are migrated to the **General settings** section, **Reports and Storage** subsection.

Administration Server interaction settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Quarantined files	**Quarantine files**
Backed up files	**Backup files**
Blocked hosts	*(does not migrate)* Kaspersky Endpoint Security automatically sends data about blocked hosts.

Tasks

Activating the application

Kaspersky Endpoint Security does not support the *Application activation* task (KSWS). You can create an *Add key* task (KES), add a license key to the Installation package, or enable automatic license key distribution.

Copying Updates

The *Copying Updates* task settings (KSWS) are migrated to the *Update of databases and application modules* task (KES).

Copying Updates task settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Update source: • **Kaspersky Security Center Administration Server** • **Kaspersky update servers** • **Custom HTTP or FTP servers, or network folders**	**Update source**: • **Kaspersky Security Center**. • **Kaspersky update servers**. • **Specified by user**.
Use Kaspersky update servers if specified servers are not available	*(does not migrate)* Kaspersky Endpoint Security allows selecting multiple update sources, including Kaspersky update servers. If the first update source is not available, Kaspersky Endpoint Security lets you obtain updates from another source in the list.
Use proxy server settings to connect to Kaspersky update servers	*(does not migrate)* Kaspersky Endpoint Security uses the proxy server for all components. You can configure the proxy server connection in network options of the application.
Use proxy server settings to connect to other servers	*(does not migrate)* Kaspersky Endpoint Security uses the proxy server for all components. You can configure the proxy server connection in network options of the application.

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Copying updates settings: • **Copy database updates** • **Copy critical software modules updates** • **Copy database updates and critical updates of application modules**	*(does not migrate)* Kaspersky Endpoint Security copies database updates and critical updates of application modules as a single package.
Folder for local storage of copied updates	**Copy updates to folder**

Baseline File Integrity Monitor

The *Baseline File Integrity Monitor* task settings (KSWS) are migrated to the *System Integrity Check* task and to the policy section **Security Controls**, subsection **System Integrity Monitoring**.

Baseline File Integrity Monitor task settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Hash calculation algorithm: • **MD5** • **SHA256**.	*(does not migrate)* Kaspersky Endpoint Security uses the SHA256 algorithm for checksum calculation.
Scan scope	**Monitoring scope** (**System Integrity Monitoring** subsection)

Database Update

The *Database Update* task settings (KSWS) are migrated to the *Update of databases and application modules* task (KES).

Database Update task settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Update source: • **Kaspersky Security Center Administration Server** • **Kaspersky update servers** • **Custom HTTP or FTP servers, or network folders**	**Update source**: • **Kaspersky Security Center**. • **Kaspersky update servers**. • **Specified by user**.
Use Kaspersky update servers if specified servers are not available	*(does not migrate)* Kaspersky Endpoint Security allows selecting multiple update sources, including Kaspersky update servers. If the first update source is not available, Kaspersky Endpoint Security lets you obtain updates from another source in the list.
Use proxy server settings to connect to Kaspersky update servers	*(does not migrate)* Kaspersky Endpoint Security uses the proxy server for all components. You can configure the proxy server connection in network options of the application.
Use proxy server settings to connect to other servers	*(does not migrate)* Kaspersky Endpoint Security uses the proxy server for all components. You can configure the proxy server connection in network options of the application.
Lower the load on the disk I/O	*(does not migrate)*

Software modules updates

The *Software Modules Update* task settings (KSWS) are migrated to the *Update of databases and application modules* task (KES).

Software Modules Update task settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Update source: • Kaspersky Security Center Administration Server • Kaspersky update servers • Custom HTTP or FTP servers, or network folders	Update source: • Kaspersky Security Center. • Kaspersky update servers. • Specified by user.
Use Kaspersky update servers if specified servers are not available	*(does not migrate)* Kaspersky Endpoint Security allows selecting multiple update sources, including Kaspersky update servers. If the first update source is not available, Kaspersky Endpoint Security lets you obtain updates from another source in the list.
Use proxy server settings to connect to Kaspersky update servers	*(does not migrate)* Kaspersky Endpoint Security uses the proxy server for all components. You can configure the proxy server connection in network options of the application.
Use proxy server settings to connect to other servers	*(does not migrate)* Kaspersky Endpoint Security uses the proxy server for all components. You can configure the proxy server connection in network options of the application.
Copy and install critical software modules updates	Install critical and approved updates
Only check for critical software updates available	*(does not migrate)* Kaspersky Endpoint Security continually checks the availability of critical updates for application modules.
Allow operating system restart	*(does not migrate)* Kaspersky Endpoint Security prompts the user for permission to restart the computer.
Receive information about available scheduled software modules updates	*(does not migrate)* Kaspersky Endpoint Security displays notifications about software module updates.

Rollback of Application Database Update

The *Rollback of Application Database Update* task settings (KSWS) are migrated to the *Update rollback* task (KES). The new *Update rollback* task (KES) has a task start schedule – *Manually*.

On-Demand Scan

The *On-Demand Scan* task settings (KSWS) are migrated to the *Malware Scan* task (KES).

Virus Scan task settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Scan scope	Scan scope
Protection level: • Maximum protection • Recommended • Maximum performance	Security level: • High. • Recommended. • Low. Security level settings are different in KSWS and KES.
Objects to scan: • All objects • Objects scanned by format • Objects scanned according to list of extensions specified in anti-virus database • Objects scanned by specified list of extensions	File types: • All files. • Files scanned by format. • Files scanned by extension. Kaspersky Endpoint Security does not allow creating custom extension lists. Kaspersky Endpoint Security replaces the **Objects scanned by specified list of extensions** value with the **Files scanned by extension** value.
Subfolders	Include subfolders
Subfiles	*(does not migrate)*
Scan disk boot sectors and MBR	*(does not migrate)*
Scan alternate NTFS streams	*(does not migrate)*

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Scan only new and modified files	Scan only new and modified files
Scan of compound objects: • All archives • All SFX archives • All email databases • All packed objects • All plain email • All embedded OLE objects	Scan of compound files: • Scan archives. • Scan password-protected archives. • Scan distribution packages. • Scan email format files. • Scan files in Microsoft Office formats.
Action to perform on infected and other objects: • Disinfect • Disinfect. Remove if disinfection fails • Remove • Perform recommended action • Notify only	Action on threat detection: • Disinfect, delete if disinfection fails. • Disinfect, inform if disinfection fails. • Inform.
Action to perform on probably infected objects: • Quarantine • Remove • Perform recommended action • Notify only	*(does not migrate)* Kaspersky Endpoint Security applies the action if any threat is detected.
Perform actions depending on the type of object detected	*(does not migrate)*
Entirely remove compound file that cannot be modified by the application in case of embedded object detection	*(does not migrate)*
Exclude files	*(does not migrate)* Kaspersky Endpoint Security applies the trusted zone to all components. You can configure exclusions in trusted zone settings.
Do not detect	*(does not migrate)*
Stop scanning if it takes longer than N sec	Skip files that are scanned for longer than N sec
Do not scan compound objects larger than N MB	Do not unpack large compound files
Use iSwift technology	iSwift Technology
Use iChecker technology	iChecker Technology
Action on the offline files: • Do not scan • Scan resident part of file only • Scan entire file • Only if the file has been accessed within the specified period (days) • Do not copy file to a local hard drive, if possible	*(does not migrate)* Kaspersky Endpoint Security scans offline files in their entirety.

Application Integrity Check

The *Application Integrity Control* task settings (KSWS) are migrated to the *Application Integrity Check* task (KES).

Rule Generator for Applications Launch Control

Kaspersky Endpoint Security does not support the *Applications Launch Control Generator* task. You can generate rules in Application Control settings.

Rule Generator for Device Control

Kaspersky Endpoint Security does not support the *Rule Generator for Device Control* task. You can generate access rules in Device Control settings.

Migrating KSWS components

Prior to the local installation, Kaspersky Endpoint Security checks the computer for the presence of Kaspersky applications. If Kaspersky Security for Windows Server is installed on the computer, KES detects the set of KSWS components that are installed and selects the same components for installation.

KES components that KSWS does not have are installed as follows:

- AMSI Protection, Host Intrusion Prevention, Remediation Engine are installed with default settings.
- BadUSB Attack Prevention, Adaptive Anomaly Control, Data Encryption, Detection and Response components are ignored.

When installed remotely, the KES application ignores the set of installed KSWS components. The installer installs components that you select in properties of the installation package. After installing Kaspersky Endpoint Security and migrating policies and tasks, KES settings are configured in accordance with KSWS settings.

Migrating KSWS tasks and policies

You can migrate KSWS policy and task settings in the following ways:

- Using the Policies and Tasks Batch Conversion Wizard (hereinafter also referred to as the Migration Wizard).

  > The Migration Wizard for KSWS is available only in the Administration Console (MMC). Policy and task settings cannot be migrated in the Web Console and Cloud Console.

  The batch conversion wizard works differently for different versions of Kaspersky Security Center. We recommend upgrading the solution to version 14.2 or higher. In this version of Kaspersky Security Center, the Policies and tasks batch conversion wizard lets you migrate policies into a profile rather than into a policy. In this version of Kaspersky Security Center, the Policies and tasks batch conversion wizard also lets you migrate a broader range of policy settings.

- Using the New Policy Wizard for Kaspersky Endpoint Security for Windows.

  The New Policy Wizard lets you create a KES policy based on a KSWS policy.

KSWS policy migration procedures are different when using Migration Wizard and the New Policy Wizard.

Policies and tasks batch conversion wizard

The migration wizard transfers KSWS policy settings into the policy profile instead of KES policy settings. The *policy profile* is a set of policy settings that is activated on a computer if the computer satisfies the configured activation rules. The `UpgradedFromKSWS` device tag is selected as the triggering criterion of the policy profile. Kaspersky Security Center automatically adds the `UpgradedFromKSWS` tag to all computers on which you install KES on top of KSWS using the remote installation task. If you chose a different installation method, you can assign the tag to devices manually.

To add a tag to a device:

1. Create a new tag for servers — `UpgradedFromKSWS`.

   For more details about creating tags for devices, refer to the Kaspersky Security Center Help.

2. Create a new administration group in the Kaspersky Security Center console and add servers to which you want to assign the tag to this group.

   You can group servers using the selection tool. For more details about working with selections, refer to the Kaspersky Security Center Help.

3. Select all servers of the administration group in the Kaspersky Security Center console, open the properties of the selected servers and assign the tag.

If you are migrating multiple KSWS policies, each policy is converted to a profile within one overarching policy. If the KSWS policy already contains profiles, these profiles are also migrated as profiles. As a result you will get a single policy that includes profiles corresponding to all KSWS policies.

How to use the Policies and Tasks Batch Conversion Wizard to migrate KSWS policy settings

1. In the Administration Console, select the Administration Server and right-click to open the context menu.

2. Select **All tasks** → **Policies and tasks batch conversion wizard**.

The Policies and Tasks Batch Conversion Wizard will start. Follow the instructions of the Wizard.

Step 1. Selecting the application for which you need to convert policies and tasks

At this step, you need to select Kaspersky Endpoint Security for Windows. Go to the next step.

Step 2. Conversion of policies

The migration wizard creates KSWS policy profiles inside a KES policy. Select the Kaspersky Security for Windows Server policies that you want to convert to policy profiles. Go to the next step.

The Migration Wizard will then begin to convert the policies. The names of new policy profiles will correspond to original KSWS policies.

Step 3. Policy migration report

The migration wizard creates a policy migration report. The policy migration report contains the date and time when the policies were converted, the name of the original KSWS policy, the name of the target KES policy, and the name of the new policy profile.

Step 4. Conversion of tasks

The Migration Wizard creates new tasks for Kaspersky Endpoint Security for Windows. In the task list, select the KSWS tasks that you want to create for Kaspersky Endpoint Security. The new tasks will be named *<KSWS task name> (converted)*. Go to the next step.

Step 5. Wizard completion

Finish the wizard. As a result, the wizard does the following:

- New policy profiles are added to the Kaspersky Endpoint Security policy.

  The policy includes profiles with the settings of Kaspersky Security for Windows Server. The new policy has the *Active* status. The Wizard leaves the KSWS policies unchanged.

- Creates new Kaspersky Endpoint Security tasks.

  The new tasks are copies of KSWS tasks. The Wizard leaves the KSWS tasks unchanged.

The new policy profile with KSWS settings will be named *UpgradedFromKSWS <Name of the Kaspersky Security for Windows Server policy>*. In profile properties, the migration wizard automatically selects the `UpgradedFromKSWS` device tag as the triggering criterion. Thus the settings from the policy profile are applied to servers automatically.

Wizard for creating a policy based on a KSWS policy

When a KES policy is created based on a KSWS policy, the wizard transfers settings to the new policy accordingly. That is, one KES policy will correspond to one KSWS policy. The wizard does not convert the policy to a profile.

How to use the New Policy Wizard to migrate KSWS policy settings

1. Open the Kaspersky Security Center Administration Console.
2. In the **Managed devices** folder in the Administration Console tree, select the folder with the name of the administration group to which the relevant client computers belong.
3. In the workspace, select the **Policies** tab.
4. Click **New policy**.

   The Policy Wizard starts.
5. Follow the instructions of the Policy Wizard.

Step 1. Selecting the application to create group policy

Select the **Kaspersky Endpoint Security for Windows (14.2)** application.

Step 2. Naming the group policy

Enter a name for the group policy, for example, *Policy for the office*.

Select the **Use policy settings for an earlier version of the application** check box. Click **Browse** and select the KSWS policy.

Step 3. Participating in Kaspersky Security Network

Please read and accept the terms of the Kaspersky Security Network (KSN) Statement.

Step 4. Selecting the application usage mode on computers

Select **Standard mode to protect hosts**. Kaspersky Endpoint Security provides a common policy for all application modes and OS types.

> We recommend using different policies for different modes and operating system types.

Step 5. Importing settings

> This step is available if you select manual policy configuration at step 4.

You can create a policy based on Kaspersky Endpoint Security settings from a CFG configuration file. The New policy wizard does not support encrypted configuration files. When exporting the configuration file, skip the file encryption step.

When importing an application CFG configuration file, not all policy settings are available to the wizard. For example, policy profiles are missing from application settings. If you want to transfer all settings and profiles to the policy, you can import another policy from a KLP file.

> When importing a configuration file, Kaspersky Endpoint Security does not transfer crypto-container passwords. If you use two-way authentication when connecting to servers, you need to specify crypto-container passwords from scratch.

Step 6 - 10. Configuring policy settings

This step is available if you select manual policy configuration at step 4.

Follow the steps to manage policy settings.

Step 11. Configuring the trusted zone

Configure the trusted zone. You can add predefined scan exclusions and trusted applications. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers. Predefined scan exclusions and trusted applications can also help you quickly configure Kaspersky Endpoint Security in Light Agent mode in Citrix and VMware virtual environments.

Step 12. Selecting the policy status

- **Active**. After the next synchronization, the policy will be used as the active policy on the computer.

  The settings of an active policy are saved on client computers during synchronization. You cannot simultaneously apply multiple policies to one computer, therefore only one policy may be active in each group.

- **Inactive**. Backup policy. If necessary, an inactive policy can be switched to active status.

  You can create an unlimited number of inactive policies. An inactive policy does not affect application settings on computers in the network. Inactive policies are intended as preparations for emergency situations, such as a virus attack. If there is an attack via flash drives, you can activate a policy that blocks access to flash drives. In this case, the active policy automatically becomes inactive.

- **Out-of-office**. The policy is activated when a computer leaves the organization network perimeter.

Finish the wizard.

Additional configuration of policies and tasks after migration

KSWS and KES have different sets of components and policy settings, so after migration you must verify that policy settings satisfy your corporate security requirements.

Check the following basic policy settings:

- Password protection. KSWS Password protection settings are not migrated. Kaspersky Endpoint Security has a built-in Password protection feature. If necessary, turn on Password protection and set a password.

- Trusted zone. The methods used by KSWS and KES for selecting objects differ. When migrating, KES supports exclusions defined as individual files or paths to file / folder. If KSWS has exclusions configured as a predefined area or a script URL, such exclusions are not migrated. After migration, you must add such exclusions manually.

To make sure Kaspersky Endpoint Security works correctly on servers, it is recommended to add files important for the server's functioning to the trusted zone. For SQL servers, you must add MDF and LDF database files. For Microsoft Exchange servers, you must add CHK, EDB, JRS, LOG, and JSL files. You may use masks, for example, `C:\Program Files (x86)\Microsoft SQL Server\*.mdf`.

Starting with Kaspersky Endpoint Security 12.6 for Windows, scan exclusions and trusted applications are added to the trusted zone. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers.

- Firewall. KSWS Firewall functions are performed by the system-level Firewall. In KES, a separate component is responsible for the Firewall functionality. After migration, you can configure the Kaspersky Endpoint Security Firewall.
- Kaspersky Security Network. Kaspersky Endpoint Security does not support configuring KSN for individual components. Kaspersky Endpoint Security uses KSN for all application components. To use KSN, you must accept the new terms and conditions of the Kaspersky Security Network Statement.
- Web Control. Blocking rules for web traffic category control are migrated to a single blocking rule in Kaspersky Endpoint Security. Kaspersky Endpoint Security ignores allowing rules for category control. Kaspersky Endpoint Security does not support all categories of Kaspersky Security for Windows Server. Categories that do not exist in Kaspersky Endpoint Security are not migrated. Therefore, web resource classification rules with unsupported categories are not migrated. If necessary, add Web Control rules.
- Proxy server. The proxy server connection password is not migrated. Enter the password to be used for connecting to the proxy server manually.
- Schedules of individual components. Kaspersky Endpoint Security does not support configuring schedules for individual components. The components are always on while Kaspersky Endpoint Security is operational.
- Set of components. The set of available Kaspersky Endpoint Security features depends on the type of operating system: workstation or server. For example, out of encryption tools, only BitLocker Drive Encryption is available on servers.
- 🔒 attribute. The state of the 🔒 attribute is not migrated. The 🔒 attribute will have the default value. By default, almost all settings in the new policy have a prohibition applied on modifying settings in child policies and in the local application interface. The attribute has the 🔓 value for policy settings in the **Managed Detection and Response (Industrial CyberSecurity)** section and in the **User support** group of settings (**Interface** section). If necessary, configure the inheritance of settings from the parent policy.
- Working with active threats. Advanced Disinfection works differently for workstations and servers. You can configure advanced disinfection in *Malware Scan* task settings and in application settings.
- Upgrading the application. To install major updates and patches without restarting, you must change the application upgrade mode. By default, the Install application updates without restart feature is disabled.
- Kaspersky Endpoint Agent. Kaspersky Endpoint Security has a built-in agent for working with Detection and Response solutions. If necessary, transfer Kaspersky Endpoint Agent policy settings to the Kaspersky Endpoint Security policy.

- *Update of databases and application modules* tasks. Make sure that the settings of the *Update of databases and application modules* task were migrated correctly. Instead of KSWS's three tasks, KES uses a single KES task. You may optimize the *Update of databases and application modules* tasks and remove superfluous tasks.

- Other tasks. Application Control, Device Control, and File Integrity Monitor components work differently in KSWS and KES. KES does not use *Baseline File Integrity Monitor*, *Applications Launch Control Generator*, *Rule Generator for Device Control* tasks. Therefore these tasks are not migrated. After migration, you can configure the File Integrity Monitor, Application Control, Device Control components.

Migrating KSWS trusted zone

A *trusted zone* is a system administrator-configured list of objects and applications that Kaspersky Endpoint Security does not monitor when active. You can migrate trusted zone objects from KSWS to KES using the *Policies and Tasks Batch Conversion Wizard* or the *wizard for creating a new KES policy based on the KSWS policy*. KSWS and KES have different sets of components and features, so after migration you must verify that exclusions satisfy your corporate security requirements. The methods of adding exclusions to the trusted zone are also different for KES and KSWS. The Migration Wizard does not have tools to migrate all KSWS exclusions. This means that after the migration, you must manually add some of the KSWS exclusions.

To make sure Kaspersky Endpoint Security works correctly on servers, it is recommended to add files important for the server's functioning to the trusted zone. For SQL servers, you must add MDF and LDF database files. For Microsoft Exchange servers, you must add CHK, EDB, JRS, LOG, and JSL files. You may use masks, for example, `C:\Program Files (x86)\Microsoft SQL Server\*.mdf`.

Starting with Kaspersky Endpoint Security 12.6 for Windows, scan exclusions and trusted applications are added to the trusted zone. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers.

KES and KSWS trusted zone creation methods.

KSWS		KES
Object to scan		
• Predefined scope	*(does not migrate)*	
• Disk, folder or network location	→	**File or folder**
• File	→	**File or folder**
• Script file or web address	*(does not migrate)*	
Detected object	→	**Type of detected object**
Trusted processes	→	**Trusted applications**

Migration of scanned objects

KSWS exclusions that have the **Object to scan** method selected in their properties are migrated to KES exclusions that have the **File or folder** method selected in their properties, with some limitations. The migration of an exclusion depends on the object selection method:

- Predefined scope – *does not migrate*.

  After migration, you must add such exclusions manually. Exclusions as predefined areas must be configured in the *Malware Scan* task settings.

- Disk, folder or network location – migrate to KES exclusions that have the "File or folder" method selected in properties.

- File – migrate to KES exclusions that have the "File or folder" method selected in properties.

- Script file or web address – *does not migrate*.

  After migration, you must add such exclusions manually. Exclusions as script web addresses must be added to trusted web addresses for Web Threat Protection.

If the **Apply also to subfolders** check box is selected for the scanned object, this setting is migrated to KES exclusions (the **Include subfolders** check box).

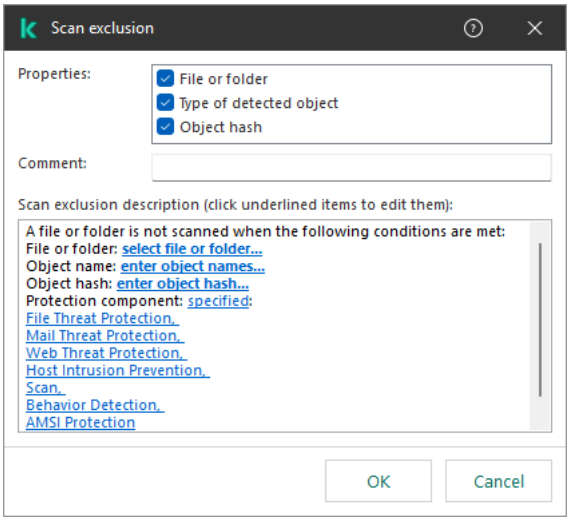

KES exclusion settings

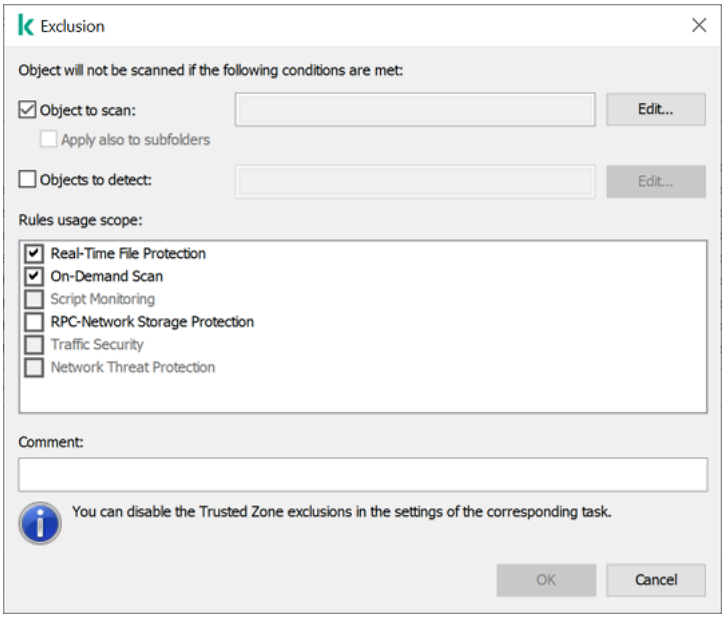

KSWS exclusion settings

Migration of detected objects

KSWS exclusions that have the **Detected object** method selected in their properties are migrated to KES exclusions that have the **Type of detected object** method selected in their properties. The name of the detected object corresponds to the classification of the Kaspersky Encyclopedia (for example, `Email-Worm`, `Rootkit`, or `RemoteAdmin`). Kaspersky Endpoint Security supports masks with the question mark `?` (matches any single character) and the asterisk `*` (matches any sequence of characters).

Migration of exclusion usage scope

The usage scope of an exclusion is a set of components to which the exclusion applies. KES and KSWS have different sets of components so the Migration Wizard cannot migrate the exclusion usage scope. Therefore, if at least one component is selected in the KSWS usage scope, KES applies the exclusion to all application components.

You can configure the KSWS usage scope in trusted zone settings and also in the settings of KSWS protection components. To do so, you can select or clear the **Apply Trusted Zone** check box in the corresponding section of the policy. The settings of KES protection components do not include such a check box. This means the trusted zone status in individual component settings is lost upon migration. After completing the migration, select components to which the exclusion applies in trusted zone settings in the KES policy.

Migrating comments

Comments from the KSWS trusted zone are migrated to KES exclusion comments without modification.

Migrating trusted processes

KSWS trusted processes are migrated to KES trusted processes with some limitations. Migrating trusted processes depends on the object selection method:

- Path to the file on the protected device – migrates to KES trusted applications.
- File hash – *does not migrate*.

If KSWS has trusted processes configured as a file hash, such trusted processes are not migrated. After migration, you must add such trusted processes manually.

If the **Do not check file backup operations** check box is selected in trusted process settings, this setting is migrated to KES trusted applications (the **Do not monitor application activity** check box).

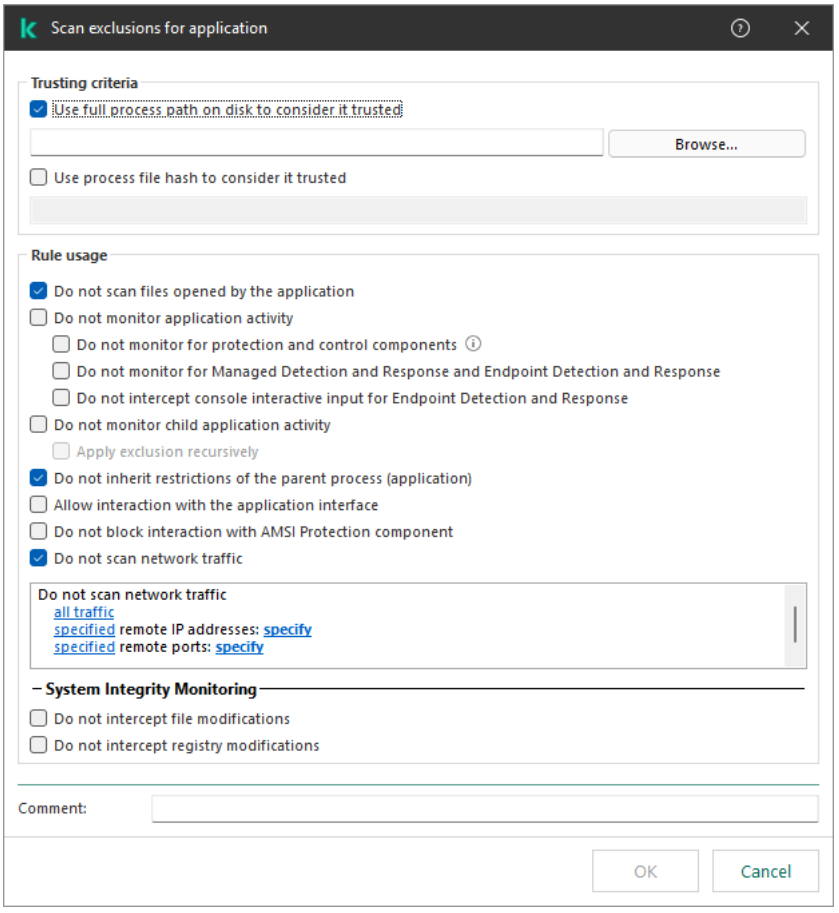

KES trusted application settings

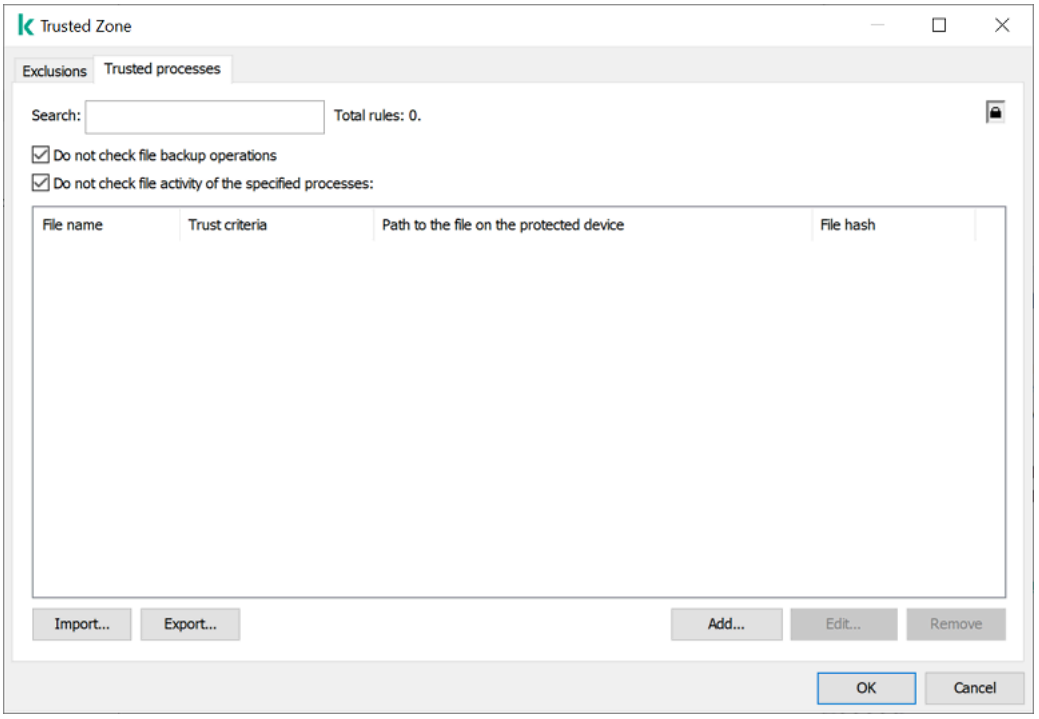

KSWS trusted process settings

Migrating KSWS Applications Launch Control rules

KSWS Applications Launch Control is block-by-default. That is, Applications Launch Control automatically blocks all applications that are not specified in rules as allowed applications. Therefore the migration wizard for KES Application Control automatically sets the **Allowlist** control mode, which corresponds to the block-by-default principle.

You can migrate rules from KSWS to KES using the *Policies and Tasks Batch Conversion Wizard* or the *wizard for creating a new KES policy based on the KSWS policy*.

Migrating the mode of Applications Launch Control

The mode of KSWS Applications Launch Control migrates to KES Application Control as follows:

- **Statistics only** → **Test rules**;
- **Active** → **Apply rules**.

Migrating KSWS Applications Launch Control predefined rules

By default, KSWS Applications Launch Control includes two rules:

- **Allow scripts and MSI by OS-trusted certificate**
- **Allow executable by OS-trusted certificate**

Predefined rules allow running *scripts*, *MSI packages*, and *executable files* signed by a trusted root certificate. If at least one predefined KSWS rule has the **Allow** type, the migration wizard creates a new allowing rule, **Applications with trusted root certificates**. That is, KES Application Control uses a single rule to allow running trusted scripts, MSI packages, and executable files.

If both KSWS predefined rules have the **Deny** type, KES ignores the predefined rules.

Migrating KSWS Applications Launch Control custom rules

KSWS Applications Launch Control rules regulate the execution of files in accordance with the following criteria:

- signature with a digital certificate;
- SHA256 hash;
- file path.

Rules are created differently in KSWS and KES, therefore the migration wizard creates *application categories*, which include conditions and exclusions from KSWS rules, and adds these application categories to KES rules. The wizard uses the **Certificate**, **Folder path**, and **File hash** conditions in application categories. New application categories are available in the Kaspersky Security Center Administration Console in the **Application management** → **Application categories** section.

The migration wizard groups KSWS rules by type and by user. Next, the wizard creates application categories that include conditions and exclusions from KSWS rules, and adds the application categories to new KES rules. The wizard specifies the names of KSWS rules in the **Description** field of KES rules.

Migrating KSWS Applications Launch Control advanced settings

The principle of operation of KSWS Applications Launch Control and KES Application Control is different so the migration wizard may migrate a subset of settings.

Applications Launch Control settings

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Repeat action taken for the first file launch on all the subsequent launches for this file	*(does not migrate)* Kaspersky Endpoint Security scans the application every time it attempts to run.
Deny the command interpreters launch with no command to execute	*(does not migrate)* Kaspersky Endpoint Security allows running command interpreters if they are not prohibited by Application Control.
Apply rules to executable files	*(does not migrate)* Rule application scope cannot be configured in KES Application Control settings. KES Application Control applies rules to all types of files: executable files, scripts, and MSI packages. If all file types are included in the rule application scope in KSWS, during migration KES carries over the KSWS rules. If some file type is excluded from the rule application scope in KSWS, during migration KES also carries over KSWS rules, but **Test rules** is selected as the Application Control action.
Monitor loading of DLL modules	**Monitor loading of DLL modules (significantly increases the load on the system)**
Apply rules to scripts and MSI packages	*(does not migrate)* Rule application scope cannot be configured in KES Application Control settings. KES Application Control applies rules to all types of files: executable files, scripts, and MSI packages. If all file types are included in the rule application scope in KSWS, during migration KES carries over the KSWS rules. If some file type is excluded from the rule application scope in KSWS, during migration KES carries over KSWS rules, but **Test rules** is selected as the Application Control action.
Deny applications untrusted by KSN	*(does not migrate)* Kaspersky Endpoint Security does not take into account the reputation of applications and allows or denies running applications in accordance with rules.
Allow applications trusted by KSN	During the migration, KES adds a new allowing rule. The **Other Software\Applications, trusted according to reputation in KSN** KL category is specified as the rule triggering condition.
Users and / or user groups allowed to run applications trusted by KSN	**Users and their rights** in an Application Control allow rule that includes the KL category **Other Software\Applications, trusted according to reputation in KSN**.
Automatically allow software distribution via applications and packages listed	Software Distribution Control in KSWS and KES works differently. During the migration, KES adds new allowing rules for applications that have automatic software distribution allowed. The file hash is specified as the rule triggering condition.
Always allow software distribution via Windows Installer	Software Distribution Control in KSWS and KES works differently. During the migration, KES adds new allowing rules for applications that have automatic software distribution allowed (**Software distribution applications and packages allowed**). The file hash is specified as the rule triggering condition. In account properties **Trusted Updaters** check box is selected.

Kaspersky Security for Windows Server settings	Kaspersky Endpoint Security for Windows settings
Always allow software distribution via SCCM using the Background Intelligent Transfer Service	*(does not migrate)*
Software distribution applications and packages allowed	Software Distribution Control in KSWS and KES works differently. During the migration, KES adds new allowing rules for applications that have automatic software distribution allowed. The file hash is specified as the rule triggering condition. In account properties **Trusted Updaters** check box is selected.
Schedule settings	*(does not migrate)* If a schedule is configured for the component in KSWS settings, the Application Control component is enabled upon migration. If a schedule is not configured for the component in KSWS settings, Application Control is disabled upon migration. It is not possible to configure a separate schedule for the component. The component is always on while Kaspersky Endpoint Security is operational.

Installing KES instead of KSWS

You can install Kaspersky Endpoint Security in the following ways:

- Installing KES after removing KSWS (recommended).
- Installing KES on top of KSWS.

Removing Kaspersky Security for Windows Server

You can remove the application remotely using the *Uninstall application remotely* task or locally on the server. You may need to restart the server after removing KSWS. If you want to install Kaspersky Endpoint Security without a restart, please make sure that Kaspersky Security for Windows Server is completely removed. If the application is not completely removed, installing Kaspersky Endpoint Security may cause faulty operation of the server. Making sure that the application is completely removed is also recommended if you have used the kavremover utility. The kavremover utility does not support managing KSWS.

If Password Protection is enabled to restrict access to KSWS, enter the uninstallation password in the settings fo the KES installation package.

After removing KSWS, install Kaspersky Endpoint Security for Windows using any available method.

Installing Kaspersky Endpoint Security

When you install KES remotely, components that you have selected in installation package properties are installed on the server. We recommend selecting default components in installation package properties. A restart is not necessary when installing KES on top of KSWS.

Prior to the local installation, Kaspersky Endpoint Security checks the computer for the presence of Kaspersky applications. If Kaspersky Security for Windows Server is installed on the computer, KES detects the set of KSWS components that are installed and selects the same components for installation. A restart is not necessary when installing KES on top of KSWS.

If installing KES on top of KSWS failed, you can roll back the installation. After rolling back the installation, it is recommended to restart the server and try again.

KSWS settings and tasks are not migrated when Kaspersky Endpoint Security for Windows is installed. To migrate settings and tasks, run the Policies and tasks batch conversion wizard.

You can check the list of installed components in the **Security** section of the application interface, using the `status` command, or in the Kaspersky Security Center console in computer properties. You can change the set of components after installation by using the *Change application components*.

Migrating the [KSWS+KEA] configuration to [KES+built-in agent] configuration

To support using Kaspersky Endpoint Security for Windows as part of EDR (KATA), EDR Optimum, EDR Expert, Kaspersky Sandbox, KUMA, and MDR, a built-in agent has been added to the application. You no longer need a separate Kaspersky Endpoint Agent application to work with these solutions.

When migrating from KSWS to KES, the EDR (KATA), EDR Optimum, EDR Expert, Kaspersky Sandbox, KUMA, and MDR solutions continue to work with Kaspersky Endpoint Security built-in agents. In addition, Kaspersky Endpoint Agent will be removed from the computer.

Migrating the [KSWS+KEA] configuration to [KES+built-in agent] involves the following steps:

1. **Migrating from KSWS to KES**

   Migrating from KSWS to KES involves installing Kaspersky Endpoint Security instead of Kaspersky Security for Windows Server.

   Administrators typically enable Password protection to restrict access to KSWS and KEA. Starting with Kaspersky Security Center Linux 15.1, you can enter the application uninstallation password in the *Install application remotely* task settings. The task allows entering only one uninstallation password. That is, if the same password is set for KSWS and KEA, the KSWS and KEA applications are removed successfully. If the passwords are different, removal of one of the applications fails with an access error. To complete the migration, you must disable Password Protection for the application whose password you could not enter in the settings of the *Install application remotely* task.

   To carry out the migration, you must select the components needed to support Detection and Response solutions as part of Kaspersky Endpoint Security. After installing the application, Kaspersky Endpoint Security switches to using the built-in agent and removes Kaspersky Endpoint Agent.

2. **Migrating the policy and tasks**

Migrating [KSWS+KEA] policies and tasks to [KES+built-in agent] involves the following steps:

1. Migrating policies and tasks from KSWS to KES using the Policies and Tasks Batch Conversion Wizard (only available on the Administration Console (MMC)).

   As a result, a policy profile with the *UpgradedFromKSWS <Name of the Kaspersky Security for Windows Server policy>* name is added to the KES policy. New KES tasks are also created with *<KSWS task name> (converted)* names.

2. Migrating policies and tasks from KEA to KES using the wizard for migration from Kaspersky Endpoint Agent (only available in Web Console and Cloud Console).

   As a result, a new policy is created with the name *<Name of the Kaspersky Endpoint Security policy> & <Name of the Kaspersky Endpoint Agent policy>*. New tasks and KES tasks are also created.

3 Licensing functionality

If you use a common Kaspersky Endpoint Detection and Response Optimum or Kaspersky Optimum Security license to activate Kaspersky Endpoint Security for Windows and Kaspersky Endpoint Agent, EDR Optimum functionality will be activated automatically after upgrading the application to version 11.7.0. You do not need to do anything else.

If you use a stand-alone Kaspersky Endpoint Detection and Response Optimum Add-on license to activate EDR Optimum functionality, you must make sure that the EDR Optimum Add-on key is added to the Kaspersky Security Center repository and the automatic license key distribution functionality is enabled. After you upgrade the application to version 11.7.0, EDR Optimum functionality is activated automatically.

If you use a Kaspersky Endpoint Detection and Response Optimum or Kaspersky Optimum Security license to activate Kaspersky Endpoint Agent, and a different license to activate Kaspersky Endpoint Security for Windows, you must replace the Kaspersky Endpoint Security for Windows key with the common Kaspersky Endpoint Detection and Response Optimum or Kaspersky Optimum Security key. You can replace the key using the *Add key* task.

You do not need to activate Kaspersky Sandbox functionality. Kaspersky Sandbox functionality will be available immediately after upgrading and activating Kaspersky Endpoint Security for Windows.

Only the Kaspersky Anti Targeted Attack Platform license can be used to activate Kaspersky Endpoint Security as part of the Kaspersky Anti Targeted Attack Platform solution. After you upgrade the application to version 12.1, EDR (KATA) functionality is activated automatically. You do not need to do anything else.

4 Checking the health of Kaspersky Endpoint Detection and Response Optimum and Kaspersky Sandbox

If after the upgrade, the computer has the *Critical* status in the Kaspersky Security Center console:

- Make sure that the computer has Network Agent version 13.2 or higher installed.
- Check the operating status of the built-in agent by viewing the *Report on status of application components*. If a component has the *Not installed* status, install the component using the *Change application components* task.
- Make sure you accept the Kaspersky Security Network Statement in the new policy of Kaspersky Endpoint Security for Windows.

Make sure EDR Optimum functionality is activated using the *Report on status of application components*. If a component has the *Not covered by license* status, make sure that the automatic license key distribution functionality of EDR Optimum is turned on.

Making sure Kaspersky Security for Windows Server was successfully removed

Make sure Kaspersky Security for Windows Server is completely removed:

- The `%ProgramFiles%\Kaspersky Lab\Kaspersky Security for Windows Server\` folder does not exist.
- The following services are not present:
  - Kaspersky Security Service (KAVFS)
  - Kaspersky Security Management service (KAVFSGT)
  - Kaspersky Security Exploit Prevention service (KAVFSSLP)
  - Kaspersky Security Script Checker service (KAVFSSCS)

  You can check running services in Task Manager or by issuing the `sc query` command (see figure below).
- The following drivers are not present:
  - klam.sys
  - klflt.sys
  - klramdisk.sys
  - klelaml.sys
  - klfltdev.sys
  - klips.sys
  - klids.sys
  - klwtpee

You can check installed drivers in the `C:\Windows\System32\drivers` folder or by issuing the `sc query` command. If a service or driver are missing, you will get the following response:

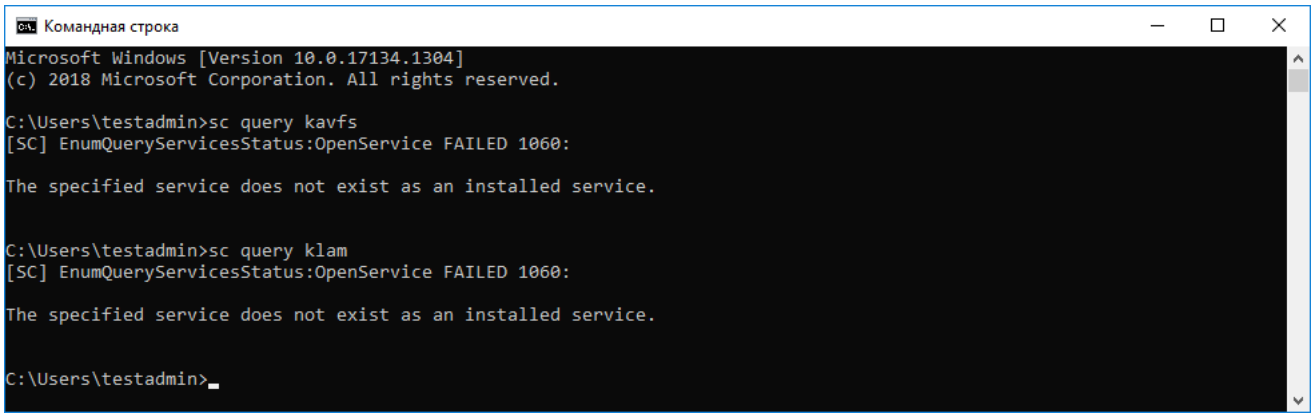

Making sure Kaspersky Security for Windows Server services and drivers were successfully removed

If application or driver files remain on the server, delete the relevant files manually. If Kaspersky Security for Windows Server services are still running on the server, stop (`sc stop`) and delete (`sc delete`) the services manually. To stop the klam.sys driver, use the `fltmc unload klam` command.

Activating KES with a KSWS key

After installing the application, you can activate Kaspersky Endpoint Security for Windows (KES) using a Kaspersky Security for Windows Server (KSWS) license key. The activation process after migration depends on the KSWS activation method (see the table below).

Kaspersky Endpoint Security does not support the *Kaspersky Security for Storage license*. To work with this license, you need to use Kaspersky Security for Windows Server.

To activate KES with the KSWS key you can use only the activation code. If you are using a key file to activate the application, you need to contact Technical Support for a Kaspersky Endpoint Security key file.

Activating Kaspersky Endpoint Security for Windows with a Kaspersky Security for Windows Server key

Kaspersky Security for Windows Server activation method	Migrating the key to Kaspersky Endpoint Security for Windows.
Automatic distribution of the KSWS license key to computers.	If automatic key distribution is enabled in KSWS license key properties, KES is automatically activated with the KSWS key.
The KSWS key is added by a task.	If your KSWS is activated using the task, the KSWS license key is deleted during migration from KSWS. You must activate the application again. For example, you can add a license key to the Kaspersky Endpoint Security for Windows installation package.
The KSWS key is added locally in the application interface.	If your KSWS is activated locally using the Application Activation Wizard, the KSWS license key is deleted during migration from KSWS. You must activate the application again. For example, you can add a license key to the Kaspersky Endpoint Security for Windows installation package.
The KSWS key is added to the installation package.	If your KSWS is activated using the key from the installation package, the KSWS license key is deleted during migration from KSWS. You must activate the application again. For example, you can add a license key to the Kaspersky Endpoint Security for Windows installation package.
Paid virtual machine image (Amazon Machine Image – AMI) in Amazon Web Services (AWS).	If you purchased Kaspersky Security Center as a paid virtual machine image (Amazon Machine Image – AMI) in Amazon Web Services (AWS), activating KES is not required. In this case, Kaspersky Security Center uses the AWS subscription that is already added to the application.
Ready-made free-of-charge Kaspersky Security Center image with your own license (Bring Your Own License – BYOL model).	If you are using an out-of-the-box free Kaspersky Security Center image with your own license in a cloud environment (the Bring Your Own License – BYOL model), you must activate the application using any available method. You will need a Kaspersky Hybrid Cloud Security license.

Special considerations for migrating high-load servers

On high-load servers, it is important to monitor performance and avoid faults. After migration to Kaspersky Endpoint Security for Windows, we recommend temporarily disabling application components that use substantial server resources relative to other components. After you make sure that the server is performing as normal, you can turn the application components back on.

We recommend migrating high-load servers as follows:

1. Create a Kaspersky Endpoint Security policy with default settings.

   Default settings are considered optimal. This settings are recommended by Kaspersky experts. Default settings provide recommended protection level and optimal resource use.

2. In policy settings, turn off the following components: Network Threat Protection, Behavior Detection, Exploit Prevention, Remediation Engine, Application Control.

   If your organization has the Kaspersky Managed Detection and Response (MDR) solution deployed, upload the BLOB configuration file to the Kaspersky Endpoint Security policy.

3. Remove Kaspersky Security for Windows Server from the server.

4. Install Kaspersky Endpoint Security for Windows with the default set of components.

   If your organization has Detection and Response solutions deployed, select the relevant components in the properties of the installation package.

5. Check the settings of the application:

   - The application is activated with the KSWS license key.
   - The new policy is applied. Previously selected components are disabled.

6. Make sure the server is working. Make sure that Kaspersky Endpoint Security for Windows is not using more than 1% of the server's resources.

7. If necessary, create scan exclusions, add trusted applications, create a list of trusted web addresses.

8. Turn on Behavior Detection, Exploit Prevention, Remediation Engine components. Make sure that Kaspersky Endpoint Security for Windows is not using more than 1% of the server's resources.

9. Turn on the Network Threat Protection component. Make sure that Kaspersky Endpoint Security for Windows is not using more than 2% of the server's resources.

10. Turn on the Application Control component in rule testing mode.

11. Make sure Application Control is working. If necessary, add new Application Control rules and turn off rule testing mode after confirming that Application Control is working.

After migrating from KSWS to KES, make sure that the application is operating correctly. Check the status of the server in the console (should be *OK*). Make sure no errors are reported for the application, also check the time of the last connection to the Administration Server, the time of the last database update and the server protection status.

Managing the application on a server in Server Core mode

A server in Server Core mode does not have a GUI. Therefore you can only manage the application remotely using the Kaspersky Security Center console or locally on the command line.

Managing the application using the Kaspersky Security Center console

Installing the application using the Kaspersky Security Center console is not different from installing it the normal way. When creating an installation package, you can add a license key to activate the application. You can use a Kaspersky Endpoint Security for Windows key or a Kaspersky Security for Windows Server key.

> On a server in Server Core mode, the following application components are not available: Web Threat Protection, Mail Threat Protection, Web Control, BadUSB Attack Prevention, File Level Encryption (FLE), Kaspersky Disk Encryption (FDE).

Restart is not required when installing Kaspersky Endpoint Security. Restart is required only if you have to remove incompatible applications prior to installation. Restart may also be required when updating the application version. The application cannot display a window to prompt the user to restart the server. You can learn about the need to restart the server from reports in the Kaspersky Security Center console.

Managing the application on a server in Server Core mode is not different from managing a computer. You can use policies and tasks to configure the application.

Managing the application on a server in Server Core mode involves the following special considerations:

- The server in Server Core mode does not have a GUI, therefore Kaspersky Endpoint Security does not display a warning telling the user that Advanced Disinfection is needed. To disinfect a threat, you need to enable Advanced Disinfection technology in application settings and enable immediate Advanced Disinfection in *Malware Scan* task settings. Then you need to start a *Malware Scan* task.

- BitLocker Drive Encryption is only available with a Trusted Platform Module (TPM). A PIN / password cannot be used for encryption because the application is unable to display the password prompt window for preboot authentication. If the operating system has Federal Information Processing standard (FIPS) compatibility mode enabled, connect a removable drive for saving the encryption key before you begin encrypting the drive.

Managing the application from the command line

When you cannot use a GUI, you can manage Kaspersky Endpoint Security from the command line.

To install the application on a server in Server Core mode, run the following command:

```
setup_kes.exe /pEULA=1 /pPRIVACYPOLICY=1 /s
```

To activate the application, run the following command:

```
avp.com license /add <activation code or key file>
```

To check application profile statuses, run the following command:

```
avp.com status
```

To view the list of application management commands, run the following command:

```
avp.com help
```

Migrating from [KSWS+KEA] to [KES+built-in agent]

When migrating from Kaspersky Security for Windows Server (KSWS) to Kaspersky Endpoint Security (KES), you can use the follow recommendations to configure server protection and optimize performance. Here we will look at an example of migration for a single organization.

Infrastructure of the organization

The company has the following equipment installed:

- Kaspersky Security Center 14.2

  The administrator manages Kaspersky solutions using the Administration Console (MMC). Kaspersky Endpoint Detection and Response Optimum (EDR Optimum) is also deployed

  In Kaspersky Security Center, three administration groups are created, containing servers of the organization: two administration groups for SQL servers and an administration group for Microsoft Exchange servers. Each administration group is managed by its own policy. *Database Update* and *On-demand scan* tasks are created for all servers in the organization.

  The KSWS activation key is added to Kaspersky Security Center. Automatic key distribution is enabled.

- SQL servers with Kaspersky Security for Windows Server 11.0.1 and Kaspersky Endpoint Agent 3.11 installed. The SQL servers are combined into two clusters.

  KSWS is managed by *SQL_Policy(1)* and *SQL_Policy(2)* policies. *Database Update*, *On-demand scan* tasks are also created.

- A Microsoft Exchange server with Kaspersky Security for Windows Server 11.0.1 and Kaspersky Endpoint Agent 3.11 installed.

  KSWS is managed by the *Exchange_Policy* policy. *Database Update*, *On-demand scan* tasks are also created.

Planning the migration

The migration involves the following steps:

1. Migrating KSWS tasks and policies using the Policies and Tasks Batch Conversion Wizard.
2. Migrating the Kaspersky Endpoint Agent policy using the Policies and Tasks Batch Conversion Wizard.
3. Using tags to activate policy profiles in the properties of the new policy.
4. Installing KES instead of KSWS.
5. Activating EDR Optimum.
6. Confirming that KES is working.

The migration scenario is initially performed on one of the cluster of SQL servers. Then the migration scenario is performed on the other cluster of SQL servers. Then the migration scenario is performed on the Microsoft Exchange.

Migrating KSWS tasks and policies using the Policies and Tasks Batch Conversion Wizard

To migrate KSWS tasks, you can use the Policies and Tasks Batch Conversion Wizard (the migration wizard). As a result, instead of the *SQL_Policy(1)*, *SQL_Policy(2)*, and *Exchange_Policy* policies, you will get a single policy with three profiles for SQL and Microsoft Exchange servers respectively. The new policy profile with KSWS settings will be named *UpgradedFromKSWS <Name of the Kaspersky Security for Windows Server policy>*. In profile properties, the migration wizard automatically selects the `UpgradedFromKSWS` device tag as the triggering criterion. Thus the settings from the policy profile are applied to servers automatically.

Migrating the Kaspersky Endpoint Agent policy using the Policies and Tasks Batch Conversion Wizard

To migrate Kaspersky Endpoint Agent policies, you can use the Policies and Tasks Batch Conversion Wizard. The Policy and Task Migration Wizard for Kaspersky Endpoint Agent is only available in the Web Console.

Using tags to activate policy profiles in the properties of the new policy

Select the device tag that you assigned earlier as the profile activation condition. Open policy properties and select *General rules for policy profile activation* as the profile activation condition.

Installing KES instead of KSWS

Before installing KES, you must disable Password protection in KSWS policy properties.

Installing KES involves the following steps:

1. Prepare the installation package. In installation package properties, select the Kaspersky Endpoint Security for Windows 12.0 distribution kit and select the default set of components.

2. Create an *Install application remotely* task for one of the SQL server administration groups.

3. In task properties, select the installation package and the license key file.

4. Wait until the task successfully completes.

5. Repeat KES installation for remaining administration groups.

Kaspersky Security Center automatically adds the `UpgradedFromKSWS` tag to names of computers on the console after the KES installation is complete.

To check the KES installation, you can use the *Report on protection deployment*. You can also check the device status. To confirm application activation, you can use the *Report on usage of license keys*.

Activating EDR Optimum

You can activate EDR Optimum functionality using a stand-alone Kaspersky Endpoint Detection and Response Optimum Add-on license. You must confirm that the EDR Optimum key is added to the Kaspersky Security Center repository and the automatic license key distribution functionality is enabled.

To check EDR Optimum activation, you can use the *Report on status of application components*.

Confirming that KES is working

To confirm that KES is working, you can check and see that no errors are reported. The device status must be *OK*. Update and malware scan tasks and successfully completed.

Light Agent mode to protect virtual machines

Starting with version 12.8, you can use Kaspersky Endpoint Security for Windows as part of Kaspersky Security for Virtualization Light Agent. *Kaspersky Security for Virtualization Light Agent* is an integrated solution that provides comprehensive protection of virtual machines against various types of information security threats, network attacks, and phishing attacks. To use this solution, you must install the application in Light Agent mode.

Installation of Kaspersky Endpoint Security in Light Agent mode on Arm-based virtual machines is not supported.

You can use Kaspersky Endpoint Security in Light Agent mode as part of Kaspersky Security for Virtualization Light Agent starting with version 6.2.

When you start Light Agent, it establishes and maintains a connection to the virtual machine SVM (Secure Virtual Machine). A Protection Server is deployed on the SVM. The *Protection Server* is the Kaspersky Security for Virtualization Light Agent solution component that scans files for viruses and other malware, updates anti-virus databases and manages license keys. Light Agent sends files or their fragments that need scanning to the SVM. Scan results are available for all virtual machines with Light Agent installed (the SharedCache technology). This technology increases the solution efficiency and provides a faster response to threats.

The infrastructure of the organization may contain many virtual machines with Light Agent installed and many SVMs. The Integration Server handles the interaction between virtual machines and SVMs. The *Integration Server* is a component of the Kaspersky Security for Virtualization Light Agent solution that generates a list of available SVMs and transfers this data to Light Agents, participates in the discovery of SVMs by Light Agents, protects the connection between Light Agents and SVMs, and performs other functions.

Special considerations for Light Agent mode

You can manage Kaspersky Endpoint Security in Standard mode and Light Agent mode using Kaspersky Endpoint Security policies and tasks. In Light Agent mode, some components and features of the application are not available.

Updating databases and application software modules

Kaspersky Endpoint Security in Light Agent mode uses special malware databases that the application needs when working as part of the Kaspersky Security for Virtualization Light Agent solution. Kaspersky Endpoint Security gets databases and application module updates from the Protection Server.

Databases and modules on protected virtual machines are updated using a special *Update of databases and application modules* task, in which a folder on the SVM is specified as the update source. Light Agent runs the *Update of databases and application modules* task automatically. You cannot select a different update source, configure the task schedule, or remove the task.

A rollback of the latest malware database update is also handled on the Protection Server side. After a rollback of a databases and application modules update on the SVM, a special local *Update of databases and application modules* task is started on the protected virtual machine. This task makes the Light Agent go back to using the previous set of malware databases.

Kaspersky Endpoint Security in Light Agent mode does not support the *Update rollback* task.

Activating Light Agent

To activate the application, you must add a license key to the SVM to which the Light Agent is connected. You do not need to activate the application separately.

Other special considerations for Light Agent mode

- When creating a policy for the application, we recommend selecting Light Agent mode. In this mode, the New Policy Wizard prompts you to configure the SVM connection. These settings are required for the application to work in Light Agent mode.
- You cannot install Data Encryption components and Adaptive Anomaly Control in Light Agent mode. The set of components also depends on the type of the guest operating system: workstation or server.
- Light Agent does not support integration with the Kaspersky Endpoint Detection and Response Expert and Kaspersky Endpoint Detection and Response Expert (cloud) solutions.
- You can manage Light Agent in Administration Console (MMC) and Kaspersky Security Center Web Console. It is not possible to manage Light Agent in the Kaspersky Security Center Cloud Console.
- Changing the set of application components on VDI virtual machines is not supported.
- Kaspersky Endpoint Security communicates with KSN servers through a KSN proxy server. Direct communication with KSN is not supported.
- Cloud mode of Kaspersky Security Network is not supported.
- Using the application proxy server when connecting to the Integration Server (VIIS), the Protection Server (SVM), and KSN servers is not supported.

Preliminary configuration of the virtual machine

You can install Kaspersky Endpoint Security on a virtual machine that uses virtual platform technology. Kaspersky Endpoint Security supports VMware, Microsoft Hyper-V, Citrix virtual platforms. Before the installation, you must perform the preliminary configuration of the virtual machines.

Compatibility with Citrix App Layering technology

If you intend to use the Full User Layer for saving the state of the temporary virtual machines, you must do the following before installing on the virtual machine template:

1. Create the C:\Program Files\Unidesk\Uniservice\UserExclusions\KESLA.txt file and add the following exclusions to it:

   - `C:\ProgramData\KasperskyLab\`
   - `C:\ProgramData\Kaspersky Lab\`
   - `C:\Program Files (x86)\Kaspersky Lab\`

2. In the registry of the operating system in the HKEY_LOCAL_MACHINE\System\CurrentControlSet\Services\Unifltr key, create a new DWORD value named MiniFilterBypass and set it to 1.

3. In the registry of the operating system in the HKEY_LOCAL_MACHINE\SYSTEM\CurrentControlSet\Services\Unirsd key, create a new MULTI_SZ value named ExcludeKey and set it to \Registry\Machine\SOFTWARE\WOW6432Node\KasperskyLab.

4. Restart the virtual machine.

For installation on virtual machines in an infrastructure that uses Citrix App Layering, you must do the following:

1. Install the Kaspersky Security Center Administration Agent and Kaspersky Endpoint Security for Windows on the virtual machine template in the Application Layer.

2. Create a virtual machine image consisting of multiple layers.

3. Deploy the created image on hypervisors that support the Citrix App Layering solution.

4. Configure the creation of temporary virtual machines from the created image.

For details about the installation of anti-virus software alongside Citrix App Layering, please refer to the Citrix App Layering documentation.

Compatibility with Citrix Provisioning (Citrix Provisioning Services) technology

To make sure the application is compatible with the Citrix Provisioning technology (Citrix Provisioning Services):

- If the Citrix Provisioning Target Device software is installed on the virtual machine, you must remove it before installing the Kaspersky Endpoint Security application (for details, please visit the Citrix technical support website). After installing the application, you must reinstall Citrix Provisioning Target Device. You also need to reinstall the Citrix Provisioning Target Device when restoring the application, including when upgrading the operating system.

Upgrading the operating system involves the following steps:

1. Delete the Citrix Provisioning Target Device.
2. Upgrade the operating system.
3. After starting the virtual machine, make sure that the Kaspersky Endpoint Security application is running and working correctly.
4. Reinstall the Citrix Provisioning Target Device.

- When installing the application using the Setup Wizard or remotely using Kaspersky Security Center, you must select the **Ensure compatibility with Citrix PVS** check box.

Compatibility with Omnissa App Volumes technology

Before installing on the virtual machine template, you must create the %SVAgent%\Config\Custom\snapvol.cfg file and add the following exclusions to it:

- `exclude_path=\ProgramData\Kaspersky Lab`
- `exclude_path=\ProgramData\KasperskyLab`
- `exclude_path=\Program Files\Kaspersky Lab`
- `exclude_path=\Program Files\Common Files\Kaspersky Lab`
- `exclude_path=\Program Files\Kaspersky Lab`
- `exclude_path=\Program Files (x86)\Kaspersky Lab`
- `exclude_path=\Program Files (x86)\Common Files\Kaspersky Lab`
- `exclude_process_path=\Program Files (x86)\Kaspersky Lab`
- `exclude_process_path=\Program Files (x86)\Common Files\Kaspersky Lab`
- `exclude_process_path=\Program Files\Common Files\Kaspersky Lab`
- `exclude_process_path=\Program Files\Kaspersky Lab`
- `exclude_process_name=avp.exe`
- `exclude_process_name=klnagent.exe`
- `exclude_registry=\REGISTRY\MACHINE\SOFTWARE\Wow6432Node\KasperskyLab`
- `exclude_registry=\REGISTRY\MACHINE\SOFTWARE\KasperskyLab`
- `exclude_registry=\REGISTRY\MACHINE\SYSTEM\CurrentControlSet\Services\klupd_klif_arkmon`
- `exclude_registry=\REGISTRY\MACHINE\SYSTEM\CurrentControlSet\Services\klupd_klif_klark`

- `exclude_registry=\REGISTRY\MACHINE\SYSTEM\CurrentControlSet\Services\klupd_klif_klbg`
- `exclude_registry=\REGISTRY\MACHINE\SYSTEM\CurrentControlSet\Services\klupd_klif_mark`
- `exclude_registry=\REGISTRY\MACHINE\SYSTEM\CurrentControlSet\Services\klupd_klif_swmon`

For details, please refer to the Omnissa documentation.

Installing Light Agent

Installation of Kaspersky Endpoint Security in Light Agent mode on Arm-based virtual machines is not supported.

Installing the application in Light Agent mode is the same as in Standard mode. Before installing Light Agent on a virtual machine, you must make sure the Kaspersky Security Center Network Agent is installed. *Network Agent* facilitates interaction between the Administration Server and a virtual machine.

Light Agent can be installed on a virtual machine in one of the following ways:

- Remotely using Kaspersky Security Center.
- Locally using the Setup Wizard.
- Locally using the command line.

To install Light Agent, you must select the appropriate configuration in installation package settings or in Setup Wizard.

When installing Light Agent on a server, advanced protection components (Behavior Detection, Exploit prevention, Remediation Engine) are excluded from the default configuration of the application. Default application settings provide the recommended protection level and optimal use of server resources. When installing Light Agent on a workstation, advanced protection components are included in the default configuration of the application.

When installing Light Agent, we recommend selecting predefined exclusions and trusted applications for the relevant virtual environment. Predefined scan exclusions and trusted applications help you quickly set up the application and avoid virtual environment compatibility problems. You can also configure predefined scan exclusions and trusted applications after the installation, in the policy.

How to install Light Agent using the Setup Wizard

1. Copy the distribution kit folder to the virtual machine.
2. Run setup_kes.exe.

   The Setup Wizard starts.

Configuration of Kaspersky Endpoint Security

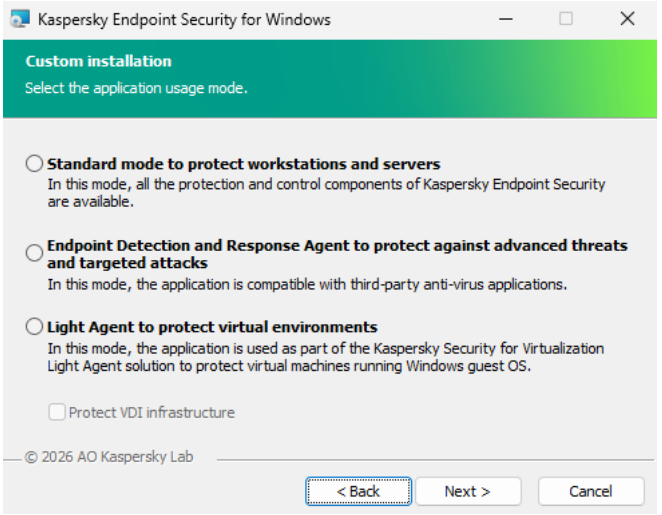

Choosing the configuration of the application

Select the **Light Agent to protect virtual environments** configuration. This configuration is intended for the application that is used as part of the Kaspersky Security for Virtualization Light Agent solution. Light Agent must be installed on each virtual machine that needs to be protected using the solution. In this configuration, you cannot use Data Encryption components or Adaptive Anomaly Control. If you are installing Light Agent on a virtual machine template that will be used to create *nonpersistent virtual machines*, select the **Protect VDI infrastructure** check box (VDI stands for Virtual Desktop Infrastructure). The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. In this mode, Light Agent declines application updates that require restarting the virtual machine. When receiving application updates that require a restart, Light Agent generates an event about needing to update the template of the protected virtual machines.

Kaspersky Endpoint Security components

Select the components that you want to install (see figure below). You can change the available application components after the application is installed. To do so, you need to run the Setup Wizard again and choose to change the available components.

Advanced settings

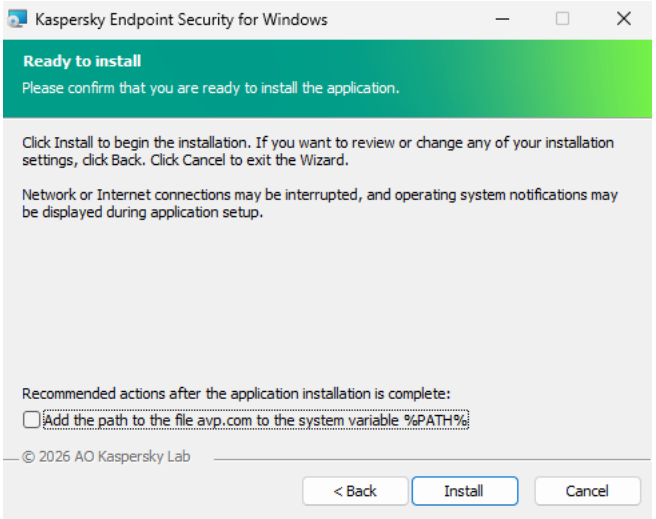

Advanced application installation settings

Protect the application installation process. Installation protection includes protection against replacement of the distribution package with malicious applications, blocking access to the installation folder of Kaspersky Endpoint Security, and blocking access to the system registry section containing application keys. However, if the application cannot be installed (for example, when performing remote installation with the help of Windows Remote Desktop), you are advised to disable protection of the installation process.

Ensure compatibility with Citrix PVS. You can enable support of Citrix Provisioning Services to install Kaspersky Endpoint Security to a virtual machine.

Add the path to the file avp.com to the system variable %PATH%. You can add the installation path to the %PATH% variable for convenient use of the command line interface.

How to install Light Agent using the command line

1. Run the command line interpreter (cmd.exe) as an administrator.

2. Go to the folder where the Kaspersky Endpoint Security distribution package is located.

3. Run the following command:

   ```
   setup_kes.exe /pEULA=1 /pPRIVACYPOLICY=1 /pKSN=1 /pLIGHTAGENTMODE=1 [/pVDI=1] [/s]
   ```

   or

   ```
   msiexec /i <distribution kit name> EULA=1 PRIVACYPOLICY=1 KSN=1 LIGHTAGENTMODE=1 [VDI=1] [/qn]
   ```

   The `VDI` option enables the VDI (Virtual Desktop Infrastructure) protection mode. The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. In this mode, Light Agent declines application updates that require restarting the virtual machine. When receiving application updates that require a restart, Light Agent generates an event about needing to update the template of the protected virtual machines. By default, the VDI protection mode is disabled.

As a result, Light Agent is installed on the virtual machine with the default set of components. You can edit the set of components and specify advanced setting using the setup.ini file. You can also specify installation settings on the command line.

How to install Light Agent using the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.

2. In the console tree, select the **Advanced** → **Remote installation** → **Installation packages** folder.

   This opens a list of installation packages that have been downloaded to Kaspersky Security Center.

3. Open the properties of the Kaspersky Endpoint Security for Windows installation package.

   If necessary, create a new installation package.

4. Go to the **Settings** section.

5. Select the **Light Agent to protect virtual environments** configuration. This configuration is intended for the application that is used as part of the Kaspersky Security for Virtualization Light Agent solution. Light Agent must be installed on each virtual machine that needs to be protected using the solution. In this configuration, you cannot use Data Encryption components or Adaptive Anomaly Control. If you are installing Light Agent on a virtual machine template that will be used to create *nonpersistent virtual machines*, select the **Protect VDI infrastructure** check box (VDI stands for Virtual Desktop Infrastructure). The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. In this mode, Light Agent declines application updates that require restarting the virtual machine. When receiving application updates that require a restart, Light Agent generates an event about needing to update the template of the protected virtual machines.

6. Select the components that you want to install.

   You can change the available application components after the application is installed.

7. Configure the trusted zone. Select predefined scan exclusions and trusted applications for the virtual environment in which you are installing the application.

   Predefined scan exclusions and trusted applications help you quickly set up the application and avoid virtual environment compatibility problems.

8. Save your changes.

9. Create a remote installation task. In task properties, select the installation package you created.

How to install Light Agent using Web Console

1. In the main window of the Web Console, select **Discovery & deployment** → **Deployment & assignment** → **Installation packages**.

This opens a list of installation packages that have been downloaded to Kaspersky Security Center.

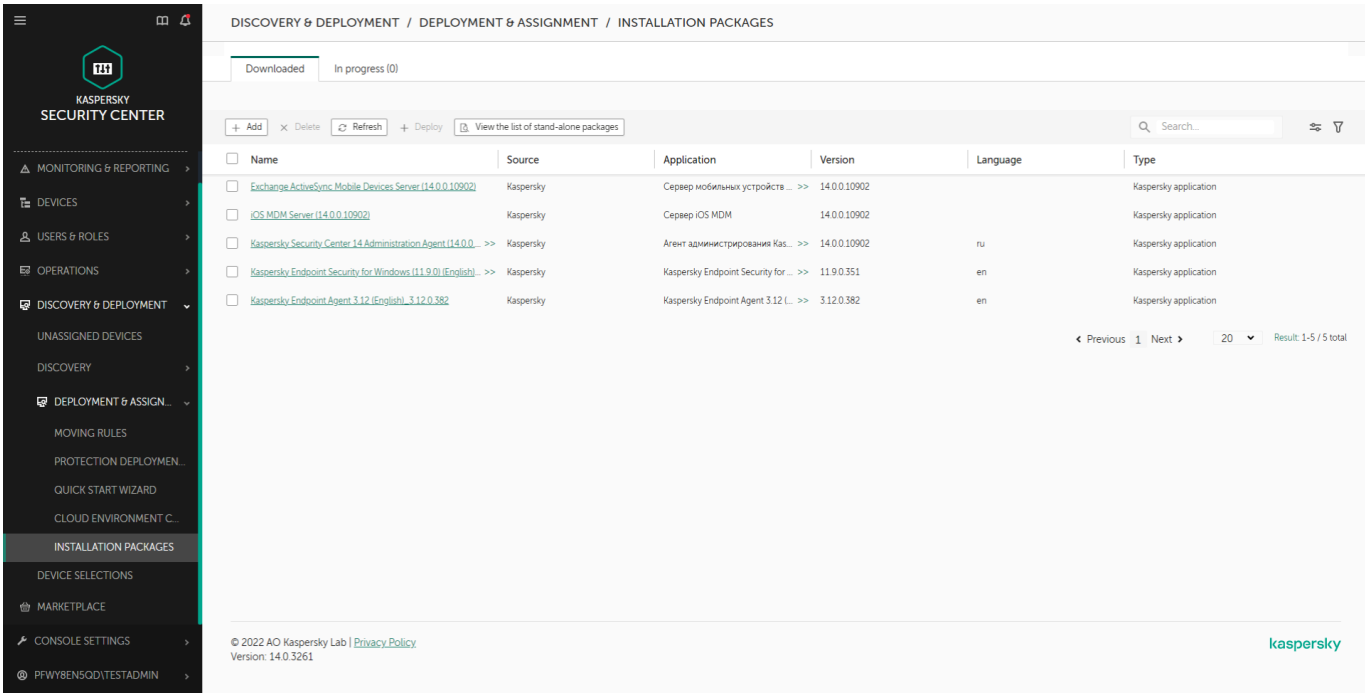

List of installation packages

2. Open the properties of the Kaspersky Endpoint Security for Windows installation package.

   If necessary, create a new installation package.

3. Select the **Settings** tab.

4. Go to the **Protection components** section.

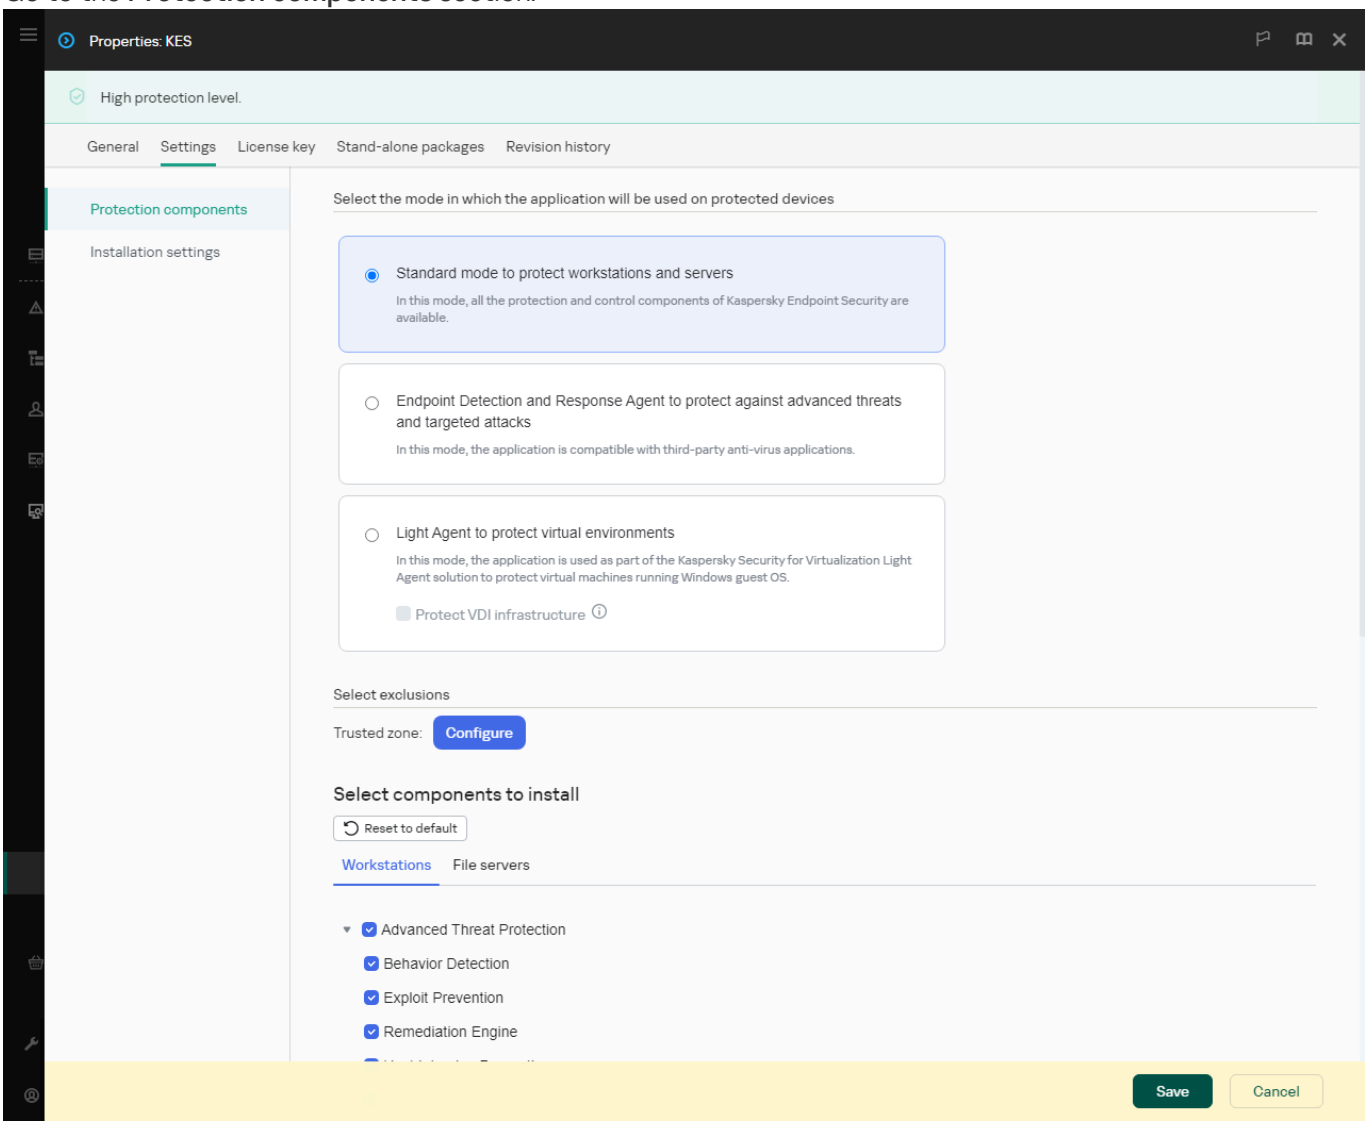

Components included in the installation package

5. Select the **Light Agent to protect virtual environments** configuration. This configuration is intended for the application that is used as part of the Kaspersky Security for Virtualization Light Agent solution. Light Agent must be installed on each virtual machine that needs to be protected using the solution. In this configuration, you cannot use Data Encryption components or Adaptive Anomaly Control. If you are installing Light Agent on a virtual machine template that will be used to create *nonpersistent virtual machines*, select the **Protect VDI infrastructure** check box (VDI stands for Virtual Desktop Infrastructure). The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. In this mode, Light Agent declines application updates that require restarting the virtual machine. When receiving application updates that require a restart, Light Agent generates an event about needing to update the template of the protected virtual machines.

6. Select the components that you want to install.

   You can change the available application components after the application is installed.

7. Configure the trusted zone. Select predefined scan exclusions and trusted applications for the virtual environment in which you are installing the application.

   Predefined scan exclusions and trusted applications help you quickly set up the application and avoid virtual environment compatibility problems.

8. Save your changes.

9. Create a remote installation task. In task properties, select the installation package you created.

As a result, Light Agent is installed on the virtual machine. You can use the interface of the application and an icon of the application is displayed in the notification area. Now you need to configure the connection of the Light Agent to SVM.

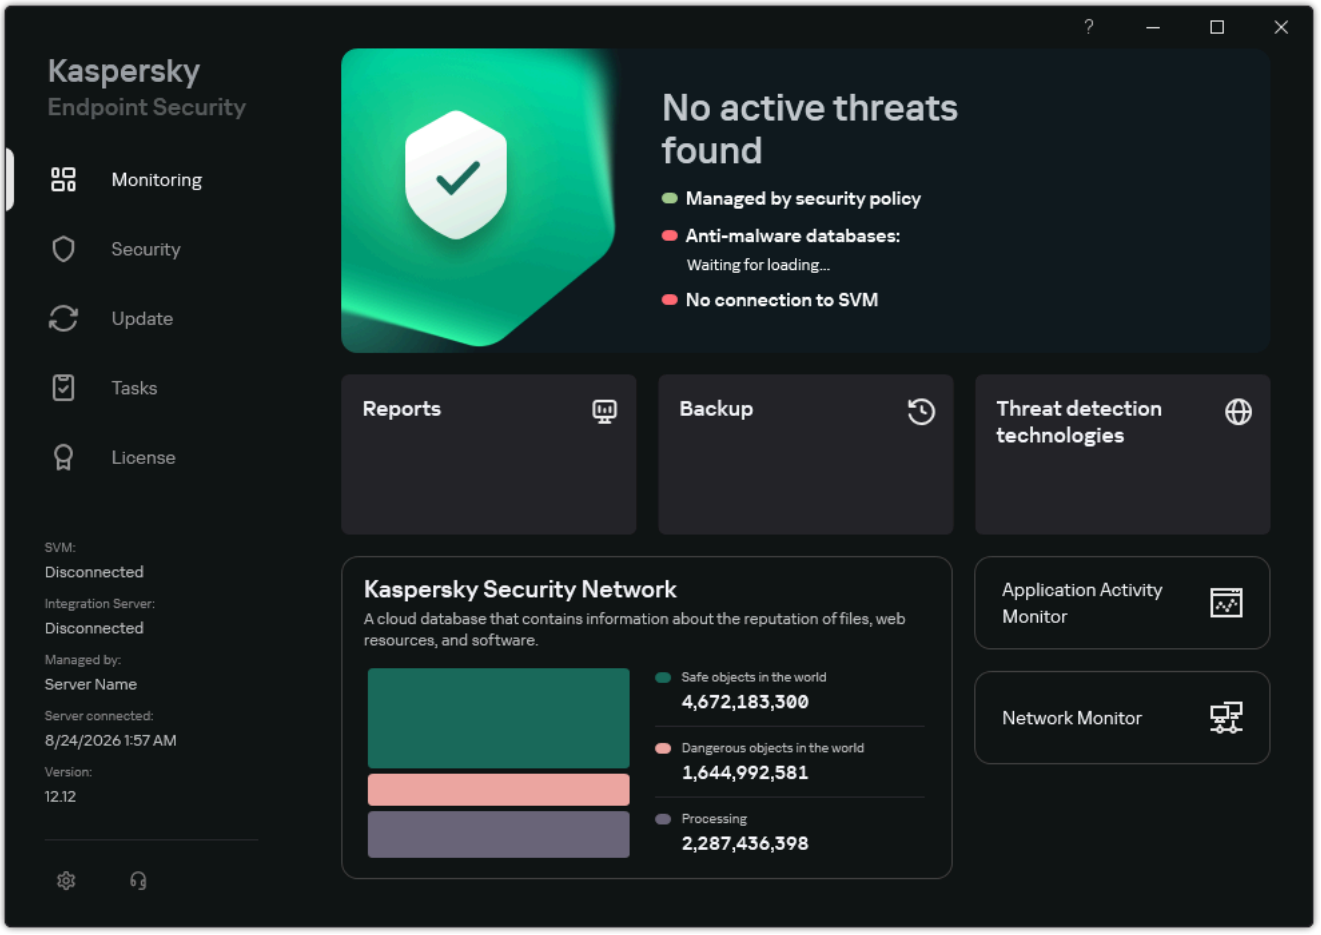

Main window of Light Agent

Connecting Light Agent to SVM

The Kaspersky Security for Virtualization Light Agent solution requires continuous communication of the Light Agent and SVM. This is necessary to scan files sent by the Light Agent for viruses and other malware. Without an SVM connection, the Light Agent cannot send files for scanning, If the connection cannot be established for over five minutes, the scan finishes with an error.

Connecting a Light Agent to an SVM involves the following steps:

1. Light Agent gets the list of available SVMs.
2. Light Agent determines an available Protection Server (SVM) that is optimal for connection according to the SVM selection algorithm.
3. Light Agent checks additional SVM connection settings: tags, connection protection status, application functionality covered by the license.
4. Connecting Light Agent to SVM.

You can get information about the status of the Light Agent's connection to the SVM in the Kaspersky Endpoint Security or using the application command. The application generates an event whenever the Light Agent's SVM connection is lost or established, and sends these events to Kaspersky Security Center. If you are using an Integration Server for SVM discovery, you can get information about the status of the SVM and the number of connected Light Agents in the Integration Server Console. For details about SVM status monitoring, see the Kaspersky Security for Virtualization Light Agent Help.

SVM discovery

You can select one of the SVM discovery methods for the Light Agent:

- Using the Integration Server (VIIS).

  Integration Server is the solution component that enables the interaction of Kaspersky Security for Virtualization Light Agent with the virtual infrastructure and generates a list of SVMs available for connection. Light Agent establishes a connection with the Integration Server and gets the list of SVM addresses.

  The Integration Server is most useful in large virtual infrastructures because it automatically balances the load between SVMs, gets information about available SVMs, analyzes this information, and provides Light Agents with a list of Protection Servers (SVMs) that are optimal for connection.

  For Light Agent to be able to get a list of SVMs, you only need to enter the address of the Integration Server.

- Using a high-availability cluster of Integration Servers.

  Deployment of a high-availability cluster of Integration Servers is available in Kaspersky Security for Virtualization Light Agent starting with version 6.4. A high-availability cluster of Integration Servers provides uninterrupted protection of the virtual environment thanks to the failover of SVMs and Light Agents to a backup Integration Server whenever the primary Integration Server fails. A special cluster component, the *load balancer*, is responsible for the server failover. For details about a high-availability cluster of Integration Servers, see the Kaspersky Security for Virtualization Light Agent Help.

  For the Light Agent to get a list of SVMs, you need to enter the address of the device on which the load balancer is installed.

- Using the list of SVM addresses.

  If you need to specify individual SVMs that you want Light Agent to connect to, you can prepare a list manually.

  You need to list addresses of available SVMs that the Light Agent can connect to.

How to configure SVM discovery by Light Agent in the Administration Console (MMC)

1. Open the Kaspersky Security Center Administration Console.
2. In the console tree, select **Policies**.
3. Select the necessary policy and double-click to open the policy properties.
4. In the policy window, select **Light Agent mode** → **SVM discovery settings**.

5. Select an SVM discovery method.

- **Use Integration Server**. Enter the settings for connecting to the Integration Server depending on your infrastructure:

  - **Single Integration Server**. Enter the Integration Server connection settings: IPv4 address or fully qualified domain name (FQDN) of the device.

  - **High-availability cluster of Integration Servers**. Enter the IP address and port of the load balancer that is part of the cluster.

- **Use a custom list of SVM addresses**. Create a list of SVMs that Light Agent can connect to. Specify the IP address in IPv4 format or the fully qualified domain name (FQDN) of SVM. Each list item must be entered on a new line or separated from the previous item with a semicolon (`;`) character.

  > In the list of SVM addresses, specify only full domain names (FQDN) that are matched by a single IP address. Using a fully qualified domain name that corresponds to multiple IP addresses can lead to errors in the solution.

6. To apply the policy to computers, close the padlock icons and save your changes.

How to configure SVM discovery by Light Agent in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Light Agent Mode** → **SVM discovery settings**.

5. Select an SVM discovery method.

- **Use Integration Server**. Enter the settings for connecting to the Integration Server depending on your infrastructure:

  - **Single Integration Server**. Enter the Integration Server connection settings: IPv4 address or fully qualified domain name (FQDN) of the device.

  - **High-availability cluster of Integration Servers**. Enter the IP address and port of the load balancer that is part of the cluster.

- **Use a custom list of SVM addresses**. Create a list of SVMs that Light Agent can connect to. Specify the IP address in IPv4 format or the fully qualified domain name (FQDN) of SVM. Each list item must be entered on a new line or separated from the previous item with a semicolon (`;`) character.

  > In the list of SVM addresses, specify only full domain names (FQDN) that are matched by a single IP address. Using a fully qualified domain name that corresponds to multiple IP addresses can lead to errors in the solution.

6. To apply the policy to computers, close the padlock icons and save your changes.

How to configure SVM discovery by Light Agent in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, under **Light Agent mode** click the **SVM discovery settings** tile.

3. Select an SVM discovery method.

   - **Use Integration Server**. Enter the settings for connecting to the Integration Server depending on your infrastructure:

     - **Single Integration Server**. Enter the Integration Server connection settings: IPv4 address or fully qualified domain name (FQDN) of the device.

     - **High-availability cluster of Integration Servers**. Enter the IP address and port of the load balancer that is part of the cluster.

   - **Use a custom list of SVM addresses**. Create a list of SVMs that Light Agent can connect to. Specify the IP address in IPv4 format or the fully qualified domain name (FQDN) of SVM. Each list item must be entered on a new line or separated from the previous item with a semicolon (**;**) character.

     > In the list of SVM addresses, specify only full domain names (FQDN) that are matched by a single IP address. Using a fully qualified domain name that corresponds to multiple IP addresses can lead to errors in the solution.

4. Save your changes.

Configuring the SVM selection algorithm for Light Agent

The infrastructure of the organization may have multiple deployed SVMs to which Light Agents can connect. To balance the load on the network and resources of the virtual infrastructure, you need to distribute the Light Agents among the SVMs.

SVM selection algorithms

Light Agents can apply the following SVM selection algorithms for connection: Standard algorithm (by default) and Extended algorithm.

Standard algorithm	Extended algorithm
If this algorithm is used, after installation and startup, the Light Agent on the virtual machine chooses to connect to an SVM that is *local* with respect to the Light Agent. If no local SVMs suitable for connection are to be found, the Light Agent selects an SVM to which the least number of Light Agents is connected, regardless of the position of the SVM in the virtual infrastructure. The application does not determine whether the SVM is local relative to the Light Agent if large infrastructure protection mode is enabled for the Protection Server on the SVM. In this case, it is recommended to use the extended SVM selection algorithm and select the Integration Server as the SVM discovery method. Whether an SVM is considered local to a Light Agent depends on the type of virtual infrastructure.	If this algorithm is applied, you can define the following SVM selection settings: • whether to consider or ignore the SVM location in the infrastructure when choosing SVMs for connection • if the SVM location is considered, the method for determining SVM locality relative to the Light Agent If Light Agents ignore the location of SVMs in the infrastructure, Light Agents will be able to connect to any SVMs available for connection. If Light Agents must consider the location of SVMs in the infrastructure, you need to select the SVM path type that will be considered when determining the SVM locality relative to the Light Agent. Whether an SVM is considered local to the Light Agent depends on the type of virtual infrastructure. If Light Agents consider the location of SVMs in the infrastructure when choosing which SVM to connect to, Light Agents can only connect to SVMs that are local. For example, if you specify a hypervisor cluster as the SVM path type, all SVMs deployed on this hypervisor cluster will be considered local to the Light Agent, and the Light Agent can connect only to one of these SVMs. If there are no SVMs available for connection in the same cluster in which the Light Agent is running, the Light Agent does not connect to an SVM. When selecting SVMs, Light Agents also consider the number of connected Light Agents to ensure that Light Agents are evenly distributed among SVMs available for connection. If the Light Agent uses the extended SVM selection algorithm and the SVM discovery method is set to SVM address list, and large infrastructure protection mode is enabled on the SVM, then connecting a Light Agent to this SVM is only possible if the SVM path is ignored.
Basis Dynamix Enterprise	
In a virtual infrastructure based on Basis Dynamix Enterprise, the SVM that is considered to be local to a Light Agent is the SVM that is deployed on the same node as the virtual machine with the Light Agent installed.	In a virtual infrastructure based on Basis Dynamix Enterprise, an SVM can be considered local to the Light Agent in any one of the following cases: • An SVM is deployed on the same node as the virtual machine with the Light Agent installed. • An SVM is deployed in the same zone as the virtual machine with the Light Agent installed. • An SVM is deployed in the same data center as the virtual machine with the Light Agent installed.
Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, and Basis Dynamix Standard	
In a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer or Basis Dynamix Standard, the SVM that is considered to be local to a Light Agent is the SVM that is deployed on the same hypervisor as the virtual machine with the Light Agent installed.	In a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer or Basis Dynamix Standard, an SVM can be considered local to the Light Agent in any one of the following cases: • An SVM is deployed on the same hypervisor as the virtual machine with the Light Agent installed. • An SVM is deployed on the same hypervisor cluster as the virtual machine with the Light Agent installed. • An SVM is deployed in the same data center as the virtual machine with the Light Agent installed.
OpenStack and VK Private Cloud SVM	

Standard algorithm	Extended algorithm
In a virtual infrastructure running on the OpenStack or VK Private Cloud platform, you can specify how to determine SVM locality relative to the Light Agent using the `StandardAlgorithmSvmLocality` parameter in the `HypervisorSpecificSettings:Openstack` section of the Integration Server configuration file appsettings.json. Depending on the version of the Integration Server, the file is located at one of the following paths: • /var/opt/kaspersky/viis/common/ for the Linux-based Integration Server • %ProgramFiles(x86)%\Kaspersky Lab\Kaspersky VIISLA\ for the Windows-based Integration Server The `StandardAlgorithmSvmLocality` parameter can take the following values: • `ServerGroup` – if this value is selected, SVM is considered local to the Light Agent if it is located within the same server group as the virtual machine with the Light Agent installed. This value is used by default. • `Project` – if this value is selected, SVM is considered local to the Light Agent if it is deployed within the same OpenStack project as the virtual machine with the Light Agent installed. • `AvailabilityZone` – if this value is selected, SVM is considered local to the Light Agent if it is located within the same availability zone as the virtual machine with the Light Agent installed.	In a virtual infrastructure running on the OpenStack or VK Private Cloud platform, an SVM can be considered local to the Light Agent in any one of the following cases: • An SVM is located in the same server group as the virtual machine with the Light Agent installed. • An SVM is deployed within the same OpenStack project as the virtual machine with the Light Agent installed. • An SVM is located in the same availability zone as the virtual machine with the Light Agent installed.

In addition to SVM connection algorithms, you can regulate the connection of Light Agents to SVMs using tags.

Configuring SVM selection algorithm

How to configure the SVM selection algorithm for Light Agent in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Light Agent mode** → **SVM selection algorithm**.
4. Select the algorithm:
   - **Use the standard SVM selection algorithm**. Light Agent selects SVMs, deployed in the same hypervisor.
   - **Use the extended SVM selection algorithm**. Light Agent selects SVMs deployed in the selected SVM path type (by default, **Hypervisor**).
5. If necessary select SVM path for the extended SVM selection algorithm:
   - **Hypervisor**. The Light Agent selects an SVM to connect to that meets the criteria (depending on the type of virtual infrastructure):
     - The SVM are deployed on the same hypervisor as the virtual machine with the Light Agent installed (in a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, or Basis Dynamix Standard).
     - The SVM is located in the same server group as the virtual machine with the Light Agent installed (in a virtual infrastructure running on the OpenStack or VK Private Cloud platform).
     - The SVM is located on the same node as the virtual machine with the Light Agent installed (in a virtual infrastructure Basis Dynamix Enterprise).

If there are no SVMs available for connection on the same hypervisor or in the same Server Group where the virtual machine with the Light Agent is located, the Light Agent does not connect to the SVM.

- **Cluster**. The Light Agent selects an SVM to connect to that meets the criteria (depending on the type of virtual infrastructure):

  - The SVMs are deployed in the same hypervisor cluster as the virtual machine with the Light Agent installed (in a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, or Basis Dynamix Standard).

  - The SVMs are deployed within the same OpenStack project as the virtual machine with the Light Agent installed (in a virtual infrastructure running on the OpenStack or VK Private Cloud platform).

  - The SVM is located in the same zone as the virtual machine with the Light Agent installed (in a virtual infrastructure Basis Dynamix Enterprise).

  If there are no SVMs available for connection in the same hypervisor cluster or within the same OpenStack project where the virtual machine with the Light Agent is located, the Light Agent does not connect to the SVM.

- **Data center**. The Light Agent selects an SVM to connect to that meets the criteria (depending on the type of virtual infrastructure):

  - The SVMs are deployed in the same data center as the virtual machine with the Light Agent installed (in a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, or Basis Dynamix Standard).

  - The SVMs are located in the same Availability Zone as the virtual machine with the Light Agent installed (in a virtual infrastructure running on the OpenStack or VK Private Cloud platform).

  - The SVM is located in the same data center as the virtual machine with the Light Agent installed (in a virtual infrastructure Basis Dynamix Enterprise).

  If there are no SVMs available for connection in the same data center or Availability Zone where the virtual machine with the Light Agent is located, the Light Agent does not connect to the SVM.

- **Ignore**. Light Agent ignores the SVM path for connecting to the Protection Server. Light Agents takes into account other criteria: tags, the number of Light Agents connected to an SVM, and so on.

6. Save your changes.

How to configure the SVM selection algorithm for Light Agent in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **Light Agent Mode** → **SVM selection algorithm**.

5. Select the algorithm:

- **Use the standard SVM selection algorithm**. Light Agent selects SVMs, deployed in the same hypervisor.
- **Use the extended SVM selection algorithm**. Light Agent selects SVMs deployed in the selected SVM path type (by default, **Hypervisor**).

6. If necessary select SVM path for the extended SVM selection algorithm:

- **Hypervisor**. The Light Agent selects an SVM to connect to that meets the criteria (depending on the type of virtual infrastructure):

  - The SVM are deployed on the same hypervisor as the virtual machine with the Light Agent installed (in a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, or Basis Dynamix Standard).
  - The SVM is located in the same server group as the virtual machine with the Light Agent installed (in a virtual infrastructure running on the OpenStack or VK Private Cloud platform).
  - The SVM is located on the same node as the virtual machine with the Light Agent installed (in a virtual infrastructure Basis Dynamix Enterprise).

  If there are no SVMs available for connection on the same hypervisor or in the same Server Group where the virtual machine with the Light Agent is located, the Light Agent does not connect to the SVM.

- **Cluster**. The Light Agent selects an SVM to connect to that meets the criteria (depending on the type of virtual infrastructure):

  - The SVMs are deployed in the same hypervisor cluster as the virtual machine with the Light Agent installed (in a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, or Basis Dynamix Standard).
  - The SVMs are deployed within the same OpenStack project as the virtual machine with the Light Agent installed (in a virtual infrastructure running on the OpenStack or VK Private Cloud platform).
  - The SVM is located in the same zone as the virtual machine with the Light Agent installed (in a virtual infrastructure Basis Dynamix Enterprise).

  If there are no SVMs available for connection in the same hypervisor cluster or within the same OpenStack project where the virtual machine with the Light Agent is located, the Light Agent does not connect to the SVM.

- **Data center**. The Light Agent selects an SVM to connect to that meets the criteria (depending on the type of virtual infrastructure):

  - The SVMs are deployed in the same data center as the virtual machine with the Light Agent installed (in a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, or Basis Dynamix Standard).

  - The SVMs are located in the same Availability Zone as the virtual machine with the Light Agent installed (in a virtual infrastructure running on the OpenStack or VK Private Cloud platform).

  - The SVM is located in the same data center as the virtual machine with the Light Agent installed (in a virtual infrastructure Basis Dynamix Enterprise).

  If there are no SVMs available for connection in the same data center or Availability Zone where the virtual machine with the Light Agent is located, the Light Agent does not connect to the SVM.

- **Ignore**. Light Agent ignores the SVM path for connecting to the Protection Server. Light Agents takes into account other criteria: tags, the number of Light Agents connected to an SVM, and so on.

7. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to configure the SVM selection algorithm for Light Agent in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, under **Light Agent mode** click the **SVM discovery settings** tile.

3. Select the algorithm:

   - **Use the standard SVM selection algorithm**. Light Agent selects SVMs, deployed in the same hypervisor.

   - **Use the extended SVM selection algorithm**. Light Agent selects SVMs deployed in the selected SVM path type (by default, **Hypervisor**).

4. If necessary select SVM path for the extended SVM selection algorithm:

   - **Hypervisor**. The Light Agent selects an SVM to connect to that meets the criteria (depending on the type of virtual infrastructure):

     - The SVM are deployed on the same hypervisor as the virtual machine with the Light Agent installed (in a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, or Basis Dynamix Standard).

     - The SVM is located in the same server group as the virtual machine with the Light Agent installed (in a virtual infrastructure running on the OpenStack or VK Private Cloud platform).

     - The SVM is located on the same node as the virtual machine with the Light Agent installed (in a virtual infrastructure Basis Dynamix Enterprise).

     If there are no SVMs available for connection on the same hypervisor or in the same Server Group where the virtual machine with the Light Agent is located, the Light Agent does not connect to the SVM.

- **Cluster**. The Light Agent selects an SVM to connect to that meets the criteria (depending on the type of virtual infrastructure):

  - The SVMs are deployed in the same hypervisor cluster as the virtual machine with the Light Agent installed (in a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, or Basis Dynamix Standard).

  - The SVMs are deployed within the same OpenStack project as the virtual machine with the Light Agent installed (in a virtual infrastructure running on the OpenStack or VK Private Cloud platform).

  - The SVM is located in the same zone as the virtual machine with the Light Agent installed (in a virtual infrastructure Basis Dynamix Enterprise).

  If there are no SVMs available for connection in the same hypervisor cluster or within the same OpenStack project where the virtual machine with the Light Agent is located, the Light Agent does not connect to the SVM.

- **Data center**. The Light Agent selects an SVM to connect to that meets the criteria (depending on the type of virtual infrastructure):

  - The SVMs are deployed in the same data center as the virtual machine with the Light Agent installed (in a virtual infrastructure based on Microsoft Hyper-V, XenServer, VMware vSphere, KVM, Proxmox VE, Basis, HUAWEI FusionSphere, Nutanix Acropolis, ALT Virtualization Server, Astra Linux, Numa vServer, or Basis Dynamix Standard).

  - The SVMs are located in the same Availability Zone as the virtual machine with the Light Agent installed (in a virtual infrastructure running on the OpenStack or VK Private Cloud platform).

  - The SVM is located in the same data center as the virtual machine with the Light Agent installed (in a virtual infrastructure Basis Dynamix Enterprise).

  If there are no SVMs available for connection in the same data center or Availability Zone where the virtual machine with the Light Agent is located, the Light Agent does not connect to the SVM.

- **Ignore**. Light Agent ignores the SVM path for connecting to the Protection Server. Light Agents takes into account other criteria: tags, the number of Light Agents connected to an SVM, and so on.

5. Save your changes.

Distributing the connections of Light Agents to SVMs (tags)

Multiple Light Agents can connect to an SVM. To balance the Light Agent connections, you can specify a separate list of SVMs. If you are using an Integration server for SVM discovery, you can use *tags* to balance Light Agent connections to SVMs. That is, for a Light Agent, you can assign a list of SVMs for connecting using a tag. To do so, you must assign a tag to the Light Agent and specify this tag in SVM settings. For details about specifying tags in SVM settings, see the Kaspersky Security for Virtualization Light Agent Help.

Example: The Kaspersky Endpoint Detection and Response Optimum solution is deployed in your infrastructure for designated virtual machine hosts. In this case, you can assign the `[EDROptimum]` tag to the Light Agent to make it connect to the SVMs that has the EDR Optimum (EDR Optimum Add-on) license key added. As a result, you can use EDR Optimum functionality on the virtual machine with the Light Agent. When connecting the Light Agent to an SVM without an EDR Optimum license key, Kaspersky Endpoint Detection and Response Optimum functionality is unavailable.

How to assign an SVM connection tag to a Light Agent in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Light Agent mode** → **SVM connection tag**.
4. Select the **Use connection tag** check box and enter SVM connection tag.

   For a tag, you can enter a text string up to 255 characters long. You can use any character except the `;` character.
5. Save your changes.

How to assign an SVM connection tag to a Light Agent in the Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Light Agent Mode** → **SVM connection tag**.
5. Select the **Use connection tag** check box and enter SVM connection tag.

   For a tag, you can enter a text string up to 255 characters long. You can use any character except the `;` character.
6. To apply the policy to computers, close the 🔒 padlock icons and save your changes.

How to assign an SVM connection tag to a Light Agent in the application interface

1. In the main application window, click the ⚙ button.
2. In the application settings window, under **Light Agent mode** click the **SVM connection tag** tile.
3. Select the **Use connection tag** check box and enter SVM connection tag.

   For a tag, you can enter a text string up to 255 characters long. You can use any character except the `;` character.
4. Save your changes.

Protecting the connection between a Light Agent and SVM

You can configure encryption of the connection between Light Agents and Protection Server. To do this, you need to enable the encryption of the data channel between Light Agent and the Protection Server in the Protection Server settings on the SVM and in the Light Agent settings.

A Light Agent for which connection protection is enabled can only connect to SVMs for which encryption of the data channel between the Light Agent and the Protection Server is enabled. A Light Agent for which connection protection is disabled can only connect to SVMs for which channel encryption is disabled or an insecure connection between the Protection Server and the Light Agent is allowed.

For details about configuring connection protection on the Protection Server, see the Kaspersky Security for Virtualization Light Agent Help.

Protecting the connection using encryption may reduce the performance of Kaspersky Security for Virtualization Light Agent.

How to configure connection protection in a Light Agent in Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **Light Agent mode** → **Connection protection**.
4. Select the **Encrypt data channel between Light Agent and the Protection Server** check box.
5. Save your changes.

How to configure connection protection in a Light Agent in Web Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.
   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **Light Agent Mode** → **Connection protection**.
5. Select the **Encrypt data channel between Light Agent and the Protection Server** check box.
6. To apply the policy to computers, close the padlock icons and save your changes.

How to configure connection protection in a Light Agent in the application interface

1. In the main application window, click the button.
2. In the application settings window, under **Light Agent mode** click the **Connection protection** tile.
3. Select the **Encrypt data channel between Light Agent and the Protection Server** check box.
4. Save your changes.

Activating Light Agent

If Kaspersky Endpoint Security is being used in Light Agent mode for protecting virtual environments, you do not need to activate the application separately. To activate the application, you must add a license key to the SVM. You can add a license key to SVM using the special task in the Kaspersky Security Center console. You cannot manage license keys in the Light Agent interface, however, you can view license information (see the figure below). You can also view Light Agent licensing information on the command line (see the instructions below). Light Agent gets this information from SVM. For details about activating the solution and managing license keys, see the Kaspersky Security for Virtualization Light Agent Help.

To view Light Agent licensing information:

1. Run the command line interpreter (cmd) as an administrator.
2. Go to the folder where the Kaspersky Endpoint Security executable file is located.
3. Run the following command:

```
avp.com LICENSE /CHECK
```

As a result, Kaspersky Endpoint Security displays license information: address of the SVM to which the Light Agent is connected, the number of days until the license expires, and other information. If you encounter any problems when activating Light Agent, please refer to the Technical Support Knowledge Base.

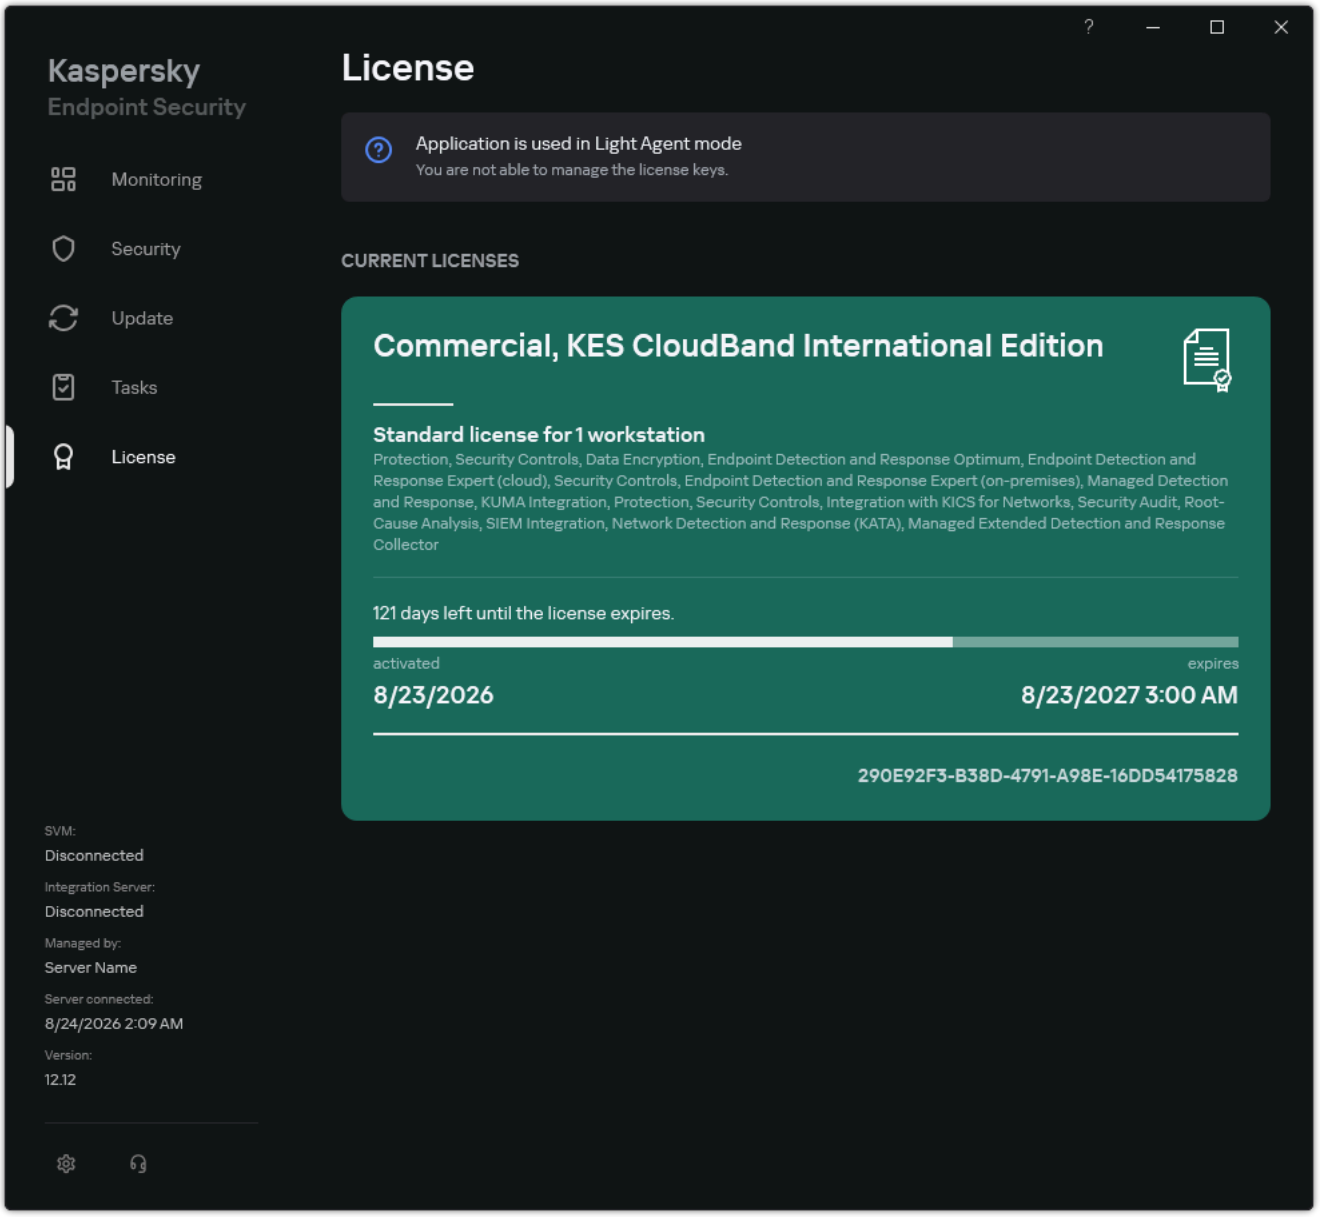

Licensing window

KSVLA Light Agent to KES Light Agent Migration Guide

Kaspersky Security for Virtualization 5.2 Light Agent includes the Light Agent for Windows 5.2 component (hereinafter also referred to as "KSVLA Light Agent"). In Kaspersky Security for Virtualization Light Agent 6.2, Kaspersky Endpoint Security in Light Agent mode is used as the Light Agent component. To update the solution to version 6.2, you must migrate from KSVLA Light Agent 5.2 to Kaspersky Endpoint Security in Light Agent mode (hereinafter also referred to as "KES Light Agent"). For details about updating the version of the Kaspersky Security for Virtualization Light Agent solution, see the Kaspersky Security for Virtualization Light Agent Help.

Software requirements

Before you begin the migration from KSVLA Light Agent to KES Light Agent, make sure your virtual machine satisfies the hardware and software requirements of Kaspersky Endpoint Security for Windows. The lists of supported operating system versions are different for KES and KSWS. For example, KES does not support servers running Windows Server 2003.

Minimum software requirements for migrating from KSVLA Light Agent to KES Light Agent:

- Kaspersky Endpoint Security for Windows 12.8.
- Kaspersky Security for Virtualization Light Agent 6.2 (including the Protection Server and Integration Server components).
- Kaspersky Security Center 14.2

  If you have an earlier version of Kaspersky Security Center installed, update it to 14.2 or later. In this version of Kaspersky Security Center, the Policies and tasks batch conversion wizard lets you migrate policies into a profile rather than into a policy. In this version of Kaspersky Security Center, the Policies and tasks batch conversion wizard also lets you migrate a broader range of policy settings.

Migration steps

Migration from KSVLA Light Agent to KES Light Agent is performed semi-automatically. This is necessary because of differing architectures of the applications.

Migrate from KSVLA Light Agent to KES Light Agent in the following order:

1. **Migrate KSVLA Light Agent tasks and policies**

   To migrate policy settings, you must run the Policies and tasks batch conversion wizard (the migration wizard). After migrating policy settings, you must manually configure settings that the migration wizard cannot migrate automatically (for example, database update settings). After the migration, it is also recommended to check if the migration wizard correctly migrated all settings.

   > If Password protection is enabled to restrict access to KSVLA Light Agent, before installing KES Light Agent, you need to disable Password protection in the policy of KSVLA Light Agent. You cannot enter the uninstallation password in KES Light Agent installation package settings. After completing the installation of KES Light Agent on top of KSVLA Light Agent, you must enable Password protection in the KES policy.

2. **Install Kaspersky Endpoint Security in Light Agent mode**

   You can install KES Light Agent in the following ways:

   - Installing KES Light Agent after removing KSVLA Light Agent (recommended)
   - Installing KES Light Agent on top of KSVLA Light Agent

3. **Confirm that the application is in working order after migration**

   After migrating from KSVLA Light Agent to KES Light Agent, make sure that the application is operating correctly. Activate the converted policy. Check the status of the virtual machine in the Kaspersky Security Center console (should be *OK*). Make sure no errors are reported for the application, also check the time of the last connection to SVM and the virtual machine protection status. You do not need to activate Light Agent because the license key is added to the SVM.

Installing KES Light Agent instead of KSVLA Light Agent

You can install KES Light Agent in the following ways:

- Installing KES Light Agent after removing KSVLA Light Agent (recommended)
- Installing KES Light Agent on top of KSVLA Light Agent

Removing KSVLA Light Agent

You can remove the application remotely using the *Install application remotely* task, locally on the virtual machine, or in the virtual machine template. After removing KSVLA Light Agent, you may need to restart the virtual machine.

After removing KSVLA Light Agent, install KES Light Agent using any suitable method.

Installing Kaspersky Endpoint Security

If Password protection is enabled to restrict access to KSVLA Light Agent, before installing KES Light Agent, you need to disable Password protection in the policy of KSVLA Light Agent. You cannot enter the uninstallation password in KES Light Agent installation package settings. After completing the installation of KES Light Agent on top of KSVLA Light Agent, you must enable Password protection in the KES policy.

When installing Kaspersky Endpoint Security, you must select the **Light Agent to protect virtual environments** mode. Before installing KES Light Agent on a virtual machine, the installer detects KSVLA Light Agent as incompatible software and removes it. The migration of KSVLA Light Agent configuration is not supported. That is, when you install KES Light Agent, the set of components to install is determined by your selection in installation package properties or in the installation wizard. After removing KSVLA Light Agent, you must restart the virtual machine.

Settings and tasks of KSVLA Light Agent are not migrated when you install KES Light Agent. To migrate settings and tasks, run the Policies and tasks batch conversion wizard.

You can check the list of installed components in the **Security** section of the application interface, using the `status` command, or in the Kaspersky Security Center console in computer properties. You can change the set of components after installation by using the *Change application components*.

Correspondence of KSVLA Light Agent and KES Light Agent components

The sets of components of KSVLA Light Agent and KES Light Agent are practically the same. KES Light Agent has more settings than KSVLA Light Agent. After migration, the new settings have default values.

Correspondence of KSVLA Light Agent and KES Light Agent components

Light Agent 5.2	KES Light Agent
Scan kernel	Application kernel
File Anti-Virus	File Threat Protection
Mail Anti-Virus	Mail Threat Protection
Web Anti-Virus	Web Threat Protection
Firewall	Firewall
Network Attack Blocker	Network Threat Protection
Application Privilege Control	Host Intrusion Prevention
Applications Launch Control	Application Control
Web Control	Web Control
Device Control	Device Control
System Watcher	In Kaspersky Endpoint Security, this component is divided into the following components: • Exploit Prevention • Behavior Detection • Remediation Engine
System Integrity Monitoring	System Integrity Monitoring

Light Agent 5.2	KES Light Agent
Integration with Kaspersky Endpoint Agent	*(not supported)* Starting with Kaspersky Endpoint Security for Windows 11.9.0, the Kaspersky Endpoint Agent distribution package is no longer part of the distribution kit.
AMSI Protection	AMSI Protection

Migrating KSVLA Light Agent tasks and policies

You can migrate the settings of KSVLA Light Agent policies and tasks using the Policies and Tasks Batch Conversion Wizard (hereinafter also referred to as the "Migration Wizard").

> The Migration Wizard for KSVLA Light Agent is available only in the Administration Console (MMC). Policy and task settings cannot be migrated in the Web Console and Cloud Console.

The following special considerations are involved in migrating policies and tasks:

- A new policy has the name *<Policy> (converted)*.
- The new policy has the *Inactive policy* status.
- The prohibition of modifying settings (the "padlock") is not migrated. The Migration Wizard sets default values.
- Policy profiles are not migrated. You must manually add the policy profiles.
- Improved trusted zone management. In KSVLA Light Agent, you could add predefined exclusions only when creating a policy. Subsequently, in policy properties, you could configure previously added predefined exclusions or add exclusions manually. You cannot add predefined exclusions in policy properties. In KES Light Agent, predefined exclusions are available both during policy creation and in the properties of the created policy. You can also select predefined exclusions in the installation package.
- The configuration of application user interface in Kaspersky Endpoint Security was moved from the installer to the policy. If you need, for example, to hide the user interface of the application, manage policy settings.
- The sets of functionality for configuring right-based access control (RBAC) are different in Kaspersky Endpoint Security and KSVLA Light Agent. You must configure user access rights to functional areas from scratch.

How to use the Policies and Tasks Batch Conversion Wizard to migrate KSVLA Light Agent policy settings

1. In the Administration Console, select the Administration Server and right-click to open the context menu.
2. Select **All tasks** → **Policies and tasks batch conversion wizard**.

   The Policies and Tasks Batch Conversion Wizard will start. Follow the instructions of the Wizard.

Step 1. Selecting the application for which you need to convert policies and tasks

At this step, you need to select Kaspersky Endpoint Security for Windows. Go to the next step.

Step 2. Conversion of policies

Select the Kaspersky Security for Virtualization 5.2 Light Agent for Windows policy that you want to convert. Go to the next step.

The Migration Wizard will then begin to convert the policies. During conversion, the Migration Wizard prompts you to accept the conditions of KSN Statement. A new policy has the name *<Policy> (converted)*.

Step 3. Conversion of tasks

The Migration Wizard creates new tasks for Kaspersky Endpoint Security for Windows. In the task list, select the KSVLA Light Agent tasks that you want to create for Kaspersky Endpoint Security. The new tasks will be named *<Task name> (converted)*. Go to the next step.

Step 4. Wizard completion

Finish the wizard.

After migrating a policy, you must open the properties of the policy, check its settings, and save the policy. If you do not complete these steps, KES Light Agent may ignore the converted policy.

Pay special attention to the migration of Light Agent's SVM connection settings, exclusion lists, trusted applications, trusted web addresses, Application Control rules.

Migrating [KSVLA Light Agent+KEA] configuration to [KES Light Agent+built-in agent] configuration

To support using Kaspersky Endpoint Security for Windows as part of EDR (KATA), EDR Optimum, Kaspersky Sandbox, a built-in agent has been added to the application. You no longer need a separate Kaspersky Endpoint Agent application to work with these solutions.

When migrating from KSVLA Light Agent to KES Light Agent, the EDR (KATA), EDR Optimum, Kaspersky Sandbox solutions continue to work with Kaspersky Endpoint Security built-in agents. In addition, Kaspersky Endpoint Agent will be removed from the computer.

Before migrating from KSVLA Light Agent to KES Light Agent, you must update all components of Kaspersky Security for Virtualization to version 6.2, including the Protection server and the Integration server. For details about updating the version of the Kaspersky Security for Virtualization Light Agent solution, see the Kaspersky Security for Virtualization Light Agent Help.

Migrating the [KSVLA Light Agent+KEA] configuration to [KES Light Agent+built-in agent] configuration involves the following steps:

1. **Migrating the policy and tasks**

   Migrating the [KSVLA Light Agent+KEA] policies and tasks to [KES Light Agent+built-in agent] involves the following steps:

   1. Migrating policies and tasks from KSVLA Light Agent to KES Light Agent using the Policies and Tasks Batch Conversion Wizard (only available on the Administration Console (MMC)).

      As a result, a new policy is created with the name *<Policy> (converted)*. New KES tasks are also created with *<Task name> (converted)* names.

   2. Migrating policies and tasks from KEA to KES using the wizard for migration from Kaspersky Endpoint Agent (only available in Web Console and Cloud Console).

      As a result, a new policy is created with the name *<Name of the Kaspersky Endpoint Security policy> & <Name of the Kaspersky Endpoint Agent policy>*. New tasks and KES tasks are also created.

2. **Migrating from KSVLA Light Agent to KES Light Agent**

   Migrating from KSVLA Light Agent to KES Light Agent involves installing KES Light Agent instead of KSVLA Light Agent.

   Administrators typically enable Password protection to restrict access to KSVLA Light Agent and KEA. You can only enter the KEA uninstallation password in the properties of the *Install application remotely* task. For migration, you must disable Password protection for KSVLA Light Agent.

   To carry out the migration, you must select the components needed to support Detection and Response solutions as part of Kaspersky Endpoint Security. After installing the application, Kaspersky Endpoint Security switches to using the built-in agent and removes Kaspersky Endpoint Agent.

3. **Licensing functionality**

   If the application is being used in Light Agent mode, you do not need to activate the application. To activate the application, you must add a license key to the SVM. You must also add the license key for activating additional functionality (for example, EDR Optimum) to the SVM. That is, as part of the migration, functionality licensing happens automatically.

4. **Checking the health of Kaspersky Endpoint Detection and Response Optimum and Kaspersky Sandbox**

   If after the upgrade, the computer has the *Critical* status in the Kaspersky Security Center console:

   - Make sure that the computer has Network Agent version 13.2 or higher installed.
   - Check the operating status of the built-in agent by viewing the *Report on status of application components*. If a component has the *Not installed* status, install the component using the *Change application components* task.
   - Make sure you accept the Kaspersky Security Network Statement in the new policy of Kaspersky Endpoint Security for Windows.

- Make sure EDR Optimum functionality is activated using the *Report on status of application components*. If a component has the *Not covered by license* status, make sure that the automatic license key distribution functionality of EDR Optimum is turned on.

- Check the status of the connection of the virtual machine to the SVM. You can get information about the status of the Light Agent's connection to the SVM in the Kaspersky Endpoint Security or using the application command.

Managing the application from the command line

You can manage Kaspersky Endpoint Security from the command line. You can view the list of commands for managing the application by running the `avp.com HELP` command. To read about the syntax of a specific command, enter `avp.com HELP <command>`.

Special characters in the command must be escaped. To escape the characters `&`, `|`, `(`, `)`, `<`, `>`, `^`, use the `^` character (for example, to use the `&` character, enter `^&`). To escape the `%` character, enter `%%`.

The alternatives to the value `1` are the values `yes`, `on`, `enable`, `enabled`, and `true`. The alternatives to the value `0` are the values `no`, `off`, `disable`, `disabled`, and `false`.

Setup. Installing the application

Installing the application from the command line involves the following steps:

1. **Choosing a distribution package**

   Kaspersky provides distribution packages for different localizations that are compatible with different CPU architectures and include various encryption modules.

   The distribution kit includes the following distribution packages:

   - **AES256**

     This distribution package is intended for installation on computers with x86/x64 architecture. This distribution package contains cryptographic tools that implement the AES (Advanced Encryption Standard) encryption algorithm with an effective key length of 256 bits.

   - **AES56**

     This distribution package is intended for installation on computers with x86/x64 architecture. This distribution package contains cryptographic tools that implement the AES encryption algorithm with an effective key length of 56 bits.

   - **Arm64**

     This distribution package is intended for installation on Arm-based computers. This distribution package is not intended for installation on servers.

2. **Transferring the distribution package of the application to the storage of the computer**

   The distribution package is a self-extracting archive in EXE format. To view the contents of the distribution package, you need to extract the archive to a separate folder. To install the application, you need all files from the distribution package, including the bases.cab file.

3. **Running the installation command**

Kaspersky Endpoint Security can be installed from the command line in one of the following modes:

- In interactive mode by using the Application Setup Wizard.
- In silent mode. After installation is started in silent mode, your involvement in the installation process is not required (silent installation). To install the application in silent mode, use the `/s` and `/qn` keys.

> Prior to installing the application in silent mode, please open and read the End User License Agreement and the text of the Privacy Policy. The End User License Agreement and the text of the Privacy Policy are included in the Kaspersky Endpoint Security distribution kit. You may proceed to install the application only if you have fully read, understand, and accept the provisions and terms of the End User License Agreement, you understand and agree that your data will be processed and transmitted (including to third-party countries) in accordance with the Privacy Policy, and you have fully read and understand the Privacy Policy. If you do not accept the provisions and terms of the End User License Agreement and the Privacy Policy, please do not install or use Kaspersky Endpoint Security.

You can view the list of commands for installing the application by running the `/h` command. To get help on the installation command syntax, type `setup_kes.exe /h`. As a result, the installer displays a window with a description of command options (see the figure below).

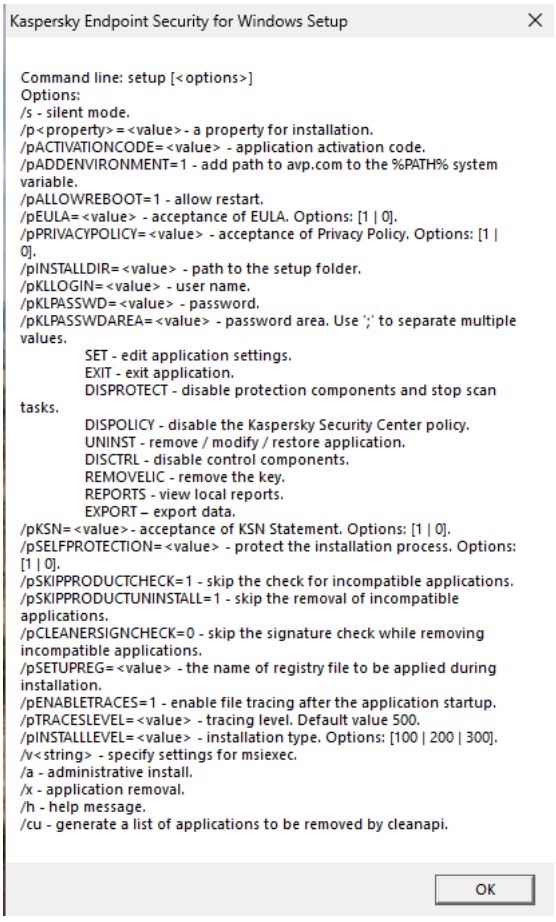

Description of installation command options

To install the application or upgrade a previous version of the application:

1. Run the command line interpreter (cmd.exe) as an administrator.
2. Go to the folder where the Kaspersky Endpoint Security distribution package is located.

3. Run the following command:

```
setup_kes.exe /pEULA=1 /pPRIVACYPOLICY=1 [/pKSN=1|0] [/pCONFIGPATH=<path to the configuration file>]
[/pALLOWREBOOT=1] [/pSKIPPRODUCTCHECK=1] [/pSKIPPRODUCTUNINSTALL=1] [/pKLLOGIN=<user name> /pKLPASSWD=
<password> /pKLPASSWDAREA=<password scope>] [/pENABLETRACES=1|0 /pTRACESLEVEL=<tracing level>]
[/pSKIPKB5007186CHECK=1] [/s]
```

or

```
msiexec /i <distribution kit name> EULA=1 PRIVACYPOLICY=1 [KSN=1|0] [CONFIGPATH=<path to the configuration
file>] [ALLOWREBOOT=1] [SKIPPRODUCTCHECK=1] [KLLOGIN=<user name> KLPASSWD=<password> KLPASSWDAREA=<password
scope>] [ENABLETRACES=1|0 TRACESLEVEL=<tracing level>] [SKIPKB5007186CHECK=1] [/qn]
```

As a result, the application is installed on the computer. You can confirm that application is installed and check application settings by issuing the `status` command.

Application installation settings

`EULA=1`	Acceptance of the terms of the End User License Agreement. The text of the License Agreement is included in the distribution kit of Kaspersky Endpoint Security. Accepting the terms of the End User License Agreement is necessary for installing the application or upgrading the application version.
`PRIVACYPOLICY=1`	Acceptance of the Privacy Policy. The text of the Privacy Policy is included in the Kaspersky Endpoint Security distribution kit. To install the application or upgrade the application version, you must accept the Privacy Policy.
`KSN`	Agreement or refusal to participate in Kaspersky Security Network (KSN). If no value is set for this parameter, Kaspersky Endpoint Security will prompt to confirm your consent or refusal to participate in KSN when Kaspersky Endpoint Security is first started. Available values: • `1` – agreement to participate in KSN. • `0` – refusal to participate in KSN (default value). The Kaspersky Endpoint Security distribution package is optimized for use with Kaspersky Security Network. If you opted not to participate in Kaspersky Security Network, you should update Kaspersky Endpoint Security immediately after the installation is complete.
`CONFIGPATH=<path to the configuration file>`	Installing the application with predefined settings. To do this, you need to upload a file that defines the settings of Kaspersky Endpoint Security. You can create a configuration file in the local interface of the application.
`ALLOWREBOOT=1`	Automatic restart of the computer, if required after installation or upgrade of the application. If no value is set for this parameter, automatic computer restart is blocked. Restart is not required when installing Kaspersky Endpoint Security. Restart is required only if you have to remove incompatible applications prior to installation. Restart may also be required when updating the application version.
`SKIPPRODUCTCHECK=1`	Disable the check for installed software. The list of software that may cause compatibility issues is available in the incompatible.txt file that is included in the distribution kit. If no value is set for this parameter and software from the list is detected, the installation of Kaspersky Endpoint Security will be terminated.
`SKIPPRODUCTUNINSTALL=1`	Disable automatic removal of detected software from the incompatible.txt list. If no value is set for this parameter, Kaspersky Endpoint Security attempts to remove the software that may cause compatibility issues. Automatic removal of the software cannot be enabled when installing Kaspersky Endpoint Security using the msiexec installer. To automatically remove the software that may cause compatibility issues, use setup_kes.exe file.

`CLEANERSIGNCHECK=0|1`	Verifying digital signatures of the detected software files from the incompatible.txt list. To remove the software, Kaspersky Endpoint Security runs the software installer file. If the installer file does not have a digital signature, Kaspersky Endpoint Security considers the file untrusted and halts the software removal to avoid running potentially malicious code. If the application cannot verify the digital signature of the detected software file, Kaspersky Endpoint Security installation is stopped with an error. The default value is different depending on the software installation method: • `0` means that digital signature verification is disabled (default value if deployed through Kaspersky Security Center). • `1` means that digital signature verification is enabled (default value if the application is being installed locally).
`STANDALONEMODE=1`	Installing the application in the Endpoint Detection and Response Agent (EDR Agent) configuration for integration with the Kaspersky Endpoint Detection and Response (KATA) or Kaspersky Endpoint Detection and Response Expert (on-premises) solutions. This configuration is needed if a third-party Endpoint Protection Platform (EPP) is deployed in your organization alongside the Kaspersky Endpoint Detection and Response class solution. This makes Kaspersky Endpoint Security in the Endpoint Detection and Response Agent configuration compatible with third-party EPP applications.
`KLLOGIN`	Set the user name for accessing the features and settings of Kaspersky Endpoint Security (the Password protection component). The user name is set together with the `KLPASSWD` and `KLPASSWDAREA` parameters. The user name KLAdmin is used by default.
`KLPASSWD`	Specify a password for accessing Kaspersky Endpoint Security features and settings (the password is specified together with the `KLLOGIN` and `KLPASSWDAREA` parameters). If you specified a password but did not specify a user name with the `KLLOGIN` parameter, the KLAdmin user name is used by default.
`KLPASSWDAREA`	Specify the scope of the password for accessing Kaspersky Endpoint Security. When a user attempts to perform an action that is included in this scope, Kaspersky Endpoint Security prompts for the user's account credentials (`KLLOGIN` and `KLPASSWD` parameters). Use the `;` character to specify multiple values. Available values: • `SET` – modifying application settings. • `EXIT` – exiting the application. • `DISPROTECT` – disabling protection components and stopping scan tasks. • `DISPOLICY` – disabling the Kaspersky Security Center policy. • `UNINST` – removing the application from the computer. • `DISCTRL` – disabling control components. • `REMOVELIC` – removing the key. • `REPORTS` – viewing reports. • `EXPORT` – exporting application settings. For example, `KLPASSWDAREA=SET;KLPASSWDAREA=UNINST;KLPASSWDAREA=EXIT`. The KLAdmin account has the right to perform any action that is password-protected. Therefore, configuring the password scope for the KLAdmin account is impossible. If you try to configure the password scope for the KLAdmin account, the application prohibits the specified actions for the "Everyone" group.
`PROTECTOSSERVICES`	Protection of operating system services functionality. Operating system services protection prevents third-party applications from interfering with the operation of operating system services. Such services include, for example, the application autostart service. • `1` means that the protection of operating system services is enabled (default value). • `0` means that the protection of operating system services is disabled.
`ENABLETRACES`	Enabling or disabling application tracing. After Kaspersky Endpoint Security starts, it saves trace files in the folder `%ProgramData%\Kaspersky Lab\KES.14.2\Traces`. Available values: • `1` – tracing is enabled. • `0` – tracing is disabled (default value).
`TRACESLEVEL`	Level of detail of traces. Available values: • `100` (critical). Only messages about fatal errors. • `200` (high). Messages about all errors, including fatal errors. • `300` (diagnostic). Messages about all errors, as well as warnings. • `400` (important). All error messages, warnings, and additional information. • `500` (normal). Messages about all errors and warnings, as well as detailed information about the operation of the application in normal mode (default). • `600` (low). All messages.

ENABLEAZURESUPPORT	Enabling or disabling Azure WVD compatibility mode. Available values: • 1 – Azure WVD compatibility mode is enabled. • 0 – Azure WVD compatibility mode is disabled (default value). This feature ensures correct display of Azure virtual machine state in the Kaspersky Anti Targeted Attack Platform console. To monitor the performance of the computer, Kaspersky Endpoint Security sends telemetry to KATA servers. Telemetry includes an ID of the computer (Sensor ID). Azure WVD compatibility mode allows assigning a permanent unique Sensor ID to these virtual machines. If the compatibility mode is turned off, the Sensor ID can change after the computer is restarted because of how Azure virtual machines work. This can cause duplicates of virtual machines to appear on the console.
AMPPL	Enables or disables protection of the Kaspersky Endpoint Security processes using AM-PPL technology (Antimalware Protected Process Light). For more details about AM-PPL technology, please visit the Microsoft website. AM-PPL technology is available for Windows 10 version 1703 (RS2) or later, and Windows Server 2019 operating systems. Available values: • 1 – protection of the Kaspersky Endpoint Security processes using AM-PPL technology is enabled. • 0 – protection of the Kaspersky Endpoint Security processes using AM-PPL technology is disabled.
UPGRADEMODE	Application upgrade mode: • Seamless means upgrading the application with a computer restart (default value). • Force means upgrading the application without a restart. You can upgrade the application without a restart starting with version 11.10.0. To upgrade an earlier version of the application, you must restart the computer. You can also install patches without a restart starting with version 11.11.0. Restart is not required when installing Kaspersky Endpoint Security. So, the upgrade mode of the application will be specified in the application settings. You can change this parameter in the application settings or in the policy. When upgrading already installed application, the priority of the command line parameter is lower than that of the parameter specified in the application settings or in the setup.ini file. For example, if Force upgrade mode is specified in the command line and Seamless mode is specified in the application settings, the upgrade will be installed with a computer restart (Seamless).
RESTAPI	Managing the application through the REST API. To manage the application through the REST API, you must specify the user name (RESTAPI_User parameter). Available values: • 1 – management via REST API is allowed. • 0 – management via REST API is blocked (default value). To manage the application through the REST API, management using administrative systems must be allowed. To do so, set the AdminKitConnector=1 parameter. If you manage the application through the REST API, it is impossible to manage the application using the administration systems of Kaspersky.
RESTAPI_User	User name of the Windows domain account used for managing the application through the REST API. Management of the application through the REST API is available only to this user. Enter the user name in the format <DOMAIN>\<UserName> (for example, RESTAPI_User=COMPANY\Administrator). You can select only one user to work with the REST API. Adding a user name is a prerequisite for managing the application through the REST API.
RESTAPI_Port	Port used for managing the application through the REST API. Port 6782 is used by default. Make sure that the port is free.
RESTAPI_Certificate	Certificate for identifying requests (for example, RESTAPI_Certificate=C:\cert.pem). Secure interaction of Kaspersky Endpoint Security with the REST client requires configuring request identification. To do so, you must install a certificate and subsequently sign the payload of each request.
ADMINKITCONNECTOR	Application management using administration systems. Administration systems include, for example, Kaspersky Security Center. In addition to Kaspersky administration systems, you can use third-party solutions. Kaspersky Endpoint Security provides an API for this purpose. Available values: • 1 – application management with the help of administration systems is allowed (default value). • 0 – application management is allowed only through the local interface.

`EnableUniqueSensorID`	Creating a unique computer identifier (Sensor ID) during the installation or update of the application. Sensor ID is used in the Kaspersky Anti Targeted Attack Platform solution to identify computers that send telemetry to the server. When creating Sensor ID, the application uses an algorithm that takes into account the computer's configuration, such as the motherboard serial number. In some cases, for example, when using the application in a virtual environment, Sensor ID may be duplicated. As a result, the Kaspersky Anti Targeted Attack Platform cannot identify the computer from which the telemetry is sent. To create a unique Sensor ID, you need to set the parameter `EnableUniqueSensorID=1`. As a result, the application will use a different algorithm to create the Sensor ID, which takes into account other data about the computer. This ensures a unique Sensor ID. By default, the parameter is not set. The application inherits the Sensor ID in the following cases: • updating the application version; • migrating the [KES+KEA] configuration to [KES+built-in agent] configuration. As part of application repair, the installer attempts to inherit the Sensor ID. If the Sensor ID cannot be restored, the application creates a new Sensor ID.
`SKIPKB5007186CHECK=1`	Disabling the check for installed operating system update KB5007186. Before installing the application, the installer checks installed operating system updates. The KB5007186 update is on the list of operating system updates that can cause problems for the application. For detailed information, refer to the Technical Support Knowledge Base. Therefore, the installer aborts the installation if this update is discovered. To proceed with the installation, set `SKIPKB5007186CHECK=1`.

Example

```
setup_kes.exe /pEULA=1 /pPRIVACYPOLICY=1 /pKSN=1 /pALLOWREBOOT=1
```

```
msiexec /i kes_win.msi EULA=1 PRIVACYPOLICY=1 KSN=1 KLLOGIN=Admin KLPASSWD=Password
KLPASSWDAREA=EXIT;DISPOLICY;UNINST /qn
```

```
setup_kes.exe /pEULA=1 /pPRIVACYPOLICY=1 /pKSN=1 /pENABLETRACES=1 /pTRACESLEVEL=600 /s
```

After Kaspersky Endpoint Security is installed, the trial license is activated unless you provided an activation code in the setup.ini file. A trial license usually has a short term. When the trial license expires, all Kaspersky Endpoint Security features become disabled. To continue using the application, you need to activate the application with a commercial license by using the Application Activation Wizard or a special command.

When installing the application or upgrading the application version in silent mode, use of the following files is supported:

- setup.ini – general settings of application installation.

  To apply settings from the setup.ini file, place this file into the folder containing the Kaspersky Endpoint Security distribution package.

- install.cfg – settings of Kaspersky Endpoint Security operation

  To apply settings from install.cfg configuration file, you need to specify the path to the file in the following application installation command: `CONFIGPATH=<path to the configuration file>`.

- setup.reg – registry keys.

  Registry keys from the setup.reg file are written to the registry only if the `setup.reg` value is set for the `SetupReg` parameter in the setup.ini file. The setup.reg file is generated by Kaspersky experts. It is not recommended to modify the contents of this file. To apply settings from the setup.reg file, place this file into the folder containing the Kaspersky Endpoint Security distribution package. You can also put the setup.reg file in a different folder. If you do so, you need to specify the path to the file in the following application installation command: `SETUPREG=<path to the setup.reg file>`.

Setup /x. Removing the application

Kaspersky Endpoint Security can be uninstalled from the command line in one of the following ways:

- In interactive mode by using the Application Setup Wizard.
- In silent mode. After uninstallation is started in silent mode, your involvement in the removal process is not required (silent uninstallation). To uninstall the application in silent mode, use the `/s` and `/qn` switches.

To uninstall the application in silent mode:

1. Run the command line interpreter (cmd.exe) as an administrator.
2. Go to the folder where the Kaspersky Endpoint Security distribution package is located.
3. Run the following command:
   - If the removal process is not password protected:

     ```
     setup_kes.exe /s /x
     ```

     or

     ```
     msiexec.exe /x <GUID> /qn
     ```

     `<GUID>` is the unique ID of the application. You can find out the GUID of the application in the Technical Support Knowledge Base or by using the following command:

     ```
     wmic product where "Name like '%Kaspersky Endpoint Security%'" get Name, IdentifyingNumber
     ```

   - If the removal process is password protected:

     ```
     setup_kes.exe /pKLLOGIN=<user name> /pKLPASSWD=<password> /s /x
     ```

     or

     ```
     msiexec.exe /x <GUID> KLLOGIN=<user name> KLPASSWD=<password> /qn
     ```

You can also use the `SAVEQB` parameter to save files scanned by the application and placed in Backup. Backup copies of files are stored in the folder `C:\ProgramData\Kaspersky Lab\KES.14.2\QB`. By default, saving files in Backup is disabled (`SAVEQB=0`).

Example

```
msiexec.exe /x {9A017278-F7F4-4DF9-A482-0B97B70DD7ED} KLLOGIN=KLAdmin KLPASSWD=samplePassword /qn
```

msiexec /i. Recovering the application

When recovering, the application checks and restores the integrity of all damaged application modules and system registry keys created as part of the application installation process.

Kaspersky Endpoint Security can be recovered from the command line in one of the following modes:

- In interactive mode by using the Application Setup Wizard.
- In silent mode. After starting the recovery in silent mode, your involvement in the recovery process is not required.

If the Kaspersky Endpoint Security installer is running in recovery mode, and the application does not need recovery, the installer makes no changes.

If the Kaspersky Endpoint Security installer is running in recovery mode, and the application is not installed, the installer starts the installation process.

To recover the application in silent mode:

1. Run the command line interpreter (cmd.exe) as an administrator.
2. Go to the folder where the Kaspersky Endpoint Security distribution package is located.
3. Run the following command:
   - If the recovery process is not password protected:

     ```
     msiexec.exe /i <GUID> REINSTALL=ALL /qn
     ```

     `<GUID>` is the unique ID of the application. You can find out the GUID of the application in the Technical Support Knowledge Base or by using the following command:

     ```
     wmic product where "Name like '%Kaspersky Endpoint Security%'" get Name, IdentifyingNumber
     ```

   - If the recovery process is password protected:

     ```
     msiexec.exe /i <GUID> REINSTALL=ALL KLLOGIN=<user name> KLPASSWD=<password> /qn
     ```

Example

```
msiexec.exe /i {9A017278-F7F4-4DF9-A482-0B97B70DD7ED} REINSTALL=ALL KLLOGIN=KLAdmin KLPASSWD=samplePassword /qn
```

AVP commands

To manage Kaspersky Endpoint Security from the command line:

1. Run the command line interpreter (cmd.exe) as an administrator.
2. Go to the folder where the Kaspersky Endpoint Security executable file is located.

   You can add path to the executable file to the %PATH% system variable during application installation.
3. Use the following template to execute the command:

```
avp.com <command> [options]
```

As a result, Kaspersky Endpoint Security will execute the command (see figure below).

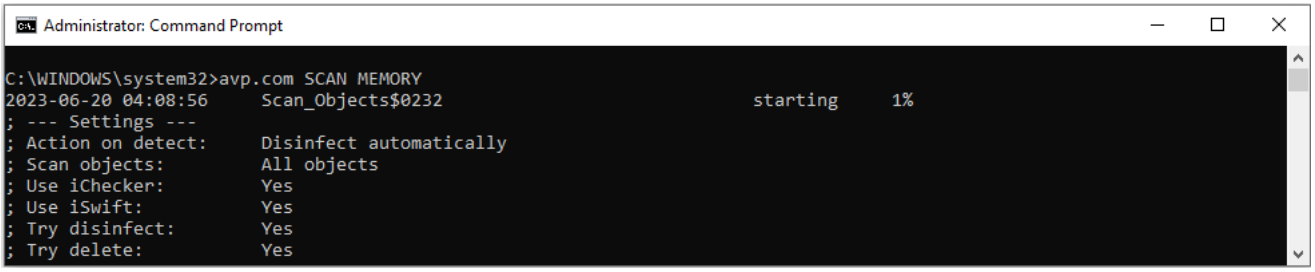

Managing the application from the command line

SCAN. Malware Scan

Running the *Malware Scan* task.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com SCAN [<scan scope>] [<action on threat detection>] [<file types>] [<scan exclusions>] [/R[A]:<report file>] [<scan technologies>] [/C:<file with scan settings>]
```

Scan scope	
`<files to scan>`	A space-separated list of files and folders. Long paths must be enclosed in quotation marks. Short paths (MS-DOS format) do not need to be enclosed in quotation marks. For example: • `"C:\Program Files (x86)\Example Folder"` – long path. • `C:\PROGRA~2\EXAMPL~1` – short path.

`/ALL`	Run the *Malware Scan* task. Kaspersky Endpoint Security scans the following objects: • Kernel memory • Objects that are loaded at startup of the operating system • Boot sectors • Operating system backup • All hard and removable drives In Kaspersky Endpoint Security for Windows 12.12 email is excluded from the application scan scope. The scan of incoming and outgoing email messages is performed by the Mail Threat Protection component. If you are using an earlier version of the management plug-in, the application excludes email from the scan scope, even if the policy includes it.
`/MEMORY`	Scan the Kernel memory
`/STARTUP`	Scan the Objects that are loaded at startup of the operating system
`/REMDRIVES`	Scan removable drives.
`/FIXDRIVES`	Scan hard drives.
`/NETDRIVES`	Scan network drives.
`/QUARANTINE`	Scan the files in the Kaspersky Endpoint Security Backup.
`/@:<file list.lst>`	Scan the files and folders from a list. Each file in the list must be on a new row. Long paths must be enclosed in quotation marks. Short paths (MS-DOS format) do not need to be enclosed in quotation marks. For example: • `"C:\Program Files (x86)\Example Folder"` – long path. • `C:\PROGRA~2\EXAMPL~1` – short path.

Action on threat detection	
`/i0`	**Inform**. If this option is selected, Kaspersky Endpoint Security adds the information about infected files to the list of active threats on detection of these files.
`/i1`	**Disinfect, inform if disinfection fails**. If this option is selected, Kaspersky Endpoint Security automatically attempts to disinfect all infected files that are detected. If disinfection fails, Kaspersky Endpoint Security adds the information about the infected files that are detected to the list of active threats.
`/i2`	**Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file. This action is selected by default.
`/i3`	**Delete if disinfection fails**. Also delete compound files (for example, archives) if the infected file cannot be disinfected or deleted.
`/i4`	**Delete**. Also delete compound files (for example, archives) if the infected file cannot be deleted.

File types	
`/fe`	**Files scanned by extension**. If this setting is enabled, the application scans infectable files only. The file format is then determined based on the file's extension.
`/fi`	**Files scanned by format**. If this setting is enabled, the application scans infectable files only. Before scanning a file for malicious code, the internal header of the file is analyzed to determine the format of the file (for example, .txt, .doc, or .exe). The scan also looks for files with particular file extensions.
`/fa`	**All files**. If this setting is enabled, the application checks all files without exception (all formats and extensions). This is the default setting.

Scan exclusions	
`-e:a`	RAR, ARJ, ZIP, CAB, LHA, JAR, and ICE archives are excluded from the scan scope.

`-e:<file mask>`	Files that match the file mask are excluded from the scan scope. For example: • The mask `*.exe` will include all paths to files that have the exe extension. • The mask `example*` will include all paths to files named EXAMPLE.
`-e:<seconds>`	Files that take longer to scan than the specified time limit (in seconds) are excluded from the scan scope.
`-es:<megabytes>`	Files that are larger than the specified size limit (in megabytes) are excluded from the scan scope.

Saving events to a report file mode (for Scan, Updater and Rollback profiles only)	
`/R:<report file>`	Save only critical events to the report file.
`/RA:<report file>`	Save all events to a report file.

Scan technologies	
`/iChecker=on|off`	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).
`/iSwift=on|off`	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.

Advanced settings	
`/C:<file with scan settings>`	File with the *Malware Scan* task settings. The file must be created manually and saved in TXT format. The file can have the following contents: `[<scan scope>] [<action on threat detection>] [<file types>] [<scan exclusions>] [/R[A]:<report file>] [<scan technologies>]`.

Example

```
avp.com SCAN /R:log.txt /MEMORY /STARTUP "C:\Documents and Settings\All Users\My Documents" "C:\Program Files"
```

UPDATE. Updating databases and application software modules

Running the *Update of databases and application modules* task.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

> This command cannot be run if the application is installed in Light Agent mode.

Command syntax

```
avp.com UPDATE [local] ["<update source>"] [/R[A]:<report file>] [/C:<file with update settings>]
```

Update task settings	
`local`	Start of the *Update of databases and application modules* task that was created automatically after the application was installed. You can change the settings of the *Update of databases and application modules* task in the local application interface or in the console of Kaspersky Security Center. If this setting is not configured, Kaspersky Endpoint Security starts the *Update of databases and application modules* task with the default settings or with the settings specified in the command. You can configure the *Update of databases and application modules* task settings as follows: • `UPDATE` starts the *Update of databases and application modules* task with the default settings: the update source is Kaspersky update servers, the account is System, and other default settings. • `UPDATE local` starts the *Update of databases and application modules* task that was created automatically after installation (predefined task). • `UPDATE <update settings>` starts the *Update of databases and application modules* task with manually defined settings (see below).

Update source	
`"<update source>"`	Address of a HTTP or FTP server, or of a shared folder with the update package. You can specify only one update source. If the update source is not specified, Kaspersky Endpoint Security uses the default source: Kaspersky update servers.

Saving events to a report file mode (for Scan, Updater and Rollback profiles only)	
`/R:<report file>`	Save only critical events to the report file.
`/RA:<report file>`	Save all events to a report file.

Advanced settings	
`/C:<file with update settings>`	File with the *Update of databases and application modules* task settings. The file must be created manually and saved in TXT format. The file can have the following contents: `["<update source>"] [/R[A]:<report file>]`.

Example

```
avp.com UPDATE local
```

```
avp.com UPDATE "ftp://my_server/kav updates" /RA:avbases_upd.txt
```

ROLLBACK. Last update rollback

Rolling back the last anti-virus database update. This lets you roll back the databases and application modules to their previous version when necessary, for example, when the new database version contains an invalid signature that causes Kaspersky Endpoint Security to block a safe application.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

This command cannot be run if the application is installed in Light Agent mode.

Command syntax

```
avp.com ROLLBACK [/R[A]:<report file>]
```

Saving events to a report file mode (for Scan, Updater and Rollback profiles only)	
`/R:<report file>`	Save only critical events to the report file.
`/RA:<report file>`	Save all events to a report file.

Example

```
avp.com ROLLBACK /RA:rollback.txt
```

TRACES. Tracing

Trace files are stored on the computer as long as the application is in use, and are deleted permanently when the application is removed. Trace files, except trace files of Authentication Agent, are stored in the folder `%ProgramData%\Kaspersky Lab\KES.14.2\Traces`. By default, tracing is disabled.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com TRACES on|off [<tracing level>] [<advanced settings>]
```

Tracing level	
`<tracing level>`	Level of detail of traces. Available values: • `100` (critical). Only messages about fatal errors. • `200` (high). Messages about all errors, including fatal errors. • `300` (diagnostic). Messages about all errors, as well as warnings. • `400` (important). All error messages, warnings, and additional information. • `500` (normal). Messages about all errors and warnings, as well as detailed information about the operation of the application in normal mode (default). • `600` (low). All messages.

Advanced settings	
`all`	Run a command with the `file` and `mem` parameters.
`file`	Save one trace file (no size limit).
`rot`	Save traces to a limited number of file sets of limited size and overwrite the older files when the maximum size is reached.
`mem`	Save traces to dump files.

Example

```
avp.com TRACES on 500
```

```
avp.com TRACES off
```

```
avp.com TRACES on 500 mem
```

```
avp.com TRACES off file
```

START. Starting a profile

Starting a profile (for example, starting a database update or enabling a protection component).

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com START <profile> [/R[A]:<report file>]
```

Profile	
`<profile>`	Profile name. A *Profile* is a Kaspersky Endpoint Security component, task or feature. You can view the list of available profiles by running the `HELP START` command.

Saving events to a report file mode (for Scan, Updater and Rollback profiles only)	
`/R:<report file>`	Save only critical events to the report file.
`/RA:<report file>`	Save all events to a report file.

Example

```
avp.com START Scan_Objects
```

STOP. Stopping a profile

Stopping profile execution (for example, stopping a Removable Drives Scan or disabling a protection component).

To execute this command, Password protection must be enabled. The user must have the **Disable protection components** and **Disable control components** permissions.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com STOP <profile> /login=<user name> /password=<password>
```

Profile	
`<profile>`	Profile name. A *Profile* is a Kaspersky Endpoint Security component, task or feature. You can view the list of available profiles by running the `HELP STOP` command.

Authentication	
`/login=<user name> /password=<password>`	User account credentials with the required Password protection permissions.

STATUS. Profile status

Displaying status information for application profiles (for example, `running` or `completed`). You can view the list of available profiles by running the `HELP STATUS` command.

> Kaspersky Endpoint Security also displays information about the status of service profiles. Information about the status of service profiles may be required when you are contacting Kaspersky Technical Support.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com STATUS [<profile>]
```

If you enter the command without a profile, Kaspersky Endpoint Security displays the status for all profiles of the application.

STATISTICS. Profile operation statistics

Displaying statistics for an application profile (for example, scan duration or the number of threats detected). You can view the list of available profiles by running the `HELP STATISTICS` command.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com STATISTICS <profile>
```

RESTORE. Restoring files from Backup

Restoring a file from Backup to its original folder. If a file with the same name already exists at the specified path, the application will ask for confirmation to replace the file. The file that is being restored is copied keeping its original name.

> To execute this command, Password protection must be enabled. The user must have the **Restore from Backup** permission.

Backup stores backup copies of files that were deleted or modified during disinfection. A *backup copy* is a file copy created before the file was disinfected or deleted. Backup copies of files are stored in a special format and do not pose a threat.

Backup copies of files are stored in the folder `C:\ProgramData\Kaspersky Lab\KES.14.2\QB`.

Users in the Administrators group are granted full permission to access this folder. Limited access rights to this folder are granted to the user whose account was used to install Kaspersky Endpoint Security.

> Kaspersky Endpoint Security does not provide the capability to configure user access permissions to backup copies of files.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com RESTORE [/REPLACE] <file name> /login=<user name> /password=<password>
```

Advanced settings	
`/REPLACE`	Overwrite an existing file.
`<file name>`	The name of the file to be restored.

Authentication	
`/login=<user name> /password=<password>`	User account credentials with the required Password protection permissions.

Example

```
avp.com RESTORE /REPLACE true_file.txt /login=KLAdmin /password=samplePassword
```

EXPORT. Exporting application settings

Exporting Kaspersky Endpoint Security settings to a file. If the command contains only the name of the file to which you want to export settings, the application places the file as follows:

- If the path to avp.com is added to the %PATH% system variable, the application places the file in the `C:\Windows\SysWOW64` folder.
- If you run the command from the application installation folder, the export will fail because the application's self-protection blocks the creation of a new file in the application folder. To export application settings to a file, enter the file path.

> To execute this command, Password protection must be enabled. The user must have the **Export settings** permission.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com EXPORT <profile> <file name> /login=<user name> /password=<password>
```

Profile	
`<profile>`	Profile name. A *Profile* is a Kaspersky Endpoint Security component, task or feature. You can view the list of available profiles by running the `HELP EXPORT` command.

File to export	
`<file name>`	The name of the file to which the application settings will be exported. You can also enter the file path. You can export Kaspersky Endpoint Security settings to a DAT or CFG configuration file, to a TXT text file, or to an XML document.

Authentication	
`/login=<user name> /password=<password>`	User account credentials with the required Password protection permissions.

Example

```
avp.com EXPORT ids ids_C:\Users\Fred123\Documents\config.dat
```

```
avp.com EXPORT fm fm_config.txt
```

IMPORT. Importing application settings

Importing Kaspersky Endpoint Security settings from a file that was created with the `EXPORT` command.

To execute this command, Password protection must be enabled. The user must have the **Configure application settings** permission.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com IMPORT <file name> /login=<user name> /password=<password>
```

File to import	
`<file name>`	The name of the file from which the application settings will be imported. You can import Kaspersky Endpoint Security settings from a DAT or CFG configuration file, a TXT text file, or an XML document.

Authentication	
/login=<user name> /password=<password>	User account credentials with the required Password protection permissions.

Example

```
avp.com IMPORT config.dat /login=KLAdmin /password=samplePassword
```

ADDKEY. Applying a key file

Activating Kaspersky Endpoint Security using a key file. If the application is already activated, the key will be added as a reserve one.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

This command cannot be run if the application is installed in Light Agent mode.

Command syntax

```
avp.com ADDKEY <file name> [/login=<user name> /password=<password>]
```

Key file	
<file name>	Key file name.

Authentication	
/login=<user name> /password=<password>	User account credentials. These credentials need to be entered only if Password protection is enabled.

Example

```
avp.com ADDKEY file.key
```

LICENSE. Licensing

Managing the license keys of Kaspersky Endpoint Security, EDR Optimum, or EDR Expert (Kaspersky Endpoint Detection and Response Add-on).

To execute this command and remove a license key, Password protection must be enabled. The user must have the **Remove key** permission.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

This command cannot be run if the application is installed in Light Agent mode.

Command syntax

```
avp.com LICENSE <operation> [/login=<user name> /password=<password>]
```

Operation	
`/ADD <file name>`	Activating Kaspersky Endpoint Security using a key file. If the application is already activated, the key will be added as a reserve one.
`/ADD <activation code>`	Activate Kaspersky Endpoint Security using an activation code. If the application is already activated, the key will be added as a reserve one.
`/REFRESH`	Update the status of the Kaspersky Endpoint Security license. As a result, the application receives up-to-date license status information from Kaspersky activation servers.
`/REFRESH <license ID>`	Update the status of licenses using license ID. Using this command, you can update the status of EDR Add-on, MDR Add-on, KUMA Add-on or other licenses. You can obtain the license ID from the license certificate. As a result, the application receives up-to-date license status information from Kaspersky activation servers.
`/CHECK`	Get license information. Kaspersky Endpoint Security displays information about all added license keys including reserve keys, EDR Add-on, MDR Add-on, KUMA Add-on keys, and other keys. Kaspersky Endpoint Security shows the following license information: • license name; • license identifier; • address of the Protection Server (SVM) to which the virtual machine is connected on which the application is installed in Light Agent mode; • license type: trial, commercial, beta, subscription; • date and time of application activation; • date and time of license expiration; • number of days till license expiration.
`/CHECK <license ID>`	Get license information by ID. You can use this command to get license information. You can obtain the license ID from the license certificate.
`/DEL /login=<user name> /password=<password>`	Remove the license key of the application. Reserve key will also be removed.
`/DEL <license ID> /login=<user name> /password=<password>`	Delete key using license ID. Using this command, you can delete a key from EDR Add-on, MDR Add-on, KUMA Add-on or other licenses. You can obtain the license ID from the license certificate.

Authentication	
`/login=<user name> /password=<password>`	User account credentials with the required Password protection permissions.

Example

```
avp.com LICENSE /ADD file.key
avp.com LICENSE /ADD AAAAA-BBBBB-CCCCC-DDDDD
avp.com LICENSE /DEL 3084-000789-456AB78C /login=KLAdmin /password=samplePassword
```

Example

```
avp.com LICENSE /ADD file.key
```

```
avp.com LICENSE /ADD AAAAA-BBBBB-CCCCC-DDDDD
```

```
avp.com LICENSE /DEL 3084-000789-456AB78C /login=KLAdmin /password=samplePassword
```

RENEW. Purchasing a license

Opening the Kaspersky website to purchase or renew your license.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

> This command cannot be run if the application is installed in Light Agent mode.

PBATESTRESET. Resetting the disk check results before encrypting the disk

Resetting the compatibility check results for Full Disk Encryption (FDE), including both Kaspersky Disk Encryption and BitLocker Drive Encryption technologies.

Before running Full Disk Encryption, the application performs a number of checks to verify that the computer can be encrypted. If the computer does not support Full Disk Encryption, Kaspersky Endpoint Security logs information about the incompatibility. The next time you try to encrypt, the application does not perform this check and warns you that encryption is not possible. If the hardware configuration of the computer has changed, the compatibility check results previously logged by the application must be reset to re-check the system hard drive for compatibility with Kaspersky Disk Encryption or BitLocker drive encryption technologies.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

EXIT. Exiting the application

Exiting Kaspersky Endpoint Security. The application will be unloaded from the computer's RAM.

> To execute this command, Password protection must be enabled. The user must have the **Exit the application** permission.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com EXIT /login=<user name> /password=<password>
```

EXITPOLICY. Disabling policy

Disabling Kaspersky Security Center policy on the computer. All Kaspersky Endpoint Security settings are available for configuration, including settings that have a closed lock in the policy (🔒).

> To execute this command, Password protection must be enabled. The user must have the **Disable Kaspersky Security Center policy** permission.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com EXITPOLICY /login=<user name> /password=<password>
```

STARTPOLICY. Enabling policy

Enabling Kaspersky Security Center policy on the computer. The application settings will be configured according to the policy.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

DISABLE. Disabling protection

Disabling File Threat Protection on a computer with an expired Kaspersky Endpoint Security license. It is not possible to run this command on a computer that has the application that is not activated or has a valid license.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

SPYWARE. Spyware detection

Managing spyware detection. By default, spyware detection is enabled.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com SPYWARE on|off
```

KSN. Switching between KSN / KPSN

Selecting a Kaspersky solution for determining the reputation of files or websites. Kaspersky Endpoint Security supports the following infrastructure solutions for working with Kaspersky reputation databases:

- *Kaspersky Security Network (KSN)* is the solution that is used by most Kaspersky applications. KSN participants receive information from Kaspersky and send Kaspersky information about objects detected on the user's computer to be analyzed additionally by Kaspersky analysts and to be included in the reputation and statistical databases.
- *Kaspersky Private Security Network (KPSN)* is a solution that enables users of computers hosting Kaspersky Endpoint Security or other Kaspersky applications to obtain access to Kaspersky reputation databases, and to other statistical data without sending data to Kaspersky from their own computers. KPSN is designed for corporate customers who are unable to participate in Kaspersky Security Network for any of the following reasons:
  - Local workstations are not connected to the Internet.
  - Transmission of any data outside the country or outside the corporate LAN is prohibited by law or restricted by corporate security policies.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

This command cannot be run if the application is installed in Light Agent mode.

Command syntax

```
avp.com KSN /global | /private <file name>
```

Kaspersky Security Network configuration file	
`<file name>`	Name of the configuration file containing Kaspersky Private Security Network settings. This file has the PKCS7 or PEM extension.

Example

```
avp.com KSN /global
avp.com KSN /private C:\ksn_config.pkcs7
```

Example

```
avp.com KSN /global
```

```
avp.com KSN /private C:\ksn_config.pkcs7
```

SERVERBINDINGDISABLE. Disabling the server connection protection

Running the *Administration Server connection protection* task, which removes the password of the computer's connection to the Administration Server. In this way, the task disables the protection of the Administration Server connection.

To execute this command, Password protection must be enabled.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com SERVERBINDINGDISABLE [/password=<password>]
```

Password	
`/password=<password>`	The password of the KL Admin user account or the password from the *Administration Server connection protection* task. If the parameter is not specified, Kaspersky Endpoint Security prompts you to enter a password on the next line.

KESCLI commands

KESCLI commands let you receive information about the state of computer protection using the OPSWAT component, and let you perform standard tasks such as *Malware Scan* and *Update of databases and application modules* tasks.

You can view the list of KESCLI commands by using the `kescli --help` command or by using the abbreviated command `kescli -h`.

To manage Kaspersky Endpoint Security from the command line:

1. Run the command line interpreter (cmd.exe) as an administrator.

2. Go to the folder where the Kaspersky Endpoint Security executable file is located.

   You can add path to the executable file to the %PATH% system variable during application installation.

3. Use the following template to execute the command:

```
kescli <command> [options]
```

As a result, Kaspersky Endpoint Security will execute the command (see figure below).

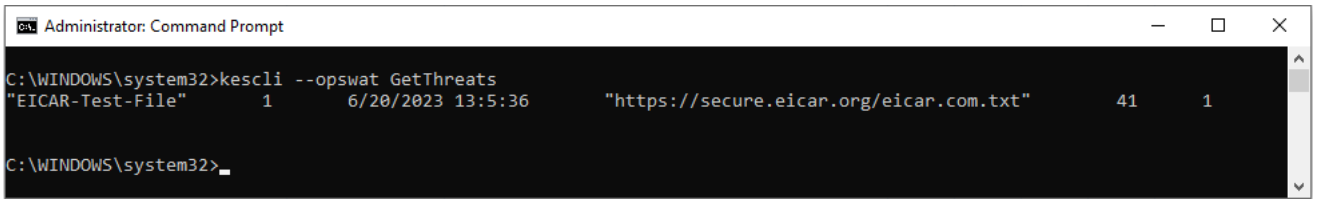

Managing the application from the command line

Scan. Malware Scan

Running the *Malware Scan* (Full Scan) task.

To run the task, the administrator must Allow use of local tasks in the policy.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

Command syntax

```
kescli --opswat Scan "<scan scope>" <action on threat detection>
```

You can check the completion status of a *Malware Scan* task by using the `GetScanState` command and view the date and time when the scan was last completed by using the `GetLastScanTime` command.

Scan scope	
`<scan scope>`	`;`-separated list of files and folders. For example, `"C:\Program Files (x86)\Example Folder"`.

Action on threat detection	
`0`	**Inform**. If this option is selected, Kaspersky Endpoint Security adds the information about infected files to the list of active threats on detection of these files.
`1`	**Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file. This action is selected by default.

Example

```
kescli --opswat Scan "C:\Documents and Settings\All Users\My Documents;C:\Program Files" 1
```

GetScanState. Scan completion status

Displaying information about the status of the *Malware Scan* (*Full Scan*) task completion:

- `1` – the scan is in progress.
- `0` – the scan is not running.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

Command syntax

```
kescli --opswat GetScanState
```

GetLastScanTime. Determining the scan completion time

Displaying information about the date and time of the last *Malware Scan* (*Full Scan*) task completion.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

Command syntax

```
kescli --opswat GetLastScanTime
```

GetThreats. Obtaining data on detected threats

Displaying a list of detected threats (*Report on threats*). This report contains information about threats and virus activity during the last 30 days prior to creating the report.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

Command syntax

```
kescli --opswat GetThreats
```

When this command is executed, Kaspersky Endpoint Security will send a response in the following format:

```
<name of detected object> <type of object> <detection date and time> <path to file>
<action on threat detection> <threat danger level>
```

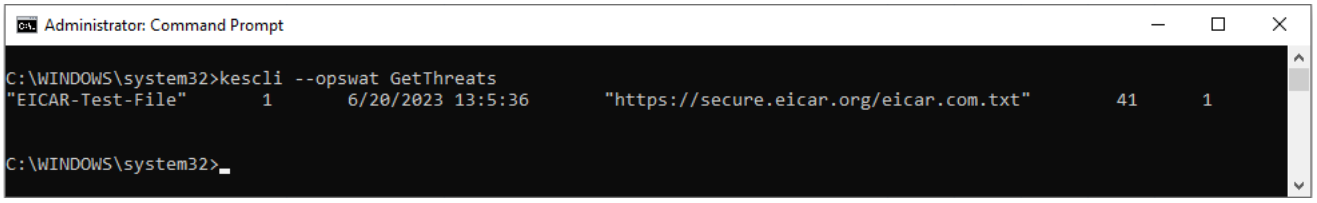

Object type	
0	Not known (`Unknown`).
1	Viruses (`Virware`).
2	Trojan programs (`Trojware`).
3	Malicious programs (`Malware`).
4	Advertisement programs (`Adware`).
5	Auto-dialer programs (`Pornware`).
6	Applications that could be used by a cybercriminal to harm the user's computer or data (`Riskware`).
7	Packed objects whose packing method may be used to protect malicious code (`Packed`).
20	Unknown objects (`Xfiles`).
21	Known applications (`Software`).
22	Concealed files (`Hidden`).
23	Applications requiring attention (`Pupware`).
24	Anomalous behavior (`Anomaly`).
30	Not determined (`Undetect`).
40	Ad banners (`Banner`).
50	Network attack (`Attack`).
51	Registry access (`Registry`).
52	Suspicious activity (`Suspicion`).
60	Vulnerabilities (`Vulnerability`).
70	Phishing (`Phishing`).
80	Unwanted email attachment (`Attachment`).
90	Malware detected by Kaspersky Security Network (`Urgent`).
100	Unknown link (`Suspic URL`).
110	Other malware (`Behavioral`).

Action on threat detection	
0	Not known (`unknown`).
1	Threat was remediated (`ok`).
2	Object was infected and has not been disinfected (`infected`).
5	Object is in an archive and has not been disinfected (`archive`).
9	Object has been disinfected (`disinfected`).
10	Object has not been disinfected (`not disinfected`).
11	Object was deleted (`deleted`).
13	A backup copy of the object was created (`backupped`).
15	Object was moved to Backup (`quarantined`).
23	Object was deleted on computer restart (`delete on reboot`).
25	Object was disinfected on computer restart (`disinfect on reboot`).
29	Object was moved to Backup by a user (`added by user`).
30	Object was added to exclusions (`added to exclude`).
31	Object was moved to Backup on computer restart (`quarantine on reboot`).

36	False positive (`false alarm`).
38	Process was terminated (`terminated`).
40	Object was not detected (`not found`).
41	Cannot resolve the threat (`untreatable`).
42	Object was restored (`rolled back`).
43	Object was created as a result of threat activity (`produced by threat`).
44	Object was restored on computer restart (`roll back on reboot`).
0xffffffff	Object was not processed (`discarded`).

Threat danger level	
0	Unknown
1	High
2	Medium scan
4	Low
8	Info (less than *Low*)

UpdateDefinitions. Updating databases and application software modules

Running the *Update of databases and application modules* task. Kaspersky Endpoint Security uses the default source: Kaspersky update servers.

> To run the task, the administrator must Allow use of local tasks in the policy.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

> This command cannot be run if the application is installed in Light Agent mode.

Command syntax

```
kescli --opswat UpdateDefinitions
```

You can view the release date and time of the current antivirus databases by using the `GetDefinitionsetState` command.

GetDefinitionState. Determining the last update date and time of the databases

Displaying information about the last update date and time of the anti-virus databases being used.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

Command syntax

```
kescli --opswat GetDefinitionState
```

EnableRTP. Enabling protection

Enabling Kaspersky Endpoint Security protection components on the computer: File Threat Protection, Web Threat Protection, Mail Threat Protection, Network Threat Protection, Host Intrusion Prevention.

> To enable protection components, the administrator must make sure that the relevant policy settings can be modified (attributes are open).

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

Command syntax

```
kescli --opswat EnableRTP
```

As a result, protection components are enabled even if you have prohibited the modification of application settings with Password protection.

You can check the operating status of File Threat Protection by using the `GetRealTimeProtectionState` command.

GetRealTimeProtectionState. File Threat Protection status

Displaying information about the status of the File Threat Protection component:

- `1` – the component is enabled.
- `0` – the component is disabled.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

Command syntax

```
kescli --opswat GetRealTimeProtectionState
```

GetEncryptionState. Disk encryption status

Displaying information about the disk encryption status:

- `1` means the disk is protected by Kaspersky or BitLocker disk encryption technology.
- `0` means the disk is not encrypted.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

```
Command syntax

kescli --opswat GetEncryptionState
```

Version. Identifying the application version

Displaying the version of Kaspersky Endpoint Security for Windows.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located.

```
Command syntax

kescli --Version
```

You can also use the abbreviated command `-v`.

Detection and Response management commands

You can use the command line to manage built-in functionality of Detection and Response solutions (for example, Kaspersky Sandbox or Kaspersky Endpoint Detection and Response Optimum). You can manage Detection and Response solutions if management using the Kaspersky Security Center console is not possible. You can view the list of commands for managing the application by running the `HELP` command. To read about the syntax of a specific command, enter `HELP <command>`.

To manage built-in features of Detection and Response solutions using the command line:

1. Run the command line interpreter (cmd.exe) as an administrator.
2. Go to the folder where the Kaspersky Endpoint Security executable file is located.
3. Use the following template to execute the command:

   ```
   avp.com <command> [options]
   ```

   As a result, Kaspersky Endpoint Security will execute the command.

SANDBOX. Managing Sandbox

Commands for managing the Sandbox component:

- Enabling or disabling the Sandbox component.

  The Sandbox components provides interaction with the Kaspersky Sandbox solution and the KATA Sandbox component, which is part of the Kaspersky Anti Targeted Attack Platform.

- Configuring the Kaspersky Sandbox component:

  - Connecting the computer to Sandbox servers.

    The servers use deployed virtual images of Microsoft Windows operating systems to run objects that need to be scanned. You can enter an IP address (IPv4 or IPv6) or a fully qualified domain name. For details about deploying virtual images and configuring Sandbox servers, refer to the Kaspersky Sandbox Help and Kaspersky Anti Targeted Attack Platform Help.

  - Configuring the connection timeout for the server.

    Connection timeout for the Sandbox server (for Kaspersky Sandbox) or Central Node server (for KATA). After the configured timeout elapses, Kaspersky Endpoint Security sends a request to the next server. You can increase the connection timeout for the server if your connection speed is low or if the connection is unstable. The recommended request timeout is 0.5 seconds or less.

  - Configuring a trusted connection between the computer and the servers.

    To configure a trusted connection with the Sandbox server (for Kaspersky Sandbox) or Central Node server (for KATA), you must prepare a TLS certificate. You must then add the certificate to the computer by using a policy. You also need to add the certificate to the Sandbox server (for Kaspersky Sandbox) or Central Node server (for KATA).

  - Configuring the integration mode.

    You need to select a solution that Sandbox is a part of, that is, Kaspersky Sandbox or KATA Sandbox. *Kaspersky Sandbox* is a standalone Detection and Response solution by Kaspersky. *KATA Sandbox* is a component of the Kaspersky Anti Targeted Attack Platform solution. When integrated with KATA Sandbox, the component can work in the following modes:

    - **Manually**. The user manually submits the file for scanning from the context menu (**Send to Sandbox**).
    - **Automatically**. The application automatically detects objects and submits them to Sandbox for scanning.
    - **Combined**.

- Displaying the current settings of the component.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com stop sandbox [/login=<user name> /password=<password>]
```

```
avp.com start sandbox
```

```
avp.com sandbox /set [--servers=<address:port>] [--pinned-certificate=<path to the TLS certificate>] [--client-certificate=<path to the PFX archive>] [--client-certificate-password=<password>] [--timeout=<Sandbox server connection timeout (ms)>] [--mode=<KSB|KATAManual|KATAAuto|KATAFull>] [/login=<user name> /password=<password>]
```

Operation	
stop	Disable the Sandbox component.
start	Enable the Sandbox component.

`set`	Configure the Sandbox component. You can configure the following settings:
	• Add Sandbox servers (`--servers`)
	• Add a TLS certificate (`--pinned-certificate`)
	• Add a crypto-container (`--client-certificate`)
	• Specify a password for the crypto-container (`--client-certificate-password`);
	• Set the server connection timeout (`--timeout`)
	• Select an integration mode (`--mode`):
	  • `KSB` – integration with Kaspersky Sandbox;
	  • `KATAManual` – manual integration with KATA Sandbox;
	  • `KATAAuto` – automatic integration with KATA Sandbox;
	  • `KATAFull` – combined integration with KATA Sandbox.

`show`	Display the current settings of the component. You get the following response:
	`sandbox.timeout=<Sandbox server connection timeout (ms)>`
	`sandbox.servers=<list of Sandbox servers>`
	`sanbox.mode=<integration mode>`
	`sandbox.tls=<trusted connection status>`

Authentication	
`/login=<user name> /password=<password>`	User account credentials with the required Password protection permissions.

Example

```
avp.com SANDBOX /SET --servers=127.0.0.1:8080;127.0.0.2:8080 --pinned-certificate=c:\my_certs\my.cer --mode=KSB
/login=login /password=password
```

PREVENTION. Managing Execution prevention

Disabling the Execution prevention component or displaying the current settings of the component, including the list of execution prevention rules.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com prevention disable
```

```
avp.com prevention /show
```

Upon executing the `prevention /show` command, you will get the following response:

```
prevention.enable=true|false

prevention.mode=audit|prevent

prevention.rules

id: <rule ID>
target: script|process|document
```

```
md5: <MD5 hash of the file>
sha256: <SHA256 hash of the file>
pattern: <path to the object>
case-sensitive: true|false
```

Command return values:

- `-1` means the command is not supported by the version of the application that is installed on the computer.
- `0` means the command was executed successfully.
- `1` means a mandatory argument was not passed to the command.
- `2` means a general error occurred.
- `4` means there was a syntax error.
- `9` – wrong operation (for example, an attempt to disable the component when it is already disabled).

ISOLATION. Managing Network isolation

Disabling Network isolation of the computer or displaying current settings of the component. Component settings also include a list of network connections added to exclusions.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com isolation /OFF /login=<user name> /password=<password>
```

```
avp.com isolation /STAT
```

As a result of running the `stat` command, you receive the following response: `Network isolation on|off`.

RESTORE. Restoring files from Quarantine

Restoring a file from Quarantine to its original folder. *Quarantine* is a special local storage on the computer. The user can quarantine files that the user considers dangerous for the computer. Quarantined files are stored in an encrypted state and do not threaten the security of the device. Kaspersky Endpoint Security uses the Quarantine only when integrated with Kaspersky Detection and Response solutions. In other cases Kaspersky Endpoint Security places the relevant file in Backup. For details on managing Quarantine as part of solutions, please refer to the Kaspersky Sandbox Help, Kaspersky Endpoint Detection and Response Optimum Help, Kaspersky Endpoint Detection and Response Expert Help, Kaspersky Anti Targeted Attack Platform Help, and Kaspersky Endpoint Detection and Response Expert (on-premises) Help.

To execute this command, Password protection must be enabled. The user must have the **Restore from Backup** permission.

The object is quarantined under the system account (SYSTEM).

Restoring files from Quarantine involves the following special considerations:

- If the destination folder has been deleted or the user does not have access rights to that folder, the application places the file in the `%DataRoot%\QB\Restored` folder. Then you must manually move the file to the destination folder.
- The application treats the name of the file being restored as case sensitive. If you do not observe the case when entering the file name, the application does not restore the file.
- If the destination folder already has a file with the same name, the application cancels the restoration of the file.
- If you are using the KATA (EDR) solution, the application saves a copy of the file in Quarantine after restoring the file. You can clear the Quarantine manually. For EDR Optimum and EDR Expert solutions, the application deletes the file after restoration.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com RESTORE [/REPLACE] <file name> /login=<user name> /password=<password>
```

Advanced settings	
`/REPLACE`	Overwrite an existing file.
`<file name>`	The name of the file to be restored.

Authentication	
`/login=<user name> /password=<password>`	User account credentials with the required Password protection permissions.

Example

```
avp.com RESTORE /REPLACE true_file.txt /login=KLAdmin /password=samplePassword
```

Command return values:

- `-1` means the command is not supported by the version of the application that is installed on the computer.
- `0` means the command was executed successfully.
- `1` means a mandatory argument was not passed to the command.
- `2` means a general error occurred.
- `4` means there was a syntax error.

IOCSCAN. Scan for indicators of compromise (IOC)

Running the *IOC Scan* task. An *Indicator of Compromise (IOC)* is a set of data about an object or activity that indicates unauthorized access to the computer (compromise of data). For example, many unsuccessful attempts to sign in to the system can constitute an Indicator of Compromise. The *IOC Scan* task allows finding Indicators of Compromise on the computer and taking threat response measures.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

The IOC Scan is aborted after 128 matches with indicators of compromise described in IOC files. This is necessary to limit the number of entries in the IOC Scan task report to make it easier to analyze and to protect the report from overflowing because of imprecisely formulated indicators of compromise that may generate a vast number of matches.

Command syntax

```
avp.com IOCSCAN <full path to the IOC file>|/path=<path to the IOC files folder> [/process=on|off] [/hint=<full
path to executable file of a process|full file path>] [/registry=on|off] [/dnsentry=on|off] [/arpentry=on|off]
[/ports=on|off] [/services=on|off] [/system=on|off] [/users=on|off] [/volumes=on|off] [/eventlog=on|off]
[/datetime=<event publication date>] [/channels=<list of channels>] [/files=on|off] [/drives=
<all|system|critical|custom>] [/excludes=<list of exclusions>][/scope=<list of folders to scan>]
```

IOC files	
`<full path to the IOC file>`	Full path to the IOC file that you want to use for scanning. You can specify multiple IOC files separated by spaces. The full path to the IOC file must be entered without the `/path` argument. For example, `C:\Users\Admin\Desktop\IOC\file1.ioc`
`/path=<path to the folder with IOC files>`	Path to the folder with IOC files that you want to use for scanning. *IOC files* are files containing the sets of indicators that the application tries to match to count a detection. IOC files must conform to the OpenIOC standard. For example, `C:\Users\Admin\Desktop\IOC`

Data type for IOC scanning	
`/process=on|off`	Analyze process data when performing the IOC scan (ProcessItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not analyze processes running on the computer when performing the scan. If the IOC file contains IOC terms of the ProcessItem IOC document, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes process data only if the ProcessItem IOC document is described in the IOC file that is provided for the scan.
`/hint=<full path to the executable file of the process|full path to the file>`	Analyze files data when performing the IOC scan (ProcessItem and FileItem terms). You can select a file in one of the following ways: • `<full path to the executable file of the process>` – ProcessItem term; • `<full path to the file>` – FileItem term.
`/registry=on|off`	Analyze Windows registry data when performing an IOC scan (RegistryItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not scan the Windows registry. If the IOC file contains RegistryItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes the Windows registry only if the RegistryItem IOC document is described in the IOC file that is provided for the scan. For the RegistryItem data type, Kaspersky Endpoint Security scans a set of registry keys.
`/dnsentry=on|off`	Analyze the data about records in the local DNS cache when performing the IOC scan (DnsEntryItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not scan the local DNS cache. If the IOC file contains DnsEntryItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes the local DNS cache only if the DnsEntryItem IOC document is described in the IOC file that is provided for the scan.
`/arpentry=on|off`	Analyze the data about records in the ARP table when performing the IOC scan (ArpEntryItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not scan the ARP table. If the IOC file contains ArpEntryItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes the ARP table only if the ArpEntryItem IOC document is described in the IOC file that is provided for the scan.
`/ports=on|off`	Analyze data about ports open for listening when performing the IOC scan (PortItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not scan the table of active connections on the device. If the IOC file contains PortItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes the table of active connections only if the PortItem IOC document is described in the IOC file that is provided for the scan.
`/services=on|off`	Analyze data about services installed on the device when performing the IOC scan (ServiceItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not scan the data about services installed on the device. If the IOC file contains ServiceItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes service data only if the ServiceItem IOC document is described in the IOC file that is provided for the scan.
`/system=on|off`	Analyze environment data when performing the IOC scan (SystemInfoItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not analyze environment data. If the IOC file contains SystemInfoItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes environment data only if the SystemInfoItem IOC document is described in the IOC file that is provided for the scan.
`/users=on|off`	Analyze data about users when performing the IOC scan (UserItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not analyze data about users created in the system. If the IOC file contains UserItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes data about users created in the system only if the UserItem IOC document is described in the IOC file that is provided for the scan.

`/volumes=on|off`	Analyze data about volumes when performing the IOC scan (VolumeItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not scan the data about volumes on the device. If the IOC file contains VolumeItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes volume data only if the VolumeItem IOC document is described in the IOC file that is provided for the scan.
`/eventlog=on|off`	Analyze the data about records in the Windows event log when performing the IOC scan (EventLogItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not scan the records in the Windows event log. If the IOC file contains EventLogItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes the Windows event log if the EventLogItem IOC document is described in the IOC file that is provided for the scan. For the EventLogItem\source IOC term, use the **Provider Name** value from the XML schema of the event.
`/datetime=<event publication date>`	Take into consideration the date when the event was published in the Windows event log when determining the IOC scan scope for the corresponding IOC document. When performing an IOC scan, Kaspersky Endpoint Security scans Windows event log entries published during the period from the specified time and date to the moment when the task is run. Kaspersky Endpoint Security allows specifying the event publication date as the value of the argument. The scan is performed only for events published in the Windows event log after the specified date and before the scan is run. If the argument is not specified, Kaspersky Endpoint Security scans events with any publication date. The `TaskSettings::BaseSettings::EventLogItem::datetime` setting cannot be edited. The setting is used only if the EventLogItem IOC document is described in the IOC file provided for the scan.
`/channel=<list of channels>`	List of channel (log) names for which you want to perform an IOC scan. If the argument is specified, Kaspersky Endpoint Security scans records published in the specified logs. The IOC document must have the EventLogItem term described. The name of the log is specified as a string in accordance with the name of the log (channel) specified in the properties of the log (the Full Name parameter) or in the event properties (the `<Channel></Channel>` parameter in the xml schema of the event). You can specify multiple channels separated by spaces. If the argument is not specified, Kaspersky Endpoint Security scans records for channels `Application`, `System`, `Security`.
`/files=on|off`	Analyze file data when performing the IOC scan (FileItem term). If the value of the argument is `off`, Kaspersky Endpoint Security does not analyze file data. If the IOC file contains FileItem IOC document terms, they are ignored (detected as no match). If the argument is not specified, Kaspersky Endpoint Security analyzes file data only if the FileItem IOC document is described in the IOC file that is provided for the scan.
`/drives=<all|system|critical|custom>`	Set IOC scan scope when analyzing data for the FileItem IOC document. You can set the following values for the scan scope: • `<all>` for all available file scopes. • `<system>` for files in folders where the operating system is installed. • `<critical>` for temporary files in user and system folders. • `<custom>` for files in user-defined scopes (`/scope=<list of folders to scan>`). If the argument is not specified, the scan is performed for critical areas.
`/excludes=<list of exclusions>`	Set exclusion scope when analyzing data for the FileItem IOC document. You can specify multiple paths separated by spaces.
`/scope=<list of folders to scan>`	User-defined IOC scan scope when analyzing data for the FileItem IOC document (`/drives=custom`). You can specify multiple paths separated by spaces.
`/retro /<number of days>`	*Retrospective IOC Scan* is a mode of the *IOC Scan* task in which Kaspersky Endpoint Security scans for indicators of compromise using data for a certain time period. This mode is intended for searching indicators of compromise by the telemetry of the protected computer such as network activity, processes, files, and other telemetry. You can set a time period from 1 to 14 days. By default, the application scans for indicators of compromise for one day.

`/network=on|off`	Analysis of network data (the NetworkItem term).
`/url=on|off`	Analysis of data in browser logs (the UrlHistoryItem term). The Retrospective IOC Scan analyzes logs of the following browsers: Google Chrome, Mozilla Firefox, Microsoft Edge (version 79 or later).
`/email`	Analysis of mail objects (the EmailItem term).
`/route`	Analysis of routing and forwarding tables (the RouteEntryItem term).

Command return values:

- `-1` means the command is not supported by the version of the application that is installed on the computer.
- `0` means the command was executed successfully.
- `1` means a mandatory argument was not passed to the command.
- `2` means a general error occurred.
- `4` means there was a syntax error.

If the command was executed successfully (return value `0`) and indicators of compromise were detected along the way, Kaspersky Endpoint Security outputs the following task result information to the command line:

`Uuid`	ID of the IOC file from the header of the IOC file structure (the `<ioc id="">` tag)
`Name`	Description of the IOC file from the header of the IOC file structure (the `<description></description>` tag)
`Matched Indicator Items`	List of IDs of all matched indicators.
`Matched objects`	Data for each IOC document for which there was a match.

MDRLICENSE. MDR activation

Adding the BLOB configuration file to activate Managed Detection and Response. The BLOB file contains the client ID and information about the license for Kaspersky Managed Detection and Response. The BLOB file is located inside the ZIP archive of the MDR configuration file. You can obtain the ZIP archive in the Kaspersky Managed Detection and Response Console. For detailed information about a BLOB file, please refer to the Kaspersky Managed Detection and Response Help.

Administrator privileges are required for performing operations with a BLOB file. Managed Detection and Response settings in the policy must also be available for editing ( ).

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com MDRLICENSE <operation> [/login=<user name> /password=<password>]
```

Operation	
/ADD <file name>	Apply the BLOB configuration file for integration with Kaspersky Managed Detection and Response (P7 file format). You can apply only one BLOB file. If a BLOB file was already added to the computer, the file will be replaced.
/DEL	Delete the BLOB configuration file.

Authentication	
/login=<user name> /password=<password>	User account credentials with the required Password protection permissions.

Example
```
avp.com MDRLICENSE /ADD file.key
avp.com MDRLICENSE /DEL /login=KLAdmin /password=samplePassword
```

Example
```
avp.com MDRLICENSE /ADD file.key
```

```
avp.com MDRLICENSE /DEL /login=KLAdmin /password=samplePassword
```

EDRKATA. EDR (KATA) integration

Commands for managing the Endpoint Detection and Response component (KATA):

- Enabling or disabling the EDR (KATA) component.

  The EDR component (KATA) provides interoperability with the Kaspersky Anti Targeted Attack Platform solution.

- Configuring the connection to Kaspersky Anti Targeted Attack Platform servers.

- Displaying the current settings of the component.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax
```
avp.com START EDRKATA
```

```
avp.com STOP EDRKATA
```

```
avp.com edrkata /set /servers=<server address>:<port> /server-certificate=<path to the TLS certificate> [/timeout=
<Central Node server connection timeout (s)>] [/sync-period=<Central Node server synchronization period (min)>]
```

```
avp.com edrkata /show
```

Operation	
stop	Disable the EDR (KATA) component.

start	Enable the EDR (KATA) component.
set	Configure the EDR (KATA) component. You can configure the following settings: • Add Central Node servers (servers=<server address>:<port>) • Add a TLS certificate (server-certificate=<path to the TLS certificate>) • Set the Central Node server connection timeout (/timeout=<Central Node server connection timeout (s)>) • Set the period for synchronization with the Central Node server (/sync-period=<Central Node server synchronization period (min)>)
show	Display the current settings of the component.

EDRExpertOnPrem. EDR Expert (on-premises) integration

Commands for managing the built-in agent to configure the Kaspersky Endpoint Detection and Response Expert (on-premises) integration:

- Enabling or disabling the built-in EDR Expert (on-premises) agent.
- Configuring connection settings for the EDR Expert (on-premises) servers.
- Displaying the current settings of the built-in agent.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com START EDRExpertOnPrem
```

```
avp.com STOP EDRExpertOnPrem
```

```
avp.com EDRExpertOnPrem /set /servers=<server address>:<port> /server-certificate=<path to the TLS certificate>
[/client-certificate=<path to the PFX archive> /client-certificate-password=<password to the PFX archive>]
[/timeout=<server connection timeout (s)>] [/sync-period=<Central Node server synchronization period (min)>]
/telemetry-servers=<server address:port> /telemetry-server-certificate=<path to the TLS certificat> [telemetry-
client-certificate=<path to the PFX archive> telemetry-client-certificate-password=<password to the PFX archive>]
[/telemetry-timeout=<server connection timeout (s)>] [/events-send-period=<seconds>] [/events-limit=<0|1>]
[/events-per-hour=<number of events>] [/max-packet-length=<number of packets>] [/telemetry-only-tagged-events=
<0|1>] login=<user name> password=<password>
```

```
avp.com EDRExpertOnPrem /show
```

Operation	Description
stop	Disable the built-in EDR Expert (on-premises) agent.
start	Enable the built-in EDR Expert (on-premises) agent.

`set`	Configure the built-in EDR Expert (on-premises) agent.
	You can configure the following connection settings for the *response servers*:
	• `servers=<server address>:<port>`. Response server address (FQDN, IPv4, IPv6).
	• `server-certificate=<path to the TLS certificate>`. TLS certificate for establishing a trusted connection with the server. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help).
	• `client-certificate=<path to the PFX archive> client-certificate-password=<password to the PFX archive>`. Use a crypto-container for two-way authentication. A *crypto-container* is a PFX archive with a certificate and a private key in the PKCS#12 format. To enable such authentication, you need to create a crypto-container in an external certification authority.
	• `timeout=<server connection timeout (s)>`. Maximum server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different server.
	• `sync-period=<server synchronization period (min)>`. Frequency of synchronization requests sent to the server. During the synchronization, Kaspersky Endpoint Security receives threat response tasks and sends task results.
	You can configure the following connection settings for the *telemetry collection servers*:
	• `telemetry-servers=<server address:port>`. Telemetry collection server address (FQDN, IPv4, IPv6).
	• `telemetry-server-certificate=<path to the TLS certificat>`. TLS certificate for establishing a trusted connection with the server. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help).
	• `telemetry-client-certificate=<path to the PFX archive> telemetry-client-certificate-password=<password to the PFX archive>`. Use a crypto-container for two-way authentication. A *crypto-container* is a PFX archive with a certificate and a private key in the PKCS#12 format. To enable such authentication, you need to create a crypto-container in an external certification authority.
	• `telemetry-timeout=<server connection timeout (s)>`. Maximum server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different server.
	• `events-send-period=<seconds>`. Maximum delay when sending events. The application synchronizes with the server to send events after the synchronization interval expires. The default setting is 30 seconds.
	• `events-limit=<0|1>`. Limit the number of requests. This feature helps optimize the load on the server. If this functionality is enabled, the application restricts the event transmission. If the number of events exceeds the configured limits, Kaspersky Endpoint Security stops sending events.
	• `events-per-hour=<number of events>`. Maximum number of events per hour The application analyzes the telemetry data stream and restricts the sending of events if the event stream exceeds the configured events-per-hour limit. Kaspersky Endpoint Security resumes sending events after an hour. The default setting is 3000 events per hour. If the application is installed on a server, the telemetry data stream is higher. For servers, it is recommended to increase the value to 60,000 events per hour.
	• `max-packet-length=<number of packets>`. Maximum packet length. The application synchronizes with the server when the buffer is filled with events. The default setting is 1024 events.
	• `telemetry-only-tagged-events=<0|1>`. Sending telemetry with IOA only. *Indicator of Attack (IOA)* is a rule that contains a description of suspicious behavior in the system that may indicate a targeted attack. The application compares ongoing behavior in the system with these rules and logs events that are indicative of a targeted attack. The application uses the *streaming scan* technology, which allows real time tracking of such events.
	You can configure the following general settings:
	• `mode=EDRKATA | EDRExpertOnPrem`. Switching between solutions:
	  • `EDRKATA`. Endpoint Detection and Response Expert (version 7.1 or earlier).
	  • `EDRExpertOnPrem`. Endpoint Detection and Response Expert (version 8.0 or later). Default value.
	• `login=<user name> password=<password>`. User account credentials with the required Password protection permissions.

`show`	Display the current settings of the component.

KUMA. KUMA Integration

Commands for managing the built-in KUMA agent:

- Enabling or disabling KUMA integration.

  The built-in KUMA agent provides interoperability with the Kaspersky Unified Monitoring and Analysis Platform solution.

- Configuring the connection to Kaspersky Unified Monitoring and Analysis Platform servers.

- Displaying the current settings of the component.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com START KUMA
```

```
avp.com STOP KUMA [/login=<user name> /password=<password>]
```

```
avp.com KUMA /SET /servers=<server address>:<port> /server-certificate=<path to the TLS certificate> [/timeout=
<KUMA server connection timeout (s)>] [/client-certificate=<path to the crypto-container>] [ /client-certificate-
password=<password>] [/maximum-data-transfer-time=<maximum events transmission delay (sec)>]
```

```
avp.com KUMA /SHOW
```

Operation	
`stop`	Disable KUMA integration.
`start`	Enable KUMA integration.
`set`	Configure the built-in KUMA agent. You can configure the following settings: • Add KUMA servers (`/servers=<protocol>://<server address>:<port>`) The application supports the following server connection protocols: `tcp`, `udp`, `http`, `https`. • Add a TLS certificate (`/server-certificate=<path to the TLS certificate>`) • Set the server connection timeout (`/timeout=<KUMA server connection timeout (s)>`) • Add a crypto-container (`/client-certificate=<path to the crypto-container> /client-certificate-password=<password>`) • Configure the event transmission delay (`/maximum-data-transfer-time=<maximum events transmission delay (sec)`)
`show`	Display the current settings of the component.

Authentication	
`/login=<user name> /password=<password>`	User account credentials with the required Password protection permissions.

Example

```
avp.com start kuma
```

```
avp.com KUMA /SET /servers=https://127.0.0.1:8080 /server-certificate=c:\\folder\\certificate.cer /timeout=15
/login=login /password=password
```

```
avp.com KUMA /SET /servers=https://kuma.server.com:8000 /server-certificate=c:\\folder\\certificate.cer
/login=login /password=password
```

YARA. Running YARA Scan

Running the *Run YARA Scan* task. The application scans files and objects for indicators of targeted attacks on the corporate IT infrastructure using databases of YARA rules. *YARA rules* are descriptions of signatures of targeted attacks and intrusions into the corporate IT infrastructure that Kaspersky Endpoint Security uses to scan objects.

To run a YARA scan, you must prepare YARA files that describe rules. When creating YARA files, consider the following requirements:

- Kaspersky Endpoint Security supports YARA files with the .YARA and .YAR extensions that follow the YARA 4.2.3 open standard for describing indicators of compromise.
- Only files with YARA rules can be specified for the task. The *Run YARA Scan* task does not support other rule types.
- If you have added YARA files that Kaspersky Endpoint Security does not support, or the rules contain syntax errors, the task is aborted with the corresponding error message.
- The identifiers of all YARA files used in a single task must be unique. If there are YARA files with the same identifier, it might affect the task execution results.
- A YARA scan is aborted after 128 matches with indicators described in YARA rules. This is necessary to limit the number of entries in the YARA scan report to make it easier to analyze and to protect the report from overflowing because of imprecisely formulated YARA rules that may generate a vast number of matches.

Kaspersky recommends creating one rule per YARA file. This makes the scan results more readable.

A YARA scan may take a considerable amount of time. Depending on the drive size, task settings, and the number of objects on the disk, a YARA scan can last anywhere from several minutes to several hours. The application does not display a progress indicator. It is not possible to stop or cancel a YARA scan. You are advised to wait until the results of a YARA scan are available.

Command syntax

```
avp.com YARA <full path to the YARA file>|/path=<path to the folder with YARA files> [<advanced settings>]
```

YARA files	
`<full path to the YARA file>`	Full path to the YARA file that you want to use for scanning. You can specify paths to multiple YARA files separated by spaces. Required argument if the `/path=<path to the folder with YARA files>` value is not specified. Example: `C:\Users\Admin\Desktop\YARA\file1.yar C:\Users\Admin\Desktop\YARA\file2.yar`
`/path=<path to the folder with YARA files>`	Full path to a folder with YARA files that you want to use for scanning. Required argument if the `<full path to the YARA file>` value is not specified. Example: `/path=C:\Users\Admin\Desktop\YARA`

Advanced settings	
`/fastScan=<on|off>`	Quick YARA Scan. For each object, the application logs one occurrence of the detected indicator. The application also hides duplicates of detected indicators in the log. Quick YARA Scan allows scanning large files quicker. If this setting is not specified, the application performs a standard YARA scan. In this mode, the application logs duplicates of detected indicators.
`/maxRules=<maximum number of scan rules>`	Limit of the number of unique triggered rules that makes the application stop the YARA scan when reached. If the value of this setting is not specified or if `0` is specified, the application performs the YARA scan without limitations.

/timeOut=<stop scan after the specified time in seconds>	How long a YARA scan can take, in seconds. When this time runs out, the application stops the YARA scan. If the value of this setting is not specified or if 0 is specified, the application performs the YARA scan without limitations.
/recursive=<on|off>	This argument starts a recursive scan of subfolders within the /scanFolders Custom Scan.
/scanFolders=<list of folders to be scanned>	This argument starts a YARA scan of files in the specified list of folders. You can specify multiple values separated by spaces. Kaspersky Endpoint Security supports the * and ? characters when entering a folder path mask. If this setting is not specified, the application performs a YARA scan of all local disks except network shares, cloud drives, and removable media.
/scanMemory=<on|off>	Scan the memory of all running processes.
/scanProcess=<process name>	Scan memory only for specified processes. Specify space-separated full paths to executable files of processes. You can also use * and ? characters to enter a mask.
/maxSize=<file size in bytes>	Limit file size for the YARA scan. The application skips larger files.
/includes=<list of objects to be scanned>>	Editing the scan scope. You can specify multiple values separated by spaces. The following values are available: • File name • File extension Scan scope must be specified with the /scanFolders parameter. Example: /scanFolders C:*.* /includes=*.exe *.dll – the application scans all files with the .EXE and .DLL extensions on disk C.
/excludes=<list of objects to be scanned>	Excluding files from the YARA scan. You can specify multiple values separated by spaces. The following values are available: • File path • Mask of the file path Exclusions must be specified with the /scanFolders parameter. Example: /scanFolders C:*.* /excludes readme.txt C:\trusted*.* *.xml – the application skips the readme.txt file, all files from the C:\trusted folder, and all files with the .XML extension in the root folder on disk C.
/scanAutoruns=<on|off>	YARA scan of autorun point objects.
/excludeAutoruns=<list of autorun point areas to skip>	Excluding autorun point objects from the scan scope. Specify space-separated full paths to executable files of processes. You can also use * and ? characters to enter a mask.
/logFolder=<path to the folder for saving the scan results in a TXT file>	If you specify a path to a folder, the application saves scan results at the specified path in a file named yara_<computer name>_<scan completion time>.txt. If you specify a path to a specific TXT file, the application saves the scan results in that file. For example: /logFolder=C:\test or /logFolder=C:\test\abc.txt. Scan results are output to the command line regardless of whether the /logFolder option is specified.

Command return values:

- -1 means the command is not supported by the version of the application that is installed on the computer.
- 0 means the command was executed successfully.
- 1 means a mandatory argument was not passed to the command.
- 2 means a general error occurred.
- 4 means there was a syntax error.
- 5 means one or more files with YARA rules specified in the parameter was not found.

If the command was executed successfully (return value 0) and indicators of compromise were detected along the way, Kaspersky Endpoint Security outputs the following task result information to the command line:

`Started at <time>` `Finished at <time>`	Start time and completion time of a scan.
`Host name: <computer name>`	The name of the computer on which the object was detected.
`Result: <error>`	Error code for the error that occurred while running the task. If there are no errors, the application outputs `0x00000000`.
`Comment: <comment text>`	Error description for the error that occurred while running the task. For example, `Operation timeout`.
`Object Name:` or `Process:` (when scanning process memory)	The name of the object or process on which the YARA rule triggered.
`Md5: <md5 hash>` `Sha256: <sha256 hash>`	Hashes of the object on which the YARA rule triggered.
`Rule Name`	The name of the triggered YARA rule.

`Meta:`
`Author: <author>`
`Date: <date>`
`Description: <description>`
	Metadata specified in the YARA rule.

`Detects:`
`Offset : String name : String data`
`<offset> : <string name> : <string data>`
	Found matches within the object that meet the YARA rule conditions:
	• Offset in the process memory or file where a match was detected (`Offset`).
	• The name of the matching string in the YARA rule (`String name`).
	• The matching string in the process memory or file (`String data`).

TELEMETRYFILTERS. Filtering events to be sent to KUMA

By default, sending events to the KUMA server is disabled. To ensure KUMA works properly, you must enable telemetry sending. You can select an event source from among the standard logs: *Application*, *Security* or *System*. To improve performance and optimize data transmission to the KUMA server, you can manually add or exclude individual events from telemetry. For example you can exclude Sysmon events.

You can export the list of exclusions to a JSON file from the command line.

If the command contains only the name of the file to which you want to export settings, the application places the file as follows:

- If the path to avp.com is added to the %PATH% system variable, the application places the file in the `C:\Windows\SysWOW64` folder.
- If you run the command from the application installation folder, the export will fail because the application's self-protection blocks the creation of a new file in the application folder. To export application settings to a file, enter the file path.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com TELEMETRYFILTERS /export <file name>
```

```
avp.com TELEMETRYFILTERS /import <file name>
```

Operation	
`export`	Exporting event filters to be sent to KUMA.
`import`	Importing event filters to be sent to KUMA. If event filtering rules already exist on the computer, Kaspersky Endpoint Security replaces these when importing.

File for export or import	
`<file name>`	Name of the file with event filters to be sent to KUMA. You can also enter the file path. You can export filters for sending to KUMA to a JSON file.

Light Agent management commands

You can manage the application in Light Agent mode for protecting virtual environments on the command line. You can manage the application in Light Agent mode if management using the Kaspersky Security Center console is not possible. You can view the list of commands for managing the application by running the `HELP` command. To read about the syntax of a specific command, enter `HELP <command>`.

To manage the application in Light Agent mode from the command line:

1. Run the command line interpreter (cmd.exe) as an administrator.
2. Go to the folder where the Kaspersky Endpoint Security executable file is located.
3. Use the following template to execute the command:

   ```
   avp.com <command> [options]
   ```

   As a result, Kaspersky Endpoint Security will execute the command.

The application installed in Light Agent mode supports almost all AVP commands of the application installed in Standard mode. In Light Agent mode, anti-virus database update tasks and license key management tasks are limited.

KSVLAINFO. Determining the Light Agent mode

Determining the Light Agent mode.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com KSVLAINFO
```

The command outputs the following information to the console:

- Light Agent mode for protecting virtual environments: enabled or disabled.

  If Light Agent mode is enabled, the application is used as part of the Kaspersky Security for Virtualization Light Agent solution.

- VDI protection mode: enabled or disabled.

  The VDI protection mode helps optimize the performance of Kaspersky Endpoint Security on nonpersistent virtual machines. If VDI protection mode is enabled, updates that require restarting the protected virtual machine are not installed on nonpersistent virtual machines. When receiving updates that require a restart, Light Agent installed on a nonpersistent virtual machine sends a message to Kaspersky Security Center informing it that the protected virtual machine template needs to be updated.

- Type of the protected virtual machine: persistent or nonpersistent.

- Role of the protected virtual machine in the virtual infrastructure: server or workstation.

- Identifier: UUID.

VIISINFO. Status of the Light Agent connection to the Integration Server

Viewing information about the Light Agent connection to the Integration Server.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com VIISINFO
```

The command outputs the following information to the console:

- Address and port of the Integration Server to which the Light Agent is connected.

- Integration Server connection status.

- Date and time of the last connection of the Light Agent to the Integration Server.

SVMINFO. Status of the Light Agent connection to the Protection Server

Viewing information about the Light Agent connection to the Protection Server.

To run the command, go to the folder where the Kaspersky Endpoint Security executable file is located. You can also add the executable file path to the %PATH% system variable and run the command without navigating to the application folder.

Command syntax

```
avp.com SVMINFO
```

The command outputs the following information to the console:

- Address of the SVM to which the Light Agent is connected, and the location of the SVM in the virtual infrastructure relative to the Light Agent: local or non-local.
- SVM discovery method that the Light Agent uses: using an Integration Server or using a custom list of SVM addresses.
- List of SVM addresses if the SVM address list is selected as the SVM discovery method.
- Tag for connecting Light Agent to SVM.
- SVM selection algorithm: standard or extended. If the extended SVM selection algorithm is being used, the SVM path type in the virtual infrastructure is also displayed.
- Protection status of the connection between the Light Agent and the Protection Server.

Error codes

Errors may occur when working with the application through the command line. When errors occur, Kaspersky Endpoint Security shows an error message, for example, `Error: Cannot start task 'EntAppControl'`. Kaspersky Endpoint Security can also show additional information in the form of a code, for example, `error=8947906D` (see the table below).

Error codes

Error code	Description
09479001	This key is already in use
0947901D	License expired. Database updates are unavailable
89479002	Key not found
89479003	Digital signature is either missing or corrupted
89479004	Data is corrupted
89479005	Key file is corrupted
89479006	License expired
89479007	Key file is not specified
89479008	Invalid key file
89479009	Failed to save data
8947900A	Failed to read data
8947900B	I/O error
8947900C	Databases not found
8947900E	Licensing library not loaded

Error code	Description
8947900F	Databases corrupted or updated manually
89479010	Databases are corrupted
89479011	Cannot use invalid key file to add a reserve key
89479012	System error
89479013	Denylist of keys corrupted
89479014	File signature does not match the digital signature of Kaspersky
89479015	Cannot use a key for trial license as a key for commercial license
89479016	The license for beta testing is required to use the beta version of the application
89479017	The key file is not compatible with this application. It is impossible to activate Kaspersky Endpoint Security for Windows with a key file for another application. Please check the installed application
89479018	License key is blocked by Kaspersky
89479019	The application has already been used under a trial license. Cannot add a key for trial license again
8947901A	Key file is corrupted
8947901B	Digital signature is missing, corrupted, or does not match the Kaspersky digital signature
8947901C	Cannot add a key if the corresponding non-commercial license has expired
8947901E	The date the key file was created or used is invalid. Please check the system date
8947901F	Cannot add a key for trial license: another key for trial license is already active
89479020	Denylist of keys corrupted or missing
89479021	Update description missing or corrupted
89479022	Key is not suitable for this application
89479023	Cannot use invalid key file to add a reserve key
89479025	Error sending activation server request. Possible reasons: Internet connection error or temporary problems on the activation server. Try to activate the application later (in 1 to 2 hours) with the activation code. If this error reoccurs, contact your Internet provider
89479026	Request contains incorrect activation code
89479027	Cannot obtain response status
89479028	Error occurred when saving temporary file
89479029	Incorrect activation code is entered or invalid system date is set on the computer. Please check the system date on your computer
8947902A	Key not compatible with this application, or license expired
8947902B	Failed to receive a key file. Incorrect activation code was entered
8947902C	Activation server has returned error 400
8947902D	Activation server has returned error 401
8947902E	Activation server has returned error 403
8947902F	Necessary resource is unavailable on the activation server. Activation server has returned error 404. Please check your Internet connection settings
89479030	Activation server has returned error 405
89479031	Activation server has returned error 406
89479032	Proxy authentication is required. Please check your network settings
89479033	Request timed out
89479034	Activation server has returned error 409
89479035	Necessary resource is unavailable on the activation server. Activation server has returned error 410. Please check your Internet connection settings
89479036	Activation server has returned error 411

Error code	Description
89479037	Activation server has returned error 412
89479038	Activation server has returned error 413
89479039	Activation server has returned error 414
8947903A	Activation server has returned error 415
8947903C	Internal server error
8947903D	Functionality not supported
8947903E	Invalid gateway response. Please check your network settings
8947903F	Resource temporarily unavailable
89479040	Gateway response timed out. Please check your network settings
89479041	The protocol is not supported by the server
89479043	Unknown HTTP error
89479044	Invalid resource ID
89479046	Invalid URL
89479047	Invalid destination folder
89479048	Memory allocation error
89479049	Error occurred when converting parameters to ANSI string (URL, folder, agent)
8947904A	Error occurred when creating worker thread
8947904B	Worker thread already running
8947904C	Worker thread not running
8947904D	Key file is not found on activation server
8947904E	Key is blocked
8947904F	Activation server internal error
89479050	Not enough data in activation request
89479053	The license that corresponds to the added key has already expired
89479054	Invalid system date is set on the computer. Please check the system date value
89479055	Trial license has expired
89479056	Application activation period expired
89479057	The limit of application activations has been exceeded for the specified code
89479058	Activation procedure completed with system error
89479059	Cannot use a key for trial license as a key for commercial license
8947905C	Activation code is required
89479062	Cannot connect to activation server
89479064	Activation server is unavailable. Please check your Internet connection settings and retry activation
89479065	License expired
89479066	Cannot replace the active key with an expired key
89479067	Cannot add a reserve key if the corresponding license expires before the current license
89479068	Updated subscription key missing
8947906A	Invalid activation code
8947906B	Key already active
8947906C	License types that correspond to active and reserve keys do not match

Error code	Description
8947906D	Component not supported by license
8947906E	Unable to add subscription key as a reserve key
89479213	Transport layer generic error
89479214	Failed to connect to activation server
89479215	Invalid web address format
89479216	Failed to convert proxy server address
89479217	Failed to convert server address. Please check Internet connection settings
89479218	Server connection attempt failed
89479219	Access denied remotely
8947921A	Operation timed out
8947921B	Error sending HTTP request
8947921C	SSL connection error
8947921D	Operation interrupted by callback
8947921E	Too many redirects
8947921F	Recipient check failed
89479220	Empty response from server
89479221	Error sending data
89479222	Error receiving data
89479223	SSL certificate related problem
89479224	SSL encryption related problem
89479225	SSL certification center related problem
89479226	Invalid contents of network packet
89479227	Account access denied
89479228	Invalid SSL certificate file
89479229	Cannot shut down SSL connection
8947922A	Recurring error
8947922B	Invalid file with revoked certificates
8947922C	SSL certificate request error
89479401	Unknown server error
89479402	Internal server error
89479403	No key available for the activation code entered
89479404	Active key is blocked
89479405	Required parameters of activation request are missing
89479406	Invalid client number or password
89479407	Invalid activation code
89479408	The activation code is not compatible with this application. It is impossible to activate Kaspersky Endpoint Security for Windows with an activation code for another application. Please check the installed application
89479409	Activation code is required
8947940B	Activation period expired
8947940C	Number of activations with this code has been exceeded

Error code	Description
8947940D	Invalid format of request ID
8947940E	Activation code already in use
8947940F	Failed to renew activation code
89479410	Activation code is invalid for this region
89479411	This activation code cannot be used for this localization of the application
89479412	The activation code is intended for the new version of this application. Get a different activation code to activate the installed version of the application
89479413	Activation server returned error 643
89479414	Activation server returned error 644
89479415	Activation server returned error 645
89479416	Activation server returned error 646
89479417	Activation server version 1.0 is required
89479418	Incorrect activation code format
89479419	Computer time is out of sync with activation server time
8947941A	Wrong application version
8947941B	Subscription has expired
8947941C	Number of activations exceeded
8947941D	Invalid ticket signature
8947941E	Additional data is needed
8947941F	Data verification failed
89479420	Subscription inactive
89479421	Activation server is under maintenance
89479501	Unexpected error
89479502	Invalid parameter transferred. For example, an empty list of activation server addresses
89479503	Invalid activation code (invalid hash)
89479504	Invalid user ID
89479505	Invalid user password
89479506	Invalid response from activation server
89479507	Activation request has been interrupted
89479509	Activation server has returned an empty forwarding list

Appendix. Application profiles

A *Profile* is a Kaspersky Endpoint Security component, task or feature. Profiles are used to manage the application from the command line. You can use profiles to execute `START`, `STOP`, `STATUS`, `STATISTICS`, and `EXPORT` commands. Using profiles, you can configure application settings (for example, `STOP DeviceControl`) or run tasks (for example, `START Scan_My_Computer`).

The following profiles are available:

- `AdaptiveAnomaliesControl` – Adaptive Anomaly Control
- `AMSI` – AMSI Protection.
- `AntiCryptor`
- `BehaviorDetection` – Behavior Detection.
- `DeviceControl` – Device control
- `EntAppControl` – Application Control
- `File_Monitoring` or `FM` – File Threat Protection
- `Firewall` or `FW` – Firewall
- `HIPS` – Host Intrusion Prevention.
- `IDS` – Network Threat Protection
- `IntegrityCheck` – Integrity check
- `LogInspector` – Log Inspection
- `Mail_Monitoring` or `EM` – Mail Threat Protection
- `Rollback` – Update rollback (the profile cannot be applied if the application is installed in Light Agent mode)
- `Scan_ContextScan` – Scan from context menu
- `Scan_IdleScan` – Background scan
- `Scan_Memory` – Kernel memory scan
- `Scan_My_Computer` – Full scan
- `Scan_Objects` – Custom scan
- `Scan_Qscan` – Scan objects that are loaded at operation system startup
- `Scan_Removable_Drive` – Removable drives scan
- `Scan_Startup` or `STARTUP` – Critical Areas Scan
- `Updater` – Update (the profile cannot be applied if the application is installed in Light Agent mode)

- `Web_Monitoring` or `WM` – Web Threat Protection
- `WebControl` – Web Control

Kaspersky Endpoint Security also supports service profiles. Service profiles may be required when you are contacting Kaspersky Technical Support.

Managing the application through the REST API

Kaspersky Endpoint Security lets you configure application settings, run a scan, update the anti-virus databases, and perform other tasks using third-party solutions. Kaspersky Endpoint Security provides an API for this purpose. The Kaspersky Endpoint Security REST API operates over HTTP and consists of a set of request/response methods. In other words, you can manage Kaspersky Endpoint Security through a third-party solution, and not the local application interface or the Kaspersky Security Center Administration Console.

To start using REST API, you need to install Kaspersky Endpoint Security with support for the REST API. The REST client and Kaspersky Endpoint Security must be installed on the same computer.

To ensure safe interaction between Kaspersky Endpoint Security and the REST client:

- Configure REST client's protection from unauthorized access according the recommendations of the REST client developer. Configure REST client folder protection from writing with the help of Discretionary Access Control List – DACL.
- To run REST client, use a separate account with administrator rights. Deny interactive sign-in into the system for this account.

The application is managed through the REST API at http://127.0.0.1 or http://localhost. It is not possible to remotely manage Kaspersky Endpoint Security through the REST API.

OPEN THE REST API DOCUMENTATION

Installing the application with the REST API

To manage the application through the REST API, you need to install Kaspersky Endpoint Security with support for the REST API. If you manage Kaspersky Endpoint Security through the REST API, you cannot manage the application using Kaspersky Security Center.

Preparing for installing the application with REST API support

Secure interaction of Kaspersky Endpoint Security with the REST client requires configuring request identification. To do so, you must install a certificate and subsequently sign the payload of each request.

To create a certificate, you can use e.g. OpenSSL.

Example:
```
$ openssl req -x509 -newkey rsa:4096 -keyout key.pem -out cert.pem -days 1825 -nodes
```

Use the RSA encryption algorithm with a key length of 2048 bits or more.

As a result, you will get a `cert.pem` certificate and a `key.pem` private key.

Installing the application with REST API support

To install Kaspersky Endpoint Security with REST API support:

1. Run the command line interpreter (cmd.exe) as an administrator.

2. Go to the folder that contains the distribution package for Kaspersky Endpoint Security version 11.2.0 or later.

3. Install Kaspersky Endpoint Security with the following settings:

   - `RESTAPI=1`

   - `RESTAPI_User=<user name>`

     User name for managing the application through the REST API. Enter the user name in the format `<DOMAIN>\<UserName>` (for example, `RESTAPI_User=COMPANY\Administrator`). You can manage the application through the REST API only under this account. You can select only one user to work with the REST API.

   - `RESTAPI_Port=<port>`

     Port used for managing the application through the REST API. Port 6782 is used by default. Make sure that the port is free. Optional parameter.

   - `RESTAPI_Certificate=<path to certificate>`

     Certificate for identifying requests (for example, `RESTAPI_Certificate=C:\cert.pem`).

     You can install the certificate after installing the application or update the certificate after the certificate expires.

     How to install a certificate for REST API request identification

     1. Disable Kaspersky Endpoint Security Self-Defense

        The Self-Defense mechanism prevents alteration or deletion of application files on the hard drive, processes in memory, and entries in the system registry.

     2. Go to the registry key that contains REST API settings:
        `HKEY_LOCAL_MACHINE\SOFTWARE\WOW6432Node\KasperskyLab\protected\KES\settings\RestAp`

     3. Enter the path to the certificate, for example, `Certificate = C:\Folder\cert.pem`.

     4. Enable Kaspersky Endpoint Security Self-Defense.

     5. Restart the application.

   - `AdminKitConnector=1`

     Application management using administration systems. Management is allowed by default.

   You can also use the setup.ini file to define the settings for working with the REST API.

   Example:
   ```
   setup_kes.exe /pEULA=1 /pPRIVACYPOLICY=1 /pKSN=1 /pALLOWREBOOT=1 /pAdminKitConnector=1 /pRESTAPI=1
   /pRESTAPI_User=COMPANY\Administrator /pRESTAPI_Certificate=C:\cert.pem /s
   ```

As a result, you will be able to manage the application through the REST API. To verify its operation, open the REST API documentation using a GET request.

Example:
```
GET http://localhost:6782/kes/v1/api-docs
```

If you installed the application with REST API support, Kaspersky Endpoint Security automatically creates an allow rule in the Web Control settings for accessing web resources (*Service Rule for REST API*). This rule is needed to allow the REST client to access Kaspersky Endpoint Security at all times. For example, if you have restricted user access to web resources, this will not affect managing the application through the REST API. We recommend that you do not delete the rule or change the *Service Rule for REST API* settings. If you deleted the rule, Kaspersky Endpoint Security will restore it after restarting the application.

Working with the API

It is not possible to restrict access to the application through the REST API using Password Protection. For example, it is not possible to block a user from disabling protection through the REST API. You can configure Password Protection through the REST API and restrict user access to the application through the local interface.

To manage the application through the REST API, you need to run the REST client under the account that you specified when installing the application with REST API support. You can select only one user to work with the REST API.

OPEN THE REST API DOCUMENTATION

Managing the application through the REST API consists of the following steps:

1. Get the current values of the application settings. To do so, send a GET request.

   Example:
   ```
   GET http://localhost:6782/kes/v1/settings/ExploitPrevention
   ```

2. The application will send a response with the structure and values of settings. Kaspersky Endpoint Security supports XML- and JSON formats.

   Example:
   ```
   {
   "action": 0,
   "enableSystemProcessesMemoryProtection": true,
   "enabled": true
   }
   ```

3. Edit the application settings. Use the settings structure received in response to the GET request.

   Example:
   ```
   {
   "action": 0,
   "enableSystemProcessesMemoryProtection": false,
   "enabled": true
   }
   ```

4. Save application settings (the payload) in a JSON (payload.json).

5. Sign the JSON in the PKCS7 format.

   Example:
   ```
   $ openssl smime -sign -in payload.json -signer cert.pem -inkey key.pem -nodetach -binary -outform pem -out signed_payload.pem
   ```

   As a result, you get a signed file with the payload of the request (`signed_payload.pem`).

6. Edit the application settings. To do so, send a POST request and attach the signed file with the request payload (`signed_payload.pem`).

The application applies the new settings and sends a response containing the application configuration results (the response can be empty). You can verify that the settings are updated using a GET request.

Sources of information about the application

This section describes the sources of information about the application.

You can choose the most convenient source of information depending on the importance and urgency of your issue.

Kaspersky Endpoint Security page on the Kaspersky website

On the Kaspersky Endpoint Security page, you can view general information about the application and its functions and features.

The Kaspersky Endpoint Security page contains a link to the online store. There you can purchase or renew the application.

Kaspersky Endpoint Security page in the Knowledge Base

Knowledge Base is a section on the Technical Support website.

On the Kaspersky Endpoint Security page in the Knowledge Base, you can read articles that provide useful information, recommendations, and answers to frequently asked questions on how to purchase, install, and use the application.

Knowledge Base articles can answer questions relating to not only Kaspersky Endpoint Security but also to other Kaspersky applications. Articles in the Knowledge Base may also contain news from Technical Support.

Discussion of Kaspersky applications in the Forum

If your question does not require an urgent answer, you can discuss it with Kaspersky experts and other users in our Forum.

In the Forum, you can view existing topics, post your own comments, and create new discussion topics.

Contacting Technical Support

If you cannot find a solution to your problem in the documentation or in other sources of information about Kaspersky Endpoint Security, we recommend that you contact Technical Support. Technical Support will answer your questions about installing and using Kaspersky Endpoint Security.

Kaspersky provides support for Kaspersky Endpoint Security during the application's life cycle (refer to the application life cycle page). Before contacting Technical Support, please read the support rules.

You can contact Technical Support in one of the following ways:

- By visiting the Technical Support website
- By sending a request to Kaspersky Technical Support through the Kaspersky CompanyAccount portal

After you inform Kaspersky Technical Support specialists about your issue, they may ask you to create a *trace file*. The trace file allows tracing the process of performing application commands step by step and determining the stage of application operation at which an error occurs.

Technical Support specialists may also require additional information about the operating system, processes that are running on the computer, detailed reports on the operation of application components.

While running diagnostics, Technical Support experts may ask you to change application settings by:

- Activating the functionality for receiving extended diagnostic information.
- Configure individual components of the application by changing special settings that are not accessible through the standard user interface.
- Changing the settings for storage of diagnostic information.
- Configuring the interception and logging of network traffic.

Technical Support experts will provide all the information needed to perform these operations (description of the sequence of steps, settings to be modified, configuration files, scripts, additional command line functionality, debugging modules, special-purpose utilities, etc.) and inform you about the scope of data used for purposes of debugging. The extended diagnostic information is saved on the user's computer. The data is not automatically transmitted to Kaspersky.

The operations listed above should be performed only under the supervision of Technical Support specialists by following their instructions. Changing application settings on your own in ways not described in the Online Help or in Technical Support recommendations can cause slowdowns and crashes of the operating system, reduce the protection level of your computer, and damage the availability and integrity of information being processed.

Contents and storage of trace files

> You are personally responsible for the security of the data that is stored on your computer, particularly for monitoring and restricting access to the data until it is submitted to Kaspersky.

Trace files are stored on the computer as long as the application is in use, and are deleted permanently when the application is removed.

Trace files, except trace files of Authentication Agent, are stored in the folder `%ProgramData%\Kaspersky Lab\KES.14.2\Traces`.

Trace files are named as follows: `KES<14.2_dateXX.XX_timeXX.XX_pidXXX.><trace file type>.log`.

You can view data saved in trace files.

All trace files contain the following common data:

- Event time
- Number of the thread of execution

  > The Authentication Agent trace file does not contain this information.

- Application component that caused the event
- Degree of event severity (informational event, warning, critical event, error)
- A description of the event involving command execution by a component of the application and the result of execution of this command.

Contents of SRV.log, GUI.log, and ALL.log trace files

`SRV.log`, `GUI.log` and `ALL.log` trace files may store the following information in addition to general data:

- Personal data, including the last name, first name, and middle name, if such data is included in the path to files on the local computer.
- Data on the hardware installed on the computer (such as BIOS/UEFI firmware data). This data is written to trace files when performing Kaspersky Disk Encryption.
- The user name and password if they were transmitted openly. This data can be recorded in trace files during Internet traffic scanning.
- The user name and password if they are contained in HTTP headers.
- The name of the Microsoft Windows account if the account name is included in a file name.

- Your email address or a web address containing the name of your account and password if they are contained in the name of the object detected.
- Websites that you visit and redirects from these websites. This data is written to trace files when the application scans websites.
- Proxy server address, computer name, port, IP address, and user name used to sign in to the proxy server. This data is written to trace files if the application uses a proxy server.
- Remote IP addresses to which your computer established connections.
- Message subject, ID, sender's name and address of the message sender's web page on a social network. This data is written to trace files if the Web Control component is enabled.
- Network traffic data. This data is written to trace files if traffic monitoring components are enabled (such as Web Control).
- Data received from Kaspersky servers (such as the version of anti-virus databases).
- Statuses of Kaspersky Endpoint Security components and their operating data.
- Data on user activity in the application.
- Operating system events.

Contents of HST.log, BL.log, Dumpwriter.log, WD.log, AVPCon.dll.log trace files

In addition to general data, the `HST.log` trace file contains information about the execution of a database and application module update task.

In addition to general data, the `BL.log` trace file contains information about events occurring during operation of the application, as well as data required to troubleshoot application errors. This file is created if the application is started with the avp.exe –bl parameter.

In addition to general data, the `Dumpwriter.log` trace file contains service information required for troubleshooting errors that occur when the application dump file is written.

In addition to general data, the `WD.log` trace file contains information about events occurring during operation of the avpsus service, including application module update events.

In addition to general data, the `AVPCon.dll.log` trace file contains information about events occurring during the operation of the Kaspersky Security Center connectivity module.

Contents of performance trace files

Performance trace files are named as follows: `KES<14.2_dateXX.XX_timeXX.XX_pidXXX.>PERF.HAND.etl`.

In addition to general data, performance trace files contain information about the load on the processor, information about the loading time of the operating system and applications, and information about running processes.

Contents of the AMSI Protection component trace file

In addition to general data, the `AMSI.log` trace file contains information about the results of scans performed on requests from third-party applications.

Contents of trace files of the Mail Threat Protection component

The trace file `mcou.OUTLOOK.EXE.log` may contain parts of email messages, including email addresses, in addition to general data.

Contents of trace files of the Scan from Context Menu component

The `shellex.dll.log` trace file contains information about completion of the scan task and data required to debug the application, in addition to general information.

Contents of trace files of the application web plug-in

Trace files of the application web plug-in are stored on the computer on which Kaspersky Security Center Web Console is deployed, in the folder `Program Files\Kaspersky Lab\Kaspersky Security Center Web Console\logs`.

Trace files of the application web plug-in are named as follows: `logs-kes_windows-<type of trace file>.DESKTOP-<date of file update>.log`. Web Console begins writing data after installation and deletes the trace files after Web Console is removed.

Trace files of the application web plug-in contain the following information in addition to general data:

- KLAdmin user password for unlocking the Kaspersky Endpoint Security interface (Password protection).
- Temporary password for unlocking the Kaspersky Endpoint Security interface (Password protection).
- User name and password for the SMTP mail server (Email notifications).
- User name and password for the Internet proxy server (Proxy server).
- User name and password for the *Change application components* task.
- Account credentials and paths specified in Kaspersky Endpoint Security tasks and policy properties.

Contents of the Authentication Agent trace file

The Authentication Agent trace file is stored in the System Volume Information folder and is named as follows: `KLFDE.{EB2A5993-DFC8-41a1-B050-F0824113A33A}.PBELOG.bin`.

In addition to general data, the Authentication Agent trace file contains information about the operation of Authentication Agent and the actions performed by the user with Authentication Agent.

Application operation tracing

Application tracing is a detailed record of actions performed by the application and of messages about events that occur during operation of the application. During the tracing process, the application creates a set of files with data about the operation of different application components (for example, SRV.log, WD.log, and others).

> Application tracing should be performed under the supervision of Kaspersky Technical Support.

To create an application trace file:

1. In the main application window, click the button.
2. In the window that opens, click the **Support Tools** button.
3. Use the **Enable application tracing** toggle to enable or disable tracing of application operation.
4. In the **Tracing** drop-down list, select an application tracing mode:
   - **With size limitation**. Save traces to a limited number of file sets of limited size and overwrite the older files when the maximum size is reached. If this mode is selected, you can define the maximum number of file sets for rotation and the maximum size for each set of files.

     By default, the application saves five sets of trace files. The size of each set of files is 3072 MB. This way, you need 15 GB of free disk space to save the trace files.
   - **Without limitations**. Save one trace file (no size limit).
5. In the **Level** drop-down list, select the tracing level:
   - **Normal** means the trace file saves messages about all errors, warnings, as well as information about normal operation of the application (default).
   - **Detailed** means the trace file saves all information about the operation of the application.

   Additional tracing levels are available if you manage application tracing settings on the command line. You are advised to clarify the required tracing level with a Technical Support specialist. In the absence of guidance from Technical Support, set the tracing level to **Normal**.

If application tracing was enabled on the command line and a tracing level was set other than **Normal** or **Detailed**, the **Level** drop-down list is set to **Normal**.

6. To stop the tracing process, return to the **Support Tools** window and disable tracing.

You can also create trace files when installing the application from the command line, including by using the setup.ini file.

As a result, application operation trace files are created in the `%ProgramData%\Kaspersky Lab\KES.14.2\Traces` folder. After the trace files are created, send the files to Kaspersky Technical Support.

Kaspersky Endpoint Security automatically deletes trace files when the application is removed. You can also delete the files manually. To do so, you must disable tracing and stop the application.

Application performance tracing

Kaspersky Endpoint Security lets you receive information about computer operating issues during use of the application. For example, you can receive information about delays in operating system loading after the application is installed. To do so, Kaspersky Endpoint Security creates performance trace files. *Performance tracing* refer to the logging of actions performed by the application for the purpose of diagnosing performance issues of Kaspersky Endpoint Security. To receive information, Kaspersky Endpoint Security uses the Event Tracing for Windows service (ETW). Kaspersky Technical Support is responsible for diagnosing issues of Kaspersky Endpoint Security and establishing the reasons for those issues.

Application tracing should be performed under the supervision of Kaspersky Technical Support.

To create a performance trace file:

1. In the main application window, click the button.

2. In the window that opens, click the **Support Tools** button.

3. Use the **Enable performance tracing** toggle to enable or disable tracing of application performance.

4. In the **Tracing** drop-down list, select an application tracing mode:

   - **With size limitation**. Save traces to a limited number of files of limited size and overwrite the older files when the maximum size is reached. If this mode is selected, you can define the maximum size for each file.

   - **Without limitations**. Save one trace file (no size limit).

5. In the **Level** drop-down list, select the tracing level:

   - **Light**. Kaspersky Endpoint Security analyzes the most important operating system processes related to performance.

   - **Detailed**. Kaspersky Endpoint Security analyzes all operating system processes related to performance.

6. In the **Tracing type** drop-down list, select the tracing type:

   - **Basic information**. Kaspersky Endpoint Security analyzes processes while the operating system is running. Use this tracing type if a problem persists after the operating system is loaded, such as a problem accessing the Internet in the browser.

   - **On restart**. Kaspersky Endpoint Security analyzes processes only while the operating system is loading. After the operating system is loaded, Kaspersky Endpoint Security stops tracing. Use this tracing type if the problem is related to delayed loading of the operating system.

7. Restart the computer and try to reproduce the problem.

8. To stop the tracing process, return to the Support Tools window and disable tracing.

   As a result, a performance trace file is created in the `%ProgramData%\Kaspersky Lab\KES.14.2\Traces` folder. After the trace file is created, send the file to Kaspersky Technical Support.

Dump writing

A dump file contains all information about the working memory of Kaspersky Endpoint Security processes at the moment when the dump file was created.

> Saved dump files may contain confidential data. To control access to data, you must independently ensure the security of dump files.

Dump files are stored on a computer as long as the application is in use, and are deleted permanently when the application is removed. Dump files are stored in the folder `%ProgramData%\Kaspersky Lab\KES.14.2\Traces`.

How to enable dump writing in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.

2. Select the necessary policy and double-click to open the policy properties.

3. In the policy window, select **General settings** → **Application settings**.

4. In the **Debug information** block, click the **Settings** button.

5. In the window that opens, use the **Enable dump writing** check box to enable or disable application dump writing.

6. Save your changes.

How to enable dump writing in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.

2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.

3. Select the **Application settings** tab.

4. Go to **General Settings** → **Technical Support**.

5. In the **Debug information** block, use the **Dump writing ENABLED** check box to enable or disable application dump writing.

6. Save your changes.

How to enable dump writing in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Application settings**.

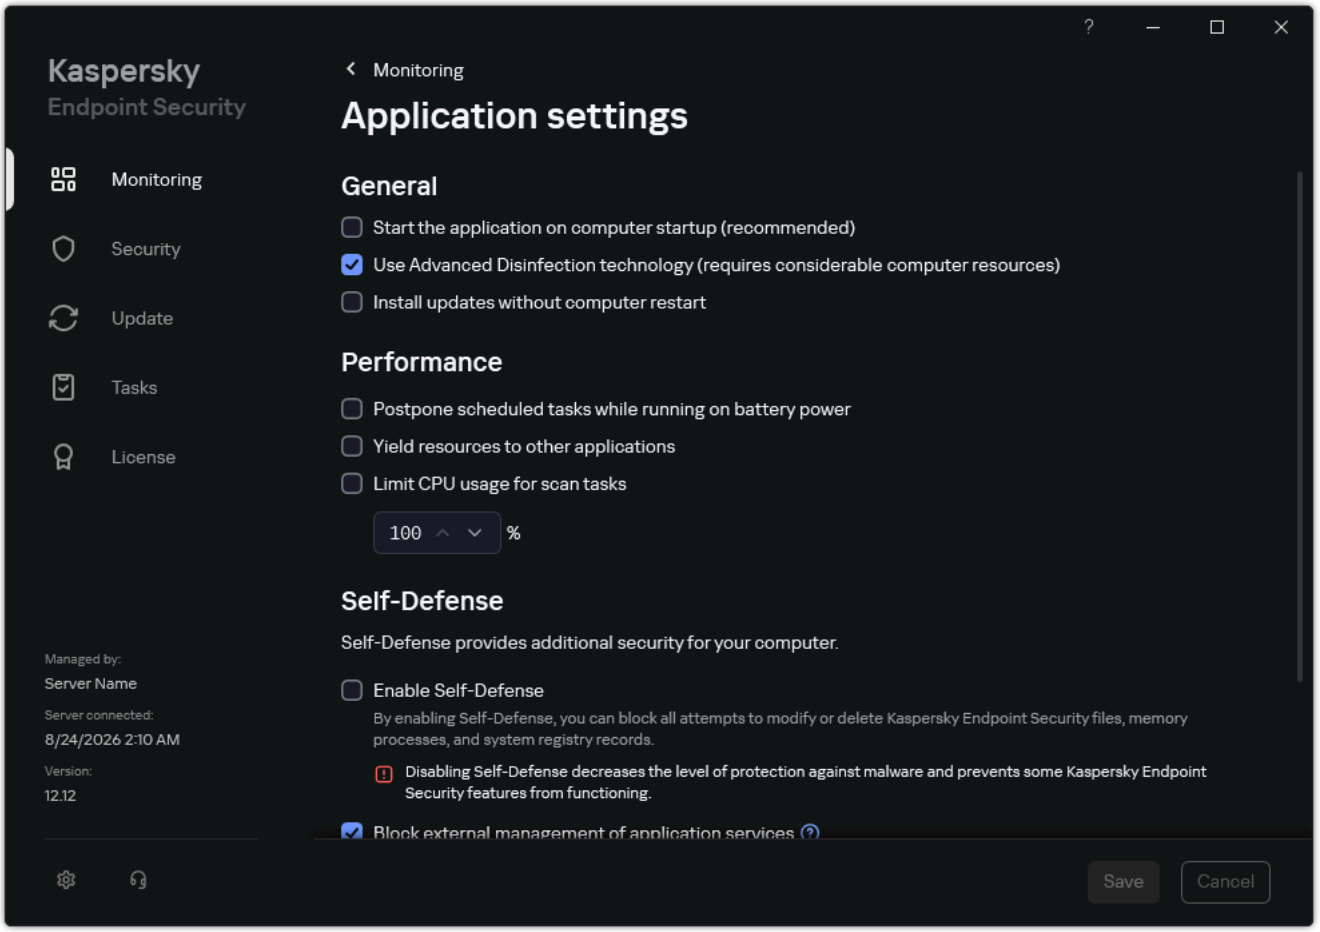

Kaspersky Endpoint Security for Windows settings

3. In the **Debug information** block, use the **Enable dump writing** check box to enable or disable application dump writing.

4. Save your changes.

Protecting dump files and trace files

Dump files and trace files contain information about the operating system, and may also contain user data. To prevent unauthorized access to such data, you can enable protection of dump files and trace files.

If protection of dump files and trace files is enabled, the files can be accessed by the following users:

- Dump files can be accessed by the system administrator and local administrator, and by the user that enabled the writing of dump files and trace files.
- Trace files can be accessed only by the system administrator and local administrator.

How to enable protection of dump files and trace files in the Administration Console (MMC)

1. In the Kaspersky Security Center Administration Console tree, select **Policies**.
2. Select the necessary policy and double-click to open the policy properties.
3. In the policy window, select **General settings** → **Application settings**.
4. In the **Debug information** block, click the **Settings** button.
5. In the window that opens, use the **Enable dump and trace files protection** check box to enable or disable file protection.
6. Save your changes.

How to enable protection of dump files and trace files in Web Console and Cloud Console

1. In the main window of the Web Console, select **Asset management** → **Policies**.
2. Click the name of the Kaspersky Endpoint Security policy.

   The policy properties window opens.
3. Select the **Application settings** tab.
4. Go to **General Settings** → **Technical Support**.
5. In the **Debug information** block, use the **Dump and trace files protection ENABLED** check box to enable or disable file protection.
6. Save your changes.

How to enable protection of dump files and trace files in the application interface

1. In the main application window, click the ⚙ button.

2. In the application settings window, select **General settings** → **Application settings**.

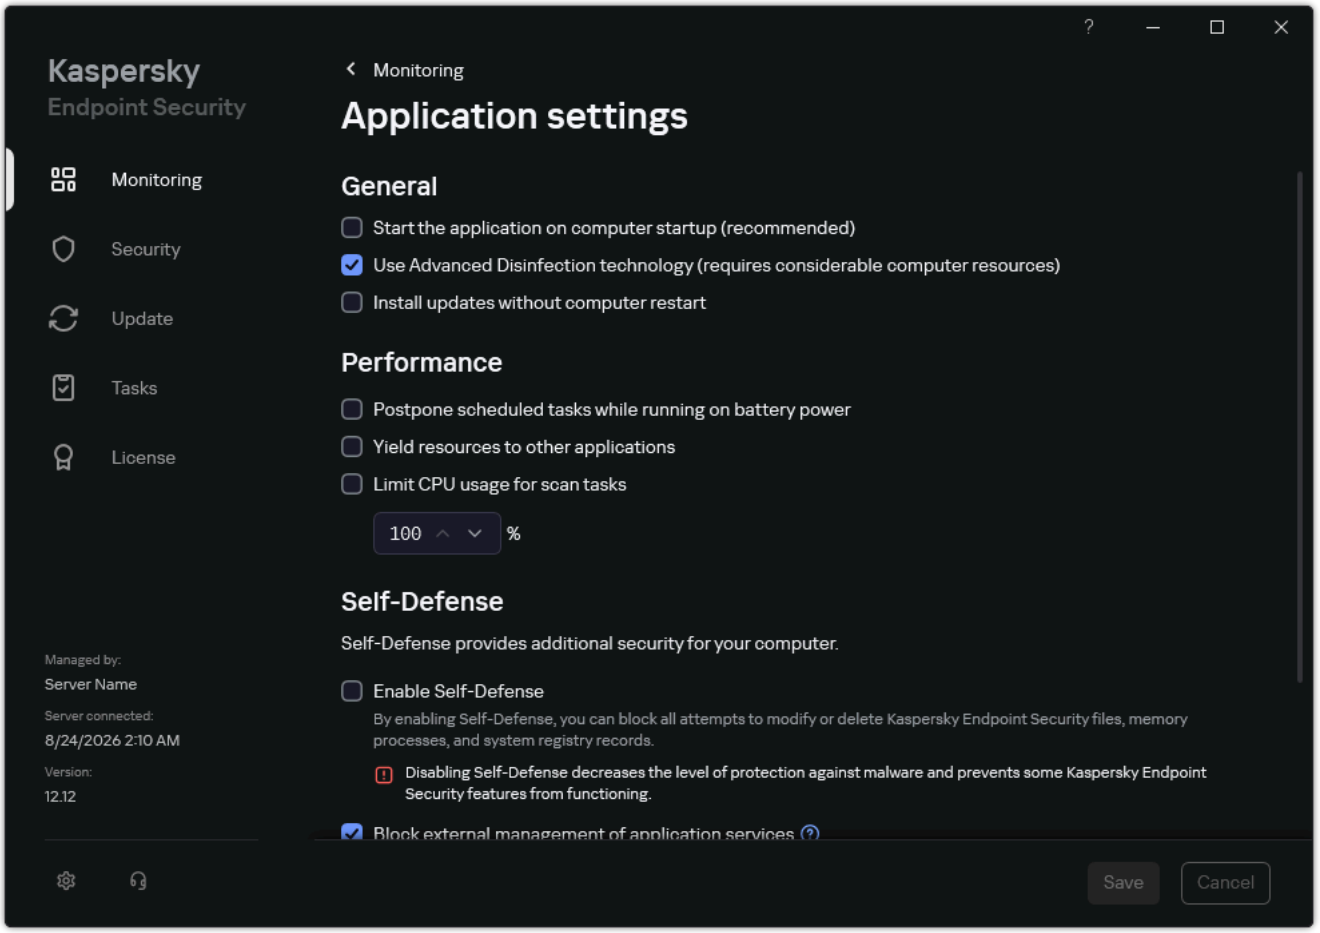

Kaspersky Endpoint Security for Windows settings

3. In the **Debug information** block, use the **Enable dump and trace files protection** check box to enable or disable file protection.

4. Save your changes.

Dump files and trace files that were written while protection was active remain protected even after this function is disabled.

Obtaining OS data (Kaspersky Get System Info)

After the Kaspersky Endpoint Security application is installed, the operating system or an application may not function correctly. There is a conflict between the application and the software or drivers of the computer components.

To identify the cause of the problem, Kaspersky Technical Support requires a report from the Kaspersky Get System Info utility (hereinafter referred to as GSI). For detailed information on using the utility, refer to the Kaspersky Knowledge Base.

Limitations and warnings

Kaspersky Endpoint Security has a number of limitations that are not critical to operation of the application.

Installing the application

- For details about support for the Microsoft Windows 10, Microsoft Windows Server 2016 and Microsoft Windows Server 2019 operating systems, please refer to the Technical Support Knowledge Base.
- For details about support for the Microsoft Windows 11 and Microsoft Windows Server 2022 operating systems, please refer to the Technical Support Knowledge Base.
- After being installed to an infected computer, the application does not inform the user about the need to run a computer scan. You may experience problems activating the application. To resolve these problems, start a Critical Areas Scan.
- If non-ASCII characters (for example, Russian letters) are used in the setup.ini and setup.reg files, you are advised to edit the file using notepad.exe and to save the file in UTF-16LE encoding. Other encodings are not supported.
- The application does not support the use of non-ASCII characters when specifying the application installation path in the installation package settings.
- When application settings are imported from a CFG file, the value of the setting that defines participation in Kaspersky Security Network is not applied. After importing the settings, please read the text of the Kaspersky Security Network Statement and confirm your consent to participate in Kaspersky Security Network. You can read the text of the Statement in the application interface or in the ksn_*.txt file located in the folder containing the application distribution kit.
- If you want to remove and then re-install encryption (FLE or FDE) or the Device Control component, you must restart the system before reinstallation.
- When using the Microsoft Windows 10 operating system, you must restart the system after removing the File Level Encryption (FLE) component.
- When removing individual application components (for example, using the *Change application components* task), a computer restart may be required.
- In the properties of the *Change application components* task, when switching the installation mode (**Separate mode** / **Combined mode**), synchronization of the set of components between modes is not supported. The application synchronizes the set of components between modes after you re-open the task properties.
- Installation of the application may end with an error stating *An application whose name is missing or unreadable is installed on your computer*. This means that incompatible applications or fragments of them remain on your computer. To remove artifacts of incompatible applications, send a request with a detailed description of the situation to Kaspersky Technical Support via Kaspersky CompanyAccount.
- If you canceled the removal of Kaspersky Endpoint Security, start application recovery after restarting the computer.
- The application requires Microsoft .NET Framework 4.0 or later. Microsoft .NET Framework 4.6.1 has vulnerabilities. If you are using Microsoft .NET Framework 4.6.1, you must install security updates. For details about Microsoft .NET Framework security updates, refer to the Microsoft Technical Support website.

- If the application is unsuccessfully installed with the Kaspersky Endpoint Agent component selected in a server operating system and the *Windows Installer Coordinator Error* window appears, refer to the instructions on the Microsoft support website.

- If the application was installed locally in non-interactive mode, use the provided setup.ini file to replace the installed components.

- After Kaspersky Endpoint Security for Windows is installed in some configurations of Windows 7, Windows Defender continues to operate. You are advised to manually disable Windows Defender to prevent degraded system performance.

- When installing Kaspersky Endpoint Security for Windows on a server with installed Kaspersky Security for Windows Server (KSWS) and Windows Defender applications, you must restart the system. A system restart is necessary even if you have enabled application installation without system restart. Windows Defender for Windows Server is included in the list of software that is incompatible with Kaspersky Endpoint Security for Windows. Before installing the application, the installer removes Windows Defender for Windows Server. Removing incompatible software makes a system restart necessary.

- Before installing Kaspersky Endpoint Security for Windows (KES) on a server with Kaspersky Security for Windows Server (KSWS) installed, you must turn off KSWS Password Protection. After migrating from KSWS to KES, enable Password Protection in the application settings.

- To install the application on computers running Windows 7 or Windows Server 2008 R2 with Veeam Backup & Replication software deployed, you may need to reboot your computer and run the installation again.

- Migration from Kaspersky Small Office Security (KSOS) to Kaspersky Endpoint Security (KES) with Password Protection enabled is available starting with KSOS build 21.16.*.*. To migrate earlier versions of KSOS, you must disable Password Protection or manually remove KSOS. Migration from KSOS to KES with disabled Password Protection is performed correctly.

- You cannot install Kaspersky Endpoint Security on a bootable removable drive. When installing, the Kaspersky Endpoint Security displays an error message: *You have selected an invalid folder or drive. The application must be installed on a local hard drive*. If you manage to install the application on a removable drive using third-party tools, this may cause the operation system to crash (BSOD) during the boot process. This means that Kaspersky Endpoint Security does not support Windows To Go and similar solutions. To scan a computer from a removable drive, you can use the free-to-use Kaspersky Rescue Disk application.

- Installing Kaspersky Endpoint Security with network components on a terminal server with multi-user RDP sessions involves some special considerations. The operating systems forces all user sessions to end after the Administrator session ends. To connect to the terminal server, you must restart the server or log in to the system locally. Such behavior is dictated by peculiarities of how the Windows operating system works.

- If web plug-ins Kaspersky Endpoint Security for Windows (build 12.11.0.2004) and Kaspersky Endpoint Security for Linux (build 12.4.0.1354) are installed in Kaspersky Security Center 16.0 or Kaspersky Security Center 16.1, updating the Kaspersky Endpoint Security for Windows web plug-in to version 12.11.0.6004 may lead to malfunctions in Kaspersky Endpoint Security for Linux policies.

  Possible solution: go to the **Settings** → **Web plug-ins** window, and remove the Kaspersky Endpoint Security for Windows web plug-in, Kaspersky Endpoint Security for Linux web plug-in, and Unified Protection and Management Plug-in from the list. Then install the Kaspersky Endpoint Security for Linux web plug-in first, followed by the Kaspersky Endpoint Security for Windows web plug-in.

- In the Web Console, the list of components is displayed incorrectly in the installation package properties of the Kaspersky Endpoint Security 12.11 for Windows. A separate component, Anti-Cryptor, is not available in this version of the application. The protection of shared folders against external encryption functionality is included in the Behavior Detection component. In Kaspersky Endpoint Security 12.12 for Windows, this functionality is a separate component. At the same time, in the Administration Console (MMC), the list of components is displayed correctly.

- When using web plug-in version 7.0 or later, the list of components selected for installation by default is displayed incorrectly in the installation package properties for Kaspersky Endpoint Security 14.1 and earlier. If this list is not modified when creating the installation package, the application will be installed with the default set of components specified for the corresponding application version.

Upgrading the application

- Starting from 11.0.0 application version, you can install Kaspersky Endpoint Security for Windows MMC plug-in on top of the previous plug-in version. To return to a previous plug-in version, delete the current plug-in and install a previous version of the plug-in.

- When upgrading Kaspersky Endpoint Security 11.0.0 or 11.0.1 for Windows, the local task schedule settings for the *Update of databases and application modules*, *Critical Areas Scan*, *Custom Scan* and *Application Integrity Check* tasks are not saved.

- On computers running Windows 10 version 1903 and 1909, upgrades from Kaspersky Endpoint Security 10 for Windows Service Pack 2 Maintenance Release 3 (build 10.3.3.275), Service Pack 2 Maintenance Release 4 (build 10.3.3.304), 11.0.0 and 11.0.1 with the File Level Encryption (FLE) component installed may end with an error. This is because file encryption is not supported for these versions of Kaspersky Endpoint Security for Windows in Windows 10 version 1903 and 1909. Prior to installing this upgrade, you are advised to remove the file encryption component.

- The application requires Microsoft .NET Framework 4.0 or later. Microsoft .NET Framework 4.6.1 has vulnerabilities. If you are using Microsoft .NET Framework 4.6.1, you must install security updates. For details about Microsoft .NET Framework security updates, refer to the Microsoft Technical Support website.

- When upgrading Kaspersky Endpoint Security, the application disables the use of KSN until the Kaspersky Security Network Statement is accepted. In addition, the computer status can be changed to *Critical* in Kaspersky Security Center; the event *KSN servers unavailable* is received. If you use Kaspersky Managed Detection and Response, you will receive events about violations in the operation of the solution. The use of KSN is required for the operation of Kaspersky Managed Detection and Response. Kaspersky Endpoint Security enables the use of KSN after applying the policy in which the administrator accepts the KSN terms of use. Once the Kaspersky Security Network Statement is accepted, Kaspersky Endpoint Security resumes its operation.

- After upgrading Kaspersky Endpoint Security to version 11.10.0 or later without a restart, the computer will have two Kaspersky Endpoint Security applications installed. Do not manually remove the previous version of the application. The previous version will be removed automatically when the computer is restarted.

- After upgrading Kaspersky Endpoint Security on a computer running Microsoft Windows 11, the file context menu may display items for both previous and new application versions. Restart your computer twice to ensure the correct operation of the file context menu.

- If the application's Self-Defense is turned off and all network adapters are stopped, the network components of the application will not work between the end of the application upgrade and the restart of the computer. The network components of the application include Web Threat Protection, Mail Threat Protection, Network Threat Protection, Firewall, Host Intrusion Prevention, and Web Control. Restart the computer for the application to work correctly.

- The BadUSB Attack Prevention component does not work between the end of the application upgrade and the restart of the computer. Restart the computer for the application to work correctly.

- The application cannot be upgraded if the previous upgrade process has not been completed. Restart the computer for the application to work correctly.
- After the application is upgraded from versions earlier than Kaspersky Endpoint Security 11 for Windows, the computer must be restarted.
- If you manage Kaspersky Endpoint Security using Kaspersky Security Center Cloud Console, updating the application locally is not allowed. When updating the application locally, it is not possible to accept the Data Processing Agreement for Kaspersky Security Center Cloud Console.

Support for Arm architecture

- Installation of Kaspersky Endpoint Security in Light Agent mode on Arm-based virtual machines is not supported.
- Kaspersky Disk Encryption is not supported on Arm-based computers.
- File encryption is not supported on Arm-based computers.
- Encryption of removable drives is not supported on Arm-based computers.
- On computers running Windows 11 for Arm64, EDR Agent is not compatible with Bitdefender Endpoint Security Tools.
- The audio signal protection functionality and webcam access protection functionality is not supported on Arm-based computers.
- On Arm-based computers, the Mail Threat Protection extension supports the 32-bit and 64-bit versions of Outlook 2016, Outlook 2021, Outlook 2024, and Outlook 365 for Arm64.
- Kaspersky Endpoint Security does not send objects intended for the Arm architecture to Kaspersky Sandbox.
- Printing control is not supported on Arm-based computers.
- On Arm-based computers, the *IOC Scan* task supports email files only from the following mail clients: 32-bit and 64-bit versions of Outlook 2016 and Outlook 2021, 2024, and 365 for Arm64.
- On computers running Windows 11 for Arm64, token-based authentication may be unavailable because the operating system cannot detect a valid certificate on the token. This behavior is caused by the way the operating system interacts with the token software. For example, the operating system may not have the drivers required for the token to work. In this case, Kaspersky Endpoint Security also does not support token-based authentication (Password Protection). You can use other authentication methods, such as user credentials.

Support for server platforms

- On servers with *data deduplication* enabled, you need to add the fsdmhost.exe file to the list of trusted applications. This helps optimize the performance of the application and prevent excessive load on the CPU.
- The ReFS file system is supported with limitations:
  - Kaspersky Endpoint Security may process threat disinfection events incorrectly. For example, if the application has deleted a malicious file, the report might have an Object not processed entry. At the same time, Kaspersky Endpoint Security disinfects threats in accordance with application settings. Kaspersky Endpoint Security can also create a duplicate of the *Object will be disinfected on restart* event for the same object.
  - File Threat Protection may skip some threats. At the same time, Malware Scan works correctly.
  - After the *Malware Scan* task is started, the exclusions added with iChecker are reset when the server is rebooted.
  - The iSwift technology is not supported. Kaspersky Endpoint Security does not consider scan exclusions added using the iSwift technology.
  - Kaspersky Endpoint Security does not detect eicar.com and susp-eicar.com files if meicar.exe file existed on the computer before Kaspersky Endpoint Security was installed.
  - Kaspersky Endpoint Security may incorrectly display threat disinfection notifications. For example, the application may display a threat notification for a previously disinfected threat.
- File Level Encryption (FLE) and Kaspersky Disk Encryption (FDE) technologies are not supported on server platforms. At the same time, Kaspersky Endpoint Security may incorrectly process data encryption events.
- In server operating systems, no warning is displayed regarding the need for advanced disinfection.
- Microsoft Windows Server 2008 was excluded from support. Installing the application on a computer running the Microsoft Windows Server 2008 operating system is not supported.
- Kaspersky Endpoint Security installed on a server with Microsoft Data Protection Manager (DPM) deployed can cause DPM to malfunction. It is related to limitations in DPM operation. To eliminate malfunctions, you should add local server drives to exclusions for File Threat Protection component and *Malware Scan* tasks.
- The Server Core mode is supported with limitations:
  - The local graphical user interface is not available, including notifications, pop-up notifications, and other interface controls. The application cannot display prompt windows, including the following windows:
    - Application version and module upgrade confirmation prompt;
    - Computer restart prompt;
    - Prompt for proxy server authentication credentials;
    - Prompt for gaining access to a device (Device Control).
  - The following components are not available: Web Threat Protection, Mail Threat Protection, Web Control, BadUSB Attack Prevention.
  - Anti-Bridging is not available.

- You can only accept the Kaspersky Security Network Statement in the application policy in the Kaspersky Security Center console.

- BitLocker Drive Encryption is only available with a Trusted Platform Module (TPM). A PIN / password cannot be used for encryption because the application is unable to display the password prompt window for preboot authentication. If the operating system has Federal Information Processing standard (FIPS) compatibility mode enabled, connect a removable drive for saving the encryption key before you begin encrypting the drive.

Support for virtual platforms

- Full disk encryption (FDE) on Hyper-V virtual machines is not supported.

- Full disk encryption (FDE) on Citrix virtual platforms is not supported.

- Windows 10 Enterprise multi-session and Windows 11 Enterprise multi-session operating systems are supported with limitations:

  - Kaspersky Endpoint Security disinfects active threats without notifying the user, just like when disinfecting active threats on servers. Because the operating system continues to run in multi-session mode, other active users may lose their data if the threat is not immediately resolved.

  - Full disk encryption (FDE) is not supported.

  - Managing BitLocker is not supported.

  - Using Kaspersky Endpoint Security with removable drives is not supported. The Microsoft Azure infrastructure defines removable drives as network drives.

- Installation and use of file level encryption (FLE) on Citrix virtual platforms is not supported.

- To support compatibility of Kaspersky Endpoint Security for Windows with Citrix PVS, perform the installation with the **Ensure compatibility with Citrix PVS** option enabled. This option can be enabled in the Setup Wizard or by using the command line parameter `/pCITRIXCOMPATIBILITY=1`. In case of remote installation, the KUD file must be edited by adding the following parameter to it: `/pCITRIXCOMPATIBILITY=1`.

- Citrix XenDesktop. Before starting cloning, you must disable Self-Defense to clone virtual machines that use vDisk.

- When preparing a template machine for the Citrix XenDesktop master image with pre-installed Kaspersky Endpoint Security for Windows and Kaspersky Security Center Network Agent, add the following types of exclusions to the configuration file:

  ```
  [Rule-Begin]
  Type=File-Catalog-Construction
  Action=Catalog-Location-Guest-Modifiable
  name="%ALLUSERSPROFILE%\Kaspersky Lab\**\*"
  name="%ALLUSERSPROFILE%\KasperskyLab\**\*"
  [Rule-End]
  ```

  For details about Citrix XenDesktop, visit the Citrix Support website.

- In some cases, an attempt to safely disconnect a removable drive may be unsuccessful on a virtual machine that is deployed on a VMware ESXi hypervisor. Attempt to safely disconnect the device once again.

- Kaspersky Endpoint Security is compatible with the VMware ESXi hypervisor with the following limitations:
  - Kaspersky Endpoint Security may be incompatible with Guest Introspection drivers (vnetWFP.sys, vnetFLT.sys and others). To resolve the incompatibility, update the drivers to the latest version or uninstall the drivers.
  - In some cases, an attempt to safely remove a removable disk on a virtual machine may be unsuccessful. Attempt to safely disconnect the device once again.
- Installing Kaspersky Endpoint Security on virtual machines with the Citrix VDA agent may end with a compatibility error. This happens because Citrix Provisioning Services has limited compatibility with anti-virus solutions. For best practices of using anti-virus solutions with Citrix Provisioning Services, refer to the Citrix support website.
- Kaspersky Endpoint Security skips the scan of a removable drive if the drive is connected to a virtual machine on the Citrix hypervisor (the *Removable Drives Scan* task). On such devices, the operating system detects the connected removable drive as a network drive. In such cases you can use the *Custom Scan* task. The behavior of the application in standard mode and in Light Agent mode is the same.
- If Kaspersky Endpoint Security is installed on a virtual machine in an infrastructure that usesCitrix App Layering technology, files detected by the application as infected with the status *Object will be deleted on restart* will not be automatically removed when the virtual machine is restarted.

  To delete such files, you must mount the VHDX file containing the User Layer on the Citrix App Layering administrator's computer and run a Malware Scan on the mounted disk.
- Before creating a Golden Image snapshot of a virtual machine with Kaspersky Endpoint Security installed, it is recommended to shut down the virtual machine and create a "cold" snapshot. If you create a snapshot while the virtual machine is running (a "hot" snapshot), correct operation of the application is not guaranteed.

Compatibility with Kaspersky Security Center

- In Kaspersky Security Center Web Console version 14.1 and earlier, the names of functional areas for Log Inspection and File Integrity Monitor components are not correctly displayed in the user access permissions settings section of Administration Server properties.
- After repairing the application, the protection of the computer's connection to the Administration Server is disabled. After repairing the application, run the *Administration Server connection protection* task again.
- In the Kaspersky Security Center Administration Console, the **Select a user or a group of users** window displays only the first 50,000 users from the list of Kaspersky Security Center users. See Kaspersky Security Center Help for more details.
- When searching for managed devices in the Kaspersky Security Center Administration Console, the **Application components** tab may simultaneously display multiple variants of the name of the same application component, including names corresponding to older versions of Kaspersky Endpoint Security. The names of some components may also be duplicated.

  To search by component, you simply need to select one of the displayed variants. For more details on device discovery, refer to the Kaspersky Security Center Help.
- In Kaspersky Security Center Web Console 15.1 Update 2 with Kaspersky Endpoint Security for Windows web plug-in version 12.11 or later and Unified Protection and Management Plug-in installed, the profile activation conditions for the policy do not work. Kaspersky Security Center does not add new devices that meet the profile activation conditions to the console.

Licensing

- If the *Error receiving data* system message is displayed, verify that the computer on which you are performing activation has network access, or configure the activation settings via Kaspersky Security Center Activation Proxy.
- In the application interface, the license expiration date is displayed in the local time of the computer.
- Installation of the application with an embedded key file on a computer that has unstable Internet access may result in the temporary display of events stating that the application is not activated or that the license does not permit component operation. This is caused by the fact that during the installation process the application first activates the embedded trial license. It requires internet access.
- During the trial period, installation of any application upgrade or patch on a computer that has unstable Internet access may result in the temporary display of events stating that the application is not activated. This is caused by the fact that during the update installation process the application first activates the embedded trial license. It requires internet access.
- If the trial license was automatically activated during application installation and then the application was removed without saving the license information, the application will not be automatically activated with the trial license when re-installed. In this case, manually activate the application.
- If you are using Kaspersky Security Center version 11 and Kaspersky Endpoint Security version 14.2, component performance reports may work incorrectly. If you installed Kaspersky Endpoint Security components that are not included in your license, Network Agent may send component status errors to the Windows Event Log. To avoid errors, remove the components that are not included in your license.

Mail Threat Protection

- When scanning email with the Mail Threat Protection extension for Microsoft Outlook, we recommend using Exchange Server Cached Mode (Use Cached Exchange Mode).
- Kaspersky Endpoint Security does not support the 64-bit version of Microsoft Outlook mail client. This means that Kaspersky Endpoint Security does not scan Microsoft Outlook files (PST and OST files) if a 64-bit version of Microsoft Outlook is installed on the computer, even if mail is included in the scan scope.
- Kaspersky Endpoint Security does not support the Microsoft Outlook New mail client.
- If you disabled the disinfection of threats detected by Mail Threat Protection and received an infected email in your Outlook mailbox, Web Threat Protection may block communication with the Exchange server over MAPI. Web Threat Protection then generates a threat detection event and sends it to Kaspersky Security Center. To restore the connection between the computer and the Exchange server, you must manually delete the infected email from the Outlook mailbox.

  When updating the application version without restarting the computer, the protection level of Mail Threat Protection is temporarily reduced (for up to one minute). If you receive an infected email in your Outlook mailbox while updating the application, Web Threat Protection will also block the connection to the Exchange server over MAPI. To restore the connection, delete the infected email from the Outlook mailbox.

Remediation Engine

- The application restores files only on devices that have the NTFS or FAT32 file system.
- The application restores files up to 100 MB in size.

- The application can restore files with the following extensions: odt, ods, odp, odm, odc, odb, doc, docx, docm, wps, xls, xlsx, xlsm, xlsb, xlk, ppt, pptx, pptm, mdb, accdb, pst, dwg, dxf, dxg, wpd, rtf, wb2, pdf, mdf, dbf, psd, pdd, eps, ai, indd, cdr, jpg, jpe, dng, 3fr, arw, srf, sr2, bay, crw, cr2, dcr, kdc, erf, mef, mrw, nef, nrw, orf, raf, raw, rwl, rw2, r3d, ptx, pef, srw, x3f, der, cer, crt, pem, pfx, p12, p7b, p7c, 1cd.

- It is not possible to restore files residing on network drives or on rewritable CD/DVD discs.

- It is not possible to restore files that were encrypted with the Encryption File System (EFS). For more details on EFS operation, please visit the Microsoft website.

- The application does not monitor modifications to files performed by processes at the level of the operating system kernel.

Firewall

- If a network packet rule or application network rule specifies DNS names, Kaspersky Endpoint Security may send requests to the DNS server to determine the IP addresses of these resources. The Firewall uses IP addresses to monitor network activity. Therefore the application resolves DNS names to IP addresses. It is recommended to use DNS names in rules only for LAN computers or internal services.

- To specify a rule for all IPv6 addresses, add the ::-ffff:ffff:ffff:ffff:ffff:ffff:ffff:ffff address range. Firewall does not support the ::/0 mask.

- Filtration of packets or connections by local address, physical interface, and packet time to live (TTL) is supported in the following cases:

  - By local address for outbound packets or connections in application rules for TCP and UDP and packet rules.

  - By local address for inbound packets or connections (except UDP) in block application rules and packet rules.

  - By packet time to live (TTL) in block packet rules for inbound or outbound packets.

  - By network interface for inbound and outbound packets or connections in packet rules.

- If you configured a network adapter or packet time to live (TTL) for an allowing packet rule, the priority of this rule is lower than a blocking application rule. In other words, if network activity is blocked for an application (for example, the application is in the *High Restricted* trust group), you cannot allow network activity of the application by using a packet rule with these settings. In all other cases, the priority of a packet rule is higher than an application network rule.

- When importing Firewall packet rules, Kaspersky Endpoint Security may modify rule names. The application determines rules with identical sets of general parameters: protocol, direction, remote and local ports, packet time-to-live (TTL). If this set of general parameters is identical for multiple rules, the application assigns the same name to those rules or appends a parameter tag to the name. In this way, Kaspersky Endpoint Security imports all packet rules, but the name of rules that have identical general settings can be modified.

- If you have enabled application event reporting in a network rule, on moving the application to a different trust group, the restrictions of this trust group will not be applied. Thus, if the application is in the Trusted trust group, it will have no network restrictions. Then you enabled event reporting for this application and moved it to the *Untrusted* trust group. Firewall will not enforce network restrictions for this application. We recommend that you first move the application to the appropriate trust group and then enable event reporting. If this method is not suitable, you can manually configure restrictions for the application in the network rule settings. The restriction applies only to the local interface of the application. Moving the application between trust groups in the policy works correctly.

- The Firewall and Intrusion Prevention components have common settings: application rights and protected resources. If you change these settings for Firewall, Kaspersky Endpoint Security automatically applies the new settings to Intrusion Prevention. If, for example, you have allowed changes to the general settings of the Firewall policy (the padlock is open), the Intrusion Prevention settings will also become editable.

- When a network packet rule is triggered in Kaspersky Endpoint Security 11.6.0 or earlier, the **Application name** column in the Firewall report will always display the *Kaspersky Endpoint Security* value. In addition, the Firewall will block the connection at packet level for all applications. This behavior has been modified for Kaspersky Endpoint Security 11.7.0 or later. The **Rule type** column has been added to the Firewall report. When a network packet rule is triggered, the value in the **Application name** column remains empty.

- If you prohibited all network activity using Firewall, the Network Threat Protection component may detect an attack of the Port Scanning type. This can happen because the application starts Network Threat Protection before Firewall to detect suspicious activity in the network.

BadUSB Attack Prevention

- Kaspersky Endpoint Security resets the timeout of USB device lock when the computer is locked (for example, screen lock timeout elapsed). That is, if you enter a wrong USB device authorization code multiple times and the application locks the USB device, Kaspersky Endpoint Security allows you to repeat the authorization attempt after unlocking the computer. In this case, Kaspersky Endpoint Security does not lock the USB device for a time specified in BadUSB Attack Prevention component settings.

- Kaspersky Endpoint Security resets the USB device lock timeout when computer protection is paused. That is, if you enter a wrong USB device authorization code multiple times and the application locks the USB device, Kaspersky Endpoint Security allows you to repeat the authorization attempt after resuming computer protection. In this case, Kaspersky Endpoint Security does not lock the USB device for a time specified in BadUSB Attack Prevention component settings.

Kaspersky Security Network

- Kaspersky Endpoint Security does not support HTTPS when connecting to KSN Proxy (**Use HTTPS** check box selected in KSN Proxy connection settings) if the address of the server includes non-Latin letters (non-ASCII symbols).

- In Kaspersky Security Center, when switching from using the global Kaspersky Security Network to using a private Kaspersky Security Network (KPSN), or vice versa, the option to participate in Kaspersky Security Network is disabled in the policy of the specific product. After switching, carefully read the text of the Kaspersky Security Network Statement and confirm your consent to participate in KSN. You can read the text of the Statement in the application interface or when editing the product policy.

- Starting with Kaspersky Endpoint Security 12.9 for Windows, when switching from KPSN to global KSN, you need to re-confirm your agreement with the Kaspersky Security Network Statement. To do this, you need to enable the use of Kaspersky Security Network in the policy properties or in the application interface and confirm your agreement with the Kaspersky Security Network Statement. If you have already used the global KSN, you must first disable the KSN Usage, then re-enable it and confirm your agreement with the Kaspersky Security Network Statement. If you do not agree with the Kaspersky Security Network Statement, the application will not be able to access the data of Kaspersky Security Network.

- Kaspersky Endpoint Security does not send text files (such as TXT, CSV, LOG, and DOCX files without macros) to the Kaspersky Security Network for scanning. The application sends files that may pose a threat to KSN for scanning. These files include executable files or files that may contain executable code (such as macros in DOCX files). Other components of the application are responsible for scanning text files. You can also manually check the reputation of a text file from the file context menu. If a text file has an *Untrusted (Kaspersky Security Network)* reputation, the application ignores the action defined for detected threats.

Application Control

- When working with the Application Control rules, it is not recommended to add more than 100,000 total inclusion and exclusion conditions for applications across different categories, provided that Kaspersky Endpoint Security is running on a computer that meets the minimum hardware requirements and operates on Microsoft Windows 10.

- Only ZIP format archives are supported when working with Application Control rules in Kaspersky Security Center Web Console. Archives in other formats, such as RAR or 7z, are not supported. There is no such restriction if you work with Application Control rules in the Administration Console (MMC).

- When working with Application Control rules in Kaspersky Security Center Web Console, the maximum supported size of an uploaded file is 104 MB. There is no such restriction if you work with Application Control rules in the Administration Console (MMC).

- When working in Microsoft Windows 10 in application denylist mode, block rules may be incorrectly applied, which could cause blocking of applications that are not specified in rules.

- If you added new *predefined Application control rules* when upgrading Kaspersky Endpoint Security, you cannot apply these rules to previous versions of the application.

- When progressive web apps (PWA) are blocked by the Application Control component, appManifest.xml is indicated as the blocked app in the report.

- When adding the standard Notepad application to an Application Control rule for Windows 11, it is not recommended to specify the path to the application. On computers running Windows 11, the operating system uses Metro Notepad located in the folder `C:\Program Files\WindowsApps\Microsoft.WindowsNotepad*\Notepad\Notepad.exe`. In previous versions of the operating system, Notepad is located in the following folders:

  - `C:\Windows\notepad.exe`

  - `C:\Windows\System32\notepad.exe`

  - `C:\Windows\SysWOW64\notepad.exe`

  When adding Notepad to an Application Control rule, you can specify the application name and the file hash from the properties of the running application, for example.

- When migrating the KSWS policy to the KES policy profile, the Policies and tasks batch conversion wizard (Migration Wizard) renames application categories if category names contain forbidden characters: `'` `*` `<` `>` `?` `\` `:` `|`. The Migration Wizard replaces these characters with `_` characters. For example, the `KSWS::\Everyone:[C61F-3B7C-4D89-96A1]` application category is renamed to `KSWS_Everyone_[C61F-3B7C-4D89-96A1]`.

Device Control

- Kaspersky Endpoint Security can log external device connection and disconnection events. Windows services use the system user account to connect or disconnect devices. This makes it impossible to know which user is connecting or disconnecting the device. Kaspersky Endpoint Security specifies the SYSTEM user account in the event.

- Access to Printer devices that were added to the trusted list is blocked by device and bus blocking rules.

- For MTP devices, control of Read, Write, and Connect operations is supported if you are using the built-in Microsoft drivers of the operating system. If a user installs a custom driver for working with a device (for example, as part of iTunes or Android Debug Bridge), control of Read and Write operations may not work.

- When working with MTP devices, access rules are changed after reconnecting the device.

- The Device Control component registers events related to monitored devices, such as connection and disconnection of a device, reading a file from a device, writing a file to a device, and other events. Kaspersky Endpoint Security registers disconnection events only for the following device types: Portable devices (MTP), Removable drives, Floppy disks, CD/DVD drives. For other device types, the application does not register disconnection events. The application registers the operation of connecting a device to a computer for all device types.

- If you are adding a device to the trusted list based on a model mask and use characters that are included in the ID but not in the model name, these devices are not added. On a workstation, these devices will be added to the trusted list based on an ID mask.

- When the application is upgraded without computer restart, Device Control does not apply access rules to devices that are reconnected. However, if the device was connected before the upgrade, Device Control applies the rules correctly. Restart the computer for the application to work correctly with devices that are reconnected.

- On computers with Kaspersky Endpoint Security version 12.0 installed, the **Allow and do not log** printer access mode for the **Network printers** device type is called **Depends on connection bus**, if Kaspersky Endpoint Security version 12.1 policy is applied on the computer. In these modes the application performs the same actions. In Kaspersky Endpoint Security version 12.1, the access mode for network printers is correctly named **Allow and do not log**.

- Starting with Kaspersky Endpoint Security 12.0 for Windows, the application allows configuring printing rules for printers (printing control). After installing the application with printing control or upgrading the application to a version with printing control, you must restart the computer. Until the computer is restarted, Kaspersky Endpoint Security does not apply printing rules and can only control access to printers. If restarting the computer adversely affects workflows in your organization, you can restart just the spoolsv service (Print Spooler). Printing control is not supported on Arm-based computers.

- Starting with Kaspersky Endpoint Security 12.0 for Windows, the WPA3 protocol is supported by the application for **Wi-Fi** type devices. If a Kaspersky Endpoint Security version 12.2 policy is applied on a computer, the WPA2 protocol is selected on computers with Kaspersky Endpoint Security version 11.11.0 and earlier; WPA2 / WPA3 is selected for versions 12.0 to 12.1; WPA3 is selected for versions 12.2 and later.

- Apple devices are classified as portable devices (MTP) and iTunes devices. The operating system can incorrectly identify the connection of the Apple device and not determine the Apple device as a portable device (MTP). Therefore the Apple device will be unavailable in the file manager, but accessible in the iTunes application. As a result, Kaspersky Endpoint Security will control access to the Apple device in the iTunes application only. To access your Apple device as a portable device (MTP), you need to go to Device Manager and remove the Apple Mobile Device USB Driver from the USB Controllers list. After computer restart, the operating system will identify the Apple device as a portable device (MTP) and iTunes device. Kaspersky Endpoint Security will control access to the device both in the iTunes application and in the file manager.

- In Kaspersky Endpoint Security 12.3 for Windows, access settings are different for the **Bluetooth** device type. If you specified the **Depends on connection bus** value in the previous version of the application, then after upgrading the application to version 12.3, the configured value changes to **Allow and do not log**. This does not alter the behavior of the device.

- Device Control supports Bluetooth devices only through the Microsoft Windows Bluetooth stack. Device Control may function incorrectly with third-party Bluetooth stacks.

- If the Bluetooth device hides or spoofs its Class of Device (COD), Device Control may function incorrectly.
- On Windows 7 or Windows 8 computers with certain Realtek Bluetooth dongle drivers, it may not be possible to only allow connecting Bluetooth devices as input devices (HID class). That is, if you prohibit access to Bluetooth devices in application settings and add input devices to exclusions, Device Control may prevent access to all Bluetooth devices instead.

Web Control

- The OGV and WEBM formats are not supported.
- The RTMP protocol is not supported.
- Web Control only supports WSL1. The application does not control WSL2 traffic.

Adaptive Anomaly Control

- It is recommended to create exclusions automatically based on the event. When manually adding an exclusion, add the `*` character to the beginning of the path when specifying the target object.
- The **Report on triggered Adaptive Anomaly Control rules** cannot be generated if the sample includes even one event whose name contains more than 260 characters.
- Adding exclusions from Adaptive Anomaly Control Triggering of Rules repository is not supported if the properties of an object or a process have a value consisting of more than 256 characters (for example, path to target object). You can add an exclusion manually in the Policy settings. You can also add an exclusion in the Report on triggered Adaptive Anomaly Control rules.
- Kaspersky Security Center 15.1 cannot generate a detailed **Report on Adaptive Anomaly Control rules state** report for a specific rule.
- Adaptive Anomaly Control rules are available only in the language that matches the web plug-in installation language. If you change the interface language, Web Console displays an empty list of rules. To access the rules, change the interface language back to the web plug-in installation language.

Drive Encryption (FDE)

- Kaspersky Disk Encryption is not supported on Arm-based computers.
- BitLocker Drive Encryption is not supported on computers running Windows Home.
- With BitLocker drive encryption, the user can manually change the authentication password using the Windows API. In such cases, BitLocker ignores the password requirements set in the Kaspersky Endpoint Security policy. In other words, the user can set any password whatsoever.
- After installing the application, you must restart the operating system for hard drive encryption to work properly.
- The Authentication Agent does not support hieroglyphics or the special characters `|` and `\`.
- For optimal computer performance after encryption, it is required that the processor supports AES-NI instruction set (Intel Advanced Encryption Standard New Instructions). If the processor does not support AES-NI, computer performance might decrease.
- When there are processes that attempt to access encrypted devices before the application has granted access to such devices, the application shows a warning stating that such processes must be terminated. If the processes cannot be terminated, re-connect the encrypted devices.

- The unique IDs of hard drives are displayed in the device encryption statistics in inverted format.
- It is not recommended to format devices while they are being encrypted.
- When multiple removable drives are simultaneously connected to a computer, the encryption policy can be applied to only one removable drive. When the removable devices are reconnected, the encryption policy is applied correctly.
- Encryption may fail to start on a heavily fragmented hard drive. Defragment the hard drive.
- When hard drives are encrypted, hibernation is blocked from the time when the encryption task starts until the first restart of a computer running Microsoft Windows 7/8/8.1/10, and after installation of hard drive encryption until the first restart of Microsoft Windows 8/8.1/10 operating systems. When hard drives are decrypted, hibernation is blocked from the time when the boot drive is fully decrypted until the first restart of the operating system. When the Quick Start option is enabled in Microsoft Windows 8/8.1/10, blocking of hibernation prevents you from shutting down the operating system.
- Windows 7 computers don't allow to change password during recovery when the disk is encrypted with BitLocker technology. After the recovery key is entered and the operating system is loaded, Kaspersky Endpoint Security won't prompt the user to change the password or PIN code. Thus, it is impossible to set a new password or a PIN code. This issue stems from the peculiarities of the operating system. To continue, you need to re-encrypt the hard drive.
- It is not recommended to use the xbootmgr.exe tool with additional providers enabled. For example, Dispatcher, Network, or Drivers.
- Formatting an encrypted removable drive is not supported on a computer that has Kaspersky Endpoint Security for Windows installed.
- Formatting an encrypted removable drive with the FAT32 file system is not supported (the drive is displayed as encrypted). To format a drive, reformat it to the NTFS file system.
- Multiple download agents cannot co-exist on one encrypted computer.
- An attempt to restore an image of a bootable GPT disk in an unencrypted state, the operating system can make the operating system inoperable. To avoid this, follow these recommendations:
  - Fully decrypt the disk before restoring the image from backup.
  - Use sector-by-sector copying when creating the image.
  - Delete data from the first sectors of the encrypted disk before restoring the image and re-initialize the disk.
- It is impossible to access a removable drive that was previously encrypted on a different computer when all of the following conditions are simultaneously met:
  - There is no connection to the Kaspersky Security Center server.
  - The user is attempting authorization with a new token or password.

  If a similar situation occurs, restart the computer. After the computer has been restarted, access to the encrypted removable drive will be granted.
- Discovery of USB devices by the Authentication Agent may not be supported when xHCI mode for USB is enabled in BIOS settings.

- Kaspersky Disk Encryption (FDE) for the SSD part of a device that is used for caching the most frequently used data is not supported for SSHD devices.

- Encryption of hard drives in 32-bit Microsoft Windows 8/8.1/10 operating systems running in UEFI mode is not supported.

- Restart the computer before encrypting a decrypted hard drive again.

- Hard drive encryption is not compatible with Kaspersky Anti-Virus for UEFI. It is not recommended to use hard drive encryption on computers that have Kaspersky Anti-Virus for UEFI installed.

- Creating Authentication Agent accounts based on Microsoft accounts is supported with the following limitations:

  - Single Sign-On technology is not supported.

  - Automatic creation of Authentication Agent accounts is not supported if the option to create accounts for users who log in to the system in the last N days is selected.

- If the name of an Authentication Agent account has the format `<domain>/<Windows account name>`, after changing the computer name you need to also change the names of accounts that were created for local users of this computer. For example, imagine that there is a local user `Ivanov` on the `Ivanov` computer, and an Authentication Agent account with the name `Ivanov/Ivanov` has been created for this user. If the computer name `Ivanov` has been changed to `Ivanov-PC`, you need to change the name of the Authentication Agent account for the user `Ivanov` from `Ivanov/Ivanov` to `Ivanov-PC/Ivanov`. You can change the account name using the local account management task of the Authentication Agent. Before the name of the account has been changed, authentication in the preboot environment is possible using the old name (for example, `Ivanov/Ivanov`).

- If a user is allowed to access a computer that was encrypted using Kaspersky Disk Encryption technology only by using a token and this user needs to complete the access recovery procedure, make sure that this user is granted password-based access to this computer after access to the encrypted computer has been restored. The password that the user set when restoring access might not be saved. In this case, the user will have to complete the procedure for restoring access to the encrypted computer again the next time the computer is restarted.

- When decrypting a hard drive using the FDE Recovery Tool, the decryption process may end with an error if data on the source device is overwritten with the decrypted data. Part of the data on the hard drive will remain encrypted. It is recommended to choose the option to save decrypted data to a file in the device decryption settings when using the FDE Recovery Tool.

- If the Authentication Agent password has been changed, a message containing the text *Your password has been changed successfully. Click OK* appears and the user restarts the computer, the new password is not saved. The old password must be used for subsequent authentication in the preboot environment.

- Disk encryption is incompatible with Intel Rapid Start technology.

- Disk encryption is incompatible with ExpressCache technology.

- In some cases, when attempting to decrypt an encrypted drive using the FDE Recovery Tool, the tool mistakenly detects the device status as "unencrypted" after the "Request-Response" procedure is completed. The tool's log shows an event stating that the device was successfully decrypted. In this case, you must restart the data recovery procedure to decrypt the device.

- After the Kaspersky Endpoint Security for Windows plug-in is updated in the Web Console, the client computer properties do not show the BitLocker recovery key until the Web Console service is restarted.

- To see the other limitations of full disk encryption support and a list of devices for which encryption of hard drives is supported with restrictions, please refer to the Technical Support Knowledge Base.

File Level Encryption (FLE)

- File encryption is not supported on Arm-based computers.

- File and folder encryption is not supported on Microsoft Windows Embedded operating systems.

- Once you have installed the application, you must restart the operating system for file and folder encryption to work properly.

- The application supports file encryption only on devices with NTFS and FAT32 file systems. If an encrypted file is transferred to a device with an unsupported file system (for example, exFAT), the file on that device will not be encrypted and will be available for modification.

- If an encrypted file is stored on a computer that has available encryption functionality and you access the file from a computer where encryption is not available, direct access to this file will be provided. An encrypted file that is stored in a network folder on a computer that has available encryption functionality is copied in decrypted form to a computer that does not have available encryption functionality.

- You are advised to decrypt files that were encrypted with Encrypting File System before encrypting files with Kaspersky Endpoint Security for Windows.

- After a file is encrypted, its size increases by 4 KB.

- After a file is encrypted, the *Archive* attribute is set in the file properties.

- When copying the decrypted file, for example, to removable media, the file may stay encrypted. This can happen because when the file manager (for example, explorer.exe) attempts to gain access to the encrypted file, it saves the hash of the file to a special list of the process. After decrypting the file, when the file manager attempts to gain access to the file, the process searches for the hash of the file in the list. If the hash is found, Kaspersky Endpoint Security leaves the file encrypted. To avoid this, you need to clear the list of the process. The operating system automatically clears the list of the process as it fills up. You can also clear the list manually. To do so, you can restart the computer, restart the process that you are using to gain access to the file (for example, explorer.exe), or you can use a different file manager that you have not used for access to the encrypted file.

- If an unpacked file from an encrypted archive has the same name as an already existing file on your computer, the latter will be overwritten by the new file that is unpacked from an encrypted archive. The user is not notified about the overwrite operation.

- Before you unpack an encrypted archive, make sure you have enough free disk space to accommodate the unpacked files. If you do not have enough disk space, the archive unpacking may be completed but the files may be corrupted. In this case, it is possible that Kaspersky Endpoint Security does not display any error messages.

- The Portable File Manager interface does not display messages about errors that occur during its operation.

- Kaspersky Endpoint Security for Windows does not start the Portable File Manager on a computer that has the File Level Encryption component installed.

- You cannot use the Portable File Manager to access a removable drive if the following conditions are true simultaneously:

  - There is no connection to Kaspersky Security Center;

  - Kaspersky Endpoint Security for Windows is installed on the computer;

  - Data encryption (FDE or FLE) was not performed on the computer.

  Access is impossible even if you know the password of the Portable File Manager.

- When file encryption is used, the application is incompatible with the Sylpheed mail client.

- Kaspersky Endpoint Security for Windows does not support the rules of restriction of access to encrypted files for some applications. This is due to the fact that some file operations are performed by a third-party application. For example, file copying is performed by the file manager, not by the application itself. In this way, if access to encrypted files is denied to the Outlook mail client, Kaspersky Endpoint Security will allow the mail client to access the encrypted file, if the user has copied files to the email message via the clipboard or using the drag-and-drop function. The copy operation was performed by a file manager, for which the rules of restriction of access to encrypted files are not specified, i.e. the access is allowed.

- When removable drives are encrypted with portable mode support, password age control cannot be disabled.

- Changing the page file settings is not supported. The operating system uses the default values instead of the specified parameter values.

- Use safe removal when working with encrypted removable drives. We cannot guarantee data integrity if the removable drive is not safely removed.

- After files are encrypted, their non-encrypted originals are securely deleted.

- Synchronization of offline files using Client-Side Caching (CSC) is not supported. Encryption of offline files or the Branch Caching technology over SMB for servers are not supported either. It is recommended to prohibit offline management of shared resources at the group policy level. Files that are in offline mode can be edited. After synchronization, changes made to an offline file may be lost.

- Creation of an encrypted archive in the root of the system hard drive is not supported.

- You may experience problems when accessing encrypted files over the network. You are advised to move the files to a different source or make sure that the computer being used as a file server is managed by the same Kaspersky Security Center Administration Server.

- Changing the keyboard layout may cause the password entry window for an encrypted self-extracting archive to hang. To solve this problem, close the password entry window, switch the keyboard layout in your operating system, and re-enter the password for the encrypted archive.

- When file encryption is used on systems that have multiple partitions on one disk, you are advised to use the option that automatically determines the size of the pagefile.sys file. After the computer restarts, the pagefile.sys file may move between disk partitions.

- After applying file encryption rules, including files in the *My Documents* folder, make sure that users for whom encryption has been applied can successfully access encrypted files. To do so, have each user sign in to the system when a connection to Kaspersky Security Center is available. If a user attempts to access encrypted files without a connection to Kaspersky Security Center, the system may hang.

- If system files are somehow included in the scope of file level encryption, events regarding errors when encrypting these files may appear in reports. The files specified in these events are not actually encrypted.

- Pico processes are not supported.

- Case-sensitive paths are not supported. When encryption rules or decryption rules are applied, the paths in product events are displayed in lowercase.

- It is not recommended to encrypt files that are used by the system on startup. If these files are encrypted, an attempt to access encrypted files without a connection to Kaspersky Security Center may cause the system to hang or result in prompts for access to unencrypted files.

- If users jointly work with a file over the network under FLE rules via applications that use the file-to-memory mapping method (such as WordPad or FAR) and applications designed for working with large files (such as Notepad ++), the file in unencrypted form may be blocked indefinitely without the capability to access it from the computer on which it resides.

- Kaspersky Endpoint Security does not encrypt files that are located in OneDrive cloud storage or in other folders that have OneDrive as their name. Kaspersky Endpoint Security also blocks the copying of encrypted files to OneDrive folders if those files are not added to the decryption rule.

- When the file level encryption component is installed, management of users and groups does not work in WSL mode (Windows Subsystem for Linux).

- When the file level encryption component is installed, POSIX (Portable Operating System Interface) for renaming and deleting files is not supported.

- It is not recommended to encrypt temporary files, as this can cause data loss. For example, Microsoft Word creates temporary files when processing a document. If temporary files are encrypted, but the original file is not, the user may receive an *Access Denied* error when trying to save the document. Additionally, Microsoft Word might save the file, but it will not be possible to open the document the next time, i.e. the data will be lost. To prevent data loss, you need to exclude the temporary files folder from encryption rules.

Detection and Response (EDR, NDR, MDR, XDR, Sandbox)

- You cannot scan an object quarantined as a result of the *Move file to Quarantine* task.

- It is not possible to quarantine an Alternate Data Stream (ADS) that is larger than 4 MB. Kaspersky Endpoint Security skips any ADS this large without notifying the user.

- Kaspersky Endpoint Security does not run *IOC Scan* tasks on network drives if the folder path in the task properties begins with a drive letter. Kaspersky Endpoint Security supports only the UNC path format for *IOC Scan* tasks on network drives. For example, `\\server\shared_folder`.

- To ensure the *IOC Scan* task using EmailItem terms works correctly, the Kaspersky Endpoint Security web plug-in must be updated to the latest version.

- On Arm-based computers, the *IOC Scan* task supports email files only from the following mail clients: 32-bit and 64-bit versions of Outlook 2016 and Outlook 2021, 2024, and 365 for Arm64.

- An import of an application configuration file ends with an error if the integration with Kaspersky Sandbox setting is enabled in the configuration file. Prior to exporting application settings, disable Kaspersky Sandbox. Then perform the export/import procedure. After importing the configuration file, enable Kaspersky Sandbox.

- When importing a policy from a KLP file, the parameter value that determines acceptance of the terms and conditions of the Kaspersky Detection and Response Expert Agreement is not applied. As a result, after the policy is imported, Kaspersky Endpoint Security does not perform the functions of EDR Agent. For EDR Agent to work, open the policy, change any parameter, and save the policy settings.

- When an indicator of compromise is detected while running the *IOC Scan* task, the application quarantines a file only for the FileItem term. Quarantining a file for other terms is not supported.

- Kaspersky Endpoint Security for Windows web plug-in 11.7.0 or later is required for managing alert details. Alert details are necessary when working with Endpoint Detection and Response solutions (EDR Optimum and EDR Expert). Alert details are available only in Kaspersky Security Center Web Console and Kaspersky Security Center Cloud Console.

- Migrating the [KES+KEA] configuration to [KES+built-in agent] configuration may complete with a Kaspersky Endpoint Agent application removal error. The application removal error is fixed in the latest version of Kaspersky Endpoint Agent. To remove Kaspersky Endpoint Agent, restart the computer and create an application removal task.

- The [KES+KEA+built-in agent] configuration is not supported. Such configuration disrupts the interaction between applications and the Detection and Response solution that is deployed in your organization. In addition, using Kaspersky Endpoint Agent and the built-in agent on the same computer can lead to duplication of telemetry and increased load on the computer and network. After migrating to [KES + built-in agent] configuration, make sure that Kaspersky Endpoint Agent has been removed from the computer. If Kaspersky Endpoint Agent continues to work after migration, uninstall the application manually (for example, using the *Uninstall application remotely* task).

  The installer allows you to deploy Kaspersky Endpoint Agent on a computer with Kaspersky Endpoint Security and the built-in agent installed. Kaspersky Endpoint Agent and the built-in agent can also be installed on one computer as a result of the *Change application components* task. The behavior depends on the versions of Kaspersky Endpoint Security and Kaspersky Endpoint Agent.

- When generating alert details, the application provides information about the detected threat, including hashes of modified files. Kaspersky Endpoint Security calculates the hash of the file while generating alert details. Consider that the original hash of the file when the file modification event was generated may not be the same as the hash calculated when the alert details were generated.

- The built-in agent, EDR (KATA), resumes the network isolation of a computer after a computer restart, even if the isolation period has expired. To prevent the repeated computer isolation, you need to turn off network isolation in the Kaspersky Anti Targeted Attack Platform console.

- We recommend upgrading the application after Network isolation finishes. After upgrading Kaspersky Endpoint Security, Network isolation can be stopped.

- Built-in agents for EDR (KATA), EDR Optimum, and EDR Expert are not compatible with each other. Therefore, the activation of the EDR built-in agent with a stand-alone Kaspersky Endpoint Detection and Response Add-on license can be skipped if you have activated Kaspersky Endpoint Security with different EDR functionality. For example, the activation of EDR (KATA) built-in agent with a stand-alone license is skipped if you have activated Kaspersky Endpoint Security with the [KES+EDR Optimum] license.

- In Kaspersky Endpoint Security version 12.1, the built-in EDR (KATA) agent does not support the following metafiles for the *Get NTFS metafiles* task: $Secure:$SDH:$INDEX_ROOT; $Secure:$SDH:$INDEX_ALLOCATION; $Secure:$SDH:$BITMAP; $Secure:$SII:$INDEX_ROOT; $Secure:$SII:$INDEX_ALLOCATION; $Secure:$SII:$BITMAP; $Extend\$UsnJrnl:$J:$DATA; $Extend\$UsnJrnl:$Max:$DATA. Support for these metafiles has been added to Kaspersky Endpoint Security version 12.2.

- When migrating from Kaspersky Endpoint Agent to Kaspersky Endpoint Security for the Kaspersky Anti Targeted Attack Platform (EDR) solution, you may encounter errors when connecting the computer to Central Node servers. The reason is that the migration wizard in Web Console skips the following policy settings and does not migrate them:

  - Settings modification prohibition **Connection settings** ("lock").

    By default, settings can be modified (the "lock" is open). Therefore the settings are not applied on the computer. You must prohibit the modification of settings and close the "lock".

  - Crypto-container.

    If you are using two-way authentication for connecting to Central Node servers, you must re-add the crypto-container. The migration wizard correctly migrates the TLS certificate of the server.

  The Policy and Task Migration Wizard in Administration Console (MMC) migrates all settings for the Kaspersky Anti Targeted Attack Platform (EDR) solution.

- Application activation status is incorrectly displayed when the application is installed in the Endpoint Detection and Response Agent mode to support the Kaspersky Managed Detection and Response solution with no connection to Kaspersky Security Center. After the BLOB file download, the Windows taskbar notification area displays an incorrect status: *Application is not activated*. However, the application interface displays the activation status correctly. Restart the computer for the application to work correctly.

- Kaspersky Endpoint Security allows integrating with the Kaspersky Anti Targeted Attack Platform solution using the EDR (KATA) component or Endpoint Sensor (unsupported). Note that you can only use one of the components to interact with Kaspersky Anti Targeted Attack Platform. To view the status of the component, open computer properties in the Administration Console (MMC), in the **Applications** section, open the properties of Kaspersky Endpoint Security for Windows, and go to the **Components** section. The following special considerations apply to the display of component status for the interaction with Kaspersky Anti Targeted Attack Platform:

  - For the management plug-in 12.0 and earlier versions, the application displays the current status of **Endpoint Sensor**. In Kaspersky Endpoint Security 12.0 and earlier, the EDR (KATA) component is not available. The EDR (KATA) component was introduced in version 12.1.

  - For the management plug-in 12.1 and later versions, the application displays the overall status of **Endpoint Detection and Response (KATA)**, which can mean either the Endpoint Sensor status, or the EDR (KATA) component status. This depends on the version of the application installed on the user's computer, and the available components that you can use to interact with Kaspersky Anti Targeted Attack Platform.

- Starting from Kaspersky Endpoint Security version 12.6 and higher, Kaspersky Security Center Web Console version 14.2 and lower does not correctly display the name of the **Endpoint Detection and Response (KATA)** component in the computer properties. Instead of **Endpoint Detection and Response (KATA)** component, the application displays the name of **Endpoint Detection and Response Expert (KATA EDR)** component. To view the list of components, open computer properties in the Web Console, in the **Applications** section, open the properties of Kaspersky Endpoint Security for Windows, and go to the **Components** section. Starting from Kaspersky Security Center Web Console version 15.1 and higher, the application correctly displays the component name.

- When updating the Kaspersky Endpoint Detection and Response management plug-in to version 15.3 installed in Web Console versions 14.0–14.2, alert details are displayed incorrectly. For alert details to work correctly, restart the Kaspersky Security Center Administration Server.

- Kaspersky Endpoint Detection and Response management plug-in version 15.4 and later does not support Kaspersky Security Center version 14.0. After updating the management plug-in, alert details are displayed incorrectly.

- Kaspersky Extended Detection and Response (XDR) version 1.4 class solutions do not support the Kaspersky Endpoint Security for Windows web plug-in version 12.12 or later. You can either leave the current web plug-in version, or update the XDR solution to version 2.0 or later.

- Kaspersky Endpoint Security does not send objects intended for the Arm architecture to Kaspersky Sandbox.

- Kaspersky Endpoint Security supports up to 10,000 EDR Expert (on-premises) inclusion and exclusion event filtering rules in total.

- EDR Expert (on-premises) event filtering rules will not be passed from the policy to managed devices running Kaspersky Endpoint Security version 14.0 or earlier if the supported limit for stored filtering rules is exceeded. The application will display a corresponding warning.

- Kaspersky Endpoint Security for Windows versions 12.11–14.1 do not support the following EDR Expert (on-premises) telemetry events:

  - LDAP Attribute Change

  - GPO Change

  - SCCM Local Config Mismatch

  - SCCM Config Change

  - SCCM Deployment Task

  - Smb Connection Open

  Starting with version 14.2, Kaspersky Endpoint Security supports all of these EDR Expert (on-premises) telemetry events except LDAP Attribute Change.

Other limitations

- Windows operating systems, starting from version 11 24H2, support the UDP Receive Segment Coalescing Offload (URO) technology. The technology is enabled by default if a compatible network card and drivers are installed on the computer. Disabling URO on a user's computer can significantly reduce the performance of the application.

- Kaspersky Endpoint Security supports the WSL subsystem (Windows Subsystem for Linux) with restrictions:

  - WSL 1. The application monitors network traffic and detects threats via HTTP / HTTPS. Due to the fact that Kaspersky Endpoint Security uses its own certificate to scan secure HTTPS connections, the operation of some third-party applications may be interrupted.

  - WSL 2. The application does not support WSL 2.

- If the application returns errors or hangs up during operation, it may be restarted automatically. If the application encounters recurring errors that cause the application to crash, the application performs the following operations:

  1. Disables control and protection functions (encryption functionality remains enabled).

  2. Notifies the user that the functions have been disabled.

  3. Attempts to restore the application to a functional state after updating anti-virus databases or applying application module updates.

- Web addresses that are added to the trusted list may be incorrectly processed.

- In the Kaspersky Security Center console, you cannot save a file to disk from the **Advanced** → **Repositories** → **Active threats** folder. To save the file, you must disinfect the infected file. When disinfecting, the application saves a copy of the file in Backup. Now you can save the file to disk from the **Advanced** → **Repositories** → **Backup** folder.

- Inheritance of settings of data transfer to Administration Server (**General settings** → **Reports and Storage** → **Data transfer to Administration Server**) differs from inheritance of other settings. If you have allowed changing data transmission settings in the policy (the "lock" is open), these settings will be reset to default values in the local computer properties in the console if they were not previously defined. If these settings were previously defined, then their values will be restored. When deleting a policy, the settings are inherited in the same way. In these cases, other settings in the local computer properties are inherited from the policy.

- Kaspersky Endpoint Security monitors HTTP traffic that complies with the RFC 2616, RFC 7540, RFC 7541, RFC 7301 standards. If Kaspersky Endpoint Security detects another data exchange format in HTTP traffic, the application blocks this connection to prevent downloading malicious files from the Internet.

- Kaspersky Endpoint Security prevents communication over the QUIC protocol. Browsers use the standard transport protocol (TLS or SSL) regardless of whether QUIC support is enabled in the browser or not.

- TLS connection errors may occur when third-party software works with the Libcurl library. This can be related to the Kaspersky certificate that Kaspersky Endpoint Security uses to scan encrypted connections. To continue working, you can disable certificate validation for third-party software (not recommended) or add a Kaspersky certificate body to the cURL certificate storage. For detailed information, refer to the Kaspersky Knowledge Base.

- When Kaspersky Endpoint Security for Windows is started for the first time, a digitally signed application may be temporarily placed into the wrong group. The digitally signed application will later be put into the correct group.

- During a rescan of a malicious object that was blocked by third-party software, the user is not notified when the threat is detected again. The threat re-detection event is displayed in the application report and in the Kaspersky Security Center report.

- The Kaspersky Security Center report on device encryption will not include information about devices that were encrypted using Microsoft BitLocker on server platforms or on workstations on which the Device Control component is not installed.

- It is not possible to enable the display of all report entries in the Kaspersky Security Center Web Console. In the Web Console, you can only change the number of entries displayed in reports. By default, Kaspersky Security Center Web Console shows 1000 report entries. You can enable the display of all report entries in the Administration Console (MMC).

- It is not possible to set the display of more than 1000 report entries in the Kaspersky Security Center Console. If you set a higher value than 1000, the Kaspersky Security Center Console will display only 1000 report entries.

- When using a policy hierarchy, the settings of the Encryption of Removable Drives section in a child policy are accessible for editing if the parent policy prohibits modification of those settings.

- You must enable Audit Logon in the operating system settings to ensure proper functioning of exclusions for the protection of shared folders against external encryption.

- If shared folder protection is enabled, Kaspersky Endpoint Security for Windows monitors attempts to encrypt shared folders for each remote access session that was started before the startup of Kaspersky Endpoint Security for Windows, including if the computer from which the remote access session was started has been added to exclusions. If you do not want Kaspersky Endpoint Security for Windows to monitor attempts to encrypt shared folders for remote access sessions that were started from a computer that was added to exclusions and that were started before the startup of Kaspersky Endpoint Security for Windows, terminate and re-establish the remote access session or restart the computer on which Kaspersky Endpoint Security for Windows is installed.

- If the update task is run with the permissions of a specific user account, product patches will not be downloaded when updating from a source that requires authorization.

- The application may fail to start due to insufficient system performance. To resolve this problem, use the Ready Boot option or increase the operating system timeout for starting services.

- The application cannot work in Windows Safe Mode.

- We cannot guarantee that Audio Control will work until after the first restart after installing the application.

- In the Administration Console (MMC), in the Intrusion Prevention settings in the window for configuring application permissions, the **Remove** button is unavailable. You can remove an application from a trust group via the context menu of the application.

- In the local interface of the application, in the Intrusion Prevention settings, application permissions and protected resources are not available for viewing if the computer is managed by a policy. Scroll, search, filter and other window controls are unavailable. You can view application permissions in the policy properties in the Kaspersky Security Center Console.

- When rotated trace files are enabled, no traces are created for the AMSI component and the Outlook plug-in.

- Performance traces cannot be manually collected in Windows Server 2008.

- Performance traces for the "Restart" trace type are not supported.

- Dump logging is not supported for pico processes.

- Turning off the **Disable external management of system services** option will not allow you to stop the service of the application that was installed with the `AMPPL=1` parameter (by default, the parameter value is set to `1` starting with the Windows 10RS2 operating system version). The `AMPPL` parameter with a value of `1` enables the use of Protection Processes technology for the product service.

- To run a custom scan of a folder, the user that starts the custom scan must have the permissions to read the attributes of this folder. Otherwise the custom folder scan will be impossible and will end with an error.

- When a scan rule defined in a policy includes a path without the `\` character at the end, for example, `C:\folder1\folder2`, the scan will be run for the path `C:\folder1\`.

- If you are using software restriction policies (Software Restriction Policies, SRP), the computer may fail to load (black screen). To prevent malfunctions, you need to allow the use of application libraries in the SRP properties. In the SRP properties add the rule with **Unrestricted** security level for khkum.dll file (**New Hash Rule** menu item). The file is located in the `C:\Program Files (x86)\Common Files\Kaspersky Lab\KES.14.2\klhk\klhk_x64\` folder. If you selected this method, you need to additionally clear the **Download updates of application modules** check box in the *Update* task settings for Kaspersky Endpoint Security. For details on using SRP, refer to the Microsoft documentation.

  You can also disable SRP and use the Application Control component of Kaspersky Endpoint Security to control application usage.

- If the computer belongs to a domain under Windows Group Policy Object (Group Policy Object, GPO) with DriverLoadPolicy parameter set to 8 (Good only), restarting the computer with Kaspersky Endpoint Security installed causes a BSOD. To prevent a failure, the Early Launch Antimalware (ELAM) parameter in Group Policy must be set to 1 (Good and unknown). ELAM settings are located in the policy under: **Computer Configuration** → **Administrative Templates** → **System** → **Early Launch Antimalware**.

- Management of Outlook plug-in settings via Rest API is not supported.

- Task run settings for a specific user cannot be transferred between devices via a configuration file. After settings are applied from a configuration file, manually specify the user name and password.

- After installing an update, the integrity check task does not work until the system is restarted to apply the update.

- When the rotated tracing level is changed through the remote diagnostics utility, Kaspersky Endpoint Security for Windows incorrectly displays a blank value for the trace level. However, trace files are written according to the correct trace level. When the rotated tracing level is changed through the local interface of the application, the tracing level is correctly modified but the remote diagnostics utility incorrectly displays the trace level that was last defined by the utility. This may cause the administrator to not have up-to-date information about the current tracing level, and relevant information may be absent from traces if a user manually changes the tracing level in the local interface of the application.

- In the local interface, Password protection settings don't allow changing the name of the administrator account (KLAdmin by default). To change the name of the administrator account, you need to disable Password protection, then enable Password protection and specify a new name of the administrator account.

- The Kaspersky Endpoint Security application when installed on a Windows Server 2019 server is incompatible with Docker. Deploying Docker containers on a computer with Kaspersky Endpoint Security causes a crash (BSOD).

- If Kaspersky Endpoint Security is installed on a server of the SQL Server DBMS, the application sends requests to the instance of the server. This is necessary to scan the jobs of SQL Server Agent and prevent malicious jobs from running. Kaspersky Endpoint Security uses the SQL Server user account to scan jobs. The application sends requests to the server when scanning system memory and after updating anti-virus databases.

- Compatibility of Kaspersky Endpoint Security and Secret Net Studio software is limited:

  - The Kaspersky Endpoint Security application is not compatible with the Antivirus component of Secret Net Studio software.

    The application cannot be installed on a computer where Secret Net Studio is deployed with the Antivirus component. To make interoperability possible, you must remove the Antivirus component from Secret Net Studio.

  - The Kaspersky Endpoint Security application is not compatible with the Disk protection and data encryption component of Secret Net Studio software.

    The application cannot be installed on a computer where Secret Net Studio is deployed with the Disk protection and data encryption component. To make interoperability possible, you must remove the Disk protection and data encryption component from Secret Net Studio.

  - Secret Net Studio is not compatible with the File Level Encryption (FLE) component of Kaspersky Endpoint Security.

    When you install Kaspersky Endpoint Security with the File Level Encryption (FLE) component, Secret Net Studio can operate with errors. To ensure interoperability, you must remove the File Level Encryption (FLE) component from Kaspersky Endpoint Security.

- When importing System Integrity Monitoring rules, the application checks the ID and name of the rule. If rule IDs are the same, Kaspersky Endpoint Security replaces the existing rules with the new rule. When exporting rules, the application automatically assigns IDs. Rule with identical IDs can exist, for example, if you manually edited exported rule XML files. If rule IDs are unique, but rule names are the same, Kaspersky Endpoint Security adds `(1)` and so on to the name of the rule.

- Starting with version 12.11 of Kaspersky Endpoint Security for Windows, it is not possible to view the settings of a parent policy that is open in a child group in the Web Console. The Web Console also displays a warning: *This policy is inherited. You can edit the policy settings only in the administration group in which it was created*.

- Pop-up notifications longer than 256 characters are not displayed in the Administration Console (MMC).

- The component names in the policy and in the installation package may be different. For example, the Endpoint Detection and Response Expert (on-premises) may be named Endpoint Detection and Response (KATA), Endpoint Detection and Response Expert (on-premises), Kaspersky Anti Targeted Attack Platform Integration. Component names may also differ depending on the version of the application.

Glossary

Active key

A key that is currently used by the application.

Administration group

A set of devices that share common functions and a set of Kaspersky applications installed on them. Devices are grouped so that they can be managed conveniently as a single unit. A group may include other groups. It is possible to create group policies and group tasks for each installed application in the group.

Anti-virus databases

Databases that contain information about computer security threats known to Kaspersky as of the anti-virus database release date. Anti-virus database signatures help to detect malicious code in scanned objects. Anti-virus databases are created by Kaspersky specialists and updated hourly.

Archive

One or several files packed into a single compressed file. A specialized application called an archiver is required for packing and unpacking data.

Authentication Agent

Interface that lets you complete authentication to access encrypted hard drives and load the operating system after the bootable hard drive has been encrypted.

Certificate issuer

Certification center that issued the certificate.

Cloud Discovery

Cloud Discovery manages user access to cloud services. Cloud services include, for example, Microsoft Teams, Salesforce, and Microsoft Office 365. Cloud services are grouped in categories, for example, *File sharing*, *Messengers*, *Email*.

Database of malicious web addresses

A list of web addresses whose content may be considered to be dangerous. The list is created by Kaspersky specialists. It is regularly updated and is included in the Kaspersky application distribution kit.

Database of phishing web addresses

A list of web addresses which Kaspersky specialists have determined to be phishing-related. The database is regularly updated and is part of the Kaspersky application distribution kit.

Disinfection

A method of processing infected objects that results in complete or partial recovery of data. Not all infected objects can be disinfected.

False alarm

A false alarm occurs when the Kaspersky application reports an uninfected file as infected because the signature of the file is similar to that of a virus.

Infectable file

A file which, due to its structure or format, can be used by intruders as a "container" to store and spread malicious code. As a rule, these are executable files, with such file extensions as .com, .exe, and .dll. There is a fairly high risk of intrusion of malicious code in such files.

Infected file

A file which contains malicious code (code of known malware has been detected when scanning the file). Kaspersky does not recommend using such files, because they may infect your computer.

Integration Server

Kaspersky Endpoint Security for Virtualization Light Agent component. Interacts between Kaspersky Endpoint Security components and the virtual infrastructure.

IOC

Indicator of Compromise. A set of data about a malicious object or activity.

IOC file

A file containing a set of indicators of compromise (IOCs) that the application tries to match to count a detection. The likelihood of detection can be higher if exact matches with multiple IOC files are found for the object as a result of the scan.

Kerberos authentication

Mechanism of mutual authentication by the client and the server before establishing a connection between them, which allows communicating over insecure networks. The mechanism is based on a ticket, which the user obtains from a trusted authentication center.

License certificate

A document that Kaspersky transfers to the user together with the key file or activation code. It contains information about the license granted to the user.

Light Agent

Kaspersky Endpoint Security for Virtualization Light Agent component. It is installed on each virtual machine that needs to be protected.

Mask

Representation of a file name and extension by using wildcards.

File masks can contain any characters that are allowed in file names, including wildcards:

- The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.

- Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask. The ** mask is available only for creating scan exclusions.

- The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.

Network Agent

A Kaspersky Security Center component that enables interaction between the Administration Server and Kaspersky applications that are installed on a specific network node (workstation or server). This component is common for all Kaspersky applications running under Windows. Dedicated versions of Network Agent are intended for applications running under other operating systems.

Normalized form of the address of a web resource

The normalized form of the address of a web resource is a textual representation of a web resource address that is obtained through normalization. *Normalization* is a process whereby the textual representation of a web resource address changes according to specific rules (for example, exclusion of the user login, password, and connection port from the text representation of the web resource address; additionally, the web resource address is changed from uppercase to lowercase characters).

Regarding the operation of protection components, the purpose of normalization of web resource addresses is to avoid scanning website addresses, which may differ in syntax while being physically equivalent, more than once.

Example:

Non-normalized form of an address: www.Example.com\.

Normalized form of an address: www.example.com.

OLE object

An attached file or a file that is embedded in another file. Kaspersky applications allow scanning OLE objects for viruses. For example, if you insert a Microsoft Office Excel® table into a Microsoft Office Word document, the table is scanned as an OLE object.

OpenIOC

Open standard of Indicator of Compromise (IOC) descriptions based on XML and including over 500 different Indicators of Compromise.

Portable File Manager

This is an application that provides an interface for working with encrypted files on removable drives when encryption functionality is not available on the computer.

Protection scope

Objects that are constantly being scanned by the Essential Threat Protection component when it is running. The protection scopes of different components have different properties.

Scan scope

Objects that Kaspersky Endpoint Security scans while performing a scan task.

SVM

Secure virtual machine – a special virtual machine on which the scanserver service (Protection Server, a component of Kaspersky Endpoint Security for Virtualization Light Agent) is installed.

Task

Functions performed by the Kaspersky application as tasks, for example: Real-time File Protection, Full Device Scan, Database Update.

Trusted Platform Module

A microchip developed to provide basic functions related to security (for example, for storing encryption keys). A Trusted Platform Module is usually installed on the computer motherboard and interacts with all other system components via the hardware bus.

Appendices

This section contains information that supplements the body of the document.

Appendix 1. Application settings

You can use a policy, tasks, or the application interface to configure Kaspersky Endpoint Security. Detailed information about application components is provided in the corresponding sections.

File Threat Protection

The File Threat Protection component lets you prevent infection of a computer file system. By default, the File Threat Protection component resides permanently in the computer's RAM and scans all files that are opened, saved, or run, in real time. This component scans files on all computer drives, including connected drives. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis.

The component scans the files accessed by a user or application. If a malicious file is detected, Kaspersky Endpoint Security blocks the file operation. The application then disinfects or deletes the malicious file, depending on the settings of the File Threat Protection component.

When attempting to access a file whose contents reside in OneDrive cloud storage, Kaspersky Endpoint Security downloads and scans the file contents.

File Threat Protection component settings

Parameter	Description
Security level *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	For File Threat Protection, Kaspersky Endpoint Security can apply different groups of settings. These groups of settings that are stored in the application are called *security levels*: • **High**. When this file security level is selected, the File Threat Protection component takes the strictest control of all files that are opened, saved, and started. The File Threat Protection component scans all file types on all hard drives, removable drives, and network drives of the computer. It also scans archives, installation packages, and embedded OLE objects. • **Recommended**. This file security level is recommended by Kaspersky Lab experts. The File Threat Protection component scans only the specified file formats on all hard drives, removable drives, and network drives of the computer, and embedded OLE objects. The File Threat Protection component does not scan archives or installation packages. • **Low**. The settings of this file security level ensure maximum scanning speed. The File Threat Protection component scans only files with specified extensions on all hard drives, removable drives, and network drives of the computer. The File Threat Protection component does not scan compound files.
File types *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	**All files**. If this setting is enabled, Kaspersky Endpoint Security checks all files without exception (all formats and extensions). **Files scanned by format**. If this setting is enabled, the application scans infectable files only. Before scanning a file for malicious code, the internal header of the file is analyzed to determine the format of the file (for example, .txt, .doc, or .exe). The scan also looks for files with particular file extensions. **Files scanned by extension**. If this setting is enabled, the application scans infectable files only. The file format is then determined based on the file's extension.
Scan scope	Contains objects that are scanned by the File Threat Protection component. A scan object may be a hard drive, removable drive, network drive, folder, file, or multiple files defined by a mask. By default, the File Threat Protection component scans files that are started on any hard drives, removable drives, or network drives. The protection scope for these objects cannot be changed or deleted. You can only exclude an object (such as removable drives) from scans.

Parameter	Description
Machine learning and signature analysis *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	The machine learning and signature analysis method uses the Kaspersky Endpoint Security databases that contain descriptions of known threats and ways to neutralize them. Protection that uses this method provides the minimum acceptable security level. Based on the recommendations of Kaspersky experts, machine learning and signature analysis is always enabled.
Heuristic analysis *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	The technology was developed for detecting threats that cannot be detected by using the current version of Kaspersky application databases. It detects files that may be infected with an unknown virus or a new variety of a known virus. When scanning files for malicious code, the heuristic analyzer executes instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.
Action on threat detection	**Disinfect, delete if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application deletes the file. **Disinfect, block if disinfection fails**. If this option is selected, the application automatically attempts to disinfect infected file that is detected. If disinfection fails, the application blocks this file. **Block**. If this option is selected, the application automatically blocks the infected file without attempting to disinfect or delete it. Before attempting to disinfect or delete an infected file, the application creates a backup copy of the file in case you need to restore the file or if it can be disinfected in the future.
Scan only new and modified files	Scans only new files and those files that have been modified since the last time they were scanned. This helps reduce the duration of a scan. This mode applies both to simple and to compound files.
Scan archives	Scanning ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR, ICE, and other archives. The application scans archives not only by extension, but also by format. When checking archives, the application performs a recursive unpacking. This allows the detection of threats inside multi-level archives (an archive within an archive).
Scan distribution packages	Scanning distribution packages of third-party applications.
Scan files in Microsoft Office formats	Scans Microsoft Office files (DOC, DOCX, XLS, PPT and other Microsoft extensions). Office format files include OLE objects as well. The application scans office format files that are smaller than 1 MB, regardless of whether the check box is selected or not.
Scan email format files	Scans email format files. The application scans MSG and EML files. Email format files include OLE objects and MHT files as well. Kaspersky Endpoint Security scans email format files that are smaller than 1 MB, regardless of whether the check box is selected or not.
Do not unpack large compound files	If this check box is selected, the application does not scan compound files if their size exceeds the specified value. If this check box is cleared, the application scans compound files of all sizes. The application scans large files that are extracted from archives regardless of whether the check box is selected or not.

Parameter	Description
Unpack compound files in the background	If the check box is selected, the application provides access to compound files that are larger than the specified value before these files are scanned. In this case, Kaspersky Endpoint Security unpacks and scans compound files in the background. The application provides access to compound files that are smaller than this value only after unpacking and scanning these files. If the check box is not selected, the application provides access to compound files only after unpacking and scanning files of any size.
Scan mode *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	Kaspersky Endpoint Security scans files accessed by the user, operating system, or an application running under the user's account. **Smart mode**. In this mode, File Threat Protection scans an object based on an analysis of actions taken on the object. For example, when working with a Microsoft Office document, Kaspersky Endpoint Security scans the file when it is first opened and last closed. Intermediate operations that overwrite the file do not cause it to be scanned. **On access and modification**. In this mode, File Threat Protection scans objects whenever there is an attempt to open or modify them. **On access**. In this mode, File Threat Protection scans objects only upon an attempt to open them. **On execution**. In this mode, File Threat Protection only scans objects upon an attempt to run them.
Use iSwift technology *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. The iSwift technology is an advancement of the iChecker technology for the NTFS file system.
Use iChecker technology *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	This technology allows increasing scan speed by excluding certain files from scanning. Files are excluded from scans by using a special algorithm that takes into account the release date of Kaspersky Endpoint Security databases, the date when the file was last scanned, and any modifications to the scan settings. There are limitations to iChecker Technology: it does not work with large files and applies only to files with a structure that the application recognizes (for example, EXE, DLL, LNK, TTF, INF, SYS, COM, CHM, ZIP, and RAR).
Pause File Threat Protection *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	This temporarily and automatically pauses operation of File Threat Protection at the specified time or when working with the specified applications.
Scan of file operations executed in Windows containers	If a threat is detected inside a container, the application applies the action selected for the File Threat Protection component. **Stop the container if disinfection fails**. The application may not have sufficient read and write rights for the detected object. In that case, disinfecting or deleting the detected object is impossible. If this check box is selected, the application blocks the detected object and stops the container. If this check box is cleared, the application only blocks the detected object. **Do not scan file operations executed in Windows containers**. If the check box is selected, the application scans the container only at the container startup. If the check box is cleared, the application scans the container continuously in real time.

Web Threat Protection

The Web Threat Protection component prevents downloads of malicious files from the internet, and also blocks the connection to malicious and phishing websites. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis.

Kaspersky Endpoint Security scans HTTP-, HTTPS-, and FTP-traffic. Kaspersky Endpoint Security scans URLs and IP addresses.

To use Web Threat Protection, you must complete the initial configuration of the application:

- For HTTPS traffic monitoring, enable encrypted connections scan (enabled by default).
- Select the ports that Kaspersky Endpoint Security must monitor (by default, the application monitors all ports).
- Select the applications whose traffic you want Kaspersky Endpoint Security to monitor. Most browsers are already present in the list of applications recommended by Kaspersky. If your browser is missing from the list, add it manually.
- We recommend to inject a web page interaction script into web traffic (by default, script injection is disabled). This script enables registration of Web Threat Protection events for the application event log, OS event log, and reports.

When a user tries to open a malicious or phishing website, Kaspersky Endpoint Security will block access and show a warning.

Web Threat Protection component settings

Parameter	Description
Security level *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	For Web Threat Protection, the application can apply different groups of settings. These groups of settings that are stored in the application are called *security levels*: • **High**. The security level under which the Web Threat Protection component performs maximum scanning of web traffic that a computer receives via HTTP and FTP. Web Threat Protection performs detailed scanning of all web traffic objects by using the full set of application databases, and performs the deepest possible heuristic analysis. • **Recommended**. The security level that provides the optimal balance between the performance of the application and the security of web traffic. The Web Threat Protection component performs heuristic analysis at the medium scan level. This web traffic security level is recommended by Kaspersky specialists. • **Low**. The settings of this web traffic security level ensure the maximum web traffic scanning speed. The Web Threat Protection component performs heuristic analysis at the light scan level.
Action on threat detection	**Block**. If this option is selected and an infected object is detected in web traffic, the Web Threat Protection component blocks access to the object and displays a message in the browser. **Inform**. If this option is selected and an infected object is detected in web traffic, Kaspersky Endpoint Security allows this object to be downloaded to the computer but adds information about the infected object to the list of active threats.
Check the web address against the database of malicious web addresses *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	Scanning the links to determine whether they are included in the database of malicious web addresses allows you to track websites that have been added to denylist. The database of malicious web addresses is maintained by Kaspersky, included in the application installation package, and updated during Kaspersky Endpoint Security database updates.
Use heuristic analysis *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	The technology was developed for detecting threats that cannot be detected by using the current version of Kaspersky application databases. It detects files that may be infected with an unknown virus or a new variety of a known virus. When web traffic is scanned for viruses and other applications that present a threat, the heuristic analyzer performs instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.
Check the web address against the database of phishing web addresses *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	The database of phishing web addresses includes the web addresses of currently known websites that are used to launch phishing attacks. Kaspersky supplements this database of phishing links with addresses obtained from the international organization known as the Anti-Phishing Working Group. The database of phishing addresses is included in the application installation package and supplemented with Kaspersky Endpoint Security database updates.
Do not scan web traffic from trusted web addresses	If this option is selected, the Web Threat Protection component does not scan the content of web pages or websites whose addresses are included in the list of trusted web addresses. You can add both the specific address and the address mask of a web page/website to the list of trusted web addresses. You can also create a general list of exclusions for encrypted connections. In this case, Kaspersky Endpoint Security does not scan the HTTPS traffic of trusted web addresses when the Web Threat Protection, Mail Threat Protection, and Web Control components are doing their work.

Mail Threat Protection

The Mail Threat Protection component scans the attachments of incoming and outgoing email messages for viruses and other threats. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and heuristic analysis.

Mail Threat Protection can scan both incoming and outgoing messages. The application supports POP3, SMTP, IMAP, and NNTP in the following mail clients:

- Microsoft Office Outlook
- Mozilla Thunderbird
- Windows Mail
- MyOffice Mail
- R7-Office Organizer

To scan traffic in the Mozilla Thunderbird, MyOffice Mail, and R7-Office Organizer mail clients, you need to add a Kaspersky certificate to the certificate store and select the own certificate store.

Mail Threat Protection does not support other protocols and mail clients.

Mail Threat Protection may not always be able to gain *protocol-level* access to messages (for example, when using the Microsoft Exchange solution). For this reason, Mail Threat Protection includes an extension for Microsoft Office Outlook. The extension allows scanning messages at the *level of the mail client*. The Mail Threat Protection extension supports the 32-bit and 64-bit versions of Outlook 2010, 2013, 2016, 2019, 2021, 2024, and 365. On Arm-based computers, the Mail Threat Protection extension supports the 32-bit and 64-bit versions of Outlook 2016, Outlook 2021, Outlook 2024, and Outlook 365 for Arm64.

The Mail Threat Protection component does not scan messages if the mail client is open in a browser.

When a malicious file is detected in an attachment, Kaspersky Endpoint Security adds information about the performed action to the message subject, for example, *[Message has been processed] <message subject>*.

Parameter	Description
Security level *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	For Mail Threat Protection, the application can apply different groups of settings. These groups of settings that are stored in the application are called *security levels*: • **High**. When this email security level is selected, the Mail Threat Protection component scans email messages most thoroughly. The Mail Threat Protection component scans incoming and outgoing email messages, and performs deep heuristic analysis. The High mail security level is recommended for high-risk environments. An example of such an environment is a connection to a free email service from a home network that is not guarded by centralized email protection. • **Recommended**. The email security level that provides the optimal balance between the performance of the application and email security. The Mail Threat Protection component scans incoming and outgoing email messages, and performs medium-level heuristic analysis. This mail traffic security level is recommended by Kaspersky specialists. • **Low**. When this email security level is selected, the Mail Threat Protection component only scans incoming email messages, performs light heuristic analysis, and does not scan archives that are attached to email messages. At this mail security level, the Mail Threat Protection component scans email messages at maximum speed and uses a minimum of operating system resources. The Low mail security level is recommended for use in a well-protected environment. An example of such an environment might be an enterprise LAN with centralized email security.
Action on threat detection	**Disinfect, delete if disinfection fails**. When an infected object is detected in an inbound or outbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application deletes the infected object. The application adds information about the performed action to the message subject, for example, *[Message has been processed] <message subject>*. **Disinfect, block if disinfection fails**. When an infected object is detected in an inbound message, the application attempts to disinfect the detected object. The user will be able to access the message with a safe attachment. If the object cannot be disinfected, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. When an infected object is detected in an outbound message, the application attempts to disinfect the detected object. If the object cannot be disinfected, the application blocks transmission of the message, and the mail client shows an error. **Block**. If an infected object is detected in an inbound message, the application adds a warning to the message subject. The user will be able to access the message with the original attachment. If an infected object is detected in an outbound message, the application blocks transmission of the message, and the mail client shows an error.
Protection scope *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	The *Protection scope* includes objects that the component checks when it is run: incoming and outgoing messages or incoming messages only. In order to protect your computers, you need only scan incoming messages. You can turn on scanning for outgoing messages to prevent infected files from being sent in archives. You can also turn on the scanning of outgoing messages if you want to prevent files in particular formats from being sent, such as audio and video files, for example.
Scan POP3, SMTP, NNTP, and IMAP traffic	Scanning by the Mail Threat Protection component of traffic that is transferred via the POP3, SMTP, NNTP, and IMAP protocols.
Connect Microsoft Outlook extension	If the check box is selected, scanning of email messages transmitted via the POP3, SMTP, NNTP, IMAP protocols is enabled on the side of the extension integrated into Microsoft Outlook. If mail is scanned using the extension for Microsoft Outlook, it is recommended to use Cached Exchange Mode. For more detailed information about Cached Exchange Mode and recommendations on its use, refer to the Microsoft Knowledge Base.
Heuristic analysis *(available only in the Administration Console (MMC) and in the Kaspersky Endpoint Security interface)*	The technology was developed for detecting threats that cannot be detected by using the current version of Kaspersky application databases. It detects files that may be infected with an unknown virus or a new variety of a known virus. When scanning files for malicious code, the heuristic analyzer executes instructions in the executable files. The number of instructions that are executed by the heuristic analyzer depends on the level that is specified for the heuristic analyzer. The heuristic analysis level ensures a balance between the thoroughness of searching for new threats, the load on the resources of the operating system, and the duration of heuristic analysis.
Scan attached archives	Scanning ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR, ICE, and other archives. The application scans archives not only by extension, but also by format. When checking archives, the application performs a recursive unpacking. This allows the detection of threats inside multi-level archives (an archive within an archive). If, during the scan, the application detects a password for an archive in the text of the message, this password will be used to scan the content of the archive for malicious applications. In this case, the password is not saved. An archive is unpacked during the scan. If an application error occurs during the unpacking process, you can manually delete the unpacked files that are saved to the following path: %systemroot%\temp. The files have the PR prefix.
Scan attached files of Microsoft Office formats	Scans Microsoft Office files (DOC, DOCX, XLS, PPT and other Microsoft extensions). Office format files include OLE objects as well. The application scans office format files that are smaller than 1 MB, regardless of whether the check box is selected or not.

Parameter	Description
Do not scan archives larger than N MB	If this check box is selected, the Mail Threat Protection component excludes archives attached to email messages from scanning if their size exceeds the specified value. If the check box is cleared, the Mail Threat Protection component scans email attachment archives of any size.
Limit the time for checking archives to N sec	If the check box is selected, the time that is allocated for scanning archives attached to email messages is limited to the specified period.
Attachment filter	The attachment filter is not applied to outgoing email messages. **Disable filtering**. If this option is selected, the Mail Threat Protection component does not filter files that are attached to email messages. **Rename attachments of selected types**. If this option is selected, the Mail Threat Protection component will replace the last extension character found in the attached files of the specified types with the underscore character (for example, attachment.doc_). Thus, in order to open the file, the user must rename the file. **Delete attachments of selected types**. If this option is selected, the Mail Threat Protection component deletes attached files of the specified types from email messages. In the list of file masks, you can specify the types of attached files to rename or delete from email messages.

Network Threat Protection

The *Network Threat Protection* component (also called Intrusion Detection System, IDS) monitors inbound network traffic for activity characteristic of network attacks. When the application detects an attempted network attack on a user's computer, it blocks the network connection with the attacking computer. Descriptions of currently known types of network attacks and ways to counteract them are provided in the application databases. The list of network attacks that the Network Threat Protection component detects is updated during database and application module updates.

Network Threat Protection component settings

Parameter	Description
Treat port scanning and network flooding as attacks	*Network Flooding* is an attack on network resources of an organization (such as web servers). This attack consists of sending a large number of requests to overload the bandwidth of network resources. When this happens, users are unable to access the network resources of the organization. A *Port Scanning* attack consists of scanning UDP ports, TCP ports, and network services on the computer. This attack allows the attacker to identify the degree of vulnerability of the computer before conducting more dangerous types of network attacks. Port Scanning also enables the attacker to identify the operating system on the computer and select the appropriate network attacks for this operating system. If this check box is selected, Kaspersky Endpoint Security monitors network traffic to detect these attacks. If an attack is detected, the application notifies the user and sends the corresponding event to Kaspersky Security Center. The application provides information about the attacking computer, which is required for timely threat response actions. You can disable detection of these types of attacks in case some of your allowed applications perform operations that are typical for these types of attacks. This will help avoid false alarms.
Block attacking devices for N min	If this option is enabled, the Network Threat Protection component adds the attacking computer to the blocked list. This means that the Network Threat Protection component blocks the network connection with the attacking computer after the first network attack attempt for the specified amount of time. This block automatically protects the user's computer against possible future network attacks from the same address. The minimum time an attacking computer must spend in the block list is one minute. The maximum time is 999 minutes. You can view the block list in the Network Monitor tool window. Kaspersky Endpoint Security clears the block list when the application is restarted and when the Network Threat Protection settings are changed.

Parameter	Description
Exclusions	The list contains IP addresses from which Network Threat Protection does not block network attacks. You can add an IP address with port and protocol specified. The application does not log information on network attacks from the IP addresses that are in the list of exclusions.
MAC spoofing protection	A *MAC spoofing attack* consists of changing the MAC address of a network device (network card). As a result, an attacker can redirect data sent to a device to another device and gain access to this data. Kaspersky Endpoint Security lets you block MAC Spoofing attacks and receive notifications about the attacks.

Firewall

The Firewall component blocks unauthorized connections to a computer while working on the internet or a local network. Firewall also controls the network activity of applications on the computer. This allows you to protect your corporate LAN from identity theft and other attacks. The component provides computer protection with the help of anti-virus databases, the Kaspersky Security Network cloud service, and predefined *network rules*.

Network Agent is used for interaction with Kaspersky Security Center. Firewall automatically creates network rules required for the application and the Network Agent to work. As a result, the Firewall opens several ports on the computer. Which ports are opened depends on computer's role (for example, distribution point). To learn more about the ports that will be opened on the computer, refer to the Kaspersky Security Center Help.

Network rules

You can configure network rules at the following levels:

- *Network packet rules*. Network packet rules impose restrictions on network packets, regardless of the application. Such rules restrict inbound and outbound network traffic through specific ports of the selected data protocol. Kaspersky Endpoint Security has predefined network packet rules with permissions recommended by Kaspersky experts.
- *Application network rules*. Application network rules impose restrictions on the network activity of a specific application. They factor in not only the characteristics of the network packet, but also the specific application to which this network packet is addressed or which issued this network packet.

Controlled access of applications to operating system resources, processes and personal data is provided by the Host Intrusion Prevention component by using *application rights*.

During the first startup of the application, the Firewall performs the following actions:

1. Checks the security of the application by using downloaded anti-virus databases.
2. Checks the security of the application in Kaspersky Security Network.

   You are advised to participate in Kaspersky Security Network to help the Firewall work more effectively.
3. Places the application in one of the trust groups: *Trusted*, *Low Restricted*, *High Restricted*, *Untrusted*.

A trust group defines the rights that Kaspersky Endpoint Security refers to when controlling application activity. Kaspersky Endpoint Security places an application in a trust group depending on the level of danger that this application may pose to the computer.

Kaspersky Endpoint Security places an application in a trust group for the Firewall and Host Intrusion Prevention components. You cannot change the trust group only for Firewall or Host Intrusion Prevention.

If you refused to participate in KSN or there is no network, Kaspersky Endpoint Security places the application in a trust group depending on the settings of the Host Intrusion Prevention component. After receiving the reputation of the application from KSN, the trust group can be changed automatically.

4. It blocks network activity of the application depending on the trust group. For example, applications in the *High Restricted* trust group are not allowed to use any network connections.

The next time the application is started, Kaspersky Endpoint Security checks the integrity of the application. If the application is unchanged, the component uses the current network rules for it. If the application has been modified, Kaspersky Endpoint Security analyzes the application as if it were being started for the first time.

Network Rule Priorities

Each rule has a priority. The higher a rule is on the list, the higher its priority. If network activity is added to several rules, the Firewall regulates network activity according to the rule with the highest priority.

Network packet rules have a higher priority than network rules for applications. If both network packet rules and network rules for applications are specified for the same type of network activity, the network activity is handled according to the network packet rules.

Network rules for applications work in a particular way. Network rule for applications includes access rules based on the network status: *Public network*, *Local network*, *Trusted network*. For example, applications in the *High Restricted* trust group are not allowed any network activity in networks of all statuses by default. If a network rule is specified for an individual application (parent application), then the child processes of other applications will run according to the network rule of the parent application. If there is no network rule for the application, the child processes will run according to network access rule of the application's trust group.

For example, you have prohibited any network activity in networks of all statuses for all applications, except browser X. If you start browser Y installation (child process) from browser X (parent application), then browser Y installer will access the network and download the necessary files. After installation, browser Y will be denied any network connections according to the Firewall settings. To prohibit network activity of browser Y installer as a child process, you must add a network rule for the installer of browser Y.

Network connection types

The Firewall allows you to control network activity depending on the type of the network connection. Kaspersky Endpoint Security receives the network connection type from the computer's operating system. The type of the network connection in the operating system is set by the user when setting up the connection. You can change the type of the network connection in the Kaspersky Endpoint Security settings. The Firewall will monitor network activity depending on the network type, specified in the Kaspersky Endpoint Security settings, and not in the operating system.

The following network connection types are available:

- **Public network**. The network is not protected by antivirus applications, firewalls, or filters (such as Wi-Fi in a cafe). When the user operates a computer that is connected to such a network, Firewall blocks access to files and printers of this computer. External users are also unable to access data through shared folders and remote access to the desktop of this computer. Firewall filters the network activity of each application according to the network rules that are set for it.

  Firewall assigns *Public network* type to the Internet by default. You cannot change the type of the Internet.

- **Local network**. Network for users with restricted access to files and printers on this computer (such as for a corporate LAN or home network).

- **Trusted network**. Safe network in which a computer is not exposed to attacks or unauthorized data access attempts. Firewall permits any network activity within networks with this status.

Firewall component settings

Parameter	Description
Packet rules	Table with a list of network packet rules. Network packet rules serve to impose restrictions on network packets, regardless of the application. Such rules restrict inbound and outbound network traffic through specific ports of the selected data protocol. The table lists pre-configured network packet rules that are recommended by Kaspersky for optimum protection of the network traffic of computers that run on Microsoft Windows operating systems. Firewall sets the execution priority of each network packet rule. Firewall processes network packet rules in the order in which they appear in the list of network packet rules, from top to bottom. Firewall locates the topmost network packet rule that is suitable for the network connection and applies it by either allowing or blocking network activity. Firewall then ignores all subsequent network packet rules for the specific network connection. Network packet rules have a higher priority than network rules for applications.
Available networks	This table contains information about network connections that Firewall detects on the computer. The *Public network* status is assigned to the internet by default. You cannot change the status of the internet.
Rules for applications	**Application**. Table of applications that are controlled by the Firewall component. Applications are assigned to trust groups. A trust group defines the rights used by Kaspersky Endpoint Security when controlling network activity of applications. You can select an application from a single list of all applications installed on computers under the influence of a policy and add the application to a trust group. **Network rules**. Table of network rules for applications that are part of a trust group. In accordance with these rules, Firewall regulates the network activity of applications. The table displays the predefined network rules that are recommended by Kaspersky experts. These network rules have been added to optimally protect the network traffic of computers running Windows operating systems. It is not possible to delete the predefined network rules.

BadUSB Attack Prevention

Some viruses modify the firmware of USB devices to trick the operating system into detecting the USB device as a keyboard. As a result, the virus may execute commands under your user account to download malware, for example.

The BadUSB Attack Prevention component prevents infected USB devices emulating a keyboard from connecting to the computer.

When a USB device is connected to a computer and identified as a keyboard by the operating system, the application prompts the user to enter a numerical code generated by the application from this keyboard or by using On-Screen Keyboard if available (see the figure below). This procedure is known as keyboard authorization.

If the code has been entered correctly, the application saves the identification parameters—VID/PID of the keyboard and the number of the port to which it has been connected—in the list of authorized keyboards. Keyboard authorization does not need to be repeated when the keyboard is reconnected or after the operating system is restarted.

When the authorized keyboard is connected to a different USB port of the computer, the application shows a prompt for re-authorization of this keyboard.

If the numerical code has been entered incorrectly, the application generates a new code. You can configure the number of attempts for entering the numerical code. If the numerical code is entered incorrectly several times or the keyboard authorization window is closed (see figure below), the application blocks input from this keyboard. When the USB device blocking time elapses or the operating system is restarted, the application prompts the user to perform keyboard authorization again.

The application allows use of an authorized keyboard and blocks a keyboard that has not been authorized.

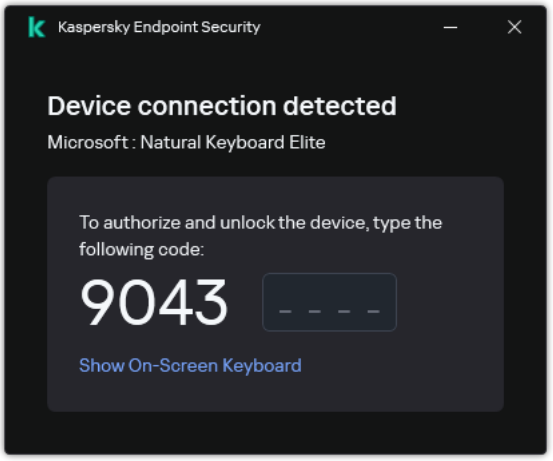

Keyboard authorization

BadUSB Attack Prevention component settings

Parameter	Description
Prohibit use of On-Screen Keyboard for authorization of USB devices	If the toggle button is switched on, the application blocks use of On-Screen Keyboard for authorization of a USB device from which an authorization code cannot be entered.
Prohibit use of a barcode for authorization of USB devices	If this toggle switch is enabled, the application does not display the bar code in the bar code scanner authentication notification.
Maximum number of USB device authorization attempts	Automatically blocking the USB device if the authorization code is entered incorrectly the specified number of times. Valid values are 1 to 10. For example, if you allow five attempts to enter the authorization code, the application blocks the USB device after the fifth unsuccessful attempt. Kaspersky Endpoint Security displays the blocking duration for the USB device. After this time elapses, you will once again have five attempts to enter the authorization code.
Timeout when reaching the maximum number of attempts	USB device block duration after the specified number of unsuccessful attempts to enter the authorization code. Valid values are 1 to 180 (minutes).

AMSI Protection

The AMSI Protection component is intended to support Antimalware Scan Interface from Microsoft. *Antimalware Scan Interface (AMSI)* allows third-party applications with AMSI support to send objects (for example, PowerShell scripts) to Kaspersky Endpoint Security for an additional scan, and then receive the results from scanning these objects. Third-party applications may include, for example, Microsoft Office applications (see the figure below). For details on AMSI, please refer to the Microsoft documentation.

AMSI Protection can only detect a threat and notify a third-party application about the detected threat. A third-party application, after receiving a notification of a threat, does not allow the malicious actions (for example, it terminates the action).

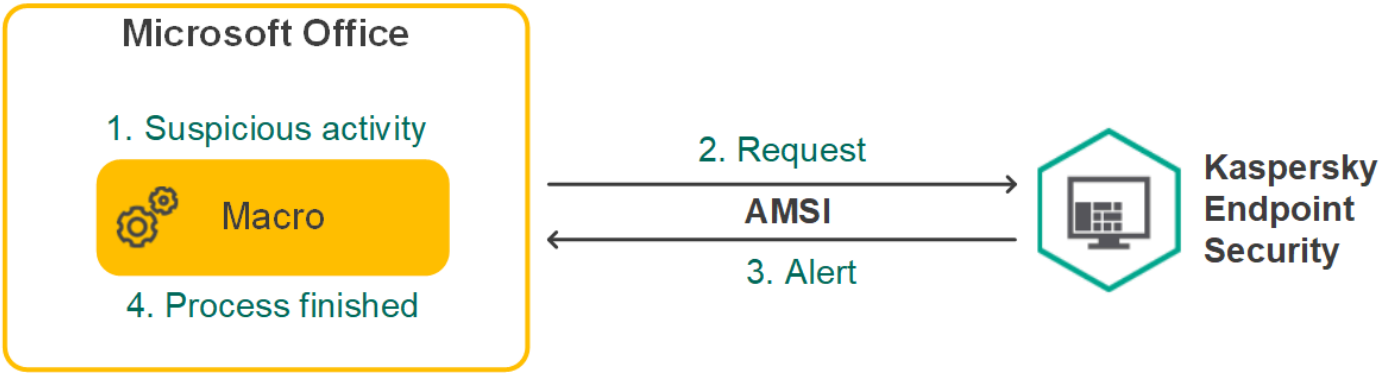

AMSI operation example

AMSI Protection component may decline a request from a third-party application, for example, if this application exceeds maximum number of requests within a specified interval. Kaspersky Endpoint Security sends information about a rejected request from a third-party application to the Administration Server. The AMSI Protection component does not deny requests from those third-party applications for which continuous integration with the AMSI Protection component is enabled.

AMSI Protection is available for the following operating systems for workstations and servers:

- Windows 10 Home / Pro / Pro for Workstations / Education / Enterprise / Enterprise multi-session
- Windows 11 Home / Pro / Pro for Workstations / Education / Enterprise / Enterprise multi-session
- Windows Server 2016 Essentials / Standard / Datacenter (including Server Core mode)
- Windows Server 2019 Essentials / Standard / Datacenter (including Server Core mode)
- Windows Server 2022 Standard / Datacenter / Datacenter: Azure Edition (including Server Core mode)
- Windows Server 2025 Standard / Datacenter

AMSI Protection settings

Parameter	Description
Scan archives	Scanning ZIP, GZIP, BZIP, RAR, TAR, ARJ, CAB, LHA, JAR, ICE, and other archives. The application scans archives not only by extension, but also by format. When checking archives, the application performs a recursive unpacking. This allows the detection of threats inside multi-level archives (an archive within an archive).
Scan distribution packages	Scanning distribution packages of third-party applications.

Parameter	Description
Scan files in Microsoft Office formats	Scans Microsoft Office files (DOC, DOCX, XLS, PPT and other Microsoft extensions). Office format files include OLE objects as well. The application scans office format files that are smaller than 1 MB, regardless of whether the check box is selected or not.
Do not unpack large compound files	If this check box is selected, the application does not scan compound files if their size exceeds the specified value. If this check box is cleared, the application scans compound files of all sizes. The application scans large files that are extracted from archives regardless of whether the check box is selected or not.

Exploit Prevention

The Exploit Prevention component detects program code that takes advantage of vulnerabilities on a computer to exploit administrator privileges or to perform malicious activities. For example, exploits can utilize a buffer overflow attack. To do so, the exploit sends a large amount of data to a vulnerable application. When processing this data, the vulnerable application executes malicious code. As a result of this attack, the exploit can start an unauthorized installation of malware. When there is an attempt to run an executable file from a vulnerable application that was not performed by the user, Kaspersky Endpoint Security blocks this file from running or notifies the user.

The Exploit Prevention component additionally monitors network ports for application processes that may threaten the security of the computer. The application gets information about such processes with anti-virus databases.

Exploit Prevention component settings

Parameter	Description
On detecting exploit	**Block**. If this item is selected, on detecting an exploit, Kaspersky Endpoint Security blocks the operations of this exploit and makes a log entry with information about this exploit. **Inform**. If this item is selected, when Kaspersky Endpoint Security detects an exploit it logs an entry containing information about the exploit and adds information about this exploit to the list of active threats.
Enable system process memory protection	If this toggle button is switched on, Kaspersky Endpoint Security blocks external processes that attempt to access system process memory.

Behavior Detection

The Behavior Detection component receives data on the actions of applications on your computer and provides this information to other protection components, to improve their performance. The Behavior Detection component utilizes Behavior Stream Signatures (BSS) for applications. If application activity matches a behavior stream signature, Kaspersky Endpoint Security performs the selected responsive action. The Kaspersky Endpoint Security functionality is based on behavior stream signatures and provides proactive defense for the computer.

The Behavior Detection component additionally monitors network ports for application processes that may threaten the security of the computer. The application gets information about such processes with anti-virus databases.

Behavior Detection component settings

Parameter	Description
Action on malware activity detection	**Delete**. If this option is selected, on detecting malicious activity Kaspersky Endpoint Security deletes the executable file of the malicious application and creates a backup copy of the file in Backup. **Block**. If this option is selected, on detecting malicious activity Kaspersky Endpoint Security terminates this application. **Inform**. If this option is selected and malicious activity of an application is detected, Kaspersky Endpoint Security does not terminate this application but adds information about the malicious activity of this application to the list of active threats.

Host Intrusion Prevention

The Host Intrusion Prevention component prevents applications from performing actions that may be dangerous for the operating system, and ensures control over access to operating system resources and personal data. The component provides computer protection with the help of anti-virus databases and the Kaspersky Security Network cloud service.

The component controls the operation of applications by using *application rights*. Application rights include the following access parameters:

- Access to operating system resources (for example, automatic startup options, registry keys)
- Access to personal data (for example, files and applications)

Network activity of applications is controlled by the Firewall component by using *network rules*.

During the first startup of the application, the Host Intrusion Prevention component performs the following actions:

1. Checks the security of the application by using downloaded anti-virus databases.
2. Checks the security of the application in Kaspersky Security Network.

   You are advised to participate in Kaspersky Security Network to help the Host Intrusion Prevention component work more effectively.

3. Places the application in one of the trust groups: *Trusted*, *Low Restricted*, *High Restricted*, *Untrusted*.

   A trust group defines the rights that Kaspersky Endpoint Security refers to when controlling application activity. Kaspersky Endpoint Security places an application in a trust group depending on the level of danger that this application may pose to the computer.

   Kaspersky Endpoint Security places an application in a trust group for the Firewall and Host Intrusion Prevention components. You cannot change the trust group only for Firewall or Host Intrusion Prevention.

   If you refused to participate in KSN or there is no network, Kaspersky Endpoint Security places the application in a trust group depending on the settings of the Host Intrusion Prevention component. After receiving the reputation of the application from KSN, the trust group can be changed automatically.

4. Blocks application actions depending on the trust group. For example, applications from the *High Restricted* trust group are denied access to the operating system modules.

The next time the application is started, Kaspersky Endpoint Security checks the integrity of the application. If the application is unchanged, the component uses the current application rights for it. If the application has been modified, Kaspersky Endpoint Security analyzes the application as if it were being started for the first time.

Parameter	Description
Application rights	Table of applications that are monitored by the Host Intrusion Prevention component. Applications are assigned to trust groups. A trust group defines the rights that Kaspersky Endpoint Security refers to when controlling application activity. You can select an application from a single list of all applications installed on computers under the influence of a policy and add the application to a trust group. Application access rights are presented in the following tables: • **Files and system registry**. Table of access rights for operating system resources and personal data for applications belonging to the trust group. • **Rights**. Table of access rights for processes and resources of the operating system for applications belonging to the trust group. • **Network rules**. Table of network rules for applications that are part of a trust group. In accordance with these rules, Firewall regulates the network activity of applications. The table displays the predefined network rules that are recommended by Kaspersky experts. These network rules have been added to optimally protect the network traffic of computers running Windows operating systems. It is not possible to delete the predefined network rules.
Protected resources	The table contains categorized computer resources. The Host Intrusion Prevention component monitors attempts by other applications to access resources in the table. A resource can be a registry category, file or folder, or registry key.
Trust group for applications started before Kaspersky Endpoint Security	A trust group in which Kaspersky Endpoint Security will place applications that are started before Kaspersky Endpoint Security.
Update rules for previously unknown applications from KSN	If the check box is selected, the Host Intrusion Prevention component updates rights for previously unknown applications by using the Kaspersky Security Network database.
Trust digitally signed applications	If this check box is selected, the Host Intrusion Prevention component places the applications with the digital signature of trusted vendors in the *Trusted* group. *Trusted vendors* are those software vendors that are trusted by Kaspersky. You can also add vendor certificate to the trusted certificate store manually. If this check box is cleared, the Host Intrusion Prevention component does not consider such applications to be trusted, and uses other parameters to determine their trust group.
Delete rules for applications that have not been started for longer than N days (from 1 to 90)	If the check box is selected, Kaspersky Endpoint Security automatically deletes information about the application (trust group and access rights) if the following conditions are met: • You manually put the application into a trust group or configured its access rights. • The application has not started within the defined period of time. If the trust group and rights of an application were determined automatically, Kaspersky Endpoint Security deletes information about this application after 30 days. It is not possible to change the storage term for application information or turn off automatic deletion. The next time you start this application, Kaspersky Endpoint Security analyzes the application as if it were starting for the first time.
Trust group for applications not included in other groups	Items in this drop-down list determine to which trust group Kaspersky Endpoint Security will assign an unknown application. You can choose one of the following items: • **Low Restricted**. • **High Restricted**. • **Untrusted**.

Remediation Engine

The Remediation Engine component lets Kaspersky Endpoint Security roll back actions that have been performed by malware in the operating system.

When rolling back malware activity in the operating system, Kaspersky Endpoint Security handles the following types of malware activity:

- **File activity**

Kaspersky Endpoint Security performs the following actions:

- Deletes executable files that were created by malware (on all media except network drives).
- Deletes executable files that were created by programs that have been infiltrated by malware.
- Restores files that have been modified or deleted by malware.

The file recovery feature has a number of limitations.

- **Registry activity**

  Kaspersky Endpoint Security performs the following actions:

  - Deletes registry keys that were created by malware.
  - Does not restore registry keys that have been modified or deleted by malware.

- **System activity**

  Kaspersky Endpoint Security performs the following actions:

  - Terminates processes that have been initiated by malware.
  - Terminates processes into which a malicious application has penetrated.
  - Does not resume processes that have been halted by malware.

- **Network activity**

  Kaspersky Endpoint Security performs the following actions:

  - Blocks the network activity of malware.
  - Blocks the network activity of processes that have been infiltrated by malware.

A rollback of malware actions can be started by the File Threat Protection or Behavior Detection component, or during a malware scan.

Rolling back malware operations affects a strictly defined set of data. Rollback has no adverse effects on the operating system or on the integrity of your computer data.

Kaspersky Security Network

To protect your computer more effectively, Kaspersky Endpoint Security uses data that is received from users around the globe. Kaspersky Security Network is designed for obtaining this data.

KSN functionality may not be available in the application in the U.S.

Kaspersky Security Network (KSN) is an infrastructure of cloud services providing access to the online Kaspersky Knowledge Base that contains information about the reputation of files, web resources, and software. The use of data from Kaspersky Security Network ensures faster responses by Kaspersky Endpoint Security to new threats, improves the performance of some protection components, and reduces the likelihood of false positives. If you are participating in Kaspersky Security Network, KSN services provide Kaspersky Endpoint Security with information about the reputation of scanned web addresses, as well as information about the category and reputation of scanned files. For more details on configuring access to KSN, refer to the Kaspersky Security Center Help.

Use of Kaspersky Security Network is voluntary. The application prompts you to use KSN during initial configuration of the application. Users can begin or discontinue participation in KSN at any time.

For more detailed information about sending Kaspersky statistical information that is generated during participation in KSN, and about the storage and destruction of such information, please refer to the Kaspersky Security Network Statement and the Kaspersky website. The ksn_<language ID>.txt file with the text of the Kaspersky Security Network Statement is included in the application distribution kit.

The infrastructure of Kaspersky reputation databases

Kaspersky Endpoint Security supports the following infrastructure solutions for working with Kaspersky reputation databases:

- *Kaspersky Security Network (KSN)* is the solution that is used by most Kaspersky applications. KSN participants receive information from Kaspersky and send Kaspersky information about objects detected on the user's computer to be analyzed additionally by Kaspersky analysts and to be included in the reputation and statistical databases.

- *Kaspersky Private Security Network (KPSN)* is a solution that enables users of computers hosting Kaspersky Endpoint Security or other Kaspersky applications to obtain access to Kaspersky reputation databases, and to other statistical data without sending data to Kaspersky from their own computers. KPSN is designed for corporate customers who are unable to participate in Kaspersky Security Network for any of the following reasons:

  - Local workstations are not connected to the Internet.

Transmission of any data outside the country or outside the corporate LAN is prohibited by law or restricted by corporate security policies.

Parameter	Description
Enable extended KSN mode	*Extended KSN mode* is a mode in which Kaspersky Endpoint Security sends additional data to Kaspersky. Kaspersky Endpoint Security uses KSN to detect threats regardless of the toggle position.
Enable cloud mode	*Cloud mode* refers to the application operating mode in which Kaspersky Endpoint Security uses a light version of anti-virus databases. Kaspersky Security Network supports the operation of the application when light anti-virus databases are being used. The light version of anti-virus databases lets you use approximately half of the computer RAM that would otherwise be used with the usual databases. If you do not participate in Kaspersky Security Network or if cloud mode is disabled, Kaspersky Endpoint Security downloads the full version of anti-virus databases from Kaspersky servers. If the toggle button is switched on, Kaspersky Endpoint Security uses the light version of anti-virus databases, which reduces the load on operating system resources. Kaspersky Endpoint Security downloads the light version of anti-virus databases during the next update after the check box was selected. If the toggle button is switched off, Kaspersky Endpoint Security uses the full version of anti-virus databases. Kaspersky Endpoint Security downloads the full version of anti-virus databases during the next update after the check box was cleared.
Computer status when KSN servers are unavailable *(available only in the Kaspersky Security Center Console)*	The items in this drop-down list determine the status of a computer in Kaspersky Security Center when KSN servers are unavailable.
Use Administration Server as a KSN proxy server *(available only in the Kaspersky Security Center Console)*	If the check box is selected, Kaspersky Endpoint Security uses the KSN Proxy service. You can configure the KSN Proxy service settings in the Administration Server properties.
Use Kaspersky Security Network servers if the KSN proxy server is unavailable *(available only in the Kaspersky Security Center Console)*	If the check box is selected, Kaspersky Endpoint Security uses KSN servers when the KSN Proxy service is unavailable. KSN servers may be located both on the side of Kaspersky and on the side of third parties (when Kaspersky Private Security Network is used).

Log Inspection

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations.

Log Inspection monitors the integrity of the protected environment based on the Windows event log analysis. When the application detects signs of atypical behavior in the system, it informs the administrator, as this behavior may indicate an attempted cyber attack.

Kaspersky Endpoint Security analyzes Windows event logs and detects violation in accordance with rules. The component includes predefined rules. Predefined rules are powered by heuristic analysis. You can also add your own rules (custom rules). When a rule triggers, the application creates an event with the *Critical* status (see figure below).

If you want to use Log Inspection, make sure the audit policy security settings are configured and the system is logging the relevant events (for details, see the Microsoft technical support website).

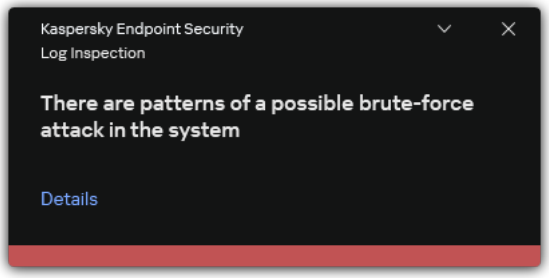

Log Inspection notification

Log Inspection settings

Parameter	Description
Predefined rules	List of Log Inspection rules. Predefined rules include templates of abnormal activity on the protected computer. Abnormal activity can signify an attempted attack.
Custom rules	List of Log Inspection rules added by the user. You can set your own Log Inspection rule triggering criteria. To do so, you must enter an event ID and select an event source. You can select an event source from among the standard logs: *Application*, *Security* or *System*. You can also specify the log of a third-party application.

Anti-Cryptor

The Anti-Cryptor component analyzes activity in shared folders. If this activity matches a behavior stream signature that is typical for external encryption, Kaspersky Endpoint Security performs the selected action.

Kaspersky Endpoint Security prevents external encryption of only those files that are located on media that have the NTFS file system and are not encrypted by the EFS system.

Parameter	Description
Exclusions by name or IP address	**Exclusions by name or IP address**. List of computers from which attempts to encrypt shared folders will not be monitored. To apply the list of exclusions of computers from protection of shared folders against external encryption, you must enable Audit Logon in the Windows security audit policy. Audit Logon is disabled by default. For more details about a Windows security audit policy, please visit the Microsoft website. **Exclusions by mask**. Protection scope exclusions. Excluding a folder from the protection scope can reduce the amount of false positives if your organization uses data encryption when exchanging files using shared folders. For example, Behavior Detection can raise false positives when the user works with files with the ENC extension in a shared folder. Such activity matches a behavioral pattern that is typical for external encryption. If you have encrypted files in a shared folder to protect data, add that folder to exclusions. Use masks: • The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders. • Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask. • The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.
Action on threat detection	• **Inform**. If this option is selected, on detecting an attempt to modify files in shared folders, Kaspersky Endpoint Security adds information about this attempt to the list of active threats, adds an entry to the local application interface reports, and sends information about the detected malicious activity to Kaspersky Security Center. • **Block connection for (min) N min**. If this option is selected, when Kaspersky Endpoint Security detects an attempt to modify files in shared folders, it blocks access to file modification for the session that initiated the malicious activity and creates backup copies of the modified files. If the Remediation Engine component is enabled and the **Block connection for (min) N min** option is selected, modified files are restored from backup copies.
Protection scope	The *protection scope* is a list of paths to shared folders in which Kaspersky Endpoint Security monitors file activity. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. By default, the application automatically identifies shared folders and monitors file activity in all folders.

Web Control

Web Control manages user access to web resources. This helps reduce traffic and inappropriate use of work time. When a user tries to open a website that is restricted by Web Control, Kaspersky Endpoint Security will block access or show a warning (see the figure below).

To use Web Control, you must complete the initial configuration of the application:

- For HTTPS traffic monitoring, enable encrypted connections scan (enabled by default).
- Select the ports that Kaspersky Endpoint Security must monitor (by default, the application monitors all ports).
- Select the applications whose traffic you want Kaspersky Endpoint Security to monitor. Most browsers are already present in the list of applications recommended by Kaspersky. If your browser is missing from the list, add it manually.
- We recommend to inject a web page interaction script into web traffic (by default, script injection is disabled). This script enables registration of Web Control events for the application event log, OS event log, and reports.

Methods for managing access to websites

Web Control lets you configure access to websites by using the following methods:

- **Website category**. Websites are categorized according to the Kaspersky Security Network cloud service, heuristic analysis, and the database of known websites (included in application databases). For example, you can restrict user access to the *Social networks* category or to other categories.

- **Data type**. You can restrict user access to data on a website, and hide images, for example. Kaspersky Endpoint Security determines the data type based on the file format and not based on its extension.

  > Kaspersky Endpoint Security does not scan files within archives. For example, if image files were placed in an archive, Kaspersky Endpoint Security identifies the *Archives* data type and not *Graphics*.

- **Individual address**. You can enter a web address or use masks.

You can simultaneously use multiple methods for regulating access to websites. For example, you can restrict access to the *Office applications files* data type just for the *Web-based email* website category.

Website access rules

Web Control manages users' access to websites by using *access rules*. You can configure the following advanced settings for a website access rule:

- Users to which the rule applies.

  For example, you can restrict Internet access through a browser for all users of the company except the IT department.

- Rule schedule.

  For example, you can restrict Internet access through a browser during working hours only.

Access rule priorities

Each rule has a priority. The higher a rule is on the list, the higher its priority. If a website has been added to multiple rules, Web Control regulates access to the website based on the rule with the highest priority. For example, Kaspersky Endpoint Security may identify a corporate portal as a social network. To restrict access to social networks and provide access to the corporate web portal, create two rules: one block rule for the *Social networks* website category and one allow rule for the corporate web portal. The access rule for the corporate web portal must have a higher priority than the access rule for social networks.

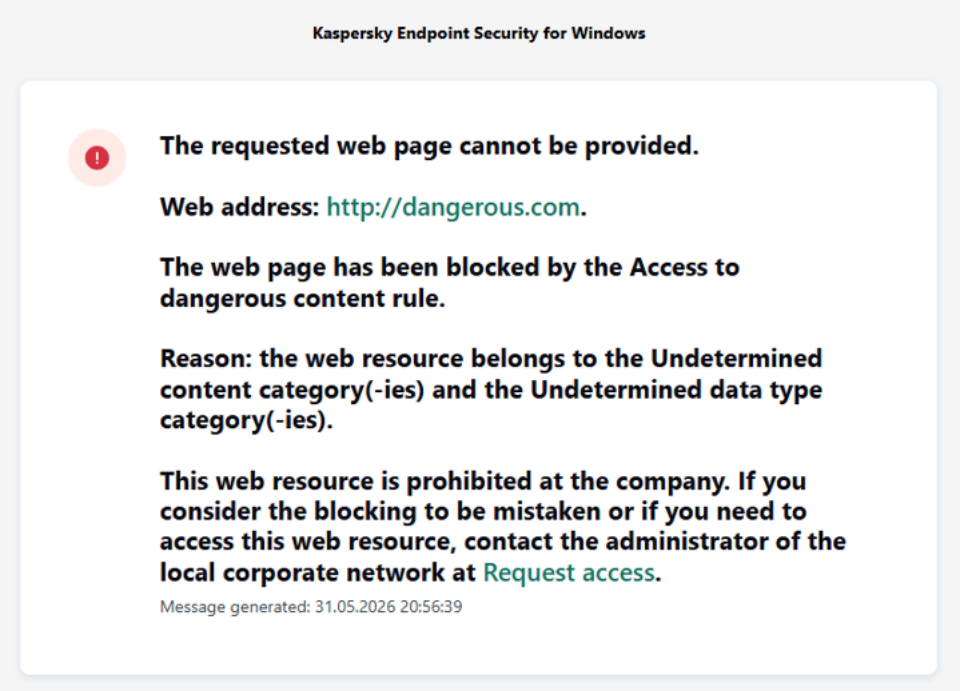

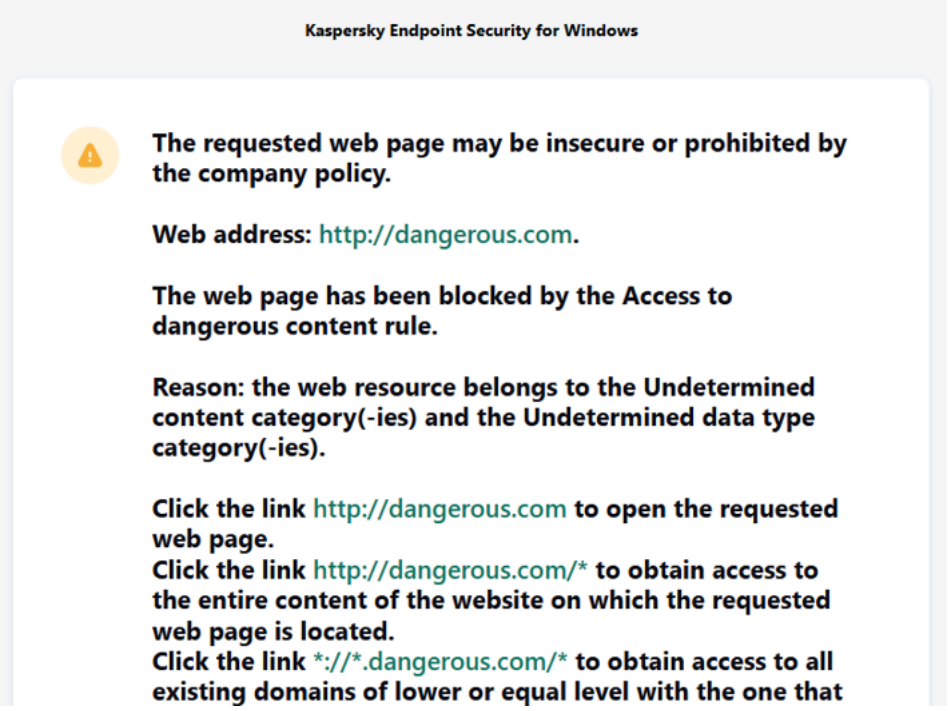

Web Control messages

Web Control component settings

Parameter	Description
Rules of access to web resources	List containing web resource access rules. Each rule has a priority. The higher a rule is on the list, the higher its priority. If a website has been added to multiple rules, Web Control regulates access to the website based on the rule with the highest priority.
Default rule	The *Default rule* is a rule for accessing web resources that are not covered by any other rule. The following options are available: • **Allow all except the rules list**, also known as denylist mode for prohibited websites. • **Deny everything except the rules list**, also known as allowlist mode for allowed websites.

Parameter	Description
Terminate active user browser sessions after the rule is applied	If the check box is selected, Web Control terminates the connection to blocked web resources immediately after the policy is applied. The browser immediately stops downloading data from the web page. When you refresh the web page or go to another prohibited web page, the application displays a warning. Web Control allows immediately disconnecting web resources only in web browsers. For other applications, Web Control only restricts new connections. If the check box is cleared, Web Control restricts only new connections to prohibited web resources. Web Control does not terminate active connections.
Templates	**Warning**. The entry field consists of a template of the message that is displayed if a rule for warning about attempts to access an unwanted web resource is triggered. **Message about blocking**. The entry field contains the template of the message that appears if a rule that blocks access to a web resource is triggered. **Message to administrator**. Template of the message to be sent to the LAN administrator if the user considers the block to be a mistake. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Web page access blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address. Special variables are provided for managing the message templates (for example, `%USER_NAME%`). Variables allow a single message template to be used for different computers.
Log the opening of allowed pages	Kaspersky Endpoint Security logs data on visits to all websites, including allowed websites. Kaspersky Endpoint Security sends events to Kaspersky Security Center, to the local log of Kaspersky Endpoint Security, and to the Windows Event log. To monitor user Internet activity, you need to configure the settings for saving events. Browsers that support the monitoring function: Microsoft Edge, Microsoft Internet Explorer, Google Chrome, Yandex Browser, Mozilla Firefox. User activity monitoring does not work in other browsers. Monitoring user Internet activity may require more computer resources when decrypting HTTPS traffic.

Device Control

Device Control manages user access to devices that are installed on or connected to a computer (for example, hard drives, cameras, or Wi-Fi modules). This lets you protect the computer from infection when such devices are connected, and prevent data loss or data leaks.

If Device Control is enabled, the application relays information about connected devices to Kaspersky Security Center. You can view the list of connected devices in Kaspersky Security Center in the **Advanced** → **Repositories** → **Hardware** folder.

Device access levels

Device Control controls access at the following levels:

- **Device type**. For example, printers, removable drives, and CD/DVD drives.

You can configure device access as follows:

- Allow – ✓.
- Block – ⊘.
- By rules (printers and portable devices only) – .
- Depends on connection bus (except Wi-Fi) – .
- Block with exceptions (Wi-Fi only) – .

- **Connection bus**. A *connection bus* is an interface used for connecting devices to the computer (for example, USB or FireWire). If **Depends on connection bus** mode is selected for the device type, the application allows or denies access to the device depending on the connection interface (e.g. USB).

  You can configure device access as follows:

  - Allow – ✓.
  - Block – ⊘.

- **Trusted devices**. *Trusted devices* are devices to which users that are specified in the trusted device settings have full access at all times.

  You can add trusted devices based on the following data:

  - **Devices by ID**. Each device has a unique identifier (Hardware ID, or HWID). You can view the ID in the device properties by using operating system tools. Example of a device ID: `SCSI\CDROM&VEN_NECVMWAR&PROD_VMWARE_SATA_CD00\5&354AE4D7&0&000000`. Adding devices by ID is convenient if you want to add several specific devices.
  - **Devices by model**. Each device has a Vendor ID (VID) and a Product ID (PID). You can view the IDs in the device properties by using operating system tools. Template for entering the VID and PID: `VID_1234&PID_5678`. Adding devices by model is convenient if you use devices of a certain model in your organization. This way, you can add all devices of this model.
  - **Devices by ID mask**. If you are using multiple devices with similar IDs, you can add devices to the trusted list by using masks. The `*` character replaces any set of characters. Kaspersky Endpoint Security does not support the `?` character when entering a mask. For example, `WDC_C*`.
  - **Devices by model mask**. If you are using multiple devices with similar VIDs or PIDs (for example, devices from the same manufacturer), you can add devices to the trusted list by using masks. The `*` character replaces any set of characters. Kaspersky Endpoint Security does not support the `?` character when entering a mask. For example, `VID_05AC&PID_*`.

Device Control regulates user access to devices by using *access rules*. Device Control also lets you save device connection/disconnection events. To save events, you need to configure the registration of events in a policy.

> If access to a device depends on the connection bus (the status), Kaspersky Endpoint Security does not save device connection/disconnection events. To enable Kaspersky Endpoint Security to save device connection/disconnection events, allow access to the corresponding type of device (the ✓ status) or add the device to the trusted list.

When a device that is blocked by Device Control is connected to the computer, Kaspersky Endpoint Security will block access and show a notification (see the figure below).

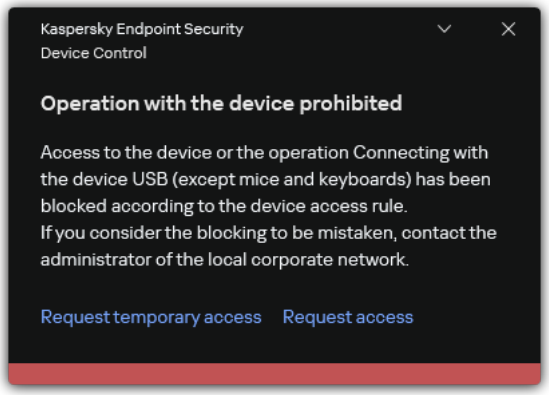

Device Control notification

Device Control operating algorithm

Kaspersky Endpoint Security makes a decision on whether to allow access to a device after the user connects the device to the computer (see the figure below).

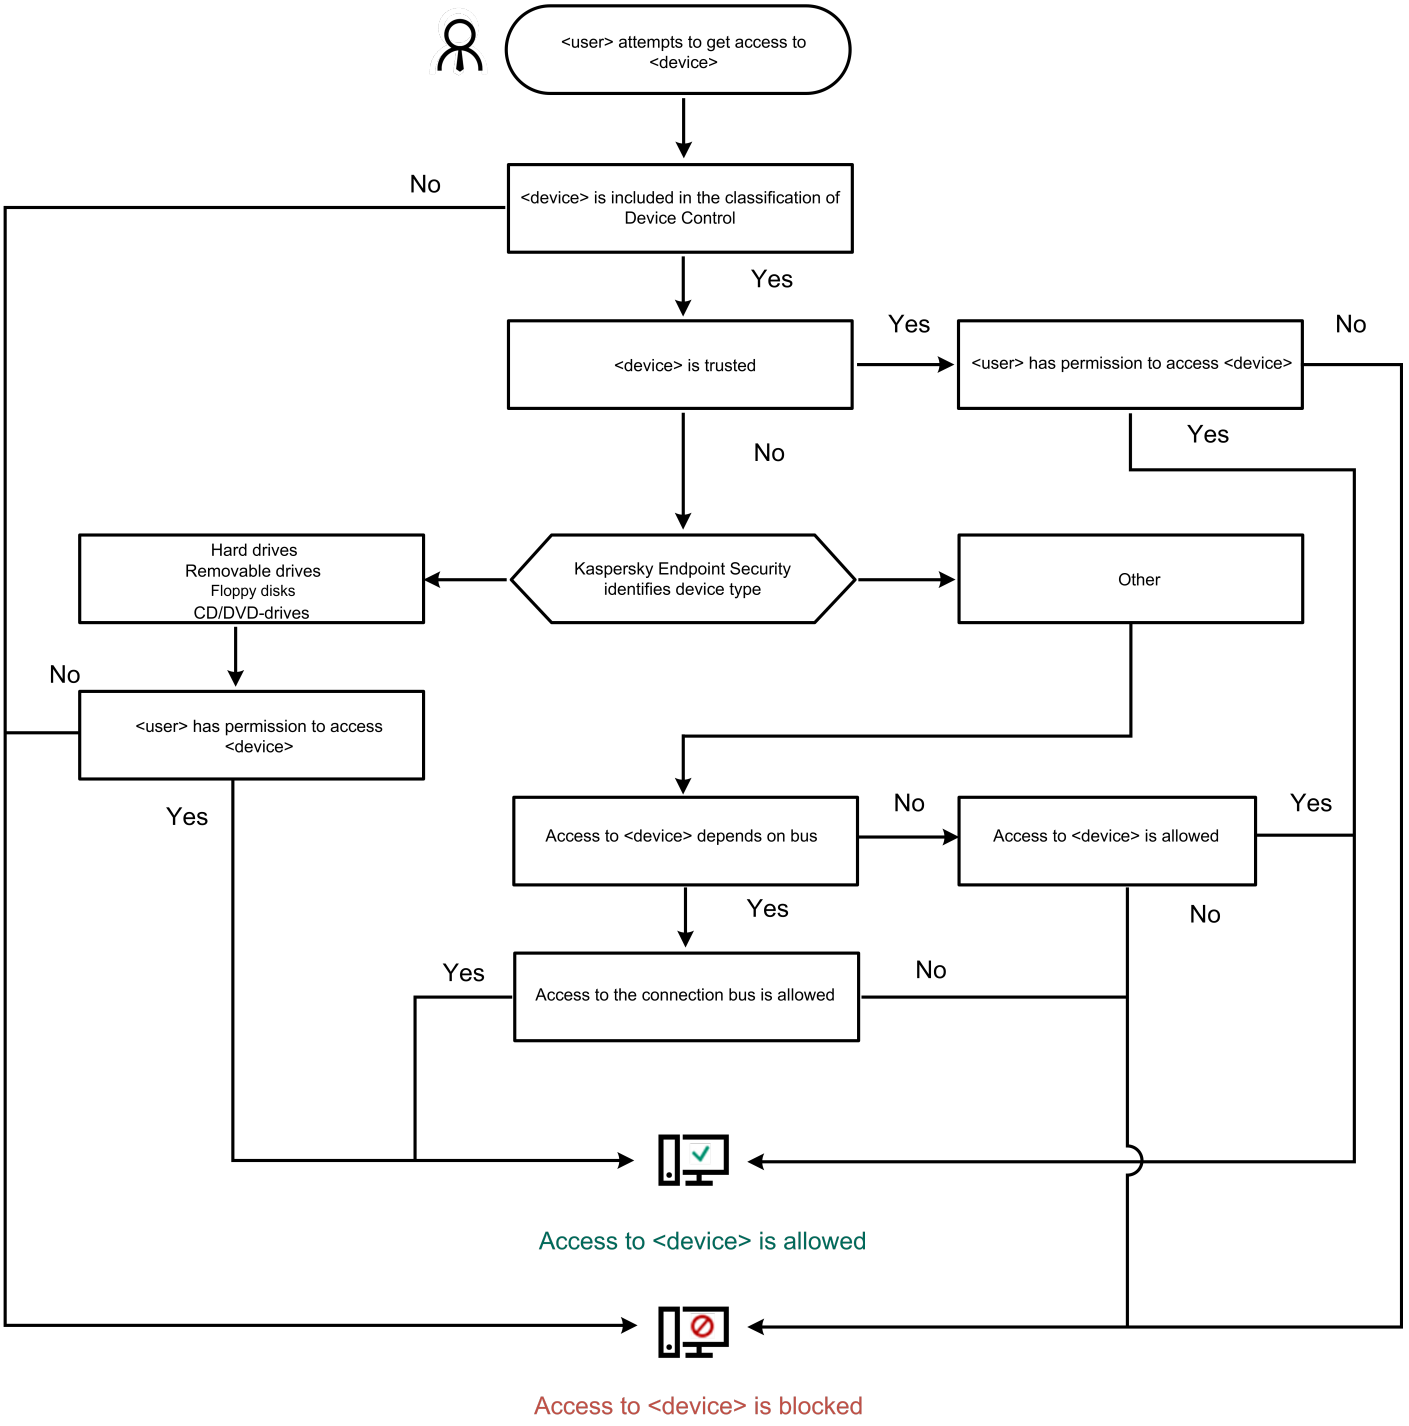

Device Control operating algorithm

If a device is connected and access is allowed, you can edit the access rule and block access. In this case, the next time someone attempts to access the device (such as to view the folder tree, or perform read or write operations), Kaspersky Endpoint Security blocks access. A device without a file system is blocked only the next time that the device is connected.

If a user of the computer with Kaspersky Endpoint Security installed must request access to a device that the user believes was blocked by mistake, send the user the request access instructions.

Device Control component settings

Parameter	Description
Allow requests for temporary access *(available only in the Kaspersky Security Center Console)*	If the check box is selected, the **Request access** button is available through the local interface of Kaspersky Endpoint Security. Using this button, the user can request temporary access to a blocked device.
Devices and Wi-Fi networks	This table contains all possible types of devices according to the classification of the Device Control component, including their respective access statuses.
Connection buses	A list of all available connection buses according to the Device Control component's classification, including their respective access statuses. Kaspersky Endpoint Security allows or denies access to devices depending on the type of connection bus if **Depends on connection bus** mode is selected.
Trusted devices	List of trusted devices and users who are granted access to these devices.
Merge values when inheriting *(available only in the Kaspersky Security Center Console)*	This merges the list of trusted devices in the parent and child policies of Kaspersky Security Center. To merge lists, the child policy must be configured to inherit the settings of the parent policy of Kaspersky Security Center. If the check box is selected, list items from the Kaspersky Security Center parent policy are displayed in child policies. This way you can, for example, create a consolidated list of trusted devices for the entire organization. Inherited list items in a child policy cannot be deleted or edited. Items on the list of trusted devices that are merged during inheritance can be deleted and edited only in the parent policy. You can add, edit or delete list items in lower-level policies. If items on lists of the child and parent policy match, these items are displayed as the same item of the parent policy. If the check box is not selected, list items are not merged when inheriting the settings of Kaspersky Security Center policies. This functionality also allows merging lists in policy profiles. To merge lists, in the highest-priority profile, enable the inheritance of settings from a lower-priority profile. For more details on policy profile priorities, please refer to the Kaspersky Security Center Help.
Anti-Bridging	Anti-Bridging inhibits the creation of network bridges by preventing the simultaneous establishment of multiple network connections for a computer. This lets you protect a corporate network from attacks over unprotected, unauthorized networks. Anti-Bridging blocks the establishment of multiple connections according to the priorities of devices. The higher a device is on the list, the higher its priority. If an active connection and a new connection are both of the same type (for example, Wi-Fi), Kaspersky Endpoint Security blocks the active connection and allows establishment of the new connection. If an active connection and a new connection are of different types (for example, a network adapter and Wi-Fi), Kaspersky Endpoint Security blocks the connection with the lower priority and allows the connection with the higher priority. Anti-Bridging supports operation with the following types of devices: network adapter, Wi-Fi, and modem.
Message templates	**Message about blocking**. Template of the message that appears when a user attempts to access a blocked device. This message also appears when a user attempts to perform an operation on the device contents that was blocked for this user. **Message to administrator**. A template of the message that is sent to the LAN administrator when the user believes that access to the device is blocked or an operation with device content is forbidden by mistake. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Device access blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address.

Application Control

Application Control manages the startup of applications on users' computers. This allows you to implement a corporate security policy when using applications. Application Control also reduces the risk of computer infection by restricting access to applications.

Configuring Application Control consists of the following steps:

1. Creating application categories.

   The administrator creates categories of applications that the administrator wants to manage. Categories of applications are intended for all computers in the corporate network, regardless of administration groups. To create a category, you can use the following criteria: KL category (for example, *Browsers* or another category), file hash, application vendor, and other criteria.

2. Creating Application Control rules.

   The administrator creates Application Control rules in the policy for the administration group. The rule includes the categories of applications and the startup status of applications from these categories: blocked or allowed. The administrator can create many rules. One application may match the criteria of multiple rules. The priority of a block rule is higher than the priority of an allow rule. Kaspersky Endpoint Security checks if an application matches a rule each time it is started. Kaspersky Endpoint Security sequentially matches the application against all Application Control rules.

3. Selecting the Application Control mode.

   The administrator chooses the mode for working with applications that are not included in any of the rules (application denylist and allowlist).

When a user attempts to start a prohibited application, Kaspersky Endpoint Security will block the application from starting and will display a notification (see the figure below).

A *test mode* is provided to check the configuration of Application Control. In this mode, Kaspersky Endpoint Security does the following:

- Allows the startup of applications, including prohibited ones.
- Shows a notification about the startup of a prohibited application and adds information to the report on the user's computer.
- Sends data about the startup of prohibited applications to Kaspersky Security Center.

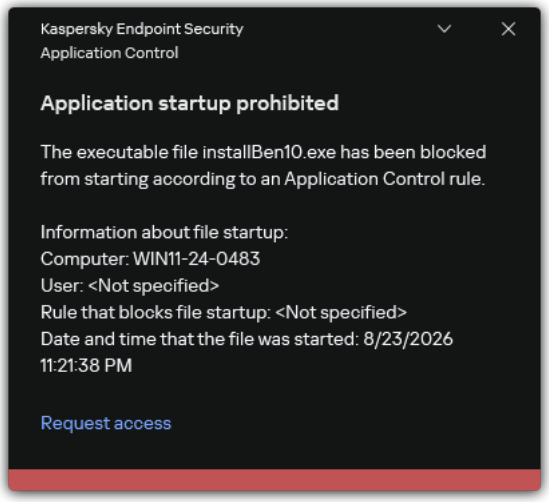

Application Control notification

Application Control operating modes

The Application Control component operates in two modes:

- **Denylist**. In this mode, Application Control allows users to start all applications except for applications that are prohibited in Application Control rules.

  This mode of Application Control is enabled by default.

- **Allowlist**. In this mode, Application Control blocks users from starting any applications except for applications that are allowed and not prohibited in Application Control rules.

  If the allow rules of Application Control are fully configured, the component blocks the startup of all new applications that have not been verified by the LAN administrator, while allowing the operation of the operating system and of trusted applications that users rely on in their work.

  You can read the recommendations on configuring Application Control rules in allowlist mode.

Application Control can be configured to operate in these modes both by using the Kaspersky Endpoint Security local interface and by using Kaspersky Security Center.

However, Kaspersky Security Center offers tools that are not available in the Kaspersky Endpoint Security local interface, such as the tools that are needed for the following tasks:

- Creating application categories.

  Application Control rules created in the Kaspersky Security Center Administration Console are based on your custom application categories and not on inclusion and exclusion conditions as is the case in the Kaspersky Endpoint Security local interface.

- Receiving information about applications that are installed on corporate LAN computers.

This is why it is recommended to use Kaspersky Security Center to configure the operation of the Application Control component.

Application Control operating algorithm

Kaspersky Endpoint Security uses an algorithm to make a decision about starting an application (see the figure below).

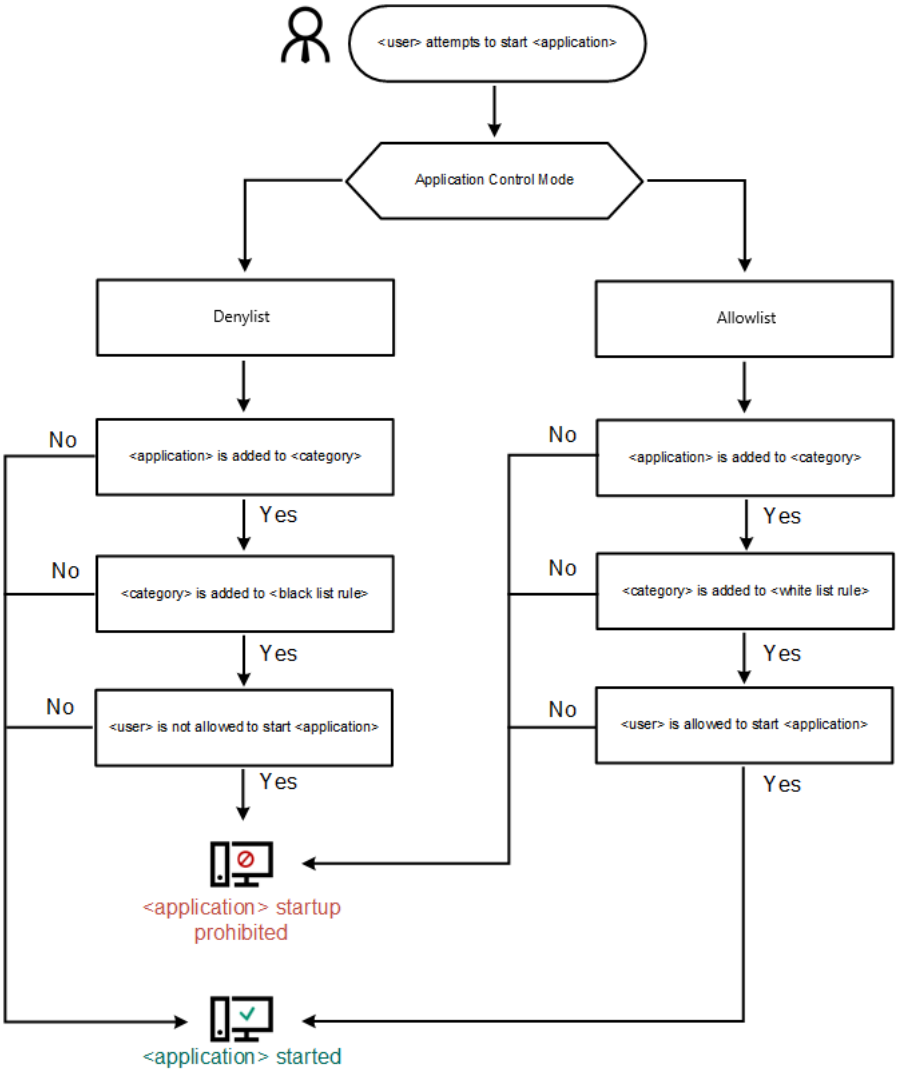

Application Control operating algorithm

Parameter	Description
Action on starting applications blocked by rules	**Apply rules**. Kaspersky Endpoint Security manages the startup of applications according to the selected mode. **Test rules**. Kaspersky Endpoint Security allows the startup of an application that is blocked in the current Application Control mode, but logs information about the application startup in the report.
Application Startup Control mode	You can choose one of the following options: • **Denylist**. If this option is selected, Application Control allows all users to start any application, except in cases that satisfy the conditions of Application Control block rules. • **Allowlist**. If this option is selected, Application Control blocks all users from starting any application, except in cases that satisfy the conditions of Application Control allow rules. When **Allowlist** mode is selected, two Application Control rules are automatically created: • **Golden Image**. • **Trusted Updaters**. You cannot edit the settings of or delete automatically created rules. You can enable or disable these rules.
Monitor loading of DLL modules	If the check box is selected, Kaspersky Endpoint Security controls the loading of DLL modules when users attempt to start applications. Information about the DLL module and the application that loaded this DLL module is logged in the report. When enabling control over the loading of DLL modules and drivers, make sure that one of the following rules is enabled in the Application Control settings: the default **Golden Image** rule or another rule that contains the "**Golden Image\Trusted Certificates**" KL category and ensures that trusted DLL modules and drivers are loaded before Kaspersky Endpoint Security is started. Enabling control of the loading of DLL modules and drivers when the **Golden Image** rule is disabled may cause instability in the operating system. Kaspersky Endpoint Security monitors only the DLL modules and drivers that have been loaded since the check box was selected. After selecting the check box, it is recommended to restart the computer to ensure that the application monitors all DLL modules and drivers, including those loaded before Kaspersky Endpoint Security starts.
Use strict digital signature verification	You can select a certificate as a triggering condition for an Application Control rule. If this check box is selected, Kaspersky Endpoint Security applies rules to applications signed with certificates only from the trusted system certificate store. Applications signed with such a certificate are also considered trusted by the protection components, for example, the *Malware Scan* task. However, if you specify a certificate from a different store in an Application Control rule, Kaspersky Endpoint Security does not apply such a rule. If the check box is cleared, Kaspersky Endpoint Security applies rules to applications signed by a certificate from the Windows Trusted Root Certificate Store. Such applications are not part of the trusted zone. Protection components monitor the activity of such applications.
Templates of messages about application blocking	**Message about blocking**. Template of the message that is displayed when an Application Control rule that blocks an application from starting is triggered. **Message to administrator**. Template of the message that a user can send to the corporate LAN administrator if the user believes that an application was blocked by mistake. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Application startup blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address.

Adaptive Anomaly Control

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers.

The Adaptive Anomaly Control component monitors and blocks actions that are not typical of the computers in a company's network. Adaptive Anomaly Control uses a set of rules to track non-typical behavior (for example, the *Start of Microsoft PowerShell from office application* rule). Rules are created by Kaspersky specialists based on typical scenarios of malicious activity. You can configure how Adaptive Anomaly Control handles each rule and, for example, allow the execution of PowerShell scripts that automate certain workflow tasks. Kaspersky Endpoint Security updates the set of rules along with the application databases. Updates to the sets of rules must be confirmed manually.

Adaptive Anomaly Control settings

Configuring Adaptive Anomaly Control consists of the following steps:

1. Training Adaptive Anomaly Control.

   After you enable Adaptive Anomaly Control, its rules work in *training mode*. During the training, Adaptive Anomaly Control monitors rule triggering and sends triggering events to Kaspersky Security Center. Each rule has its own duration of the training mode. The duration of the training mode is set by Kaspersky experts. Normally, the training mode is active for two weeks.

   If a rule is not triggered at all during the training, Adaptive Anomaly Control will consider the actions associated with this rule as non-typical. Kaspersky Endpoint Security will block all actions associated with that rule.

   If a rule was triggered during training, Kaspersky Endpoint Security logs events in the rule triggering report and the **Rule triggers in Smart Training state** repository.

2. Analyzing the rule triggering report.

   The administrator analyzes the rule triggering report or the contents of the **Rule triggers in Smart Training state** repository. Then the administrator can select the behavior of Adaptive Anomaly Control when the rule is triggered: either block or allow. The administrator can also continue to monitor how the rule works and extend the duration of the training mode. If the administrator does not take any action, the application will also continue to work in training mode. The training mode term is restarted.

Adaptive Anomaly Control is configured in real time via the following channels:

- Adaptive Anomaly Control automatically starts to block actions associated with the rules that were never triggered in training mode.
- Kaspersky Endpoint Security adds new rules or removes obsolete ones.
- The administrator configures the operation of the Adaptive Anomaly Control after reviewing the rule triggering report and the contents of the **Rule triggers in Smart Training state** repository. We recommend checking the report about rules triggering and the contents of the **Rule triggers in Smart Training state** storage.

When a malicious application attempts to perform an action, Kaspersky Endpoint Security will block the action and display a notification (see figure below).

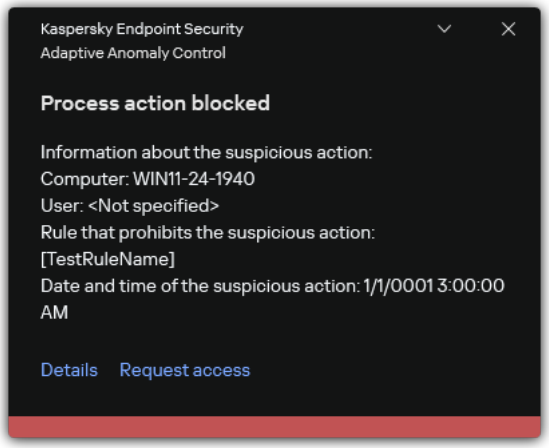

Adaptive Anomaly Control notification

Adaptive Anomaly Control operating algorithm

Kaspersky Endpoint Security decides whether to allow or block an action that is associated with a rule based on the following algorithm (see the figure below).

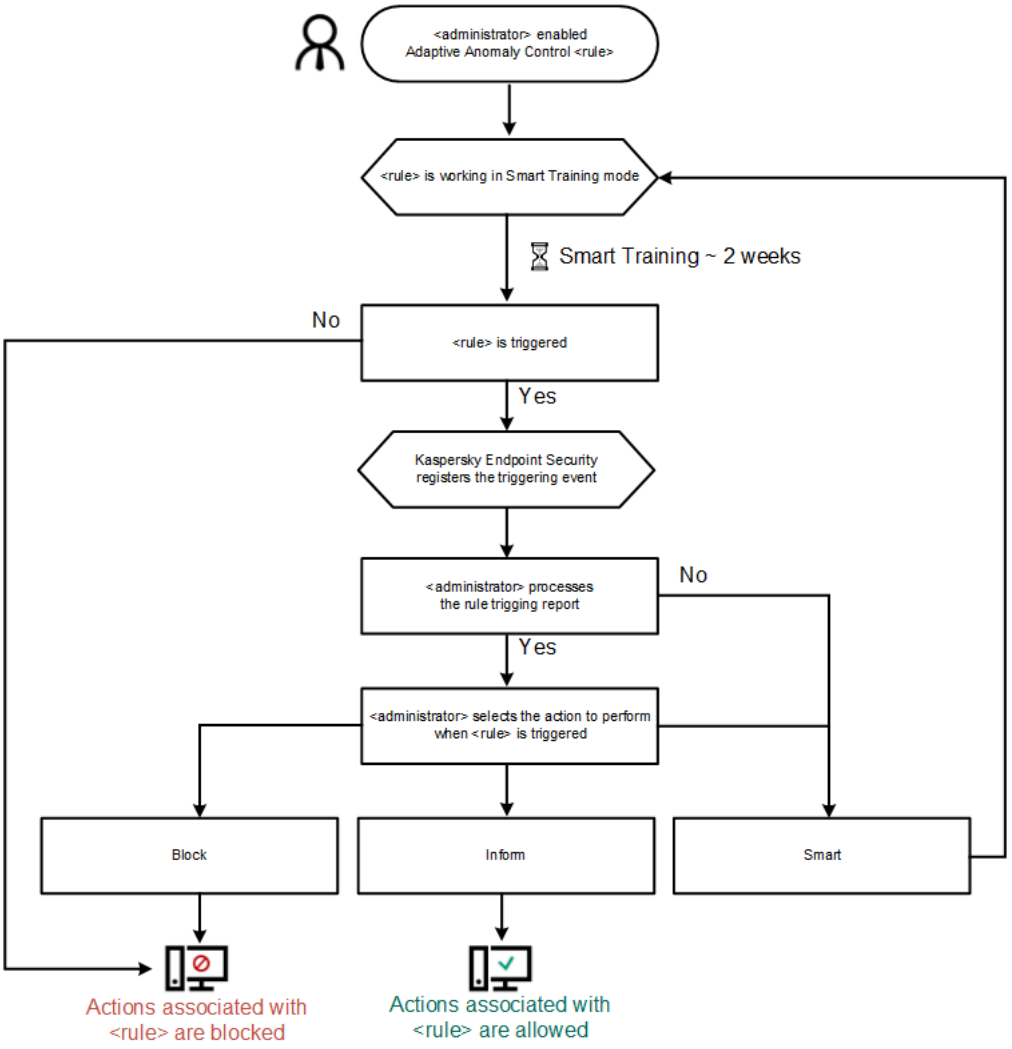

Adaptive Anomaly Control operating algorithm

Parameter	Description
Report on Adaptive Anomaly Control rules state *(available only in the Kaspersky Security Center Console)*	This report contains information about the status of Adaptive Anomaly Control detection rules (for example, the *Disabled* or *Block*). The report is generated for all administration groups.
Report on triggered Adaptive Anomaly Control rules *(available only in the Kaspersky Security Center Console)*	This report contains information about non-typical actions detected by using Adaptive Anomaly Control. The report is generated for all administration groups.
Rules	Adaptive Anomaly Control table of rules. Rules are created by Kaspersky specialists based on typical scenarios of malicious activity.
Templates	**Message about blocking**. Template of the message that is displayed to a user when an Adaptive Anomaly Control rule that blocks a non-typical action is triggered. **Message to administrator**. Template of the message that a user can be sent to the local corporate network administrator if the user considers the blocking to be a mistake. After the user requests to provide access, Kaspersky Endpoint Security sends an event to Kaspersky Security Center: **Application activity blockage message to administrator**. The event description contains a message to administrator with substituted variables. You can view these events in the Kaspersky Security Center console using the predefined event selection **User requests**. If your organization does not have Kaspersky Security Center deployed or there is no connection to the Administration Server, the application will send a message to administrator to the specified email address.

System Integrity Monitoring

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations.

Starting with version 12.6, Kaspersky Endpoint Security for Windows includes the System Integrity Monitoring component instead of the File Integrity Monitor component. System Integrity Monitoring component includes all functionality of File Integrity Monitor and additionally allows to monitor registry changes and connection of external devices.

The System Integrity Monitoring component monitors changes in the operating system that may indicate computer security breaches. When such changes are detected, Kaspersky Endpoint Security generates corresponding events and alerts the administrator. System Integrity Monitoring can operate in real-time mode and can also perform system integrity checks on demand.

Real-Time System Integrity Monitoring

In real-time mode, System Integrity Monitoring tracks changes in objects that you included in the component's scope (the *monitoring scope*). System Integrity Monitoring also allows blocking unauthorized access to such objects in real time.

On-Demand System Integrity Check

On-Demand System Integrity Check is a task that you can run manually or on a schedule. To run the *System Integrity Check* task, you must configure the scope of the component (the *monitoring scope*) and create a baseline. A *baseline* is a recorded state of objects in the system, which the application uses as reference when comparing to the current state.

System Integrity Monitoring settings

Parameter	Description
Operating mode for blocking rules	• **Block**. In this mode, System Integrity Monitoring blocks actions with files and registry keys from the monitoring scope, and generates a corresponding event. • **Inform**. In this mode, System Integrity Monitoring allows actions with files and registry keys from the monitoring scope, and generates a corresponding event.
Real-Time System Integrity Monitoring	In real-time mode, System Integrity Monitoring tracks changes in objects that you included in the component's scope (the *monitoring scope*). System Integrity Monitoring also allows blocking unauthorized access to such objects in real time.
Monitor devices	System Integrity Monitoring monitors connection and disconnection of external devices.
Monitor files and the registry	System Integrity Monitoring monitors changes to files, folders, and registry.
System Integrity Check	On-Demand System Integrity Check is a task that you can run manually or on a schedule. To run the *System Integrity Check* task, you must configure the scope of the component (the *monitoring scope*) and create a baseline. A *baseline* is a recorded state of objects in the system, which the application uses as reference when comparing to the current state.

Endpoint Sensor

Endpoint Sensor is not included in Kaspersky Endpoint Security 11.4.0.

You can manage the Endpoint Sensor in the Kaspersky Security Center Web Console and in the Kaspersky Security Center Administration Console. It is not possible to manage Endpoint Sensor in the Kaspersky Security Center Cloud Console.

Endpoint Sensor is designed to interact with Kaspersky Anti Targeted Attack Platform. *Kaspersky Anti Targeted Attack Platform* is a solution designed for timely detection of sophisticated threats such as targeted attacks, advanced persistent threats (APT), zero-day attacks, and others. Kaspersky Anti Targeted Attack Platform includes three functional units:

- Kaspersky Anti Targeted Attack Platform (*KATA*)
- Kaspersky Endpoint Detection and Response (*EDR (KATA)*)
- Network Detection and Response (*NDR (KATA)*)

You can purchase all functional units or individual functional units separately. For details about the solution, please refer to the Kaspersky Anti Targeted Attack Platform Help.

Managing Endpoint Sensor has the following limitations:

- You can configure Endpoint Sensor settings in a policy provided that Kaspersky Endpoint Security version 11.0.0 to 11.3.0 is installed on the computer. For more information about configuring Endpoint Sensor settings using the policy, refer to the help articles for the previous versions of Kaspersky Endpoint Security.
- If Kaspersky Endpoint Security version 11.4.0 and later is installed on the computer, you cannot configure Endpoint Sensor settings in the policy.

Endpoint Sensor is installed on client computers. On these computers, the component constantly monitors processes, active network connections, and files that are modified. Endpoint Sensor relays information to the KATA server.

The component functionality is available under the following operating systems:

- Windows 7 Service Pack 1 Home / Professional / Enterprise;
- Windows 8.1.1 Professional / Enterprise;
- Windows 10 RS3 Home / Professional / Education / Enterprise;
- Windows 10 RS4 Home / Professional / Education / Enterprise;
- Windows 10 RS5 Home / Professional / Education / Enterprise;
- Windows 10 RS6 Home / Professional / Education / Enterprise;
- Windows Server 2008 R2 Foundation / Standard / Enterprise (64-bit);
- Windows Server 2012 Foundation / Standard / Enterprise (64-bit);
- Windows Server 2012 R2 Foundation / Standard / Enterprise (64-bit);
- Windows Server 2016 Essentials / Standard (64-bit).

For detailed information on KATA operation, refer to the Kaspersky Anti Targeted Attack Platform Help.

Sandbox

Kaspersky Endpoint Security for Windows includes a built-in agent for integration with Kaspersky Sandbox solution. The *Sandbox* component detects and automatically blocks advanced threats on computers. Sandbox analyzes object behavior to detect malicious activity and activity characteristic of targeted attacks on the IT infrastructure of the organization. Sandbox analyzes and scans objects on special servers with deployed virtual images of Microsoft Windows operating systems (the Sandbox servers). For details about the solution, please refer to the Kaspersky Sandbox Help and Kaspersky Anti Targeted Attack Platform Help.

Starting with version 12.7, Kaspersky Endpoint Security for Windows supports the Sandbox component that is part of the Kaspersky Anti Targeted Attack Platform solution. In contrast to the Kaspersky Sandbox solution, the KATA Sandbox component allows scanning files not only automatically, but also manually from the file context menu.

KATA Sandbox requires Kaspersky Anti Targeted Attack Platform 7.0 or later to be deployed.

The component can be managed only using the Kaspersky Security Center Web Console. You cannot manage this component using the Administration Console (MMC).

Sandbox component settings

Parameter	Description
Integration mode	**Kaspersky Sandbox**. Integration with Kaspersky Sandbox solution. The application sends files to be scanned in Kaspersky Sandbox only in automatic mode. **KATA Sandbox**. Integration with the Sandbox component of the Kaspersky Anti Targeted Attack Platform solution. You can select the file submission mode for scanning: • **Manually**. The user manually submits the file for scanning from the context menu (**Send to Sandbox**). • **Automatically**. The application automatically detects objects and submits them to Sandbox for scanning. • **Combined**.
Server connection settings	**Timeout (msec)**. Connection timeout for the Sandbox server (for Kaspersky Sandbox) or Central Node server (for KATA). After the configured timeout elapses, Kaspersky Endpoint Security sends a request to the next server. You can increase the connection timeout for the server if your connection speed is low or if the connection is unstable. The recommended request timeout is 0.5 seconds or less. **Request queue**. Size of the request queue folder. When sending multiple objects for scanning in Sandbox, Kaspersky Endpoint Security creates a request queue. By default, the size of the request queue folder is limited to 100 MB. After the maximum size is reached, Sandbox stops adding new requests to the queue and sends the corresponding event to Kaspersky Security Center. You can configure the size of the request queue folder depending on your server configuration. **Server TLS certificate**. To configure a trusted connection with the Sandbox server (for Kaspersky Sandbox) or Central Node server (for KATA), you must prepare a TLS certificate. You must then add the certificate to the computer by using a policy. You also need to add the certificate to the Sandbox server (for Kaspersky Sandbox) or Central Node server (for KATA). **Use two-way authentication** (only for KATA Sandbox). Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.
Connection to Sandbox servers	**Kaspersky Sandbox**. Sandbox server connection settings. The servers use deployed virtual images of Microsoft Windows operating systems to run objects that need to be scanned. You can enter an IP address (IPv4 or IPv6) or a fully qualified domain name. **KATA Sandbox**. Central Node server connection settings. Central Node chooses optimal settings for scanning and balances load between Sandbox servers.
Action on threat detection	**Move copy to Quarantine, delete object**. If this option is selected, Kaspersky Endpoint Security deletes the malicious object found on the computer. Before deleting the object, Kaspersky Endpoint Security creates a backup copy in case the object needs to be restored later. Kaspersky Endpoint Security moves the backup copy to Quarantine. **Run Critical Areas Scan**. If this option is selected, Kaspersky Endpoint Security runs the *Critical Areas Scan* task. By default, Kaspersky Endpoint Security scans the kernel memory, running processes, and disk boot sectors. **Create IOC Scan task**. If this option is selected, Kaspersky Endpoint Security automatically creates the *IOC Scan (autonomous IOC scan task)*. For this task, you can configure the run mode, scan scope, and action on IOC detection (*Move copy to Quarantine, delete object* or *Run Critical Areas Scan*). To modify other settings of the *IOC Scan* task, go to the task settings.
IOC Scan scope	**Critical file areas**. If this option is selected, Kaspersky Endpoint Security does an IOC scan only in critical file areas of the computer: kernel memory and boot sectors. **File areas on system drive of the computer**. If this option is selected, Kaspersky Endpoint Security does an IOC scan on the system drive of the computer.
Run IOC Scan task	**Manually**. Run mode in which you can start the *IOC Scan* task manually at a time when it is convenient for you. **Automatically**. Run mode in which Kaspersky Endpoint Security runs the *IOC Scan* task automatically after a threat is detected. **Run only when the computer is idle**. Run mode in which Kaspersky Endpoint Security runs the *IOC Scan* task if the screensaver is active or the screen is locked. If the user unlocks the computer, Kaspersky Endpoint Security pauses the task. This means that the task can take several days to complete.

Managed Detection and Response

Kaspersky Endpoint Security for Windows supports integration with the Managed Detection and Response solution. The *Kaspersky Managed Detection and Response (MDR)* solution automatically detects and analyzes security incidents in your infrastructure. To do so, MDR uses telemetry data received from endpoints and machine learning. MDR sends incident data to Kaspersky experts. The experts can then process the incident and, for example, add a new entry to Anti-Virus databases. Alternatively, the experts can issue recommendations on processing the incident and, for example, suggest isolating computer from the network. For detailed information about how the solution works, please refer to the Kaspersky Managed Detection and Response Help.

Managed Detection and Response settings

Parameter	Description
MDR configuration file	The BLOB file contains the client ID and information about the license for Kaspersky Managed Detection and Response. The BLOB file is located inside the ZIP archive of the MDR configuration file. You can obtain the ZIP archive in the Kaspersky Managed Detection and Response Console. For detailed information about a BLOB file, please refer to the Kaspersky Managed Detection and Response Help.

Endpoint Detection and Response

Kaspersky Endpoint Security for Windows includes a built-in agent for the Kaspersky Endpoint Detection and Response Optimum solution (hereinafter also "EDR Optimum"). Starting with version 11.8.0, Kaspersky Endpoint Security for Windows includes a built-in agent for the Kaspersky Endpoint Detection and Response Expert solution (hereinafter also "EDR Expert"). *Kaspersky Endpoint Detection and Response* is a range of solutions for protecting the corporate IT infrastructure from advanced cyber threats. The functionality of the solutions combines automatic detection of threats with the ability to react to these threats to counteract advanced attacks including new exploits, ransomware, fileless attacks, as well as methods using legitimate system tools. EDR Expert offers more threat monitoring and response functionality than EDR Optimum. For details about the solutions, see the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.

Kaspersky Endpoint Detection and Response reviews and analyses threat development and provides *security personnel* or the *Administrator* with information about the potential attack that is necessary for a timely response. Kaspersky Endpoint Detection and Response displays alert details in a separate window. An *alert* is an event in the corporate IT infrastructure that the application has identified as unusual or suspicious and that can pose a security threat for the corporate IT infrastructure. *Alert Details* is a tool for viewing the entirety of collected information about a detected threat. Alert details include, for example, the history of files appearing on the computer. For details about managing alert details, refer to the Kaspersky Endpoint Detection and Response Optimum Help and the Kaspersky Endpoint Detection and Response Expert Help.

You can configure the Endpoint Detection and Response Optimum component in Web Console and Cloud Console. The Endpoint Detection and Response Expert (cloud) component settings are available only in Cloud Console.

Parameter	Description
Enable advanced system activity logging	Extended telemetry improves the accuracy of IOC detection, but uses more resources of the computer. We recommend enabling extended telemetry on the computer for retrospective IOC scanning. *Retrospective IOC Scan* is a mode of the *IOC Scan* task in which Kaspersky Endpoint Security scans for indicators of compromise using data for a certain time period. This mode is intended for searching indicators of compromise by the telemetry of the protected computer such as network activity, processes, files, and other telemetry. If extended telemetry is disabled, Kaspersky Endpoint Security may rotate the information about detected indicators of compromise.
Network Isolation	Automatic isolation of the computer from the network in response to detected threats. When network isolation is turned on, the application severs all active connections and blocks all new TCP/IP connections on the computer. The application leaves only the following connections active: • Connections listed in Network isolation exclusions. • Connections initiated by Kaspersky Endpoint Security services. • Connections initiated by the Kaspersky Security Center Network Agent.
Automatically unlock isolated device in (hours)	Network isolation can be turned off automatically after a specified time or manually. By default, Kaspersky Endpoint Security turns off Network isolation 5 hours after the start of the isolation.
Network isolation exclusions	List of rules for exclusions from network isolation. Network connections that match the rules are not blocked on computers when Network isolation is turned on. To configure Network isolation exclusions, you can use a list of *standard network profiles*. By default, exclusions include network profiles containing rules that ensure uninterrupted operation of devices with the DNS/DHCP server and DNS/DHCP client roles. You can also modify the settings of standard network profiles or define exclusions manually. Exclusions specified in policy properties are applied only if Network isolation is turned on automatically in response to a detected threat. Exclusions specified in computer properties are applied only if Network isolation is turned on manually in computer properties in the Kaspersky Security Center console or in alert details.
Execution Prevention	Control the execution of executable files and scripts and opening of office format files. For example, you can prevent the execution of applications that are considered insecure on the selected computer. Execution prevention supports a set of office file extensions and a set of script interpreters. To use Execution prevention component, you need to add execution prevention rules. *Execution prevention rule* is a set of criteria that the application takes into account when reacting to an object execution, for example when blocking object execution. The application identifies files by their paths or checksums calculated using MD5 and SHA256 hashing algorithms.
Action on execution or opening of forbidden object	**Block and add to event log**. In this mode, the application blocks the execution of objects or opening of documents that match prevention rule criteria. The application also publishes an event about attempts to execute objects or open documents to the Windows event log and Kaspersky Security Center event log. **Add to event log**. In this mode, Kaspersky Endpoint Security publishes an event about attempts to run executable objects or open documents that match prevention rule criteria to the Windows event log and Kaspersky Security Center, but does not block the attempt to run or open the object or document. This mode is selected by default.
Execution prevention rules	*Execution prevention rule* is a set of criteria that the application takes into account when reacting to an object execution, for example when blocking object execution. The application identifies files by their paths or checksums calculated using MD5 and SHA256 hashing algorithms.
Cloud Sandbox	*Cloud Sandbox* is a technology that lets you detect advanced threats on a computer. Kaspersky Endpoint Security automatically forwards detected files to Cloud Sandbox for analysis. Cloud Sandbox runs these files in an isolated environment to identify malicious activity and decides on their reputation. Data on these files is then sent to Kaspersky Security Network. Therefore, if Cloud Sandbox has detected a malicious file, Kaspersky Endpoint Security will perform the appropriate action to eliminate this threat on all computers where this file is detected. Cloud Sandbox technology is permanently enabled and is available to all Kaspersky Security Network users regardless of the type of license they are using. If this check box is selected, Kaspersky Endpoint Security will enable the counter for threats detected using Cloud Sandbox in the main application window under **Threat detection technologies**. Kaspersky Endpoint Security will also indicate the Cloud Sandbox threat detection technology in application events and in the *Report on threats* in the Kaspersky Security Center console.

Endpoint Detection and Response Expert (on-premises)

Endpoint Detection and Response Expert (on-premises)

Kaspersky Endpoint Security for Windows supports integration with the Kaspersky Endpoint Detection and Response Expert (on-premises) solution. *Kaspersky Endpoint Detection and Response Expert (on-premises)* is an enterprise cybersecurity solution that includes Kaspersky applications that allow an organization to defend against most types of cyber risks and cover the most important threat propagation scenarios. EDR Expert (on-premises) components are deployed on the Open Single Management Platform (OSMP). This platform runs cross-platform scenarios in a single interface and allows integrating Kaspersky applications with third-party applications into a comprehensive security system.

One of the central elements of the solution is *SIEM*. SIEM tracks events coming from all components and correlates these events with each other using vendor and user-defined rules. EDR Expert (on-premises) looks at logs and telemetry received from the corporate infrastructure to automatically detect attacks and allows investigating incidents using a unified investigation graph which combines all events collected in EDR Expert (on-premises), including events from Kaspersky applications and third-party information security products.

For response to advanced incidents, EDR Expert (on-premises) uses preset and user-defined scenarios. You can also use response actions from third-party applications and response scenarios that involve multiple applications.

Endpoint Detection and Response (KATA)

Kaspersky Endpoint Security for Windows supports working with the Kaspersky Endpoint Detection and Response component as part of the Kaspersky Anti Targeted Attack Platform (EDR (KATA)) solution. *Kaspersky Anti Targeted Attack Platform* is a solution designed for timely detection of sophisticated threats such as targeted attacks, advanced persistent threats (APT), zero-day attacks, and others. Kaspersky Anti Targeted Attack Platform includes three functional units:

- Kaspersky Anti Targeted Attack Platform (*KATA*)
- Kaspersky Endpoint Detection and Response (*EDR (KATA)*)
- Network Detection and Response (*NDR (KATA)*)

You can purchase all functional units or individual functional units separately. For details about the solution, please refer to the Kaspersky Anti Targeted Attack Platform Help.

Kaspersky Endpoint Security is installed on individual computers on the corporate IT infrastructure and continuously monitors processes, open network connections, and files being modified. Information about events on the computer (telemetry data) is sent to the Kaspersky Anti Targeted Attack Platform server. In this case, Kaspersky Endpoint Security also sends information to the Kaspersky Anti Targeted Attack Platform server about threats discovered by the application as well as information about processing results for these threats.

The EDR (KATA) and NDR (KATA) integration is configured in the Kaspersky Security Center console. The built-in agent is then managed using the Kaspersky Anti Targeted Attack Platform console, including running tasks, managing quarantined objects, viewing reports, and other actions.

Parameter	Description
Connection to telemetry collection servers	A *telemetry collection server* is a server that is part of a SIEM solution that collects, normalizes, correlates, analyzes, and stores information about events occurring on the computer. Configure the following to connect to the telemetry collection servers (KUMA): • **Timeout (sec)**. Maximum server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different server. • **Server certificate**. TLS certificate for establishing a trusted connection with the server. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). • **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the server. To use two-way authentication, you need to enable two-way authentication in the server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). After configuring the server settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container. The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.
Address and **Port** (telemetry collection servers)	Settings for connecting to telemetry collection servers. You can enter an IP address (IPv4 or IPv6). You can add multiple telemetry collection server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.
Send telemetry to telemetry collection servers	This functionality lets you completely turn off the sending of telemetry to the KATA server. For example, if you are using Kaspersky Anti Targeted Attack Platform together with another solution which also uses telemetry, you can turn off telemetry sending for KATA (EDR). This lets you optimize server load for these solutions. If you have the Managed Detection and Response solution and KATA (EDR) deployed, you can use MDR telemetry and create Threat Response tasks in KATA (EDR). • **Send telemetry with IOA only**. This allows optimizing telemetry and sending only telemetry with IOA. *Indicator of Attack (IOA)* is a rule that contains a description of suspicious behavior in the system that may indicate a targeted attack. The application compares ongoing behavior in the system with these rules and logs events that are indicative of a targeted attack. The application uses the *streaming scan* technology, which allows real time tracking of such events. • **Maximum event transmission delay (sec)**. The application synchronizes with the server to send events after the synchronization interval expires. The default setting is 30 seconds. • **Limit the number of event packets per transmission**. The application synchronizes with the server when the buffer is filled with events. The default setting is 1024 events. This function allows disabling the buffering of events before synchronization with the server.
Enable request throttling	This feature helps optimize the load on the server. If this functionality is enabled, the application restricts the event transmission. If the number of events exceeds the configured limits, Kaspersky Endpoint Security stops sending events. Configure telemetry settings: • **Maximum number of events per hour**. The application analyzes the telemetry data stream and restricts the sending of events if the event stream exceeds the configured events-per-hour limit. Kaspersky Endpoint Security resumes sending events after an hour. The default setting is 3000 events per hour. If the application is installed on a server, the telemetry data stream is higher. For servers, it is recommended to increase the value to 60 000 events per hour. • **Percentage of event limit excess**. The application sorts events by type (for example, "changes in the registry" events) and restricts transmission of events if the ratio of events of the same type to the total number of events exceeds the configured limit in percent. Kaspersky Endpoint Security resumes sending events when the ratio of other events to the total number of events becomes big enough again. The default setting is 15 %.
Send sync request to server every (min)	Frequency of synchronization requests sent to the server. During synchronization, Kaspersky Endpoint Security sends information about modified application settings and tasks.

Parameter	Description
Connection to response servers	A *response server* is a server for receiving and scanning data, studying the behavior of objects, and publishing the results of such studies. Configure the following for the response servers connection: • **Timeout (sec)**. Maximum server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different server. • **Server certificate**. TLS certificate for establishing a trusted connection with the server. You can get a TLS certificate on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). • **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the server. To use two-way authentication, you need to enable two-way authentication in the server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container on the Open Single Management Platform (see instructions in the Kaspersky Endpoint Detection and Response Expert (on-premises) Help). After configuring the server settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container.
Address and **Port** (response servers)	Settings for connecting to response servers. You can enter an IP address (IPv4 or IPv6). You can add multiple telemetry collection server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

Endpoint Detection and Response (KATA) settings

Parameter	Description
Send sync request to server every (min)	Frequency of synchronization requests sent to the server. During synchronization, Kaspersky Endpoint Security sends information about modified application settings and tasks.
Connection to KATA servers	Configure the following for the Central Node server connection: • **Timeout (sec)**. Maximum Central Node server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different Central Node server. • **Server certificate**. TLS certificate for establishing a trusted connection with the Central Node server. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). • **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container. The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.
Address and **Port** (KATA servers)	Settings for connecting to Kaspersky Anti Targeted Attack Platform servers. Enter the IP address (IPv4 or IPv6) and port of the Central Node server to connect. You can add multiple Central Node server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.
Send telemetry to KATA	This functionality lets you completely turn off the sending of telemetry to the KATA server. For example, if you are using Kaspersky Anti Targeted Attack Platform together with another solution which also uses telemetry, you can turn off telemetry sending for KATA (EDR). This lets you optimize server load for these solutions. If you have the Managed Detection and Response solution and KATA (EDR) deployed, you can use MDR telemetry and create Threat Response tasks in KATA (EDR). Configure telemetry settings: • **Maximum event transmission delay (sec)**. The application synchronizes with the server to send events after the synchronization interval expires. The default setting is 30 seconds. • **Maximum number of event packages**. The application synchronizes with the server when the buffer is filled with events. The default setting is 1024 events.

Parameter	Description
Enable request throttling	This feature helps optimize the load on the server. If this functionality is enabled, the application restricts the event transmission. If the number of events exceeds the configured limits, Kaspersky Endpoint Security stops sending events. Configure telemetry settings: • **Maximum number of events per hour**. The application analyzes the telemetry data stream and restricts the sending of events if the event stream exceeds the configured events-per-hour limit. Kaspersky Endpoint Security resumes sending events after an hour. The default setting is 3000 events per hour. If the application is installed on a server, the telemetry data stream is higher. For servers, it is recommended to increase the value to 60 000 events per hour. • **Percentage of event limit excess**. The application sorts events by type (for example, "changes in the registry" events) and restricts transmission of events if the ratio of events of the same type to the total number of events exceeds the configured limit in percent. Kaspersky Endpoint Security resumes sending events when the ratio of other events to the total number of events becomes big enough again. The default setting is 15 %.

Network Detection and Response (KATA)

Kaspersky Endpoint Security for Windows supports working with the Kaspersky Network Detection and Response component as part of the Kaspersky Anti Targeted Attack Platform (EDR (KATA)) solution. *Kaspersky Anti Targeted Attack Platform* is a solution designed for timely detection of sophisticated threats such as targeted attacks, advanced persistent threats (APT), zero-day attacks, and others. Kaspersky Anti Targeted Attack Platform includes three functional units:

- Kaspersky Anti Targeted Attack Platform (*KATA*)
- Kaspersky Endpoint Detection and Response (*EDR (KATA)*)
- Network Detection and Response (*NDR (KATA)*)

You can purchase all functional units or individual functional units separately. For details about the solution, please refer to the Kaspersky Anti Targeted Attack Platform Help.

Kaspersky Endpoint Security is installed on individual computers on the corporate IT infrastructure and continuously monitors processes, open network connections, and files being modified. Information about events on the computer (telemetry data) is sent to the Kaspersky Anti Targeted Attack Platform server. In this case, Kaspersky Endpoint Security also sends information to the Kaspersky Anti Targeted Attack Platform server about threats discovered by the application as well as information about processing results for these threats.

The EDR (KATA) and NDR (KATA) integration is configured in the Kaspersky Security Center console. The built-in agent is then managed using the Kaspersky Anti Targeted Attack Platform console, including running tasks, managing quarantined objects, viewing reports, and other actions.

Network Detection and Response (KATA) parameters

Parameter	Description
Server connection settings	**Timeout (sec)**. Maximum Central Node server response timeout. When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different Central Node server. **Server TLS certificate**. TLS certificate for establishing a trusted connection with the Central Node server. You can get a TLS certificate in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). **Use two-way authentication**. Two-way authentication when establishing a secure connection between Kaspersky Endpoint Security and the Central Node server. To use two-way authentication, you need to enable two-way authentication in the Central Node server settings, then get a crypto-container and set a password to protect the crypto-container. A *crypto-container* is a PFX archive with a certificate and a private key. You can get a crypto-container in the Kaspersky Anti Targeted Attack Platform console (see instructions in the Kaspersky Anti Targeted Attack Platform Help). After configuring the Central Node settings, you need to also enable two-way authentication in Kaspersky Endpoint Security settings and load a password-protected crypto-container. The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.

Parameter	Description
Address and **Port**	Settings for connecting to Kaspersky Anti Targeted Attack Platform servers. Enter the IP address (IPv4 or IPv6) and port of the Central Node server to connect. You can add multiple Central Node server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.
Send sync request to NDR server every (min)	Frequency of synchronization requests sent to the server. During synchronization, Kaspersky Endpoint Security sends information about modified application settings and tasks.
Maximum event transmission delay (sec)	The application synchronizes with the server to send events after the synchronization interval expires. The default setting is 30 seconds.
Enable request throttling	This feature helps optimize the load on the server. If this functionality is enabled, the application restricts the event transmission. If the number of events exceeds the configured limits, Kaspersky Endpoint Security stops sending events.
Maximum number of events per hour	The application analyzes the telemetry data stream and restricts the sending of events if the event stream exceeds the configured events-per-hour limit. Kaspersky Endpoint Security resumes sending events after an hour. The default setting is 3000 events per hour. If the application is installed on a server, the telemetry data stream is higher. For servers, it is recommended to increase the value to 60 000 events per hour.
Percentage of event limit excess	The application sorts events by type (for example, "changes in the registry" events) and restricts transmission of events if the ratio of events of the same type to the total number of events exceeds the configured limit in percent. Kaspersky Endpoint Security resumes sending events when the ratio of other events to the total number of events becomes big enough again. The default setting is 15 %.

KUMA Integration

Kaspersky Endpoint Security for Windows supports the Kaspersky Unified Monitoring and Analysis Platform solution. *Kaspersky Unified Monitoring and Analysis Platform (KUMA)* is a security information and event management (SIEM) solution for the IT infrastructure of organizations. KUMA allows detecting, analyzing, and mitigating security threats before they can cause harm.

KUMA integration settings

Parameter	Description
Maximum delay when sending events (sec)	The application synchronizes with the server to send events after the synchronization interval expires. The default setting is 30 seconds.
Connection to KUMA servers	**Timeout (sec)**. Maximum time to wait for a response from the KUMA server (be default, the value is 5 seconds). When the timeout runs out, Kaspersky Endpoint Security tries to connect to a different KUMA server. **Server certificate**. TLS certificate for establishing a trusted connection with the KUMA server. You can get a TLS certificate in the Kaspersky Unified Monitoring and Analysis Platform console (see instructions in the Kaspersky Unified Monitoring and Analysis Platform Help). To establish a trusted connection, in the KUMA console, in tcp connector settings, you must select the **With verification** TLS mode (see the settings for the tcp type connector in the Kaspersky Unified Monitoring and Analysis Platform Help). **Use two-way authentication**. Two-way authentication when establishing a secure connection between KES and KUMA. To use two-way authentication, in the KUMA console, in the connector settings, you must select the **Custom PFX with client authentication** TLS mode (see the connector settings in the Kaspersky Unified Monitoring and Analysis Platform Help). Then you must download a server certificate and set a password to protect the cryptocontainer. The crypto-container must be password-protected. It is not possible to add a crypto-container with a blank password.
KUMA servers	Connection to Kaspersky Unified Monitoring and Analysis Platform servers settings. You can enter an IP address (IPv4 or IPv6). You can add multiple KUMA server addresses. Kaspersky Endpoint Security attempts to connect to the server using the first IP address. If a connection cannot be established, Kaspersky Endpoint Security tries to connect using the second IP address in the list and so on.

Full Disk Encryption

You can select an encryption technology: Kaspersky Disk Encryption or BitLocker Drive Encryption (hereinafter also referred to as simply "BitLocker").

Kaspersky Disk Encryption

Kaspersky Disk Encryption is not supported on Arm-based computers.

After the system hard drives have been encrypted, at the next computer startup the user must complete authentication using the Authentication Agent before the hard drives can be accessed and the operating system is loaded. This requires entering the password of the token or smart card connected to the computer, or the user name and password of the Authentication Agent account created by the local area network administrator using the *Manage Authentication Agent accounts* task. These accounts are based on Microsoft Windows accounts under which users log into the operating system. You can also use Single Sign-On (SSO) technology, which lets you automatically log in to the operating system using the user name and password of the Authentication Agent account.

User authentication in the Authentication Agent can be performed in two ways:

- Enter the name and password of the Authentication Agent account created by the LAN administrator using Kaspersky Security Center tools.
- Enter the password of a token or smart card connected to the computer.

  Use of a token or smart card is available only if the computer hard drives were encrypted using the AES256 encryption algorithm. If the computer hard drives were encrypted using the AES56 encryption algorithm, addition of the electronic certificate file to the command will be denied.

BitLocker Drive Encryption

BitLocker is an encryption technology built into Windows operating systems. Kaspersky Endpoint Security allows you to control and manage Bitlocker by using the Kaspersky Next infrastructure. BitLocker encrypts logical volumes. BitLocker cannot be used for the encryption of removable drives. For more details on BitLocker, refer to the Microsoft documentation.

When encrypting the disk, BitLocker puts the boot loader and other auxiliary files in the system partition. This partition is not encrypted. The operating system creates the system partition automatically during the installation of Windows. If the disk is fully partitioned before installing Windows, the operating system cannot create a system partition. In this case, when you start BitLocker disk encryption, the operating system prompts you to repartition the disk and create a system partition. After creating a system partition, the operating system starts BitLocker encryption.

BitLocker provides secure storage of access keys by using a trusted platform module. A *Trusted Platform Module* (TPM) is a microchip developed to provide basic functions related to security (for example, to store encryption keys). A Trusted Platform Module is usually installed on the computer motherboard and interacts with all other system components via the hardware bus. Using TPM is the safest way to store BitLocker access keys, since TPM provides pre-startup system integrity verification. You can still encrypt drives on a computer without a TPM. In this case, the access key will be encrypted with a password. BitLocker uses the following authentication methods:

- TPM.
- TPM and PIN.
- Password.

After encrypting the system hard drive, the user needs to go through BitLocker authentication to boot the operating system. After authentication, BitLocker allows the user to log in. BitLocker does not support single sign-on technology (SSO).

After encrypting a drive, BitLocker creates a recovery key. Kaspersky Endpoint Security sends the recovery key to Kaspersky Security Center so that you can restore access to the disk, for example, if a user has forgotten their password.

If a user encrypts a disk using BitLocker, Kaspersky Endpoint Security will send the recovery key and information about disk encryption to Kaspersky Security Center.

If you are using Windows group policies, turn off BitLocker management in the policy settings. Windows policy settings may conflict with Kaspersky Endpoint Security policy settings. When encrypting a drive, errors may occur.

Kaspersky Disk Encryption component settings

Parameter	Description
Encryption mode	**Encrypt all hard drives**. If this option is selected, the application encrypts all hard drives when the policy is applied. If the computer has several operating systems installed, after encryption you will be able to load only the operating system that has the application installed. **Decrypt all hard drives**. If this option is selected, the application decrypts all previously encrypted hard drives when the policy is applied. **Leave unchanged**. If this item is selected, the application leaves drives in their previous state when the policy is applied. If the drive was encrypted, it remains encrypted. If the drive was decrypted, it remains decrypted. This item is selected by default.
During encryption, automatically create Authentication Agent accounts for Windows users	If this check box is selected, the application creates Authentication Agent accounts based on the list of Windows user accounts on the computer. By default, Kaspersky Endpoint Security uses all local and domain accounts with which the user logged in to the operating system over the past 30 days.

Parameter	Description
Authentication Agent account creation settings	**All accounts on the computer**. All accounts on the computer that have been active at any time. **All domain accounts on the computer**. All accounts on the computer that belong to some domain and that have been active at any time. **All local accounts on the computer**. All local accounts on the computer that have been active at any time. **Service account with a one-time password**. The service account is necessary to gain access to the computer, for example, when the user forgets the password. You can also use the service account as a reserve account. You must enter the name of the account (by default, `ServiceAccount`). Kaspersky Endpoint Security creates a password automatically. You can find the password in the Kaspersky Security Center console. **Local administrator**. Kaspersky Endpoint Security creates an Authentication Agent user account for the local administrator of the computer. **Computer manager**. Kaspersky Endpoint Security creates an Authentication Agent user account for the account of the computer manager. You can see which account has the computer manager role in computer properties in Active Directory. By default, the computer manager role is not defined, that is, it does not correspond to any account. **Active account**. Kaspersky Endpoint Security automatically creates an Authentication Agent account for the account that is active at the time of disk encryption.
Automatically create Authentication Agent accounts for all users of this computer upon sign-in	If this check box is selected, the application checks information about Windows user accounts on the computer before starting Authentication Agent. If Kaspersky Endpoint Security detects a Windows user account that has no Authentication Agent account, the application will create a new account for accessing encrypted drives. The new Authentication Agent account will have the following default settings: password-protected sign-on only, and password change on first authentication. Therefore, you do not need to manually add Authentication Agent accounts using the *Manage Authentication Agent accounts* task for computers with already encrypted drives.
Save user name entered in Authentication Agent	If the check box is selected, the application saves the name of the Authentication Agent account. You will not be required to enter the account name the next time you attempt to complete authorization in the Authentication Agent under the same account.
Encrypt used disk space only (reduces encryption time)	This check box enables / disables the option that limits the encryption area to only occupied hard drive sectors. This limit lets you reduce encryption time. Enabling or disabling the **Encrypt used disk space only (reduces encryption time)** feature after starting encryption does not modify this setting until the hard drives are decrypted. You must select or clear the check box before starting encryption. If the check box is selected, only portions of the hard drive that are occupied by files are encrypted. Kaspersky Endpoint Security automatically encrypts new data as it is added. If the check box is cleared, the entire hard drive is encrypted, including residual fragments of previously deleted and modified files. This option is recommended for new hard drives whose data has not been modified or deleted. If you are applying encryption on a hard drive that is already in use, it is recommended to encrypt the entire hard drive. This ensures protection of all data, even deleted data that is potentially recoverable. By default, the check box is cleared.
Use Legacy USB Support (not recommended)	This check box enables or disables the Legacy USB Support functionality. *Legacy USB Support* **is** a BIOS/UEFI function that allows you to use USB devices (such as a security token) during the computer's boot phase before starting the operating system (BIOS mode). Legacy USB Support does not affect support for USB devices after the operating system is started. If the check box is selected, support for USB devices during initial startup of the computer will be enabled. When the Legacy USB Support function is enabled, the Authentication Agent in BIOS mode does not support working with tokens via USB. It is recommended to use this option only when there is a hardware compatibility issue and only for those computers on which the problem occurred.
Password settings	Authentication Agent account password strength settings. When using Single Sign-on technology, the Authentication Agent ignores the password strength requirements specified in Kaspersky Security Center. You can set the password strength requirements in the operating system settings.

Parameter	Description
Use Single Sign-On (SSO) technology	SSO technology makes it possible to use the same account credentials to access encrypted hard drives and to sign in to the operating system. If the check box is selected, you must enter the account credentials for accessing encrypted hard drives and then automatically logging in to the operating system. If the check box is cleared, to access encrypted hard drives and subsequently log into the operating system you must separately enter the credentials for accessing encrypted hard drives and the operating system user account credentials.
Wrap third-party credential providers	Kaspersky Endpoint Security supports the third-party credential provider ADSelfService Plus. When working with third-party credential providers, Authentication Agent intercepts the password before the operating system is loaded. This means that a user needs to enter a password only once when signing in to Windows. After signing in to Windows, the user can utilize the capabilities of a third-party credential provider for authentication in corporate services, for example. Third-party credential providers also allow users to independently reset their own password. In this case, Kaspersky Endpoint Security will automatically update the password for Authentication Agent. If you are using a third-party credential provider that is not supported by the application, you may encounter some limitations in Single Sign-On technology operation.
Help	**Authentication**. Help text that appears in the Authentication Agent window when entering account credentials. **Change password**. Help text that appears in the Authentication Agent window when changing the password for the Authentication Agent account. **Recover password**. Help text that appears in the Authentication Agent window when recovering the password for the Authentication Agent account.

BitLocker Drive Encryption component settings

Parameter	Description
Encryption mode	**Encrypt all hard drives**. If this option is selected, the application encrypts all hard drives when the policy is applied. If the computer has several operating systems installed, after encryption you will be able to load only the operating system that has the application installed. **Decrypt all hard drives**. If this option is selected, the application decrypts all previously encrypted hard drives when the policy is applied. **Leave unchanged**. If this item is selected, the application leaves drives in their previous state when the policy is applied. If the drive was encrypted, it remains encrypted. If the drive was decrypted, it remains decrypted. This item is selected by default.
Enable use of BitLocker authentication requiring pre-boot keyboard input on tablets	Using authentication that requires data input in a preboot environment, even if the platform does not have the capability for preboot input (for example, with touchscreen keyboards on tablets). The touchscreen of tablet computers is not available in the preboot environment. To complete BitLocker authentication on tablet computers, the user must connect a USB keyboard, for example. If the check box is selected, use of authentication requiring preboot input is allowed. We recommend using this setting only for devices that have alternative data input tools in a preboot environment, such as a USB keyboard in addition to touchscreen keyboards. If the check box is cleared, BitLocker Drive Encryption is not possible on tablets.
Use hardware encryption (Windows 8 and later versions)	If the check box is selected, the application applies hardware encryption. This lets you increase the speed of encryption and use fewer computer resources.

Parameter	Description
Encrypt used disk space only (Windows 8 and later versions)	This check box enables / disables the option that limits the encryption area to only occupied hard drive sectors. This limit lets you reduce encryption time. Enabling or disabling the **Encrypt used disk space only (reduces encryption time)** feature after starting encryption does not modify this setting until the hard drives are decrypted. You must select or clear the check box before starting encryption. If the check box is selected, only portions of the hard drive that are occupied by files are encrypted. Kaspersky Endpoint Security automatically encrypts new data as it is added. If the check box is cleared, the entire hard drive is encrypted, including residual fragments of previously deleted and modified files. This option is recommended for new hard drives whose data has not been modified or deleted. If you are applying encryption on a hard drive that is already in use, it is recommended to encrypt the entire hard drive. This ensures protection of all data, even deleted data that is potentially recoverable. By default, the check box is cleared.
Authentication method	**Only password (Windows 8 and later versions)** If this option is selected, Kaspersky Endpoint Security prompts the user for a password when the user attempts to access an encrypted drive. This option can be selected when a Trusted Platform Module (TPM) is not being used. **Trusted platform module (TPM)** If this option is selected, BitLocker uses a Trusted Platform Module (TPM). A *Trusted Platform Module* (TPM) is a microchip developed to provide basic functions related to security (for example, to store encryption keys). A Trusted Platform Module is usually installed on the computer motherboard and interacts with all other system components via the hardware bus. For computers running Windows 7 or Windows Server 2008 R2, only encryption using a TPM module is available. If a TPM module is not installed, BitLocker encryption is not possible. Use of a password on these computers is not supported. A device equipped with a Trusted Platform Module can create encryption keys that can be decrypted only with the device. A Trusted Platform Module encrypts encryption keys with its own root storage key. The root storage key is stored within the Trusted Platform Module. This provides an additional level of protection against attempts to hack encryption keys. This action is selected by default. You can set an additional layer of protection for access to the encryption key, and encrypt the key with a password or a PIN: • **Use PIN for TPM**. If this check box is selected, a user can use a PIN code to obtain access to an encryption key that is stored in a Trusted Platform Module (TPM). If this check box is cleared, users are prohibited from using PIN codes. To access the encryption key, a user must enter the password. • **Trusted platform module (TPM), or password if TPM is unavailable**. If this option is selected, the user can use a password to obtain access to encryption keys when a Trusted Platform Module (TPM) is not available. If the check box is cleared and the TPM is not available, full disk encryption will not start. The selected authentication method must be configured by specifying password or PIN requirements: • **Minimum PIN length (characters)** (the default value is 6). • **Minimum password length (characters)** (the default value is 8). • **Maximum number of stored passwords / PINs** (the default value is 5). • **Limit password / PIN validity period for TPM (days)** (disabled by default). • **Use enhanced PIN (letters and numbers)**. *Enhanced PIN* allows using other characters in addition to numerical characters: uppercase and lowercase Latin letters, special characters, and spaces. Disabled by default.
Automatically recreate recovery key (days)	Automatically update the password to restore access to a drive protected by BitLocker. If the check box is selected, specify the validity period of the recovery key password. This helps prevent recovery key password reuse.

File Level Encryption

File encryption is not supported on Arm-based computers.

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers.

You can compile lists of files by extension or group of extensions and lists of folders stored on local computer drives, and create rules for encrypting files that are created by specific applications. After a policy is applied, Kaspersky Endpoint Security encrypts and decrypts the following files:

- files individually added to lists for encryption and decryption;
- files stored in folders added to lists for encryption and decryption;
- files created by separate applications.

File encryption has the following special features:

- Kaspersky Endpoint Security encrypts / decrypts files in predefined folders only for local user profiles of the operating system. Kaspersky Endpoint Security does not encrypt or decrypt files in predefined folders of roaming user profiles, mandatory user profiles, temporary user profiles, or redirected folders.
- Kaspersky Endpoint Security does not encrypt files whose modification could harm the operating system and installed applications. For example, the following files and folders with all nested folders are on the list of encryption exclusions:
  - %WINDIR%;
  - %PROGRAMFILES% and %PROGRAMFILES(X86)%;
  - Windows registry files.

  The list of encryption exclusions cannot be viewed or edited. While files and folders on the list of encryption exclusions can be added to the encryption list, they will not be encrypted during file encryption.

File Level Encryption component settings

Parameter	Description
Encryption mode	**Leave unchanged**. If this item is selected, Kaspersky Endpoint Security leaves the files and folders unchanged without encrypting or decrypting them. **According to rules**. If this item is selected, Kaspersky Endpoint Security encrypts the files and folders according to encryption rules, decrypts the files and folders according to decryption rules, and regulates the access of applications to encrypted files according to application rules. **Decrypt all**. If this item is selected, Kaspersky Endpoint Security decrypts all encrypted files and folders.

Parameter	Description
Encryption	This tab shows encryption rules for files stored on local drives. You can add files as follows: • **Predefined folders**. Kaspersky Endpoint Security allows you to add the following areas: **Documents**. Files in the standard *Documents* folder of the operating system, and its subfolders. **Favorites**. Files in the standard *Favorites* folder of the operating system, and its subfolders. **Desktop**. Files in the standard *Desktop* folder of the operating system, and its subfolders. **Temporary files**. Temporary files related to the operation of applications installed on the computer. For example, Microsoft Office applications create temporary files containing backup copies of documents. **Outlook files**. Files related to the operation of the Outlook mail client: data files (PST), offline data files (OST), offline address book files (OAB), and personal address book files (PAB). • **Custom folder**. You can type the path to the folder. When adding a folder path, adhere to the following rules: Use an environment variable (for example, `%FOLDER%\UserFolder\`). You can use an environment variable only once and only at the beginning of the path. Do not use relative paths. Do not use the `*` and `?` characters. Do not use UNC paths. Use `;` or `,` as a separator character. • **Files by extension**. You can select extension groups from the list, such as the extension group *Archives*. You can also manually add the file extension.
Decryption	This tab shows decryption rules for files stored on local drives.
Rules for applications	The tab displays a table containing encrypted file access rules for applications and encryption rules for files that are created or modified by individual applications.
Encrypted packages	Password strength requirements to meet when creating encrypted packages.

Encryption of removable drives

Encryption of removable drives is not supported on Arm-based computers.

This component is available if Kaspersky Endpoint Security is installed on a computer that runs on Windows for workstations. This component is unavailable if Kaspersky Endpoint Security is installed on a computer that runs on Windows for servers.

Kaspersky Endpoint Security supports encryption of files in FAT32 and NTFS file systems. If a removable drive with an unsupported file system is connected to the computer, the encryption task for this removable drive ends with an error and Kaspersky Endpoint Security assigns the read-only status to the removable drive.

To protect data on removable drives, you can use the following types of encryption:

- Full Disk Encryption (FDE).

  Encryption of the entire removable drive, including the file system.

  It is not possible to access encrypted data outside the corporate network. It is also impossible to access encrypted data inside the corporate network if the computer is not connected to Kaspersky Security Center (e.g. on a guest computer).

- File Level Encryption (FLE).

  Encryption of only files on a removable drive. The file system remains unchanged.

Encryption of files on removable drives provides the capability to access data outside the corporate network using a special mode called *portable mode*.

During encryption, Kaspersky Endpoint Security creates a master key. Kaspersky Endpoint Security saves the master key in the following repositories:

- Kaspersky Security Center.
- User's computer.

  The master key is encrypted with the user's secret key.
- Removable drive.

  The master key is encrypted with the public key of Kaspersky Security Center.

After encryption is complete, the data on the removable drive can be accessed within the corporate network as if was on an ordinary unencrypted removable drive.

Accessing encrypted data

When a removable drive with encrypted data is connected, Kaspersky Endpoint Security performs the following actions:

1. Checks for a master key in the local storage on the user's computer.

   If the master key is found, the user gains access to the data on the removable drive.

   If the master key is not found, Kaspersky Endpoint Security performs the following actions:

   a. Sends a request to Kaspersky Security Center.

      After receiving the request, Kaspersky Security Center sends a response that contains the master key.

   b. Kaspersky Endpoint Security saves the master key in the local storage on the user's computer for subsequent operations with the encrypted removable drive.
2. Decrypts the data.

Special features of removable drive encryption

Encryption of removable drives has the following special features:

- The policy with preset settings for removable drive encryption is formed for a specific group of managed computers. Therefore, the result of applying the Kaspersky Security Center policy configured for encryption / decryption of removable drives depends on the computer to which the removable drive is connected.
- Kaspersky Endpoint Security does not encrypt / decrypt read-only files that are stored on removable drives.

- The following device types are supported as removable drives:
  - Data media connected via the USB bus
  - hard drives connected via USB and FireWire buses
  - SSD drives connected via USB and FireWire buses

Encryption of removable drives component settings

Parameter	Description
Encryption mode	**Encrypt entire removable drive**. If this item is selected, when applying the policy with the specified encryption settings for removable drives, Kaspersky Endpoint Security encrypts removable drives sector by sector, including their file systems. **Encrypt all files**. If this item is selected, when applying the policy with the specified encryption settings for removable drives, Kaspersky Endpoint Security encrypts all files that are stored on removable drives. Kaspersky Endpoint Security does not re-encrypt files that are already encrypted. The contents of the file system of a removable drive, including the folder structure and names of encrypted files, are not encrypted and remain accessible. **Encrypt new files only**. If this item is selected, when applying the policy with the specified encryption settings for removable drives, Kaspersky Endpoint Security encrypts only those files that were added or modified on removable drives after the Kaspersky Security Center policy was last applied. This encryption mode is convenient when a removable drive is used for both personal and work purposes. This encryption mode lets you leave all old files unchanged and encrypt only those files that the user creates on a work computer that has Kaspersky Endpoint Security installed and encryption functionality enabled. As a result, access to personal files is always available, regardless of whether or not Kaspersky Endpoint Security is installed on the computer with encryption functionality enabled. **Decrypt entire removable drive**. If this item is selected, when applying the policy with the specified encryption settings for removable drives, Kaspersky Endpoint Security decrypts all encrypted files stored on removable drives as well as the file systems of the removable drives if they were previously encrypted. **Leave unchanged**. If this item is selected, the application leaves drives in their previous state when the policy is applied. If the drive was encrypted, it remains encrypted. If the drive was decrypted, it remains decrypted. This item is selected by default.
Portable mode	This check box enables / disables the preparation of a removable drive that makes it possible to access files stored on this removable drive on computers outside of the corporate network. If this check box is selected, Kaspersky Endpoint Security prompts the user to specify a password before encrypting files on a removable drive upon the application of the policy. The password is needed to access files encrypted on a removable drive on computers outside of the corporate network. You can configure the password strength. Portable mode is available for the **Encrypt all files** or **Encrypt new files only** modes.
Encrypt used disk space only	This check box enables / disables the encryption mode in which only occupied disk sectors are encrypted. This mode is recommended for new drives whose data has not been modified or deleted. If the check box is selected, only portions of the drive that are occupied by files are encrypted. Kaspersky Endpoint Security automatically encrypts new data as it is added. If the check box is cleared, the entire drive is encrypted, including residual fragments of previously deleted and modified files. The ability to encrypt only occupied space is available only for the **Encrypt entire removable drive** mode. After encryption started, enabling / disabling the **Encrypt used disk space only** function will not change this setting. You must select or clear the check box before starting encryption.

Custom rules	This table contains devices for which custom encryption rules are defined. You can create encryption rules for individual removable drives in the following ways:
	• Add a removable drive from the list of trusted devices for Device Control.
	• Manually add a removable drive:
	  • By device ID (Hardware ID, or HWID)
	  • By device model: Vendor ID (VID) and Product ID (PID)

Parameter	Description
Allow encryption of removable drives in offline mode	If this check box is selected, Kaspersky Endpoint Security encrypts removable drives even when there is no connection to Kaspersky Security Center. In this case, the data required for decrypting removable drives is stored on the hard drive of the computer to which the removable drive is connected, and is not transmitted to Kaspersky Security Center. If the check box is cleared, Kaspersky Endpoint Security does not encrypt removable drives without a connection to Kaspersky Security Center.
Encryption password settings / Portable File Manager	Password strength settings for the Portable File Manager.

Templates (data encryption)

After data encryption, Kaspersky Endpoint Security may restrict access to data, for example, due to a change in the organization's infrastructure and a change in the Kaspersky Security Center Administration Server. If a user does not have access to encrypted data, the user can ask the administrator for access to the data. In other words, the user needs to send a request access file to the administrator. The user then needs to upload the response file received from the administrator to Kaspersky Endpoint Security. Kaspersky Endpoint Security allows you to request access to data from the administrator via email (see the figure below).

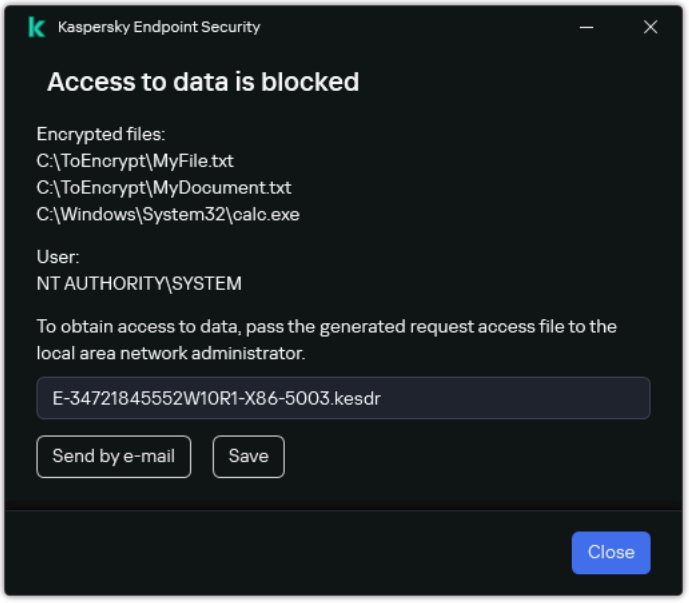

Requesting access to encrypted data

A template is provided for reporting a lack of access to encrypted data. For user convenience, you can fill out the following fields:

- **To**. Enter the email address of the administrator group with rights to the data encryption features.
- **Subject**. Enter the subject of the email with your request for access to encrypted files. You can, for example, add tags to filter messages.
- **User's message**. If necessary, change the contents of the message. You can use variables to get the necessary data (for example, `%USER_NAME%` variable).

Exclusions

A *trusted zone* is a system administrator-configured list of objects and applications that Kaspersky Endpoint Security does not monitor when active.

The administrator forms the trusted zone independently, taking into account the features of the objects that are handled and the applications that are installed on the computer. It may be necessary to include objects and applications in the trusted zone when Kaspersky Endpoint Security blocks access to a certain object or application, if you are sure that the object or application is harmless. An administrator can also allow a user to create their own local trusted zone for a specific computer. This way, users can create their own local lists of exclusions and trusted applications in addition to the general trusted zone in a policy.

Starting with Kaspersky Endpoint Security 12.5 for Windows, you can add EDR telemetry to the trusted zone. This allows optimizing the data that the application sends to the Telemetry collection server for the Kaspersky Anti Targeted Attack Platform (EDR) solution.

Starting with Kaspersky Endpoint Security 12.6 for Windows, scan exclusions and trusted applications are added to the trusted zone. Predefined scan exclusions and trusted applications help quickly configure Kaspersky Endpoint Security on SQL servers, Microsoft Exchange servers, and System Center Configuration Manager. This means you do not need to manually set up a trusted zone for the application on servers.

Starting with Kaspersky Endpoint Security 12.8 for Windows, you can install the application in Light Agent mode for protecting virtual environments. Predefined scan exclusions and trusted applications can help you quickly configure Kaspersky Endpoint Security in Citrix and VMware virtual environments.

Scan exclusions

A *scan exclusion* is a set of conditions that must be fulfilled so that Kaspersky Endpoint Security will not scan a particular object for viruses and other threats. Scan exclusions make it possible for the safe use of legitimate software that can be exploited by criminals to damage a computer or user data. Such applications do not necessarily have a malicious purpose, but can be exploited by hackers. For detailed information about legitimate applications that intruders can use to compromise the computer or user data, please visit the Kaspersky Encyclopedia website.

Such applications may be blocked by Kaspersky Endpoint Security. To prevent them from being blocked, you can configure scan exclusions for the applications in use. To do so, add the name or name mask that is listed in the Kaspersky IT Encyclopedia to the trusted zone. For example, you often use the Radmin application for remote administration of computers. Kaspersky Endpoint Security regards this activity as suspicious and may block it. To prevent the application from being blocked, create a scan exclusion with the name or name mask that is listed in the Kaspersky IT Encyclopedia.

If an application that collects information and sends it to be processed is installed on your computer, Kaspersky Endpoint Security may classify this application as malware. To avoid this, you can exclude the application from scanning by configuring Kaspersky Endpoint Security as described in this document.

Scan exclusions can be used by the following application components and tasks that are configured by the system administrator:

- Behavior Detection.
- Exploit Prevention.

- Host Intrusion Prevention.
- File Threat Protection.
- Web Threat Protection.
- Mail Threat Protection.
- *Malware Scan* task

List of trusted applications

The *list of trusted applications* is a list of applications whose file and network activity (including malicious activity) and access to the system registry are not monitored by Kaspersky Endpoint Security. By default, Kaspersky Endpoint Security monitors objects that are opened, executed, or saved by any application process, and controls the activity of all applications and network traffic that is generated by them. After an application is added to the list of trusted applications, Kaspersky Endpoint Security stops monitoring the application's activity.

The difference between scan exclusions and trusted applications is that for exclusions Kaspersky Endpoint Security does not scan files, while for trusted applications it does not control the initiated processes. If a trusted application creates a malicious file in a folder which is not included in scan exclusions, Kaspersky Endpoint Security will detect the file and eliminate the threat. If the folder is added to exclusions, Kaspersky Endpoint Security will skip this file.

For example, if you consider objects that are used by the standard Microsoft Windows Notepad application to be safe, meaning that you trust this application, you can add Microsoft Windows Notepad to the list of trusted applications so that the objects used by this application are not monitored. This will increase computer performance, which is especially important when using server applications.

In addition, certain actions that are classified by Kaspersky Endpoint Security as suspicious may be safe within the context of the functionality of a number of applications. For example, the interception of text that is typed from the keyboard is a routine process for automatic keyboard layout switchers (such as Punto Switcher). To take account of the specifics of such applications and exclude their activity from monitoring, we recommend that you add such applications to the trusted applications list.

Trusted applications help to avoid compatibility issues between Kaspersky Endpoint Security and other applications (for example, the problem of double-scanning of the network traffic of a third-party computer by Kaspersky Endpoint Security and by another anti-virus application).

At the same time, the executable file and process of the trusted application are still scanned for viruses and other malware. An application can be fully excluded from Kaspersky Endpoint Security scanning by means of scan exclusions.

Parameter	Description

Types of detected objects	Regardless of the configured application settings, Kaspersky Endpoint Security always detects and blocks viruses, worms, and Trojans. They can cause significant harm to a computer.

- **Viruses and worms**

  Subcategory: Viruses and worms (Viruses_and_Worms)

  Danger level: High

  Classic viruses and worms perform actions that are not authorized by the user. They can create copies of themselves which are able to self-replicate.

  Classic virus

  When a classic virus infiltrates a computer, it infects a file, activates, performs malicious actions, and adds copies of itself to other files.

  A classic virus multiplies only on local resources of the computer; it cannot penetrate other computers on its own. It can be passed to another computer only if it adds a copy of itself to a file that is stored in a shared folder or on an inserted CD, or if the user forwards an email message with an attached infected file.

  Classic virus code can penetrate various areas of computers, operating systems, and applications. Depending on the environment, viruses are divided into *file viruses*, *boot viruses*, *script viruses*, and *macro viruses*.

  Viruses can infect files by using a variety of techniques. *Overwriting* viruses write their code over the code of the file that is infected, thus erasing the content of the file. The infected file stops functioning and cannot be restored. *Parasitic* viruses modify files, leaving them fully or partially functional. *Companion* do not modify files, but instead create duplicates. When an infected file is opened, a duplicate of it (what is actually a virus) is started. The following types of viruses are also encountered: *Link viruses*, *OBJ viruses*, *LIB viruses*, *source code* viruses, and many others.

  Worm

  As with a classic virus, the code of a worm is activated and performs malicious actions after it infiltrates a computer. Worms are so named because of their ability to "crawl" from one computer to another and to spread copies via numerous data channels without the user's permission.

  The main feature that allows differentiating between various types of worms is the way they spread. The following table provides an overview of various types of worms, which are classified by the way in which they spread.

  Ways in which worms spread

Type	Name	Description
Email-Worm	Email-Worm	They spread via email. An infected email message contains an attached file with a copy of a worm, or a link to a file that is uploaded to a website which may have been hacked or created exclusively for that purpose. When you open the attached file, the worm is activated. When you click the link, download, and then open the file, the worm also starts performing its malicious actions. After that, it goes on spreading copies of itself, searching for other email addresses and sending infected messages to them.
IM-Worm	IM client worms	They spread through IM clients. Usually, such worms send messages that contain a link to a file with a copy of the worm on a website, making use of the user's contact lists. When the user downloads and opens the file, the worm activates.
IRC-Worm	Internet chat worms	They spread via Internet Relay Chats, service systems which allow communicating with other people over the Internet in real time. These worms publish a file with a copy of themselves or a link to the file in an Internet chat. When the user downloads and opens the file, the worm activates.
Net-Worm	Network worms	These worms spread over computer networks. Unlike other types of worms, a typical network worm spreads without the user's participation. It scans the local network for computers that contain programs with vulnerabilities. To do this, it sends a specially formed network packet (exploit) which contains the worm code or a part of it. If a "vulnerable" computer is on the network, it receives such a network packet. When the worm completely penetrates the computer, it activates.
P2P-Worm	File sharing network worms	They spread over peer-to-peer file sharing networks. To infiltrate a P2P network, the worm copies itself into a file sharing folder which is usually located on the user's computer. The P2P network displays information about this file so that the user may "find" the infected file on the network like any other file, and then download and open it. More sophisticated worms emulate the network protocol of a specific P2P network: they return positive responses to search queries and offer copies of themselves for download.
Worm	Other types of worms	Other types of worms include: • Worms that spread copies of themselves over network resources. By using the functions of the operating system, they scan available network folders, connect to computers on the Internet, and attempt to obtain full access to their disk drives. Unlike the previously described types of worms, other types of worms activate not on their own, but when the user opens a file that contains a copy of the worm. • Worms that do not use any of the methods described in the previous table to spread (for example, those that spread over cell phones).

- **Trojans (including ransomware)**

  Subcategory: Trojans

  Danger level: High

  Unlike worms and viruses, Trojans do not self-replicate. For example, they penetrate a computer via email or a browser when the user visits an infected web page. Trojans are started with the user's participation. They begin performing their malicious actions right after they are started.

Different Trojans behave differently on infected computers. The main functions of Trojans consist in blocking, modifying, or destroying information, and disabling computers or networks. Trojans can also receive or send files, run them, display messages on the screen, request web pages, download and install programs, and restart the computer.

Hackers often use "sets" of various Trojans.

Types of Trojan behavior are described in the following table.

Types of Trojan behavior on an infected computer

Type	Name	Description
Trojan-ArcBomb	Trojans – "archive bombs"	When unpacked, these archives grow in size to such an extent that the computer's operation is impacted. When the user attempts to unpack such an archive, the computer may slow down or freeze; the hard disk may become filled with "empty" data. "Archive bombs" are especially dangerous to file and mail servers. If the server uses an automatic system to process incoming information, an "archive bomb" may halt the server.
Backdoor	Trojans for remote administration	They are considered the most dangerous type of Trojan. In their functions, they are similar to remote administration applications that are installed on computers. These programs install themselves on the computer without being noticed by the user, allowing the intruder to manage the computer remotely.
Trojan	Trojans	They include the following malicious applications: • **Classic Trojans**. These programs perform only the main functions of Trojans: blocking, modifying or destroying information, and disabling computers or networks. They do not have any advanced features, unlike the other types of Trojans that are described in the table. • **Versatile Trojans**. These programs have advanced features typical of several types of Trojans.
Trojan-Ransom	Ransom Trojans	They take the user's information "hostage", modifying or blocking it, or impact the computer's operation so that the user loses the ability to use information. The intruder demands a ransom from the user, promising to send an application to restore the computer's performance and the data that had been stored on it.
Trojan-Clicker	Trojan clickers	They access web pages from the user's computer, either by sending commands to a browser on their own or by changing the web addresses that are specified in operating system files. By using these programs, intruders perpetrate network attacks and increase website visits, increasing the number of displays of banner ads.
Trojan-Downloader	Trojan downloaders	They access the intruder's web page, download other malicious applications from it, and install them on the user's computer. They can contain the file name of the malicious application to download, or receive it from the web page that is accessed.
Trojan-Dropper	Trojan droppers	They contain other Trojans which they install on the hard drive and then install. Intruders may use Trojan Dropper–type programs for the following goals: • Install a malicious application without being noticed by the user: Trojan Dropper–type programs display no messages, or display fake messages which inform, for example, of an error in an archive or an incompatible version of the operating system. • Protect another known malicious application from detection: not all anti-virus software can detect a malicious application within a Trojan Dropper–type application.
Trojan-Notifier	Trojan notifiers	They inform an intruder that the infected computer is accessible, sending the intruder information about the computer: IP address, number of opened port, or email address. They connect with the intruder via email, FTP, accessing the intruder's web page, or in another way. Trojan Notifier–type programs are often used in sets that are made of several Trojans. They notify the intruder that other Trojans have been successfully installed on the user's computer.
Trojan-Proxy	Trojan proxies	They allow the intruder to anonymously access web pages by using the user's computer; they are often used for sending spam.
Trojan-PSW	Password-stealing-ware	Password-stealing-ware is a kind of Trojan that steals user accounts, such as software registration data. These Trojans find confidential data in system files and in the registry and send it to the "attacker" by email, via FTP, by accessing the intruder's web page, or in another way. Some of these Trojans are categorized into separate types that are described in this table. These are Trojans that steal bank accounts (Trojan-Banker), steal data from users of IM clients (Trojan-IM), and steal information from users of online games (Trojan-GameThief).
Trojan-Spy	Trojan spies	They spy on the user, collecting information about the actions that the user makes while working at the computer. They may intercept the data that the user enters at the keyboard, take screenshots, or collect lists of active applications. After they receive the information, they transfer it to the intruder by email, via FTP, by accessing the intruder's web page, or in another way.
Trojan-DDoS	Trojan network attackers	They send numerous requests from the user's computer to a remote server. The server lacks resources to process all requests, so it stops functioning (Denial of Service, or simply DoS). Hackers often infect many computers with these programs so that they can use the computers to attack a single server simultaneously. DoS programs perpetrate an attack from a single computer with the user's knowledge. DDoS (Distributed DoS) programs perpetrate distributed attacks from several computers without being noticed by the user of the infected computer.
Trojan-IM	Trojans that steal information from users of IM clients	They steal account numbers and passwords of IM client users. They transfer the data to the intruder by email, via FTP, by accessing the intruder's web page, or in another way.
Rootkit	Rootkits	They mask other malicious applications and their activity, thus prolonging the applications' persistence in the operating system. They can also conceal files, processes in an infected computer's memory, or registry keys which run malicious applications. The rootkits can mask data exchange between applications on the user's computer and other computers on the network.
Trojan-SMS	Trojans in the form of SMS messages	They infect cell phones, sending SMS messages to premium-rate phone numbers.
Trojan-GameThief	Trojans that steal information from users of online games	They steal account credentials from users of online games, after which they send the data to the intruder by email, via FTP, by accessing the intruder's web page, or in another way.
Trojan-Banker	Trojans that steal bank accounts	They steal bank account data or e-money system data; send the data to the hacker by email, via FTP, by accessing the hacker's web page, or by using another method.
Trojan-Mailfinder	Trojans that collect email addresses	They collect email addresses that stored on a computer and send them to the intruder by email, via FTP, by accessing the intruder's web page, or in another way. Intruders may send spam to the addresses they have collected.

- **Malicious tools**

Subcategory: Malicious tools

Danger level: Medium

Unlike other types of malware, malicious tools do not perform their actions right after they are started. They can be safely stored and started on the user's computer. Intruders often use the features of these programs to create viruses, worms, and Trojans, perpetrate network attacks on remote servers, hack computers, or perform other malicious actions.

Various features of malicious tools are grouped by the types that are described in the following table.

Features of malicious tools

Type	Name	Description
Constructor	Constructors	They allow creating new viruses, worms, and Trojans. Some constructors boast a standard window-based interface in which the user can select the type of malicious application to create, the way of counteracting debuggers, and other features.
Dos	Network attacks	They send numerous requests from the user's computer to a remote server. The server lacks resources to process all requests, so it stops functioning (Denial of Service, or simply DoS).
Exploit	Exploits	An *exploit* is a set of data or a program code that uses vulnerabilities of the application in which it is processed, performing a malicious action on a computer. For example, an exploit can write or read files, or request "infected" web pages. Different exploits use vulnerabilities in different applications or network services. Disguised as a network packet, an exploit is transmitted over the network to numerous computers, searching for computers with vulnerable network services. An exploit in a DOC file uses the vulnerabilities of a text editor. It may start performing the actions that are preprogrammed by the hacker when the user opens the infected file. An exploit that is embedded in an email message searches for vulnerabilities in any email client. It may start performing a malicious action as soon as the user opens the infected message in this email client. Net-Worms spread over networks by using exploits. Nuker exploits are network packets that disable computers.
FileCryptor	Encryptors	They encrypt other malicious applications to conceal them from the anti-virus application.
Flooder	Programs for "contaminating" networks	They send numerous messages over network channels. This type of tools includes, for example, programs that contaminate Internet Relay Chats. Flooder-type tools do not include programs that "contaminate" channels that are used by email, IM clients, and mobile communication systems. These programs are distinguished as separate types that are described in the table (Email-Flooder, IM-Flooder, and SMS-Flooder).
HackTool	Hacking tools	They make it possible to hack the computer on which they are installed or attack another computer (for example, by adding new system accounts without the user's permission or by erasing system logs to conceal traces of their presence in the operating system). This type of tools includes some sniffers which feature malicious functions, such as password interception. Sniffers are programs that allow viewing network traffic.
Hoax	Hoaxes	They alarm the user with virus-like messages: they may "detect a virus" in an uninfected file or notify the user that the disk has been formatted, although this has not happened in reality.
Spoofer	Spoofing tools	They send messages and network requests with a fake address of the sender. Intruders use Spoofer-type tools to pass themselves off as the true senders of messages, for example.
VirTool	Tools that modify malicious applications	They allow modifying other malware programs, concealing them from anti-virus applications.
Email-Flooder	Programs that "contaminate" email addresses	They send numerous messages to various email addresses, thus "contaminating" them. A large volume of incoming messages prevents users from viewing useful messages in their inboxes.
IM-Flooder	Programs that "contaminate" traffic of IM clients	They flood users of IM clients with messages. A large volume of messages prevents users from viewing useful incoming messages.
SMS-Flooder	Programs that "contaminate" traffic with SMS messages	They send numerous SMS messages to cell phones.

- **Adware**

  Subcategory: Advertising software (Adware)

  Danger level: Medium

  Adware displays advertising information to the user. Adware programs display banner ads in the interfaces of other programs and redirect search queries to advertising web pages. Some of them collect marketing information about the user and send it to the developer: this information may include the names of the websites that are visited by the user or the content of the user's search queries. Unlike Trojan-Spy–type programs, adware sends this information to the developer with the user's permission.

- **Auto-dialers**

  Subcategory: Legitimate software that can be used by intruders to damage your computer or personal data.

  Danger level: Medium

  Most of these applications are useful, so many users run them. These applications include IRC clients, auto-dialers, file download programs, computer system activity monitors, password utilities, and internet servers for FTP, HTTP, and Telnet.

  However, if intruders gain access to these programs, or if they plant them on the user's computer, some of the application's features may be used to violate security.

These applications differ by function; their types are described in the following table.

Type	Name	Description
Client-IRC	Internet chat clients	Users install these programs to talk to people in Internet Relay Chats. Intruders use them to spread malware.
Downloader	Programs for downloading	They can download files from web pages in hidden mode.
Monitor	Programs for monitoring	They allow monitoring activity on the computer on which they are installed (seeing which applications are active and how they exchange data with applications that are installed on other computers).
PSWTool	Password restorers	They allow viewing and restoring forgotten passwords. Intruders secretly implant them on users' computers with the same purpose.
RemoteAdmin	Remote administration programs	They are widely used by system administrators. These programs allow obtaining access to the interface of a remote computer to monitor and manage it. Intruders secretly implant them on users' computers with the same purpose: to monitor and manage remote computers. Legal remote administration programs differ from backdoor-type Trojans for remote administration. Trojans have the ability to penetrate the operating system independently and install themselves; legal programs are unable to do so.
Server-FTP	FTP servers	They function as FTP servers. Intruders implant them on the user's computer to open remote access to it via FTP.
Server-Proxy	Proxy servers	They function as proxy servers. Intruders implant them on the user's computer to send spam under the user's name.
Server-Telnet	Telnet servers	They function as Telnet servers. Intruders implant them on the user's computer to open remote access to it via Telnet.
Server-Web	Web servers	They function as web servers. Intruders implant them on the user's computer to open remote access to it via HTTP.
RiskTool	Tools for working at a local computer	They provide the user with additional options when working at the user's own computer. The tools allow the user to hide files or windows of active applications and terminate active processes.
NetTool	Network tools	They provide the user with additional options when working with other computers on the network. These tools allow restarting them, detecting open ports, and starting applications that are installed on the computers.
Client-P2P	P2P network clients	They allow working on peer-to-peer networks. They can be used by intruders for spreading malware.
Client-SMTP	SMTP clients	They send email messages without the user's knowledge. Intruders implant them on the user's computer to send spam under the user's name.
WebToolbar	Web toolbars	They add toolbars to the interfaces of other applications to use search engines.
FraudTool	Pseudo-programs	They pass themselves off as other programs. For example, there are pseudo-anti-virus programs that display messages about malware detection. However, in reality, they do not find or disinfect anything.

- **Legitimate software that can be used by intruders to damage your computer or personal data**

  Subcategory: Legitimate software that can be used by intruders to damage your computer or personal data.

  Danger level: Medium

  Most of these applications are useful, so many users run them. These applications include IRC clients, auto-dialers, file download programs, computer system activity monitors, password utilities, and internet servers for FTP, HTTP, and Telnet.

  However, if intruders gain access to these programs, or if they plant them on the user's computer, some of the application's features may be used to violate security.

  These applications differ by function; their types are described in the following table.

Type	Name	Description
Client-IRC	Internet chat clients	Users install these programs to talk to people in Internet Relay Chats. Intruders use them to spread malware.
Downloader	Programs for downloading	They can download files from web pages in hidden mode.
Monitor	Programs for monitoring	They allow monitoring activity on the computer on which they are installed (seeing which applications are active and how they exchange data with applications that are installed on other computers).
PSWTool	Password restorers	They allow viewing and restoring forgotten passwords. Intruders secretly implant them on users' computers with the same purpose.
RemoteAdmin	Remote administration programs	They are widely used by system administrators. These programs allow obtaining access to the interface of a remote computer to monitor and manage it. Intruders secretly implant them on users' computers with the same purpose: to monitor and manage remote computers. Legal remote administration programs differ from backdoor-type Trojans for remote administration. Trojans have the ability to penetrate the operating system independently and install themselves; legal programs are unable to do so.
Server-FTP	FTP servers	They function as FTP servers. Intruders implant them on the user's computer to open remote access to it via FTP.
Server-Proxy	Proxy servers	They function as proxy servers. Intruders implant them on the user's computer to send spam under the user's name.
Server-Telnet	Telnet servers	They function as Telnet servers. Intruders implant them on the user's computer to open remote access to it via Telnet.
Server-Web	Web servers	They function as web servers. Intruders implant them on the user's computer to open remote access to it via HTTP.
RiskTool	Tools for working at a local computer	They provide the user with additional options when working at the user's own computer. The tools allow the user to hide files or windows of active applications and terminate active processes.
NetTool	Network tools	They provide the user with additional options when working with other computers on the network. These tools allow restarting them, detecting open ports, and starting applications that are installed on the computers.
Client-P2P	P2P network clients	They allow working on peer-to-peer networks. They can be used by intruders for spreading malware.

Client-SMTP	SMTP clients	They send email messages without the user's knowledge. Intruders implant them on the user's computer to send spam under the user's name.
WebToolbar	Web toolbars	They add toolbars to the interfaces of other applications to use search engines.
FraudTool	Pseudo-programs	They pass themselves off as other programs. For example, there are pseudo-anti-virus programs that display messages about malware detection. However, in reality, they do not find or disinfect anything.

- **Packed objects whose packing may be used to protect malicious code**

  Subcategory: Packed files that may cause harm.

  Danger level: Medium.

  The file is packed using a special packer that is used for packing malware: viruses, worms, Trojans. Kaspersky Endpoint Security scans the unpacker module within SFX (self-extracting) archives.

  To hide malware from detection by an anti-virus, hackers pack it using special packers. Kaspersky experts have identified packers that are the most popular amongst hackers.

- **Multi-packed objects**

  Subcategory: Packed files that may cause harm.

  Danger level: Medium.

  The file is packed using a special packer that is used for packing malware: viruses, worms, Trojans. Kaspersky Endpoint Security scans the unpacker module within SFX (self-extracting) archives.

  To hide malware from detection by an anti-virus, hackers pack it using special packers. Kaspersky experts have identified packers that are the most popular amongst hackers.

Exclusions

This table contains information about scan exclusions.

> We recommend specifying relative paths instead of absolute paths. This allows excluding not just file system objects, but also fileless objects. For example, `*\Program Files (x86)\Folder\Subfolder`.

	You can exclude objects from scans by using the following methods:
	• Specify the path to the file or folder.
	• Enter the object hash.
	• Use masks:
	  • The `*` (asterisk) character, which takes the place of any set of characters, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\*\*.txt` will include all paths to files with the TXT extension located in folders on the C: drive, but not in subfolders.
	  • Two consecutive `*` characters take the place of any set of characters (including an empty set) in the file or folder name, including the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\**\*.txt` will include all paths to files with the TXT extension located in folders nested within the `Folder`, except the `Folder` itself. The mask must include at least one nesting level. The mask `C:\**\*.txt` is not a valid mask.
	  • The `?` (question mark) character, which takes the place of any single character, except the `\` and `/` characters (delimiters of the names of files and folders in paths to files and folders). For example, the mask `C:\Folder\???.txt` will include paths to all files residing in the folder named `Folder` that have the TXT extension and a name consisting of three characters.
	  You can use masks anywhere in a file or folder path. For example, if you want the scan scope to include the Downloads folder for all user accounts on the computer, enter the `C:\Users\*\Downloads\` mask.
	  Kaspersky Endpoint Security supports environment variables
	  Kaspersky Endpoint Security does not support the `%userprofile%` environment variable when generating a list of exclusions using the Kaspersky Security Center console. To apply the entry to all user accounts, you can use the * character (for example, `C:\Users\*\Documents\File.exe`). Whenever you add a new environment variable, you need to restart the application.
	• Enter the name of the object type according to the classification of the Kaspersky Encyclopedia (for example, `Email-Worm`, `Rootkit` or `RemoteAdmin`). You can use masks with the `?` character (replaces any single character) and the `*` character (replaces any number of characters). For example, if the `Client*` mask is specified, the application excludes `Client-IRC`, `Client-P2P` and `Client-SMTP` objects from scans.
	Kaspersky Endpoint Security hides the list of scan exclusions in the user interface of the application if configuration of scan exclusions is blocked by the administrator in the console ("closed lock" symbol) and local scan exclusions are prohibited (the **Allow use of local exclusions** check box is cleared).

Trusted applications	This table lists trusted applications whose activity is not monitored by Kaspersky Endpoint Security during its operation. Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask. Kaspersky Endpoint Security does not support the `%userprofile%` environment variable when generating a list of trusted applications in the Kaspersky Security Center console. To apply the entry to all user accounts, you can use the `*` character (for example, `C:\Users\*\Documents\File.exe`). Whenever you add a new environment variable, you need to restart the application. The Application Control component regulates the startup of each of the applications regardless of whether or not the application is included in the table of trusted applications. Kaspersky Endpoint Security hides the consolidated list of trusted applications in the user interface of the application if configuration of trusted applications is blocked by the administrator in the console ("closed lock" symbol) and local trusted applications are prohibited (the **Allow use of local trusted applications** check box is cleared).

Merge values when inheriting *(available only in the Kaspersky Security Center Console)*	This merges the list of scan exclusions and trusted applications in the parent and child policies of Kaspersky Security Center. To merge lists, the child policy must be configured to inherit the settings of the parent policy of Kaspersky Security Center. If the check box is selected, list items from the Kaspersky Security Center parent policy are displayed in child policies. This way you can, for example, create a consolidated list of trusted applications for the entire organization. Inherited list items in a child policy cannot be deleted or edited. Items on the list of scan exclusions and the list of trusted applications that are merged during inheritance can be deleted and edited only in the parent policy. You can add, edit or delete list items in lower-level policies. If items on lists of the child and parent policy match, these items are displayed as the same item of the parent policy. If the check box is not selected, list items are not merged when inheriting the settings of Kaspersky Security Center policies. This functionality also allows merging lists in policy profiles. To merge lists, in the highest-priority profile, enable the inheritance of settings from a lower-priority profile. For more details on policy profile priorities, please refer to the Kaspersky Security Center Help.
Allow use of local exclusions / Allow use of local trusted applications *(available only in the Kaspersky Security Center Console)*	*Local exclusions and local trusted applications (local trusted zone)* – user-defined list of objects and applications in Kaspersky Endpoint Security for a specific computer. Kaspersky Endpoint Security does not monitor objects and applications from the local trusted zone. This way, users can create their own local lists of exclusions and trusted applications in addition to the general trusted zone in a policy. If the check box is selected, a user can create a local list of scan exclusions and a local list of trusted applications. An administrator can use Kaspersky Security Center to view, add, edit, or delete list items in the computer properties. If the check box is cleared, a user can access only the general lists of scan exclusions and trusted applications generated in the policy.
EDR (KATA) / NDR (KATA) telemetry *(available only in the Kaspersky Security Center Console)*	This table contains information about EDR telemetry exclusions.
KUMA telemetry *(available only in the Kaspersky Security Center Console)*	List of events to be sent to Kaspersky Unified Monitoring and Analysis Platform (KUMA). Kaspersky Endpoint Security works in the following modes: • **Send all events**. In this mode, the application sends all events from the Windows log except events added to exclusion rules. • **Send only selected events**. In this mode, the application sends only events added in inclusion rules.
Trusted system certificate store	If one of the trusted system certificate stores is selected, Kaspersky Endpoint Security excludes applications signed with a trusted digital signature from scans. Kaspersky Endpoint Security automatically assigns such applications to the **Trusted** group. If **Do not use** is selected, Kaspersky Endpoint Security scans applications regardless of whether or not they have a digital signature. Kaspersky Endpoint Security places an application in a trust group depending on the level of danger that this application may pose to the computer.

Application settings

You can configure the following general settings of the application:

- Operating mode
- Self-Defense
- Performance
- Debug information
- Computer status when settings are applied

Parameter	Description
Start the application on computer startup (recommended)	When this option is selected, Kaspersky Endpoint Security is started after the operating system loads, to protect the computer during the entire session. When this option is cleared, Kaspersky Endpoint Security is not started after the operating system loads, until the user starts it manually. Computer protection is disabled and user data may be exposed to threats.
Use Advanced Disinfection technology (requires considerable computer resources)	Typically, Kaspersky Endpoint Security terminate detected malware before the computer becomes infected. The Advanced Disinfection Technology protects the computer from already active malware (active infection), thus minimizing the risk of data loss and the threat spreading. If this technology is enabled, when malicious activity is detected, Kaspersky Endpoint Security displays a pop-up notification. In its notification, Kaspersky Endpoint Security offers the user the option to perform Advanced Disinfection of the computer. After the user approves this procedure, Kaspersky Endpoint Security neutralizes the threat and then restarts the computer. The advanced disinfection technology uses considerable computing resources, which may slow down other applications. When the application is in process of detecting an active infection, some operating system functionality can be unavailable. The availability of the operating system is restored when Advanced Disinfection is complete and the computer is restarted. If Kaspersky Endpoint Security is installed on a computer running Windows for Servers, Kaspersky Endpoint Security does not show the notification. Therefore, you cannot select an action to disinfect an active threat. To disinfect a threat, you need to enable Advanced Disinfection technology in application settings and enable immediate Advanced Disinfection in *Malware Scan* task settings. Then you need to start a *Malware Scan* task.
Use Kaspersky Security Center as proxy server for activation *(available only in the Kaspersky Security Center Console)*	If this check box is selected, the application uses the Kaspersky Security Center Administration Server as a proxy server for connecting to activation servers. This is necessary when you are using an activation code to activate the application in an isolated network segment without internet access. If you are activating the application with a key file, internet access is not necessary.
Enable Self-Defense	If this functionality is enabled, Kaspersky Endpoint Security prevents alteration or deletion of application files on the hard drive, memory processes, and entries in the system registry.
Block external management of application services	If this functionality is enabled, Kaspersky Endpoint Security does not allow managing application services by using third-party applications (such as CMD). When an attempt is made to manage application services using third-party applications, a notification is displayed in the Microsoft Windows taskbar, above the application icon (unless the notification service has been disabled by the user). You can allow external management of application services only on computers that do not support the AM-PPL technology or on computers that have the technology disabled.
Postpone scheduled tasks while running on battery power	If this check box is selected, power-saving mode is enabled when the computer is running on battery power. Kaspersky Endpoint Security postpones scheduled tasks. You can start a scan and update tasks manually, if necessary. When power-saving mode is enabled and a computer is running on battery power, the following tasks are not run, even if scheduled: • *Full Scan.* • *Critical Areas Scan.* • *Custom Scan.* • *Application Integrity Check.* • *IOC Scan.* • *Update of databases and application modules* (patches only) The application skips scheduled database updates only when the laptop is running on battery power and the battery level is below 30% (default value). You can change the minimum battery charge level at which the application starts skipping scheduled anti-virus database updates by editing the registry. In all other cases, Kaspersky Endpoint Security updates databases according to schedule, regardless of whether the laptop is plugged in or running on battery power, or whether the application is in power-saving mode.

Parameter	Description
Yield resources to other applications	Consumption of computer resources by Kaspersky Endpoint Security when scanning a computer may increase the load on the CPU and hard drive subsystems. This may slow down other applications. To optimize the performance, Kaspersky Endpoint Security provides a *mode for transferring resources to other applications*. In this mode, the operating system can decrease the priority of Kaspersky Endpoint Security scan task threads when the CPU load is high. This allows redistributing operating system resources to other applications. Thus, scan tasks will receive less CPU time. As a result, Kaspersky Endpoint Security will take longer to scan the computer. By default, the application is configured to yield resources to other applications.
Limit CPU usage for scan tasks	To optimize Kaspersky Endpoint Security performance, you can limit CPU usage via the *Malware Scan* task. If the check box is selected, the average load on all CPU cores from the *Malware Scan* task approaches the specified value. By default, the check box is cleared.
Enable dump writing	If the check box is selected, Kaspersky Endpoint Security writes dumps when it crashes. If the check box is cleared, Kaspersky Endpoint Security does not write dumps. The application also deletes existing dump files from the computer hard drive.
Enable dump and trace files protection	If the check box is selected, access to dump files is granted to the system administrator and local administrator as well as to the user who enabled dump writing. Only system and local administrators can access trace files. If the check box is cleared, any user can access dump files and trace files.
Computer status when settings are applied *(available only in the Kaspersky Security Center Console)*	Settings for displaying the statuses of client computers with Kaspersky Endpoint Security installed in the Web Console when errors occur while applying a policy or executing a task. The following statuses are available *OK*, *Warning* and *Critical*.
Install updates without computer restart	Upgrading the application without computer restart allows you to ensure uninterrupted operation of servers. You can upgrade the application without a restart starting with version 11.10.0. To upgrade an earlier version of the application, you must restart the computer. Starting with version 11.11.0 you can perform the following actions without restarting a computer: • install patches • change the set of application components • install Kaspersky Endpoint Security over Kaspersky Security for Windows Server The default value of the parameter varies depending on the type of the operating system. If the application is installed on a workstation, the upgrading the application without a restart option is disabled. If the application is installed on a server, the upgrading the application without a restart option is enabled.
Compatibility with remote administration software *(available only in the Kaspersky Security Center Console)*	If using Kaspersky Endpoint Security alongside Remote Administration Tools (RAT) causes problems, you can enable the compatibility mode. The problems may be related to the incompatibility of RATs with the Secure Desktop functionality of the application. The purpose of this functionality is to confirm actions that can potentially lower the security level of the computer. This functionality lets an application display a confirmation dialog that is isolated from other processes. This functionality uses elevated rights to secure the request. In this way, only the user can confirm the action and not the malware. If this option is selected, the RAT compatibility mode is enabled. The application displays a confirmation dialog without this functionality. This can reduce the security level of the computer. We do not recommend enabling the compatibility mode if Kaspersky Endpoint Security is not causing problems with your RAT. If this option is cleared, the RAT compatibility mode is disabled. By default, the check box is cleared. Example: When using the browser in RemoteApp mode, Kaspersky Endpoint Security may not display a confirmation window when visiting a website with an untrusted certificate because RemoteApp does not support the Secure Desktop functionality of the application. This can cause the browser to become unresponsive. For the browser to work correctly in RemoteApp mode, you must enable the compatibility mode. You can also try enabling the compatibility mode if you encounter problems with the Secure Desktop functionality when using other third-party software.

Reports and storage

Reports

Information about the operation of each Kaspersky Endpoint Security component, data encryption events, the performance of each scan task, the update task and integrity check task, and the overall operation of the application is recorded in reports.

Reports are stored in the folder `C:\ProgramData\Kaspersky Lab\KES.14.2\Report`.

Backup

Backup stores backup copies of files that were deleted or modified during disinfection. A *backup copy* is a file copy created before the file was disinfected or deleted. Backup copies of files are stored in a special format and do not pose a threat.

Backup copies of files are stored in the folder `C:\ProgramData\Kaspersky Lab\KES.14.2\QB`.

Users in the Administrators group are granted full permission to access this folder. Limited access rights to this folder are granted to the user whose account was used to install Kaspersky Endpoint Security.

> Kaspersky Endpoint Security does not provide the capability to configure user access permissions to backup copies of files.

Quarantine

Quarantine is a special local storage on the computer. The user can quarantine files that the user considers dangerous for the computer. Quarantined files are stored in an encrypted state and do not threaten the security of the device. Kaspersky Endpoint Security uses the Quarantine only when integrated with Kaspersky Detection and Response solutions. In other cases Kaspersky Endpoint Security places the relevant file in Backup. For details on managing Quarantine as part of solutions, please refer to the Kaspersky Sandbox Help, Kaspersky Endpoint Detection and Response Optimum Help, Kaspersky Endpoint Detection and Response Expert Help, Kaspersky Anti Targeted Attack Platform Help, and Kaspersky Endpoint Detection and Response Expert (on-premises) Help.

Quarantine can only be configured using Web Console. You can also use Web Console to manage quarantined objects (restore, delete, add, etc). You can restore objects locally on the computer using the command line.

> Kaspersky Endpoint Security uses the system account (SYSTEM) to quarantine files.

Settings of reports and storage

Parameter	Description
Delete reports after (days)	If the check box is selected, the maximum report storage term is limited to the defined time interval. The default maximum storage term for reports is 30 days. After that period of time, Kaspersky Endpoint Security automatically deletes the oldest entries from the report file.
Limit the size of report file to (MB)	If the check box is selected, the maximum report file size is limited to the defined value. By default, the maximum file size is 1024 MB. To avoid exceeding the maximum report file size, Kaspersky Endpoint Security automatically deletes the oldest entries from the report file when the maximum report file size is reached.
Delete objects after (days)	If the check box is selected, the maximum file storage term is limited to the defined time interval. The default maximum storage term for files is 30 days. After expiration of the maximum storage term, Kaspersky Endpoint Security deletes the oldest files from Backup.
Limit the size of Backup to (MB)	If the check box is selected, the maximum storage size is limited to the defined value. By default, the maximum size is 1024 MB. To avoid exceeding the maximum storage size, Kaspersky Endpoint Security automatically deletes the oldest files from storage when the maximum storage size is reached.

Parameter	Description
Limit the size of Quarantine	If the check box is selected, the maximum Quarantine size is limited to the defined value. By default, the maximum size is 1024 MB. When Quarantine reaches maximum size, Kaspersky Endpoint Security sends the *Not enough space in Quarantine storage* event to Kaspersky Security Center and publishes the event in Windows Event Log. Meanwhile the application stops quarantining new objects. You must empty the Quarantine manually.
Notify when the Quarantine storage reaches (%)	Threshold value of the Quarantine. For example, you can set the Quarantine threshold to 50%. When Quarantine reaches the threshold, Kaspersky Endpoint Security sends the corresponding event to Kaspersky Security Center and publishes the event in Windows Event Log. Meanwhile the application continues quarantining new objects.
Data transfer to Administration Server *(available only in Kaspersky Security Center)*	Categories of events on client computers whose information must be relayed to the Administration Server. You can disable the transfer of some data to optimize disk space on the Administration Server. The application sends events of the following categories: • **About Quarantine files**. You can view the list of quarantined files in the Kaspersky Security Center console in the **Advanced** → **Repositories** → **Quarantine** folder. Kaspersky Endpoint Security uses the Quarantine only when integrated with Kaspersky Detection and Response solutions. • **About files in Backup**. You can view the list of files in Backup in the Kaspersky Security Center console in the **Advanced** → **Repositories** → **Backup** folder. • **About unprocessed files**. You can view the list of unprocessed files in the Kaspersky Security Center console in the **Advanced** → **Repositories** → **Active threats** folder. • **About installed devices**. You can view the list of connected devices in the Kaspersky Security Center console in the **Advanced** → **Repositories** → **Hardware** folder. The list of devices is also available in computer properties and in the Kaspersky Endpoint Security for Windows policy (**Device Control** section). • **About started applications**. You can view the list of executable files in the Kaspersky Security Center console in the **Advanced** → **Application management** → **Executable files** folder. The list of executable files is also available in computer properties. • **About file encryption errors**. You can view the list of file encryption errors in the Kaspersky Security Center console in the **Advanced** → **Data encryption and protection** → **Encryption events** folder. The list of errors is also available in computer properties. • **Report on Adaptive Anomaly Control rules state**. You can view the report in the Kaspersky Security Center console in the **Administration Server** node on the **Reports** tab. This report is also available in Kaspersky Endpoint Security for Windows policy properties (**Adaptive Anomaly Control** section). • **Report on triggered Adaptive Anomaly Control rules**. You can view the report in the Kaspersky Security Center console in the **Administration Server** node on the **Reports** tab. This report is also available in Kaspersky Endpoint Security for Windows policy properties (**Adaptive Anomaly Control** section). • **About a threat development chain**. You can view detection details in the Kaspersky Security Center Web Console in the **Monitoring** → **Alerts** section. The information about the threat development chain is used by Kaspersky Endpoint Detection and Response solutions.

Network settings

You can configure the proxy server used for connecting to the internet and updating anti-virus databases, select the network port monitoring mode, and set up an encrypted connections scan.

Network options

Parameter	Description
Limit traffic on metered connections	If this check box is selected, the application limits its own network traffic when the Internet connection is limited. Kaspersky Endpoint Security identifies a high-speed mobile Internet connection as a limited connection and identifies a Wi-Fi connection as an unlimited connection. Cost-Aware Networking works on computers running Windows 8 or later.
Inject script into web traffic to interact with web pages	If the check box is selected, Kaspersky Endpoint Security injects a web page interaction script into web traffic. This script ensures that the Web Control component can work correctly. The script enables registration of Web Control events. Without this script, you cannot enable user Internet activity monitoring. Kaspersky experts recommend injecting this web page interaction script into traffic to ensure correct operation of Web Control.
Proxy server settings	Settings of the proxy server used for internet access of users of client computers. Kaspersky Endpoint Security uses these settings for certain protection components, including for updating databases and application modules. For automatic configuration of a proxy server, Kaspersky Endpoint Security uses the WPAD protocol (Web Proxy Auto-Discovery Protocol). If the IP address of the proxy server cannot be determined by using this protocol, the application uses the proxy server address that is specified in the Microsoft Internet Explorer browser settings.

Parameter	Description
Bypass a proxy server for local addresses	If the check box is selected, Kaspersky Endpoint Security does not use a proxy server when performing an update from a shared folder.
Proxy server authentication settings	To authenticate the application on the proxy server for internet access, you must enter the credentials of the user. Kaspersky Endpoint Security supports automatic authentication on the proxy server. If automatic authentication failed, the application prompts you to enter the credentials. **Do not use authentication**. **NTLM authentication**. NTLM authentication with the current user account (default). **NTLM authentication with user name and password**. NTLM authentication with manually specified credentials. **User name and password**. Authentication with manually specified credentials. **Automatic authentication**. **Kerberos authentication**. Kerberos authentication with the current user account. To ensure the Kerberos authentication works correctly when using CNAME records for the proxy server address, you must register a Service Principal Name (SPN) for each CNAME record. **Kerberos authentication with user name and password**. Kerberos authentication with manually specified credentials. If Kerberos authentication is selected, Kaspersky Endpoint Security can, depending on the proxy server settings, perform authentication using either the Kerberos or NTLM protocol.
Monitored ports	**Monitor all network ports**. In this network port monitoring mode, the protection components (File Threat Protection, Web Threat Protection, and Mail Threat Protection) monitor data streams that are transmitted via any open network ports of the computer. **Monitor selected network ports only**. In this network port monitoring mode, the protection components monitor the selected ports of the computer and the network activity of the selected applications. The list of network ports that are normally used for transmission of email and network traffic is configured according to the recommendations of Kaspersky experts. **Monitor all ports for the applications from the list recommended by Kaspersky**. This uses a predefined list of applications whose network ports are monitored by Kaspersky Endpoint Security. For example, this list includes Google Chrome, Adobe Reader, Java, and other applications. **Monitor all ports for specified applications**. This uses a list of applications whose network ports are monitored by Kaspersky Endpoint Security.
Encrypted connections scan	Kaspersky Endpoint Security scans encrypted network traffic transmitted over the following protocols: • SSL 3.0. • TLS 1.0, TLS 1.1, TLS 1.2, TLS 1.3. Kaspersky Endpoint Security supports the following encrypted connection scanning modes: • **Do not scan encrypted connections**. Kaspersky Endpoint Security will not have access to the contents of websites whose addresses begin with `https://`. • **Scan encrypted connections upon request from protection components**. Kaspersky Endpoint Security will scan encrypted traffic only when requested by the Web Threat Protection, Mail Threat Protection, and Web Control components. • **Always scan encrypted connections**. Kaspersky Endpoint Security will scan encrypted network traffic even if protection components are disabled. Kaspersky Endpoint Security does not scan encrypted connections that were established by trusted applications for which traffic scanning is disabled. Kaspersky Endpoint Security does not scan encrypted connections from the predefined list of trusted websites. The predefined list of trusted websites is created by Kaspersky experts. This list is updated with the application's anti-virus databases. You can view the predefined list of trusted websites only in the Kaspersky Endpoint Security interface. You cannot view the list in the Kaspersky Security Center Console.

Parameter	Description
Trusted root certificates	List of trusted root certificates. Kaspersky Endpoint Security lets you install trusted root certificates on user computers if, for example, you need to deploy a new certification center. The application lets you add a certificate to a special Kaspersky Endpoint Security certificate store. In this case, the certificate is considered trusted only for the Kaspersky Endpoint Security application. In other words, the user can gain access to a website with the new certificate in the browser. If another application tries to gain access to the website, you can get a connection error because of a certificate issue. To add to the system certificate store, you can use Active Directory group policies.
Visiting a domain with an untrusted certificate	• **Allow**. When visiting a domain with an untrusted certificate, Kaspersky Endpoint Security allows the network connection. When opening a domain with an untrusted certificate in a browser, Kaspersky Endpoint Security displays an HTML page showing a warning and the reason why visiting that domain is not recommended. A user can click the link from the HTML warning page to obtain access to the requested web resource. If a third-party application or service establishes a connection with a domain with an untrusted certificate, Kaspersky Endpoint Security creates its own certificate to scan traffic. The new certificate has the *Untrusted* status. This is necessary to warn the third-party application about the untrusted connection because the HTML page cannot be shown in this case and the connection can be established in background mode. • **Block**. When visiting a domain with an untrusted certificate, Kaspersky Endpoint Security blocks the network connection. When opening a domain with an untrusted certificate in a browser, Kaspersky Endpoint Security displays an HTML page showing the reason why that domain is blocked.
Visiting a domain with an encrypted connections scan error	• **Block**. If an encrypted connection scan error occurs, Kaspersky Endpoint Security blocks the network connection. • **Allow and add domain to exclusions**. If an encrypted connection scan error occurs, Kaspersky Endpoint Security adds the domain that resulted in the error to the list of domains with scan errors and does not monitor encrypted network traffic when this domain is visited. You can view a list of domains with encrypted connections scan errors only in the local interface of the application. To clear the list contents, you need to select **Block**. Kaspersky Endpoint Security also generates an event for the encrypted connection scan error.
Block SSL 2.0 connections	If the check box is selected, the application monitors and blocks network connections established over the SSL 2.0 protocol. If the check box is cleared, the application does not block network connections established over the SSL 2.0 protocol. However, the application does not monitor network traffic over this protocol.
Block SSL 3.0 connections	If the check box is selected, the application blocks network connections established over the SSL 3.0 protocol. If the check box is cleared, the application does not block network connections established over the SSL 3.0 protocol. The application monitors network traffic over this protocol. All components of the application work without restrictions.
Block TLS 1.0 connections	If the check box is selected, the application blocks network connections established over the TLS 1.0 protocol. If the check box is cleared, the application does not block network connections established over the TLS 1.0 protocol. The application monitors network traffic over this protocol. All components of the application work without restrictions.
Decrypt an encrypted connection with the website that uses EV certificate	EV certificates (Extended Validation Certificate) confirm the authenticity of websites and enhance the security of the connection. Browsers use a lock icon in their address bar to indicate that a website has an EV certificate. Browsers may also fully or partially color the address bar in green. If the check box is selected, the application decrypts and monitors encrypted connections with websites that use an EV certificate. If the check box is cleared, the application does not have access to the contents of HTTPS traffic. For this reason, the application monitors HTTPS traffic only based on the website address, for example, `https://bing.com`. If you are opening a website with an EV certificate for the first time, the encrypted connection will be decrypted regardless of whether or not the check box is selected.
Configure trusted addresses	This uses a list of web addresses for which Kaspersky Endpoint Security does not scan network connections. In this case, Kaspersky Endpoint Security does not scan the HTTPS traffic of trusted web addresses when the Web Threat Protection, Mail Threat Protection, and Web Control components are doing their work. You can enter a domain name or an IP address. Kaspersky Endpoint Security supports the `*` character for entering a mask in the domain name. Kaspersky Endpoint Security does not support the `*` symbol for IP addresses. You can select a range of IP addresses using a subnet mask (for example, 198.51.100.0/24). Examples: • `domain.com` – the record is inclusive of the following addresses: `https://domain.com`, `https://www.domain.com`, `https://domain.com/page123`. The record is exclusive of subdomains (for example, `subdomain.domain.com`). • `subdomain.domain.com` – the record is inclusive of the following addresses: `https://subdomain.domain.com`, `https://subdomain.domain.com/page123`. The record is exclusive of the `domain.com` domain. • `*.domain.com` – the record is inclusive of the following addresses: `https://movies.domain.com`, `https://images.domain.com/page123`. The record is exclusive of the `domain.com` domain.
Configure trusted applications	List of applications whose activity is not monitored by Kaspersky Endpoint Security during its operation. You can select the types of application activity that Kaspersky Endpoint Security will not monitor (for example, do not scan network traffic). Kaspersky Endpoint Security supports environment variables and the `*` and `?` characters when entering a mask.

Parameter	Description
To scan encrypted connections in applications with their own certificate store, use *(available only in the Kaspersky Endpoint Security interface)*	If this check box is selected, the application scans encrypted traffic in the Mozilla Firefox browser and Thunderbird mail client. Access to some websites via the HTTPS protocol may be blocked. To scan traffic in the Mozilla Firefox browser and the Thunderbird mail client, you must enable the Encrypted Connections Scan. If Encrypted Connections Scan is disabled, the application does not scan traffic in the Mozilla Firefox browser and Thunderbird mail client. The application uses the Kaspersky root certificate to decrypt and analyze encrypted traffic. You can select the certificate store that will contain the Kaspersky root certificate. • **Windows certificate store (recommended)**. The Kaspersky root certificate is added to this store during installation of Kaspersky Endpoint Security. • **Own certificate store**. Mozilla Firefox and Thunderbird use their own certificate stores. If the Mozilla certificate store is selected, you need to manually add the Kaspersky root certificate to this store through the browser properties.

Interface

You can configure the settings of the application interface.

Interface settings

Parameter	Description
Interaction with user *(available only in the Kaspersky Security Center Console)*	**Display simplified interface**. On a client computer, the main application window is inaccessible, and only the icon in the Windows notification area is available. In the context menu of the icon, the user can perform a limited number of operations with Kaspersky Endpoint Security. Kaspersky Endpoint Security also displays only notifications that require user action above the application icon. **Display user interface**. On a client computer, the main window of Kaspersky Endpoint Security and the icon in the Windows notification area are available. In the context menu of the icon, the user can perform operations with Kaspersky Endpoint Security. Kaspersky Endpoint Security also displays notifications above the application icon. **Hide Application Activity Monitor section**. On the client computer, in the main window of Kaspersky Endpoint Security, the **Application Activity Monitor** button is not available. *Application Activity Monitor* is a tool designed for viewing information about the activity of applications on a user's computer in real time. **Do not display user interface**. On a client computer, no signs of Kaspersky Endpoint Security operation are displayed. The icon in the Windows notification area and notifications are not available.
Access to local tasks	If the check box is selected, local tasks are displayed in the Kaspersky Endpoint Security local interface. When there are no additional policy restrictions, the user can configure and run tasks. However, configuring task run schedule remains unavailable for the user. The user can run tasks only manually. If this check box is cleared, local tasks are hidden in the application interface. In this mode, local tasks do not run according to schedule. Tasks cannot be started or configured in the local interface of Kaspersky Endpoint Security, or when working with the command line. A user can still start a scan of a file or folder by selecting the **Scan for viruses** option in the context menu of the file or folder. The scan task is started with the default values of settings for the custom scan task.
View group tasks	If the check box is selected, group tasks are displayed in the Kaspersky Endpoint Security local interface. The user can view the list of all tasks in the application interface. If the check box is cleared, Kaspersky Endpoint Security displays an empty task list.
Manage group tasks	If the check box is selected, users can start and stop group tasks specified in the Kaspersky Security Center console. Users can start and stop tasks in the application interface or in the simplified application interface. If the check box is cleared, Kaspersky Endpoint Security starts scheduled tasks automatically, or the administrator starts tasks manually in the Kaspersky Security Center console.
Configure notifications	A table with the settings of notifications about events of different importance levels that may occur during the operation of a component, task, or the entire application. Kaspersky Endpoint Security shows notifications about these events on the screen, sends them by email, or logs them.

Parameter	Description
Configure email notifications	SMTP server settings for delivery of notifications about events registered during operation of the application. By default, Kaspersky Endpoint Security uses email notification settings from Kaspersky Security Center. For more details on email notification settings, refer to the Kaspersky Security Center Help. If you need to configure individual email notification, you can edit the following settings: • **Sender's address**. Email address of the sender. Using a non-existent address is not recommended. • **SMTP server**. One or more addresses of email servers of your organization (for example, `mail.company.com`). You can enter an IP address (IPv4 or IPv6). To authenticate the user on the SMTP server, enter sender credentials in the corresponding fields. To test email notifications, you can send a test message. • **Recipient's address**. Email addresses of recipients to whom the application will send notifications. • **Send mode**. Send mode of email notifications. Kaspersky Endpoint Security can send messages immediately when an event occurs; alternatively, it can follow a pre-configured schedule.
Show application's status in notifications area	Categories of application events that cause the Kaspersky Endpoint Security icon to change in the Microsoft Windows taskbar notification area (or) and result in a pop-up notification.
Local anti-malware database status notifications	Settings of notifications about outdated anti-virus databases used by the application.
Password protection	If the toggle button is switched on, Kaspersky Endpoint Security prompts the user for a password when the user attempts to perform an operation that is within the scope of Password Protection. The Password Protection scope includes forbidden operations (such as disabling protection components) and the user accounts to which the Password Protection scope is applied. After Password Protection is enabled, Kaspersky Endpoint Security prompts you to set a password for the KLAdmin account.
User support / Links to web resources *(available only in the Kaspersky Security Center Console)*	List of links to web resources containing information about technical support for Kaspersky Endpoint Security. Added links are displayed in the **Support** window of the Kaspersky Endpoint Security local interface instead of standard links.
User support / Description *(available only in the Kaspersky Security Center Console)*	Message that is displayed in the **Support** window of the local interface of Kaspersky Endpoint Security.

Manage Settings

You can save the current Kaspersky Endpoint Security settings to a file and use them to quickly configure the application on a different computer. You can also use a configuration file when deploying the application through Kaspersky Security Center with an installation package. You can restore the default settings at any time.

Application configuration management settings are available only in the Kaspersky Endpoint Security interface.

Application configuration management settings

Settings	Description
Import	Extract application settings from a file in CFG format and apply them.
Export	Save the current application settings to a file in CFG format.
Restore	You can restore the application settings recommended by Kaspersky at any time. When the settings are restored, the **Recommended** security level is set for all protection components.

Updating databases and application software modules

Updating the databases and application modules of Kaspersky Endpoint Security ensures up-to-date protection on your computer. New viruses and other types of malware appear worldwide on a daily basis. Kaspersky Endpoint Security databases contain information about threats and ways of neutralizing them. To detect threats quickly, you are urged to regularly update the databases and application modules.

Updates functionality (including providing anti-virus signature updates and codebase updates) may not be available in the application in the U.S.

Regular updates require a license in effect. If there is no current license, you will be able to perform an update only once.

Your computer must be connected to the Internet to successfully download the update package from Kaspersky update servers. By default, the Internet connection settings are determined automatically. If you are using a proxy server, you need to configure the proxy server settings.

Updates are downloaded over the HTTPS protocol. They may also be downloaded over the HTTP protocol when it is impossible to download updates over the HTTPS protocol.

While performing an update, the following objects are downloaded and installed on your computer:

- Kaspersky Endpoint Security databases. Computer protection is provided using databases that contain signatures of viruses and other threats and information on ways to neutralize them. Protection components use this information when searching for and neutralizing infected files on your computer. The databases are constantly updated with records of new threats and methods for counteracting them. Therefore, we recommend that you update the databases regularly.

  In addition to the Kaspersky Endpoint Security databases, the network drivers that enable the application's components to intercept network traffic are updated.

- Application modules. In addition to the databases of Kaspersky Endpoint Security, you can also update the application modules. Updating the application modules fixes vulnerabilities in Kaspersky Endpoint Security, adds new functions, or enhances existing functions.

While updating, the application modules and databases on your computer are compared against the up-to-date version at the update source. If your current databases and application modules differ from their respective up-to-date versions, the missing portion of the updates is installed on your computer.

If the databases are obsolete, the update package may be large, which may cause additional internet traffic (up to several dozen MB).

Information about the current state of the Kaspersky Endpoint Security databases is displayed in the main application window or the tooltip that you see when you hover the cursor over the icon of the application in the notification area.

Information on update results and on all events that occur during the performance of the update task is logged in the Kaspersky Endpoint Security report.

> If the application is working in Light Agent mode, special considerations are involved in updating application databases and modules.

Application module and database update settings

Parameter	Description
Databases update schedule	**Automatically**. In this mode, the application checks the update source for availability of new update packages with a certain frequency. The frequency of checking for the update package increases during virus outbreaks and decreases when there are none. After detecting a fresh update package, Kaspersky Endpoint Security downloads it and installs updates on your computer. **Manually**. This update task run mode allows you to manually start the update task. **By schedule**. In this update task run mode, Kaspersky Endpoint Security runs the update task in accordance with the schedule that you have specified. If this update task run mode is selected, you can also start the Kaspersky Endpoint Security update task manually.
Run missed tasks	If the check box is selected, Kaspersky Endpoint Security starts the skipped task as soon as it becomes possible. The task may be skipped, for example, if the computer was off at the scheduled task start time. When the application gets an opportunity to execute missed tasks, it runs the tasks randomly within a certain time interval to distribute the load on the computer. If the check box is cleared, Kaspersky Endpoint Security does not run skipped tasks. Instead, it carries out the next task in accordance with the current schedule.
Update sources	An *update source* is a resource that contains updates for databases and application modules of Kaspersky Endpoint Security. Update sources include the Kaspersky Security Center server, Kaspersky update servers, and network or local folders. > If Kaspersky update servers are unavailable, Kaspersky Endpoint Security can use alternative domains to update its databases and application software modules. For detailed information, refer to the Technical Support Knowledge Base. The default list of update sources includes Kaspersky Security Center and Kaspersky update servers. You can add other update sources to the list. You can specify HTTP/FTP servers and shared folders as update sources. > Kaspersky Endpoint Security does not support updates from HTTPS servers unless they are Kaspersky's update servers. If several resources are selected as update sources, Kaspersky Endpoint Security tries to connect to them one after another, starting from the top of the list, and performs the update task by retrieving the update package from the first available source. By default, Kaspersky Endpoint Security uses the Kaspersky Security Center server as the first update source. This helps conserve traffic when updating. If a policy is not applied to the computer, Kaspersky servers are selected as the first update source in the settings of the *Update of databases and application modules* local task because the application may not have access to the Kaspersky Security Center server. If the application is running in Light Agent mode, a folder on the SVM is selected as the update source.
Run database updates as	By default, the Kaspersky Endpoint Security update task is started on behalf of the user whose account you have used to log in to the operating system. However, Kaspersky Endpoint Security may be updated from an update source that the user cannot access due to a lack of required rights (for example, from a shared folder that contains an update package) or an update source for which proxy server authentication is not configured. In the application settings, you can specify a user that has such rights and start the Kaspersky Endpoint Security update task under that user account.

Parameter	Description
Download updates of application modules	Downloading application module updates with application database updates. If the check box is selected, Kaspersky Endpoint Security notifies the user about available application module updates and includes application module updates in the update package while running the update task. The way application module updates are applied is determined by the following settings: • **Install critical and approved updates**. If this option is selected, when application module updates are available Kaspersky Endpoint Security installs critical updates automatically and all other application module updates only after their installation is approved locally via the application interface or on the side of Kaspersky Security Center. • **Install only approved updates**. If this option is selected, when application module updates are available Kaspersky Endpoint Security installs them only after their installation is approved locally via the application interface or on the side of Kaspersky Security Center. This option is selected by default. If the check box is cleared, Kaspersky Endpoint Security does not notify the user about available application module updates and does not include application module updates in the update package while running the update task. If application module updates require reviewing and accepting the terms of the End User License Agreement, the application installs updates after the terms of the End User License Agreement have been accepted. The check box is selected by default.
Copy updates to folder	If this check box is selected, Kaspersky Endpoint Security copies the update package to the shared folder specified under the check box. After that, other computers on your LAN are able to receive the update package from this shared folder. This reduces Internet traffic because the update package is downloaded only once. The following folder is specified by default: `C:\ProgramData\Kaspersky Lab\KES.14.2\Update distribution\`.
Proxy server for updates *(available only in the Kaspersky Endpoint Security interface)*	Proxy server settings for Internet access of users of client computers to update application modules and databases. For automatic configuration of a proxy server, Kaspersky Endpoint Security uses the WPAD protocol (Web Proxy Auto-Discovery Protocol). If the IP address of the proxy server cannot be determined by using this protocol, Kaspersky Endpoint Security uses the proxy server address that is specified in the Microsoft Internet Explorer browser settings.
Bypass a proxy server for local addresses *(available only in the Kaspersky Endpoint Security interface)*	If the check box is selected, Kaspersky Endpoint Security does not use a proxy server when performing an update from a shared folder.

Appendix 2. Application trust groups

Kaspersky Endpoint Security categorizes all applications that are started on the computer into trust groups. Applications are categorized into trust groups depending on the level of threat that the applications pose to the operating system.

The trust groups are as follows:

- **Trusted**. This group includes applications for which one or more of the following conditions are met:
  - Applications are digitally signed by trusted vendors.
  - Applications are recorded in the trusted applications database of Kaspersky Security Network.
  - The user has placed application in the *Trusted* group.

  No operations are prohibited for these applications.

- **Low Restricted**. This group includes applications for which the following conditions are met:
  - Applications are not digitally signed by trusted vendors.
  - Applications are not recorded in the trusted applications database of Kaspersky Security Network.
  - The user has placed application in the *Low Restricted* group.

  Such applications are subject to minimal restrictions on access to operating system resources.
- **High Restricted**. This group includes applications for which the following conditions are met:
  - Applications are not digitally signed by trusted vendors.
  - Applications are not recorded in the trusted applications database of Kaspersky Security Network.
  - The user has placed application in the *High Restricted* group.

  Such applications are subject to high restrictions on access to operating system resources.
- **Untrusted**. This group includes applications for which the following conditions are met:
  - Applications are not digitally signed by trusted vendors.
  - Applications are not recorded in the trusted applications database of Kaspersky Security Network.
  - The user has placed application in the *Untrusted* group.

  For such applications, all operations are blocked.

Appendix 3. File extensions for quick removable drives scan

com – executable file of an application no larger than 64 KB

exe – executable file or self-extracting archive

sys – Microsoft Windows system file

prg – program text for dBase™, Clipper or Microsoft Visual FoxPro®, or a WAVmaker program

bin – binary file

bat – batch file

cmd – command file for Microsoft Windows NT (similar to a bat file for DOS), OS/2

dpl – compressed Borland Delphi library

dll – dynamic link library

scr – Microsoft Windows splash screen

cpl – Microsoft Windows control panel module

ocx – Microsoft OLE (Object Linking and Embedding) object

tsp – program running in split-time mode

drv – device driver

vxd – Microsoft Windows virtual device driver

pif – program information file

lnk – Microsoft Windows link file

reg – Microsoft Windows system registry key file

ini – configuration file which contains configuration data for Microsoft Windows, Windows NT, and some applications

cla – Java class

vbs – Visual Basic® script

vbe – BIOS video extension

js, jse – JavaScript source text

htm – hypertext document

htt – Microsoft Windows hypertext header

hta – hypertext program for Microsoft Internet Explorer®

asp – Active Server Pages script

chm – compiled HTML file

pht – HTML file with integrated PHP scripts

php – script that is integrated into HTML files

wsh – Microsoft Windows Script Host file

wsf – Microsoft Windows script

the – Microsoft Windows 95 desktop wallpaper file

hlp – Win Help file

msg – Microsoft Mail email message

plg – email message

mbx – saved Microsoft Office Outlook email message

doc* – Microsoft Office Word documents, such as: doc for Microsoft Office Word documents, docx for Microsoft Office Word 2007 documents with XML support, and docm for Microsoft Office Word 2007 documents with macro support

dot* – Microsoft Office Word document templates, such as: dot for Microsoft Office Word document templates, dotx for Microsoft Office Word 2007 document templates, dotm for Microsoft Office Word 2007 document templates with macro support

fpm – database program, Microsoft Visual FoxPro start file

rtf – Rich Text Format document

shs – Windows Shell Scrap Object Handler fragment

dwg – AutoCAD® drawing database

msi – Microsoft Windows Installer package

otm – VBA project for Microsoft Office Outlook

pdf – Adobe Acrobat document

swf – Shockwave® Flash package object

jpg, jpeg – compressed image graphics format

emf – Enhanced Metafile format file;

ico – object icon file

ov? – Microsoft Office Word executable files

xl* – Microsoft Office Excel documents and files, such as: xla, the extension for Microsoft Office Excel, xlc for diagrams, xlt for document templates, xlsx for Microsoft Office Excel 2007 workbooks, xltm for Microsoft Office Excel 2007 workbooks with macro support, xlsb for Microsoft Office Excel 2007 workbooks in binary (non-XML) format, xltx for Microsoft Office Excel 2007 templates, xlsm for Microsoft Office Excel 2007 templates with macro support, and xlam for Microsoft Office Excel 2007 plug-ins with macro support

pp* – Microsoft Office PowerPoint® documents and files, such as: pps for Microsoft Office PowerPoint slides, ppt for presentations, pptx for Microsoft Office PowerPoint 2007 presentations, pptm for Microsoft Office PowerPoint 2007 presentations with macros support, potx for Microsoft Office PowerPoint 2007 presentation templates, potm for Microsoft Office PowerPoint 2007 presentation templates with macro support, ppsx for Microsoft Office PowerPoint 2007 slide shows, ppsm for Microsoft Office PowerPoint 2007 slide shows with macro support, and ppam for Microsoft Office PowerPoint 2007 plug-ins with macro support

md* – Microsoft Office Access® documents and files, such as: mda for Microsoft Office Access workgroups and mdb for databases

sldx – a Microsoft PowerPoint 2007 slide

sldm – a Microsoft PowerPoint 2007 slide with macro support

thmx – a Microsoft Office 2007 theme

Appendix 4. File Types for the Mail Threat Protection attachment filter

> Note that the actual format of a file may not match its file name extension.

If you enabled filtering of email attachments, the Mail Threat Protection component may rename or delete files with the following extensions:

com – executable file of an application no larger than 64 KB

exe – executable file or self-extracting archive

sys – Microsoft Windows system file

prg – program text for dBase™, Clipper or Microsoft Visual FoxPro®, or a WAVmaker program

bin – binary file

bat – batch file

cmd – command file for Microsoft Windows NT (similar to a bat file for DOS), OS/2

dpl – compressed Borland Delphi library

dll – dynamic link library

scr – Microsoft Windows splash screen

cpl – Microsoft Windows control panel module

ocx – Microsoft OLE (Object Linking and Embedding) object

tsp – program running in split-time mode

drv – device driver

vxd – Microsoft Windows virtual device driver

pif – program information file

lnk – Microsoft Windows link file

reg – Microsoft Windows system registry key file

ini – configuration file which contains configuration data for Microsoft Windows, Windows NT, and some applications

cla – Java class

vbs – Visual Basic® script

vbe – BIOS video extension

js, jse – JavaScript source text

htm – hypertext document

htt – Microsoft Windows hypertext header

hta – hypertext program for Microsoft Internet Explorer®

asp – Active Server Pages script

chm – compiled HTML file

pht – HTML file with integrated PHP scripts

php – script that is integrated into HTML files

wsh – Microsoft Windows Script Host file

wsf – Microsoft Windows script

the – Microsoft Windows 95 desktop wallpaper file

hlp – Win Help file

msg – Microsoft Mail email message

plg – email message

mbx – saved Microsoft Office Outlook email message

doc* – Microsoft Office Word documents, such as: doc for Microsoft Office Word documents, docx for Microsoft Office Word 2007 documents with XML support, and docm for Microsoft Office Word 2007 documents with macro support

dot* – Microsoft Office Word document templates, such as: dot for Microsoft Office Word document templates, dotx for Microsoft Office Word 2007 document templates, dotm for Microsoft Office Word 2007 document templates with macro support

fpm – database program, Microsoft Visual FoxPro start file

rtf – Rich Text Format document

shs – Windows Shell Scrap Object Handler fragment

dwg – AutoCAD® drawing database

msi – Microsoft Windows Installer package

otm – VBA project for Microsoft Office Outlook

pdf – Adobe Acrobat document

swf – Shockwave® Flash package object

jpg, jpeg – compressed image graphics format

emf – Enhanced Metafile format file;

ico – object icon file

ov? – Microsoft Office Word executable files

xl* – Microsoft Office Excel documents and files, such as: xla, the extension for Microsoft Office Excel, xlc for diagrams, xlt for document templates, xlsx for Microsoft Office Excel 2007 workbooks, xltm for Microsoft Office Excel 2007 workbooks with macro support, xlsb for Microsoft Office Excel 2007 workbooks in binary (non-XML) format, xltx for Microsoft Office Excel 2007 templates, xlsm for Microsoft Office Excel 2007 templates with macro support, and xlam for Microsoft Office Excel 2007 plug-ins with macro support

pp* – Microsoft Office PowerPoint® documents and files, such as: pps for Microsoft Office PowerPoint slides, ppt for presentations, pptx for Microsoft Office PowerPoint 2007 presentations, pptm for Microsoft Office PowerPoint 2007 presentations with macros support, potx for Microsoft Office PowerPoint 2007 presentation templates, potm for Microsoft Office PowerPoint 2007 presentation templates with macro support, ppsx for Microsoft Office PowerPoint 2007 slide shows, ppsm for Microsoft Office PowerPoint 2007 slide shows with macro support, and ppam for Microsoft Office PowerPoint 2007 plug-ins with macro support

md* – Microsoft Office Access® documents and files, such as: mda for Microsoft Office Access workgroups and mdb for databases

sldx – a Microsoft PowerPoint 2007 slide

sldm – a Microsoft PowerPoint 2007 slide with macro support

thmx – a Microsoft Office 2007 theme

Appendix 5. Network settings for interaction with external services

Kaspersky Endpoint Security and Kaspersky Security Center uses an encrypted communication channel with TLS (Transport Layer Security) to work with external services of Kaspersky.

Kaspersky Endpoint Security uses the following network settings for interacting with external services.

Address	Description
`activation-v2.kaspersky.com/activationservice/activationservice.svc` Protocol: `HTTPS` Port: `443`	Activating the application.

Address	Description

`s00.upd.kaspersky.com`
`s01.upd.kaspersky.com`
`s02.upd.kaspersky.com`
`s03.upd.kaspersky.com`
`s04.upd.kaspersky.com`
`s05.upd.kaspersky.com`
`s06.upd.kaspersky.com`
`s07.upd.kaspersky.com`
`s08.upd.kaspersky.com`
`s09.upd.kaspersky.com`
`s10.upd.kaspersky.com`
`s11.upd.kaspersky.com`
`s12.upd.kaspersky.com`
`s13.upd.kaspersky.com`
`s14.upd.kaspersky.com`
`s15.upd.kaspersky.com`
`s16.upd.kaspersky.com`
`s17.upd.kaspersky.com`
`s18.upd.kaspersky.com`
`s19.upd.kaspersky.com`
`cm.k.kaspersky-labs.com`
Protocol: `HTTPS`
Port: `443`
	Updating databases and application software modules.

`downloads.upd.kaspersky.com` Protocol: `HTTPS` Port: `443`	• Updating databases and application software modules. • Verifying access to Kaspersky servers. If access to the servers using system DNS is not possible, the application uses public DNS. This is necessary to make sure anti-virus databases are updated and the level of security is maintained for the computer. Kaspersky Endpoint Security uses the following list of public DNS servers in the following order: 1. Google Public DNS (8.8.8.8). 2. Cloudflare DNS (1.1.1.1). 3. Alibaba Cloud DNS (223.6.6.6). 4. Quad9 DNS (9.9.9.9). 5. CleanBrowsing (185.228.168.168). Requests emitted by the application may contain addresses of domains and the public IP address of the user because the application establishes a TCP/UDP connection with the DNS server. This information is needed, for example, to validate the certificate of a web resource when using HTTPS. If Kaspersky Endpoint Security is using a public DNS server, data processing is governed by the privacy policy of the relevant service. If you want to prevent Kaspersky Endpoint Security from using a public DNS server, contact Technical Support for a private patch.
`touch.kaspersky.com` Protocol: `HTTP`	• Receiving the trusted time for checking the validity period of the certificate (TLS connection). • Warning about denied access to a web resource in the browser when Web Threat Protection is running.

Address	Description

`p00.upd.kaspersky.com`
`p01.upd.kaspersky.com`
`p02.upd.kaspersky.com`
`p03.upd.kaspersky.com`
`p04.upd.kaspersky.com`
`p05.upd.kaspersky.com`
`p06.upd.kaspersky.com`
`p07.upd.kaspersky.com`
`p08.upd.kaspersky.com`
`p09.upd.kaspersky.com`
`p10.upd.kaspersky.com`
`p11.upd.kaspersky.com`
`p12.upd.kaspersky.com`
`p13.upd.kaspersky.com`
`p14.upd.kaspersky.com`
`p15.upd.kaspersky.com`
`p16.upd.kaspersky.com`
`p17.upd.kaspersky.com`
`p18.upd.kaspersky.com`
`p19.upd.kaspersky.com`
`downloads.kaspersky-labs.com`
`cm.k.kaspersky-labs.com`
Protocol: `HTTP`
Port: `80`
	Updating databases and application software modules.

`ds.kaspersky.com`
`dc1.ksn.kaspersky-labs.com`
`dc1-file.ksn.kaspersky-labs.com`
`dc1-pp.ksn.kaspersky-labs.com`
`dc1-st.ksn.kaspersky-labs.com`
Protocol: `HTTPS`
Port: `443`
	Using Kaspersky Security Network.

`ksn-a-stat-geo.kaspersky-labs.com`
`ksn-file-geo.kaspersky-labs.com`
`ksn-verdict-geo.kaspersky-labs.com`
`ksn-url-geo.kaspersky-labs.com`
`ksn-a-p2p-geo.kaspersky-labs.com`
`ksn-info-geo.kaspersky-labs.com`
`ksn-cinfo-geo.kaspersky-labs.com`
Protocol: `KSN`
Port: `443`, `1443`
	Using Kaspersky Security Network.

`click.kaspersky.com`
`redirect.kaspersky.com`
Protocol: `HTTPS`
Port: `443`
	Follow links from the interface.

Settings, used for encryption

Address	Description

`crl.kaspersky.com`
`ocsp.kaspersky.com`
Protocol: `HTTP`
Port: `80`
	Public Key Infrastructure (PKI).

Appendix 6. Application events

Information about the operation of each Kaspersky Endpoint Security component, data encryption events, the completion of each malware scan task, update task and integrity check task, and the overall operation of the application is recorded in the Kaspersky Security Center event log and Windows event log.

Kaspersky Endpoint Security generates events of the following types: general events and specific events. Specific events are created only by Kaspersky Endpoint Security for Windows. Specific events have a simple ID, such as `000000cb`. Specific events contain the following required parameters:

- `GNRL_EA_DESCRIPTION` is the content of the event.
- `GNRL_EA_ID` is the service ID of the event.
- `GNRL_EA_SEVERITY` is the status of the event. `1` – *Info*, `2` – *Warning*, `3` – *Functional failure*, `4` – *Critical*.
- `EVENT_TYPE_DISPLAY_NAME` is the title of the event.
- `TASK_DISPLAY_NAME` is the name of the application component that initiated the event.

General events can be created by Kaspersky Endpoint Security for Windows as well as other Kaspersky applications (for example, Kaspersky Security for Windows Server). General events have a more complex ID, such as `GNRL_EV_VIRUS_FOUND`. In addition to required settings, general events contain advanced settings.

How long events are stored on the server

Critical

License has expired

Status	!
Component	System Audit
Windows event ID	`201`
Kaspersky Security Center event ID	`GNRL_EV_LICENSE_EXPIRATION`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

License has almost expired

Status	!
Component	System Audit
Windows event ID	`203`
Kaspersky Security Center event ID	`000000cb`

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Databases are missing or corrupted

Status	!
Component	System Audit
Windows event ID	`206`
Kaspersky Security Center event ID	`000000ce`
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Databases are extremely out of date

Status	!
Component	System Audit
Windows event ID	`207`
Kaspersky Security Center event ID	`000000cf`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Application autorun is disabled

Status	!
Component	System Audit
Windows event ID	`209`
Kaspersky Security Center event ID	`000000d1`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Activation error

Status	!
Component	System Audit
Windows event ID	`229`
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Active threat detected. Advanced Disinfection should be started

Status	!
Component	System Audit
Windows event ID	`231`
Kaspersky Security Center event ID	`000000e7`

Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

KSN servers unavailable

Status	!
Component	System Audit
Windows event ID	2023
Kaspersky Security Center event ID	000007e7
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Not enough space in Quarantine storage

Status	!
Component	System Audit
Windows event ID	343
Kaspersky Security Center event ID	00000157
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object not restored from Quarantine

Status	!
Component	System Audit
Windows event ID	346
Kaspersky Security Center event ID	0000015a
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object not deleted from Quarantine

Status	!
Component	System Audit
Windows event ID	348
Kaspersky Security Center event ID	0000015c
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

The application established a connection to a website with an untrusted certificate

Status	!
Component	System Audit
Windows event ID	57
Kaspersky Security Center event ID	00000039

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Failed to verify an encrypted connection. The domain is added to the list of exclusions

Status	!
Component	System Audit
Windows event ID	`60`
Kaspersky Security Center event ID	`0000003c`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Malicious object detected (local bases)

Status	!
Component	File Threat Protection Web Threat Protection Mail Threat Protection AMSI Protection Host Intrusion Prevention Behavior Detection Anti-Cryptor Exploit Prevention Malware Scan
Windows event ID	`302`
Kaspersky Security Center event ID	`GNRL_EV_VIRUS_FOUND`
Event parameters	• `GNRL_EA_PARAM_1` is the hash of the object (SHA256). • `GNRL_EA_PARAM_2` is the name of the object. When external encryption of shared folders is detected, the application shows the path to the target file. • `GNRL_EA_PARAM_5` is the name of the threat in accordance with Kaspersky classification, for example, `EICAR-Test-File`. • `GNRL_EA_PARAM_7` is the name of the session user. • `GNRL_EA_PARAM_8` is the type of the threat (`type`). • `GNRL_EA_PARAM_9` is additional information about the detected object: Application component (`engine`). Threat detection technology (`method`). Threat detected by Kaspersky Private Security Network (`blacklist`): `true` or `false`. EDR version. Threat identifier in EDR. MD5 hash of the object.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Malicious object detected (KSN)

Status	!
Component	File Threat Protection Web Threat Protection Mail Threat Protection AMSI Protection Host Intrusion Prevention Behavior Detection Anti-Cryptor Exploit Prevention Malware Scan
Windows event ID	`302`
Kaspersky Security Center event ID	`GNRL_EV_VIRUS_FOUND_BY_KSN`
Event parameters	• `GNRL_EA_PARAM_1` is the hash of the object (SHA256). • `GNRL_EA_PARAM_2` is the name of the object. • `GNRL_EA_PARAM_5` is the name of the threat in accordance with Kaspersky classification, for example, `EICAR-Test-File`. • `GNRL_EA_PARAM_7` is the name of the session user. • `GNRL_EA_PARAM_8` is the type of the threat (`type`). • `GNRL_EA_PARAM_9` is additional information about the detected object: Application component (`engine`). Threat detection technology (`method`). Threat detected by Kaspersky Private Security Network (`blacklist`): `true` or `false`. EDR version. Threat identifier in EDR. MD5 hash of the object.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Disinfection impossible

Status	!
Component	File Threat Protection Mail Threat Protection Host Intrusion Prevention Behavior Detection Anti-Cryptor Malware Scan
Windows event ID	`312`
Kaspersky Security Center event ID	`GNRL_EV_OBJECT_NOTCURED`
Event parameters	• `GNRL_EA_PARAM_1` is the hash of the object (SHA256). • `GNRL_EA_PARAM_2` is the name of the object. • `GNRL_EA_PARAM_5` is the name of the threat in accordance with Kaspersky classification, for example, `EICAR-Test-File`. • `GNRL_EA_PARAM_7` is the name of the session user. • `GNRL_EA_PARAM_8` is the type of the threat (`type`). • `GNRL_EA_PARAM_9` is additional information about the detected object: Application component (`engine`). Threat detection technology (`method`). Threat detected by Kaspersky Private Security Network (`blacklist`): `true` or `false`. EDR version. Threat identifier in EDR. MD5 hash of the object.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Cannot be deleted

Status	!
Component	File Threat Protection Host Intrusion Prevention Behavior Detection Anti-Cryptor Malware Scan
Windows event ID	313
Kaspersky Security Center event ID	00000139
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Processing error

Status	!
Component	File Threat Protection Web Threat Protection Mail Threat Protection Host Intrusion Prevention AMSI Protection Malware Scan
Windows event ID	317
Kaspersky Security Center event ID	0000013d
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Process terminated

Status	!
Component	File Threat Protection Host Intrusion Prevention Behavior Detection Malware Scan
Windows event ID	452
Kaspersky Security Center event ID	000001c4
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Unable to terminate process

Status	!
Component	File Threat Protection Host Intrusion Prevention Behavior Detection Malware Scan
Windows event ID	453
Kaspersky Security Center event ID	000001c5
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Dangerous link blocked

Status	!
Component	Web Threat Protection
Windows event ID	362
Kaspersky Security Center event ID	GNRL_EV_VIRUS_FOUND_AND_BLOCKED
Event parameters	• GNRL_EA_PARAM_2 is the path to the object. • GNRL_EA_PARAM_5 is the name of the object according to Kaspersky classification. • GNRL_EA_PARAM_7 is the name of the session user. • GNRL_EA_PARAM_8 is the type of the threat (type). • GNRL_EA_PARAM_9 is additional information about the detected object: Application component (engine). Threat detection technology (method). Threat detected by Private KSN (blacklist): true or false.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Dangerous link opened

Status	!
Component	Web Threat Protection
Windows event ID	363
Kaspersky Security Center event ID	GNRL_EV_VIRUS_FOUND_AND_REPORTED
Event parameters	• GNRL_EA_PARAM_2 is the path to the object. • GNRL_EA_PARAM_5 is the name of the object according to Kaspersky classification. • GNRL_EA_PARAM_7 is the name of the session user. • GNRL_EA_PARAM_8 is the type of the threat (type). • GNRL_EA_PARAM_9 is additional information about the detected object: Application component (engine). Threat detection technology (method). Threat detected by Private KSN (blacklist): true or false.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Previously opened dangerous link detected

Status	!
Component	Web Threat Protection
Windows event ID	1201
Kaspersky Security Center event ID	GNRL_EV_VIRUS_FOUND_AND_PASSED
Event parameters	• GNRL_EA_PARAM_2 is the path to the object. • GNRL_EA_PARAM_5 is the name of the object according to Kaspersky classification. • GNRL_EA_PARAM_7 is the name of the session user. • GNRL_EA_PARAM_8 is the type of the threat (type). • GNRL_EA_PARAM_9 is additional information about the detected object: Application component (engine). Threat detection technology (method). Threat detected by Private KSN (blacklist): true or false.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Process action blocked

Status	!
Component	Adaptive Anomaly Control
Windows event ID	`2200`
Kaspersky Security Center event ID	`GNRL_EV_ADSEC_DETECT`
Event parameters	• `GNRL_EA_PARAM_1` is the name of the Adaptive Anomaly Control rule. • `GNRL_EA_PARAM_2` is the ID of the heuristic rule. • `GNRL_EA_PARAM_3` is the name of the session user. • `GNRL_EA_PARAM_4` is the source process. • `GNRL_EA_PARAM_5` is the source object. • `GNRL_EA_PARAM_6` is the target process. • `GNRL_EA_PARAM_7` is the target object. • `GNRL_EA_PARAM_8` is additional information about the detected object: Checksums of the source process / object and target process / object. Process blocked (`verdict_type`): `true` or `false`. User security ID (SID).
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Keyboard not authorized

Status	!
Component	BadUSB Attack Prevention
Windows event ID	`2051`
Kaspersky Security Center event ID	`00000803`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

AMSI request was blocked

Status	!
Component	AMSI Protection
Windows event ID	`2200`
Kaspersky Security Center event ID	`00000898`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Network activity blocked

Status	!
Component	Firewall
Windows event ID	`602`
Kaspersky Security Center event ID	`00000329`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Network attack detected

Status	!
Component	Network Threat Protection
Windows event ID	`651`
Kaspersky Security Center event ID	`GNRL_EV_ATTACK_DETECTED`
Event parameters	• `GNRL_EA_PARAM_1` is the name of the attack. • `GNRL_EA_PARAM_2` is the protocol. • `GNRL_EA_PARAM_3` is the IP address of the computer acting as the source of the network attack. The IP address is indicated in the byte order of the host. For example, `2886729929` for `172.16.0.201`. • `GNRL_EA_PARAM_4` is the port number. • `GNRL_EA_PARAM_5` is an IPv6 address, for example, `12B012B012B012B012B012B012B012B0`. • `GNRL_EA_PARAM_6` is the IP address of the computer targeted by the network attack. The IP address is indicated in the byte order of the host. For example, `2886729929` for `172.16.0.201`.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Application startup prohibited

Status	!
Component	Application Control
Windows event ID	`702`
Kaspersky Security Center event ID	`GNRL_EV_APPLICATION_LAUNCH_DENIED`
Event parameters	• `GNRL_EA_PARAM_2` is the name of the session user. • `GNRL_EA_PARAM_3` is the manually created category identifier. • `GNRL_EA_PARAM_4` is the application category ID. • `GNRL_EA_PARAM_5` is information about the digital signature of the application. • `GNRL_EA_PARAM_6` is the name of the executable file of the application (for example, chrome.exe). • `GNRL_EA_PARAM_7` is the path to the executable file. • `GNRL_EA_PARAM_8` is the hash of the object (SHA256). • `GNRL_EA_PARAM_9` is the version of the application that the user is trying to run.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Prohibited process was started before Kaspersky Endpoint Security startup

Status	!
Component	Application Control
Windows event ID	`710`
Kaspersky Security Center event ID	`000002c6`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Access denied (local bases)

Status	!
Component	Web Control

Windows event ID	752
Kaspersky Security Center event ID	GNRL_EV_WEB_URL_BLOCKED
Event parameters	• GNRL_EA_PARAM_1 is the URL. • GNRL_EA_PARAM_2 is the name of the session user. • GNRL_EA_PARAM_3 is the name of the Web Control rule.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Access denied (KSN)

Status	!
Component	Web Control
Windows event ID	752
Kaspersky Security Center event ID	GNRL_EV_WEB_URL_BLOCKED_BY_KSN
Event parameters	• GNRL_EA_PARAM_1 is the URL. • GNRL_EA_PARAM_2 is the name of the session user. • GNRL_EA_PARAM_3 is the name of the Web Control rule.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Operation with the device prohibited

Status	!
Component	Device Control
Windows event ID	802
Kaspersky Security Center event ID	GNRL_EV_DEVCTRL_DEV_PLUG_DENIED
Event parameters	• GNRL_EA_PARAM_1 is the Hardware ID (HWID). • GNRL_EA_PARAM_2 is the name of the session user.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Network connection blocked

Status	!
Component	Device Control
Windows event ID	809
Kaspersky Security Center event ID	00000329
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Operation with the device is prohibited until Kaspersky Endpoint Security is started

Status	!
Component	Device Control
Windows event ID	816
Kaspersky Security Center event ID	00000330

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Device connection is prohibited until Kaspersky Endpoint Security is started

Status	!
Component	Device Control
Windows event ID	817
Kaspersky Security Center event ID	00000331
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Error updating component

Status	!
Component	Update
Windows event ID	1011
Kaspersky Security Center event ID	000003f3
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Error distributing component updates

Status	!
Component	Update
Windows event ID	1012
Kaspersky Security Center event ID	000003f4
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Local update error

Status	!
Component	Update
Windows event ID	1014
Kaspersky Security Center event ID	000003f6
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Network update error

Status	!
Component	Update
Windows event ID	1015
Kaspersky Security Center event ID	000003f7

Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Cannot start two tasks at the same time

Status	!
Component	Update
Windows event ID	1017
Kaspersky Security Center event ID	000003f9
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Error verifying application databases and modules

Status	!
Component	Update
Windows event ID	1018
Kaspersky Security Center event ID	000003fa
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Error in interaction with Kaspersky Security Center

Status	!
Component	Update
Windows event ID	1019
Kaspersky Security Center event ID	000003fb
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Not all components were updated

Status	!
Component	Update
Windows event ID	1021
Kaspersky Security Center event ID	000003fd
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Update completed successfully, update distribution failed

Status	!
Component	Update
Windows event ID	1023
Kaspersky Security Center event ID	000003ff

Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Internal task error

Status	!
Component	System Audit
Windows event ID	101
Kaspersky Security Center event ID	00000065
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Patch installation failed

Status	!
Component	Update
Windows event ID	2153
Kaspersky Security Center event ID	00000869
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Patch rollback failed

Status	!
Component	Update
Windows event ID	2156
Kaspersky Security Center event ID	0000086c
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Error applying file encryption / decryption rules

Status	!
Component	Data Encryption
Windows event ID	904
Kaspersky Security Center event ID	00000388
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

File encryption / decryption error

Status	!
Component	Data Encryption
Windows event ID	912

Kaspersky Security Center event ID	`GNRL_EV_ENCRYPTION_ERROR`
Event parameters	• `GNRL_EA_PARAM_1` is the path to the file. • `GNRL_EA_PARAM_2` is the cause of the error. • `GNRL_EA_PARAM_3` is the type of the device.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

File access blocked

Status	!
Component	Data Encryption
Windows event ID	`940`
Kaspersky Security Center event ID	`GNRL_EV_ENCRYPTION_DATAACCESS_VIOLATION`
Event parameters	• `GNRL_EA_PARAM_1` is the target object. • `GNRL_EA_PARAM_2` is the name of the session user. • `GNRL_EA_PARAM_3` is the name of the executable file of the application (for example, chrome.exe), which is trying to gain access to the file.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Error enabling portable mode

Status	!
Component	Data Encryption
Windows event ID	`951`
Kaspersky Security Center event ID	`000003b7`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Error disabling portable mode

Status	!
Component	Data Encryption
Windows event ID	`953`
Kaspersky Security Center event ID	`000003b9`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Error creating encrypted package

Status	!
Component	Data Encryption
Windows event ID	`931`
Kaspersky Security Center event ID	`000003a3`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Error encrypting / decrypting device

Status	!
Component	Data Encryption
Windows event ID	1305
Kaspersky Security Center event ID	00000519
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Could not load encryption module

Status	!
Component	Data Encryption
Windows event ID	1311
Kaspersky Security Center event ID	0000051f
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

The task for managing Authentication Agent accounts ended with an error

Status	!
Component	Data Encryption
Windows event ID	1340
Kaspersky Security Center event ID	0000053c
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Policy cannot be applied

Status	!
Component	System Audit
Windows event ID	1312
Kaspersky Security Center event ID	00000520
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

FDE upgrade failed

Status	!
Component	Data Encryption
Windows event ID	1342
Kaspersky Security Center event ID	0000053e
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

FDE upgrade rollback failed (for more information, please refer to the Kaspersky Endpoint Security for Windows Online Help)

Status	!
Component	Data Encryption
Windows event ID	1344
Kaspersky Security Center event ID	00000540
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Kaspersky Anti Targeted Attack Platform server unavailable

Status	!
Component	Endpoint Sensor
Windows event ID	2100
Kaspersky Security Center event ID	00000834
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Failed to delete object

Status	!
Component	Sandbox
Windows event ID	2252
Kaspersky Security Center event ID	000008cc
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Object not quarantined (Sandbox)

Status	!
Component	Sandbox
Windows event ID	2603
Kaspersky Security Center event ID	00000a2b
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

An internal error occurred

Status	!
Component	Sandbox
Windows event ID	2607
Kaspersky Security Center event ID	00000a2f
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Invalid Sandbox server certificate

Status	!
Component	Sandbox
Windows event ID	2613
Kaspersky Security Center event ID	00000a35
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

The Sandbox node is unavailable

Status	!
Component	Sandbox
Windows event ID	2614
Kaspersky Security Center event ID	00000a36
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Failed to process the object in Sandbox

Status	!
Component	Sandbox
Windows event ID	2617
Kaspersky Security Center event ID	00000a39
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Maximum load to Sandbox is exceeded

Status	!
Component	Sandbox
Windows event ID	2618
Kaspersky Security Center event ID	00000a3a
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

IOC found

Status	!
Component	Endpoint Detection and Response
Windows event ID	2651
Kaspersky Security Center event ID	00000a5b
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Sandbox license verification failed

Status	!
Component	Sandbox
Windows event ID	2620
Kaspersky Security Center event ID	00000a3c
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Failed to submit the scan task to Sandbox by a user

Status	!
Component	Sandbox
Windows event ID	2623
Kaspersky Security Center event ID	00000a3e
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Error creating Sandbox task

Status	!
Component	Sandbox
Windows event ID	2621
Kaspersky Security Center event ID	00000a3d
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object startup blocked

Status	!
Component	Endpoint Detection and Response
Windows event ID	2553
Kaspersky Security Center event ID	000009f9
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Process startup blocked

Status	!
Component	Endpoint Detection and Response
Windows event ID	2551
Kaspersky Security Center event ID	000009f7
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Script execution blocked

Status	ⓘ
Component	Endpoint Detection and Response
Windows event ID	2559
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object not quarantined (Endpoint Detection and Response)

Status	ⓘ
Component	Endpoint Detection and Response
Windows event ID	2556
Kaspersky Security Center event ID	000009fc
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Process startup is not blocked

Status	ⓘ
Component	Endpoint Detection and Response
Windows event ID	2561
Kaspersky Security Center event ID	00000a01
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object is not blocked

Status	ⓘ
Component	Endpoint Detection and Response
Windows event ID	2562
Kaspersky Security Center event ID	00000a02
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Script execution is not blocked

Status	ⓘ
Component	Endpoint Detection and Response
Windows event ID	2563
Kaspersky Security Center event ID	00000a03
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Error changing application components

Status	!
Component	System Audit
Windows event ID	1401
Kaspersky Security Center event ID	00000579
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

There are patterns of a possible brute-force attack in the system

Status	!
Component	Log Inspection
Windows event ID	2800
Kaspersky Security Center event ID	00000af0
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

There are patterns of a possible Windows Event Log abuse

Status	!
Component	Log Inspection
Windows event ID	2801
Kaspersky Security Center event ID	00000af1
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Atypical actions detected on behalf of a new service installed

Status	!
Component	Log Inspection
Windows event ID	2802
Kaspersky Security Center event ID	00000af2
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Atypical logon that uses explicit credentials detected

Status	!
Component	Log Inspection
Windows event ID	2803
Kaspersky Security Center event ID	00000af3
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

There are patterns of a possible Kerberos forged PAC (MS14-068) attack in the system

Status	!
Component	Log Inspection
Windows event ID	2804
Kaspersky Security Center event ID	00000af4
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Suspicious changes detected in the privileged built-in Administrators group

Status	!
Component	Log Inspection
Windows event ID	2805
Kaspersky Security Center event ID	00000af5
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

There is an atypical activity detected during a network logon session

Status	!
Component	Log Inspection
Windows event ID	2806
Kaspersky Security Center event ID	00000af6
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Log Inspection rule triggered

Status	!
Component	Log Inspection
Windows event ID	2807
Kaspersky Security Center event ID	00000af7
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Atypical event occurs too often. Event aggregation started

Status	!
Component	Log Inspection
Windows event ID	2808
Kaspersky Security Center event ID	00000af8
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Report on an atypical event for the aggregation period

Status	!
Component	Log Inspection
Windows event ID	2809
Kaspersky Security Center event ID	00000af9
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Error connecting to the EDR Expert server

Status	!
Component	Endpoint Detection and Response Expert (on-premises)
Windows event ID	2850
Kaspersky Security Center event ID	00000b22
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Invalid certificate of the EDR Expert server

Status	!
Component	Endpoint Detection and Response Expert (on-premises)
Windows event ID	2851
Kaspersky Security Center event ID	00000b23
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Invalid certificate of the agent on the EDR Expert server

Status	!
Component	Endpoint Detection and Response Expert (on-premises)
Windows event ID	2852
Kaspersky Security Center event ID	00000b24
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Error connecting to the EDR Expert response server

Status	!
Component	Endpoint Detection and Response Expert (on-premises) Endpoint Detection and Response Expert (cloud)
Windows event ID	2858
Kaspersky Security Center event ID	00000b22
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Invalid certificate of the EDR Expert response server

Status	!
Component	Endpoint Detection and Response Expert (on-premises) Endpoint Detection and Response Expert (cloud)
Windows event ID	2859
Kaspersky Security Center event ID	00000b23
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Invalid certificate of the agent on the EDR Expert response server

Status	!
Component	Endpoint Detection and Response Expert (on-premises) Endpoint Detection and Response Expert (cloud)
Windows event ID	2860
Kaspersky Security Center event ID	00000b24
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

EDR Expert telemetry collection server connection error

Status	!
Component	Endpoint Detection and Response Expert (on-premises) Endpoint Detection and Response Expert (cloud)
Windows event ID	2854
Kaspersky Security Center event ID	00000b22
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Invalid certificate of the EDR Expert telemetry collection server

Status	!
Component	Endpoint Detection and Response Expert (on-premises) Endpoint Detection and Response Expert (cloud)
Windows event ID	2855
Kaspersky Security Center event ID	00000b23
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Invalid certificate of the agent on the EDR Expert telemetry collection server

Status	!
Component	Endpoint Detection and Response Expert (on-premises) Endpoint Detection and Response Expert (cloud)
Windows event ID	2856
Kaspersky Security Center event ID	00000b24

Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Error connecting to the NDR server

Status	!
Component	Network Detection and Response (KATA)
Windows event ID	`3080`
Kaspersky Security Center event ID	`00000c08`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Invalid certificate of the NDR server

Status	!
Component	Network Detection and Response (KATA)
Windows event ID	`3081`
Kaspersky Security Center event ID	`00000c09`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Invalid certificate of the agent on the NDR server

Status	!
Component	Network Detection and Response (KATA)
Windows event ID	`3082`
Kaspersky Security Center event ID	`00000c0a`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Your device is connected to an untrusted Administration Server. Contact the administrator

Status	!
Component	Administration Server connection protection
Windows event ID	`3301`
Kaspersky Security Center event ID	`00000ce5`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

File or folder change was detected

Status	i / ⚠ / !
Component	System Integrity Monitoring
Windows event ID	`2950`
Kaspersky Security Center event ID	`00000b86`
Windows event log (default)	–

Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Object changes too often. Event aggregation started

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2955
Kaspersky Security Center event ID	00000b8b
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Report on object modification for the aggregation period

Status	ⓘ
Component	System Integrity Monitoring
Windows event ID	2953
Kaspersky Security Center event ID	00000b89
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2956
Kaspersky Security Center event ID	00000b8c
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Registry change was detected

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2951
Kaspersky Security Center event ID	00000b87
Windows event log (default)	–

Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected.*

Device connection / disconnection is detected

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2952
Kaspersky Security Center event ID	00000b88
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected.*

Monitoring scope includes incorrect objects

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2903
Kaspersky Security Center event ID	00000b89
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected.*

Attempts to perform the restricted operations with the object is too many. Event aggregation started

Status	ⓘ
Component	System Integrity Monitoring
Windows event ID	2963
Kaspersky Security Center event ID	00000b93
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

An operation with the files of the monitoring scope was blocked

Status	ⓘ
Component	System Integrity Monitoring
Windows event ID	2959
Kaspersky Security Center event ID	00000b8f

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Registry modification blocked

Status	ⓘ
Component	System Integrity Monitoring
Windows event ID	`2960`
Kaspersky Security Center event ID	`00000b90`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Processing error

Status	ⓘ
Component	System Integrity Monitoring
Windows event ID	`2954`
Kaspersky Security Center event ID	`00000b8a`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

System Integrity Monitoring: rule triggering disabled for user accounts without matching security identifier (SID)

Status	ⓘ
Component	System Integrity Monitoring
Windows event ID	`2964`
Kaspersky Security Center event ID	`00000b94`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Application Control: rule triggering disabled for user accounts without matching security identifier (SID)

Status	ⓘ
Component	Application Control
Windows event ID	`711`
Kaspersky Security Center event ID	`000002c7`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Device Control: rule triggering disabled for user accounts without matching security identifier (SID)

Status	!
Component	Device Control
Windows event ID	810
Kaspersky Security Center event ID	0000032a
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Web Control: rule triggering disabled for user accounts without matching security identifier (SID)

Status	!
Component	Web Control
Windows event ID	757
Kaspersky Security Center event ID	000002f5
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Adaptive Anomaly Control: rule triggering disabled for user accounts without matching security identifier (SID)

Status	!
Component	Adaptive Anomaly Control
Windows event ID	504
Kaspersky Security Center event ID	000001f8
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Log Inspection: rule triggering disabled for user accounts without matching security identifier (SID)

Status	!
Component	Log Inspection
Windows event ID	2810
Kaspersky Security Center event ID	00000afa
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

SVM is unavailable

Status	!
Component	Light Agent
Windows event ID	3151
Kaspersky Security Center event ID	00000c4f
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Malicious object detected. Advanced Disinfection should be started on a virtual machine template

Status	!
Component	Light Agent
Windows event ID	3182
Kaspersky Security Center event ID	00000c6e
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

The network connection established over the deprecated protocol was blocked

Status	!
Component	Protection
Windows event ID	75
Kaspersky Security Center event ID	0000004b
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

KUMA server connection error

Status	!
Component	KUMA Integration
Windows event ID	2854
Kaspersky Security Center event ID	00000b26
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Invalid certificate of the KUMA server

Status	!
Component	KUMA Integration
Windows event ID	2855
Kaspersky Security Center event ID	00000b27
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Invalid certificate of the agent on the KUMA server

Status	!
Component	KUMA Integration
Windows event ID	2856
Kaspersky Security Center event ID	00000b28
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

SIEM server connection error

Status	!
Component	KUMA Integration
Windows event ID	3250
Kaspersky Security Center event ID	00000cb2
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Invalid certificate of the SIEM server

Status	!
Component	KUMA Integration
Windows event ID	3251
Kaspersky Security Center event ID	00000cb3
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Invalid certificate of the agent on the SIEM server

Status	!
Component	KUMA Integration
Windows event ID	3252
Kaspersky Security Center event ID	00000cb4
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Functional failure

Task cannot be performed

Status	!
Component	System Audit
Windows event ID	212
Kaspersky Security Center event ID	000000d4
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Invalid task settings. Settings not applied

Status	!
Component	System Audit
Windows event ID	707
Kaspersky Security Center event ID	000002c3

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Warning

Application crashed during previous session

Status	⚠
Component	System Audit
Windows event ID	237
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

License expires soon

Status	⚠
Component	System Audit
Windows event ID	204
Kaspersky Security Center event ID	000000cc
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Databases are out of date

Status	⚠
Component	System Audit
Windows event ID	208
Kaspersky Security Center event ID	000000d0
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Automatic updates are disabled

Status	⚠
Component	System Audit
Windows event ID	210
Kaspersky Security Center event ID	000000d2
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Self-Defense is disabled

Status	⚠
Component	System Audit
Windows event ID	211
Kaspersky Security Center event ID	000000d3
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Protection components are disabled

Status	⚠
Component	System Audit
Windows event ID	214
Kaspersky Security Center event ID	000000d6
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Computer is running in safe mode

Status	⚠
Component	System Audit
Windows event ID	215
Kaspersky Security Center event ID	000000d7
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

There are unprocessed files

Status	⚠
Component	System Audit
Windows event ID	216
Kaspersky Security Center event ID	000000d8
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Group policy applied

Status	⚠
Component	System Audit
Windows event ID	219
Kaspersky Security Center event ID	000000db
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Task stopped

Status	⚠
Component	System Audit
Windows event ID	222
Kaspersky Security Center event ID	000000de
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Quit and reopen the application to complete updating

Status	⚠
Component	System Audit
Windows event ID	224
Kaspersky Security Center event ID	0000057b
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Computer restart required

Status	⚠
Component	System Audit
Windows event ID	225
Kaspersky Security Center event ID	000000e1
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

The license allows the use of components that have not been installed

Status	⚠
Component	System Audit
Windows event ID	226
Kaspersky Security Center event ID	000000e2
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Advanced Disinfection started

Status	⚠
Component	System Audit
Windows event ID	232
Kaspersky Security Center event ID	000000e8
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Advanced Disinfection completed

Status	⚠
Component	System Audit
Windows event ID	233
Kaspersky Security Center event ID	000000e9
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Incorrect reserve key

Status	⚠
Component	System Audit
Windows event ID	230
Kaspersky Security Center event ID	000000e6
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Subscription expires soon

Status	⚠
Component	System Audit
Windows event ID	240
Kaspersky Security Center event ID	000000f0
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Blocked

Status	⚠
Component	Behavior Detection Anti-Cryptor Exploit Prevention Web Threat Protection
Windows event ID	331

Kaspersky Security Center event ID	`GNRL_EV_OBJECT_BLOCKED`
Event parameters	• `GNRL_EA_PARAM_1` is the hash of the object (SHA256). • `GNRL_EA_PARAM_2` is the name of the object. When external encryption of shared folders is detected, the application shows the path to the target file. • `GNRL_EA_PARAM_5` is the name of the threat in accordance with Kaspersky classification, for example, `EICAR-Test-File`. • `GNRL_EA_PARAM_7` is the name of the session user. • `GNRL_EA_PARAM_8` is the type of the threat (`type`). • `GNRL_EA_PARAM_9` is additional information about the detected object: Application component (`engine`). Threat detection technology (`method`). Threat detected by Kaspersky Private Security Network (`blacklist`): `true` or `false`. EDR version. Threat identifier in EDR. MD5 hash of the object.
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

The operating system settings do not allow to control access to Wi-Fi networks

Status	⚠
Component	Device Control
Windows event ID	`249`
Kaspersky Security Center event ID	`000000f9`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Object not restored from Backup

Status	⚠
Component	System Audit
Windows event ID	`336`
Kaspersky Security Center event ID	`00000150`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Suspicious network activity detected

Status	⚠
Component	System Audit
Windows event ID	`2001`
Kaspersky Security Center event ID	`000007d1`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Encrypted connection terminated

Status	⚠
Component	System Audit
Windows event ID	250
Kaspersky Security Center event ID	000007d3
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Participation in KSN disabled

Status	⚠
Component	System Audit
Windows event ID	2021
Kaspersky Security Center event ID	000007e5
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Processing of some OS functions is disabled

Status	⚠
Component	System Audit
Windows event ID	245
Kaspersky Security Center event ID	000000f5
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Quarantine storage is almost out of space

Status	⚠
Component	System Audit
Windows event ID	344
Kaspersky Security Center event ID	00000158
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Network connection blocked

Status	⚠
Component	System Audit
Windows event ID	809
Kaspersky Security Center event ID	00000abe
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Cannot create a backup copy

Status	⚠
Component	File Threat Protection Behavior Detection Anti-Cryptor Host Intrusion Prevention Malware Scan
Windows event ID	`310`
Kaspersky Security Center event ID	`00000136`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Object not processed

Status	⚠
Component	File Threat Protection Mail Threat Protection Host Intrusion Prevention AMSI Protection Malware Scan
Windows event ID	`314`
Kaspersky Security Center event ID	`0000013a`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Object encrypted

Status	⚠
Component	Host Intrusion Prevention
Windows event ID	`320`
Kaspersky Security Center event ID	`00000140`
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Object corrupted

Status	⚠
Component	File Threat Protection Web Threat Protection Mail Threat Protection AMSI Protection Host Intrusion Prevention Malware Scan
Windows event ID	`321`
Kaspersky Security Center event ID	`00000141`
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Legitimate software that can be used by intruders to damage your computer or personal data was detected (local bases)

Status	⚠
Component	File Threat Protection Web Threat Protection Mail Threat Protection Host Intrusion Prevention AMSI Protection Behavior Detection Anti-Cryptor Anti-Cryptor Malware Scan
Windows event ID	`303`
Kaspersky Security Center event ID	`GNRL_EV_VIRUS_FOUND`
Event parameters	• `GNRL_EA_PARAM_1` is the hash of the object (SHA256). • `GNRL_EA_PARAM_2` is the name of the object. • `GNRL_EA_PARAM_5` is the name of the threat in accordance with Kaspersky classification, for example, `EICAR-Test-File`. • `GNRL_EA_PARAM_7` is the name of the session user. • `GNRL_EA_PARAM_8` is the type of the threat (type).
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Legitimate software that can be used by intruders to damage your computer or personal data was detected (KSN)

Status	⚠
Component	File Threat Protection Web Threat Protection Mail Threat Protection Host Intrusion Prevention AMSI Protection Behavior Detection Anti-Cryptor Anti-Cryptor Malware Scan
Windows event ID	`303`
Kaspersky Security Center event ID	`GNRL_EV_VIRUS_FOUND_BY_KSN`
Event parameters	• `GNRL_EA_PARAM_1` is the hash of the object (SHA256). • `GNRL_EA_PARAM_2` is the name of the object. • `GNRL_EA_PARAM_5` is the name of the threat in accordance with Kaspersky classification, for example, `EICAR-Test-File`. • `GNRL_EA_PARAM_7` is the name of the session user. • `GNRL_EA_PARAM_8` is the type of the threat (type).
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Object deleted

Status	⚠
Component	File Threat Protection Mail Threat Protection Host Intrusion Prevention Exploit Prevention Behavior Detection Anti-Cryptor Malware Scan

Windows event ID	307
Kaspersky Security Center event ID	GNRL_EV_OBJECT_DELETED
Event parameters	• GNRL_EA_PARAM_1 is the hash of the object (SHA256). • GNRL_EA_PARAM_2 is the name of the object. • GNRL_EA_PARAM_5 is the name of the threat in accordance with Kaspersky classification, for example, EICAR-Test-File. • GNRL_EA_PARAM_7 is the name of the session user. • GNRL_EA_PARAM_8 is the type of the threat (type). • GNRL_EA_PARAM_9 is additional information about the detected object: Application component (engine). Threat detection technology (method). Threat detected by Kaspersky Private Security Network (blacklist): true or false. EDR version. Threat identifier in EDR. MD5 hash of the object.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Object disinfected

Status	⚠
Component	File Threat Protection Mail Threat Protection Host Intrusion Prevention Malware Scan
Windows event ID	306
Kaspersky Security Center event ID	GNRL_EV_OBJECT_CURED
Event parameters	• GNRL_EA_PARAM_1 is the hash of the object (SHA256). • GNRL_EA_PARAM_2 is the name of the object. • GNRL_EA_PARAM_5 is the name of the threat in accordance with Kaspersky classification, for example, EICAR-Test-File. • GNRL_EA_PARAM_7 is the name of the session user. • GNRL_EA_PARAM_8 is the type of the threat (type). • GNRL_EA_PARAM_9 is additional information about the detected object: Application component (engine). Threat detection technology (method). Threat detected by Kaspersky Private Security Network (blacklist): true or false. EDR version. Threat identifier in EDR. MD5 hash of the object.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Object will be disinfected on restart

Status	⚠
Component	Host Intrusion Prevention File Threat Protection Malware Scan
Windows event ID	324
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Object will be deleted on restart

Status	⚠
Component	Behavior Detection Anti-Cryptor Exploit Prevention Host Intrusion Prevention File Threat Protection Malware Scan
Windows event ID	323
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Object deleted according to settings

Status	⚠
Component	Mail Threat Protection
Windows event ID	342
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Rollback completed

Status	⚠
Component	File Threat Protection Behavior Detection Anti-Cryptor Exploit Prevention Malware Scan
Windows event ID	455
Kaspersky Security Center event ID	000001c7
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Error removing the previous version of the application

Status	⚠
Component	System Audit
Windows event ID	246
Kaspersky Security Center event ID	000000f6
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object download was blocked

Status	⚠
Component	Web Threat Protection

Windows event ID	341
Kaspersky Security Center event ID	GNRL_EV_OBJECT_BLOCKED
Event parameters	• GNRL_EA_PARAM_1 is the hash of the object (SHA256). • GNRL_EA_PARAM_2 is the name of the object. • GNRL_EA_PARAM_5 is the name of the threat in accordance with Kaspersky classification, for example, EICAR-Test-File. • GNRL_EA_PARAM_7 is the name of the session user. • GNRL_EA_PARAM_8 is the type of the threat (type). • GNRL_EA_PARAM_9 is additional information about the detected object: Application component (engine). Threat detection technology (method). Threat detected by Kaspersky Private Security Network (blacklist): true or false. EDR version. Threat identifier in EDR. MD5 hash of the object.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Keyboard authorization error

Status	⚠
Component	BadUSB Attack Prevention
Windows event ID	2052
Kaspersky Security Center event ID	00000804
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

The object scan result has been sent to a third-party application

Status	⚠
Component	AMSI Protection
Windows event ID	1512
Kaspersky Security Center event ID	GNRL_EV_OBJECT_REPORTED
Event parameters	• GNRL_EA_PARAM_1 is the hash of the object (SHA256). • GNRL_EA_PARAM_2 is the name of the object. • GNRL_EA_PARAM_5 is the name of the threat in accordance with Kaspersky classification, for example, EICAR-Test-File. • GNRL_EA_PARAM_7 is the name of the session user. • GNRL_EA_PARAM_8 is the type of the threat (type). • GNRL_EA_PARAM_9 is additional information about the detected object: Application component (engine). Threat detection technology (method). Threat detected by Kaspersky Private Security Network (blacklist): true or false. EDR version. Threat identifier in EDR. MD5 hash of the object.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Task settings applied successfully

Status	⚠
Component	Application Control

Windows event ID	708
Kaspersky Security Center event ID	000002c4
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Warning about undesirable content (local bases)

Status	⚠
Component	Web Control
Windows event ID	708
Kaspersky Security Center event ID	GNRL_EV_WEB_URL_WARNING
Event parameters	• GNRL_EA_PARAM_1 is the URL. • GNRL_EA_PARAM_2 is the name of the session user. • GNRL_EA_PARAM_3 is the name of the Web Control rule.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Warning about undesirable content (KSN)

Status	⚠
Component	Web Control
Windows event ID	708
Kaspersky Security Center event ID	GNRL_EV_WEB_URL_WARNING
Event parameters	• GNRL_EA_PARAM_1 is the URL. • GNRL_EA_PARAM_2 is the name of the session user. • GNRL_EA_PARAM_3 is the name of the Web Control rule.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Undesirable content was accessed after a warning

Status	⚠
Component	Web Control
Windows event ID	754
Kaspersky Security Center event ID	000002f2
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Temporary access to the device activated

Status	⚠
Component	Device Control
Windows event ID	803
Kaspersky Security Center event ID	000002f2
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Operation canceled by the user

Status	⚠
Component	Update
Windows event ID	1016
Kaspersky Security Center event ID	000003f8
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

User has opted out of the encryption policy

Status	⚠
Component	Data Encryption
Windows event ID	1306
Kaspersky Security Center event ID	0000051a
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Interrupted applying file encryption / decryption rules

Status	⚠
Component	Data Encryption
Windows event ID	903
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

File encryption / decryption interrupted

Status	⚠
Component	Data Encryption
Windows event ID	914
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Device encryption / decryption interrupted

Status	⚠
Component	Data Encryption
Windows event ID	1303
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Failed to install or upgrade Kaspersky Disk Encryption drivers in the WinRE image

Status	⚠
Component	Data Encryption
Windows event ID	1345
Kaspersky Security Center event ID	00000541
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Module signature check failed

Status	⚠
Component	System Integrity Check
Windows event ID	2002
Kaspersky Security Center event ID	000007d2
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Application startup was blocked

Status	⚠
Component	Endpoint Sensor
Windows event ID	2105
Kaspersky Security Center event ID	00000839
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Document opening was blocked

Status	⚠
Component	Endpoint Sensor
Windows event ID	2106
Kaspersky Security Center event ID	0000083a
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Process was terminated by the Kaspersky Anti Targeted Attack Platform server administrator

Status	⚠
Component	Endpoint Sensor
Windows event ID	2112
Kaspersky Security Center event ID	00000840
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

The application was terminated by the Kaspersky Anti Targeted Attack Platform server administrator

Status	⚠
Component	Endpoint Sensor
Windows event ID	`2113`
Kaspersky Security Center event ID	`00000841`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

File or stream was deleted by the Kaspersky Anti Targeted Attack Platform server administrator

Status	⚠
Component	Endpoint Sensor
Windows event ID	`2111`
Kaspersky Security Center event ID	`0000083f`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

File was restored from quarantine on the Kaspersky Anti Targeted Attack Platform server by the administrator

Status	⚠
Component	Endpoint Sensor
Windows event ID	`2110`
Kaspersky Security Center event ID	`0000083e`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

File was quarantined on the Kaspersky Anti Targeted Attack Platform server by the administrator

Status	⚠
Component	Endpoint Sensor
Windows event ID	`2109`
Kaspersky Security Center event ID	`0000083d`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Network activity of all third-party applications is blocked

Status	⚠
Component	Endpoint Sensor
Windows event ID	`2107`
Kaspersky Security Center event ID	`0000083b`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Network activity of all third-party applications is unblocked

Status	⚠
Component	Endpoint Sensor
Windows event ID	2108
Kaspersky Security Center event ID	0000083c
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object will be deleted after restart (Sandbox)

Status	⚠
Component	Sandbox
Windows event ID	2605
Kaspersky Security Center event ID	00000a2d
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Total size of scan tasks exceeded the limit

Status	⚠
Component	Sandbox
Windows event ID	2612
Kaspersky Security Center event ID	00000a34
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object startup allowed, event logged

Status	⚠
Component	Endpoint Detection and Response
Windows event ID	2553
Kaspersky Security Center event ID	000009fa
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Process startup allowed, event logged

Status	⚠
Component	Endpoint Detection and Response
Windows event ID	2554
Kaspersky Security Center event ID	000009f8
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object will be deleted after restart (Endpoint Detection and Response)

Status	⚠
Component	Endpoint Detection and Response
Windows event ID	2558
Kaspersky Security Center event ID	000009fe
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Network isolation

Status	⚠
Component	Endpoint Detection and Response
Windows event ID	2700
Kaspersky Security Center event ID	00000a8c
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Termination of network isolation

Status	⚠
Component	Endpoint Detection and Response
Windows event ID	2701
Kaspersky Security Center event ID	00000a8d
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Restart required to complete the task

Status	⚠
Component	System Audit
Windows event ID	225
Kaspersky Security Center event ID	0000057b
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Connection to a website with an untrusted certificate is established by user decision

Status	⚠
Component	Network Detection and Response (KATA)
Windows event ID	70
Kaspersky Security Center event ID	00000046
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Application startup blockage message to administrator

Status	⚠
Component	Application Control
Windows event ID	503
Kaspersky Security Center event ID	GNRL_EV_AC_USER_REQUEST
Event parameters	• GNRL_EA_DESCRIPTION is the message to user. • GNRL_EA_PARAM_2 is the name of the session user. • GNRL_EA_PARAM_6 is the name of the executable file of the application (for example, chrome.exe). • GNRL_EA_PARAM_7 is the path to the executable file. • GNRL_EA_PARAM_8 is the hash of the object (SHA256). • GNRL_EA_PARAM_9 is the version of the application that the user is trying to run.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Device access blockage message to administrator

Status	⚠
Component	Device Control
Windows event ID	804
Kaspersky Security Center event ID	GNRL_EV_DC_USER_REQUEST
Event parameters	• c_er_descr is the message to user. • GNRL_EA_PARAM_1 is the Hardware ID (HWID). • GNRL_EA_PARAM_2 is the name of the session user.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Web page access blockage message to administrator

Status	⚠
Component	Web Control
Windows event ID	755
Kaspersky Security Center event ID	GNRL_EV_WC_USER_REQUEST
Event parameters	• GNRL_EA_DESCRIPTION is the message to user. • GNRL_EA_PARAM_1 is the URL. • GNRL_EA_PARAM_2 is the name of the session user.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Device connection blocked

Status	⚠
Component	Device Control
Windows event ID	807
Kaspersky Security Center event ID	GNRL_EV_DEVCTRL_DEV_PLUG_DENIED
Event parameters	• GNRL_EA_PARAM_1 is the Hardware ID (HWID). • GNRL_EA_PARAM_2 is the name of the session user.

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Application activity blockage message to administrator

Status	⚠
Component	Adaptive Anomaly Control
Windows event ID	`503`
Kaspersky Security Center event ID	`GNRL_EV_ADSEC_USER_REQUEST`
Event parameters	• `GNRL_EA_DESCRIPTION` is the message to user. • `GNRL_EA_PARAM_1` is the name of the Adaptive Anomaly Control rule. • `GNRL_EA_PARAM_2` is the ID of the heuristic rule. • `GNRL_EA_PARAM_3` is the name of the session user. • `GNRL_EA_PARAM_4` is the source process. • `GNRL_EA_PARAM_5` is the source object. • `GNRL_EA_PARAM_6` is the target process. • `GNRL_EA_PARAM_7` is the target object. • `GNRL_EA_PARAM_8` is additional information about the detected object: Hashes of source process / object and target process / object. Process blocked (`verdict_type`): `true` or `false`. User security ID (SID).
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Starting the cloud service client application is blocked

Status	⚠
Component	Cloud Discovery
Windows event ID	`2212`
Kaspersky Security Center event ID	`000008a4`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Access to the cloud service is blocked

Status	⚠
Component	Cloud Discovery
Windows event ID	`2213`
Kaspersky Security Center event ID	`000008a5`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

File or folder change was detected

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	`2950`
Kaspersky Security Center event ID	`00000b86`
Windows event log (default)	–

Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Object changes too often. Event aggregation started

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2955
Kaspersky Security Center event ID	00000b8b
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Report on object modification for the aggregation period

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2956
Kaspersky Security Center event ID	00000b8c
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Registry change was detected

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2951
Kaspersky Security Center event ID	00000b87
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Device connection / disconnection is detected

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2952
Kaspersky Security Center event ID	00000b88

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Monitoring scope includes incorrect objects

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	`2903`
Kaspersky Security Center event ID	`00000b89`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

The prohibited operation was allowed in test mode

Status	⚠
Component	System Integrity Monitoring
Windows event ID	`2961`
Kaspersky Security Center event ID	`00000b91`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Unable to connect to the Integration Server for more than 30 minutes. Check Integration Server status and network settings

Status	⚠
Component	Light Agent
Windows event ID	`3102`
Kaspersky Security Center event ID	`00000c1e`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Unable to connect to the Integration Server for more than 6 hours. Check Integration Server status and network settings

Status	⚠
Component	Light Agent
Windows event ID	`3103`
Kaspersky Security Center event ID	`00000c1f`

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Unable to connect to the Integration Server. Check Integration Server status and network settings

Status	⚠
Component	Light Agent
Windows event ID	`3101`
Kaspersky Security Center event ID	`00000c1d`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Virtual machine template needs updating

Status	⚠
Component	Light Agent
Windows event ID	`3181`
Kaspersky Security Center event ID	`00000c6d`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

The Standard license is terminated. The application is running under the Enterprise license

Status	⚠
Component	Light Agent
Windows event ID	`3171`
Kaspersky Security Center event ID	`00000c64`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Status	⚠
Component	File Integrity Monitor
Windows event ID	`2901`
Kaspersky Security Center event ID	`00000b55`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Status	⚠
Component	File Integrity Monitor
Windows event ID	`2900`
Kaspersky Security Center event ID	`00000b54`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Informational message

Application started

Status	ⓘ
Component	System Audit
Windows event ID	235
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Application stopped

Status	ⓘ
Component	System Audit
Windows event ID	236
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Self-Defense restricted access to the protected resource

Status	ⓘ
Component	System Audit
Windows event ID	213
Kaspersky Security Center event ID	000000d5
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Report cleared

Status	ⓘ
Component	System Audit
Windows event ID	217
Kaspersky Security Center event ID	000000d9
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Group policy disabled

Status	ⓘ
Component	System Audit
Windows event ID	220

Kaspersky Security Center event ID	000000dc
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Application settings changed

Status	ⓘ
Component	System Audit
Windows event ID	218
Kaspersky Security Center event ID	000000da
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Task started

Status	ⓘ
Component	System Audit
Windows event ID	221
Kaspersky Security Center event ID	000000dd
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Task completed

Status	ⓘ
Component	System Audit
Windows event ID	223
Kaspersky Security Center event ID	000000df
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

All application components that are defined by the license have been installed and run in normal mode

Status	ⓘ
Component	System Audit
Windows event ID	227
Kaspersky Security Center event ID	000000e3
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Subscription settings have changed

Status	ⓘ
Component	System Audit
Windows event ID	238

Kaspersky Security Center event ID	000000ee
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Subscription has been renewed

Status	ⓘ
Component	System Audit
Windows event ID	239
Kaspersky Security Center event ID	000000ef
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object restored from Backup

Status	ⓘ
Component	System Audit
Windows event ID	335
Kaspersky Security Center event ID	0000014f
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

User name and password input

Status	ⓘ
Component	System Audit
Windows event ID	2000
Kaspersky Security Center event ID	000007d0
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Participation in KSN enabled

Status	ⓘ
Component	System Audit
Windows event ID	2020
Kaspersky Security Center event ID	000007e4
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

KSN servers available

Status	ⓘ
Component	System Audit
Windows event ID	2022

Kaspersky Security Center event ID	000007e6
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

The application works and processes data under relevant laws and uses the appropriate infrastructure

Status	ⓘ
Component	System Audit
Windows event ID	2024
Kaspersky Security Center event ID	000007e8
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object restored from Quarantine

Status	ⓘ
Component	System Audit
Windows event ID	345
Kaspersky Security Center event ID	00000159
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object deleted from Quarantine

Status	ⓘ
Component	System Audit
Windows event ID	347
Kaspersky Security Center event ID	0000015b
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

A backup copy of the object was created

Status	ⓘ
Component	File Threat Protection Mail Threat Protection Behavior Detection Anti-Cryptor Host Intrusion Prevention Sandbox Malware Scan
Windows event ID	308
Kaspersky Security Center event ID	00000134
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Overwritten by a copy that was disinfected earlier

Status	ⓘ
Component	File Threat Protection Host Intrusion Prevention Malware Scan
Windows event ID	327
Kaspersky Security Center event ID	00000147
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Password-protected archive detected

Status	ⓘ
Component	File Threat Protection Web Threat Protection Mail Threat Protection AMSI Protection Host Intrusion Prevention Malware Scan
Windows event ID	322
Kaspersky Security Center event ID	GNRL_EV_PASSWD_ARCHIVE_FOUND
Event parameters	• GNRL_EA_PARAM_2 is the name of the object. • GNRL_EA_PARAM_3 is the creation date of the object (optional). • GNRL_EA_PARAM_7 is the name of the session user. • GNRL_EA_PARAM_9 is additional information about the detected object: Application component (engine). Threat detection technology (method). Threat detected by Private KSN (denylist): true or false.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Information about detected object

Status	ⓘ
Component	File Threat Protection Web Threat Protection Mail Threat Protection AMSI Protection Host Intrusion Prevention Malware Scan
Windows event ID	332
Kaspersky Security Center event ID	0000014c
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

The object is in the Kaspersky Private Security Network allowlist

Status	ⓘ
Component	File Threat Protection Web Threat Protection Mail Threat Protection AMSI Protection Host Intrusion Prevention Malware Scan
Windows event ID	340

Kaspersky Security Center event ID	00000154
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object renamed

Status	ⓘ
Component	Mail Threat Protection Exploit Prevention Behavior Detection Anti-Cryptor Malware Scan
Windows event ID	329
Kaspersky Security Center event ID	00000149
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Object processed

Status	ⓘ
Component	Host Intrusion Prevention File Threat Protection Web Threat Protection Mail Threat Protection Malware Scan
Windows event ID	301
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Object skipped

Status	ⓘ
Component	Host Intrusion Prevention File Threat Protection AMSI Protection Malware Scan
Windows event ID	315
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Archive detected

Status	ⓘ
Component	Host Intrusion Prevention File Threat Protection Web Threat Protection Mail Threat Protection AMSI Protection Malware Scan
Windows event ID	318

Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Packed object detected

Status	ⓘ
Component	Host Intrusion Prevention File Threat Protection Web Threat Protection Mail Threat Protection AMSI Protection Malware Scan
Windows event ID	319
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Link processed

Status	ⓘ
Component	Web Threat Protection
Windows event ID	361
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Application startup allowed

Status	ⓘ
Component	Application Control
Windows event ID	701
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Update source is selected

Status	ⓘ
Component	Update
Windows event ID	1001
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Proxy server is selected

Status	ⓘ
Component	Update
Windows event ID	1002
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

The link is in the Kaspersky Private Security Network allowlist

Status	ⓘ
Component	Web Threat Protection
Windows event ID	370
Kaspersky Security Center event ID	00000172
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Application placed in the trusted group

Status	ⓘ
Component	Host Intrusion Prevention
Windows event ID	401
Kaspersky Security Center event ID	00000191
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Application placed in restricted group

Status	ⓘ
Component	Host Intrusion Prevention
Windows event ID	402
Kaspersky Security Center event ID	00000192
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Host Intrusion Prevention was triggered

Status	ⓘ
Component	Host Intrusion Prevention
Windows event ID	403
Kaspersky Security Center event ID	00000193
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

File restored

Status	ⓘ
Component	Behavior Detection Anti-Cryptor Exploit Prevention Host Intrusion Prevention
Windows event ID	`457`
Kaspersky Security Center event ID	`000001c9`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Registry value restored

Status	ⓘ
Component	Behavior Detection Exploit Prevention
Windows event ID	`458`
Kaspersky Security Center event ID	`000001ca`
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Registry value deleted

Status	ⓘ
Component	Behavior Detection Exploit Prevention
Windows event ID	`459`
Kaspersky Security Center event ID	`000001cb`
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Process action skipped

Status	ⓘ
Component	Adaptive Anomaly Control
Windows event ID	`2201`
Kaspersky Security Center event ID	`GNRL_EV_ADSEC_DETECT`
Event parameters	• `GNRL_EA_PARAM_1` is the name of the Adaptive Anomaly Control rule. • `GNRL_EA_PARAM_2` is the ID of the heuristic rule. • `GNRL_EA_PARAM_3` is the name of the session user. • `GNRL_EA_PARAM_4` is the source process. • `GNRL_EA_PARAM_5` is the source object. • `GNRL_EA_PARAM_6` is the target process. • `GNRL_EA_PARAM_7` is the target object. • `GNRL_EA_PARAM_8` is additional information about the detected object: Hashes of source process / object and target process / object. Process blocked (`verdict_type`): `true` or `false`. User security ID (SID).
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Keyboard authorized

Status	ⓘ
Component	BadUSB Attack Prevention
Windows event ID	2050
Kaspersky Security Center event ID	00000802
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Network activity allowed

Status	ⓘ
Component	Firewall
Windows event ID	601
Kaspersky Security Center event ID	00000259
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Application startup prohibited in test mode

Status	ⓘ
Component	Application Control
Windows event ID	703
Kaspersky Security Center event ID	GNRL_EV_APP_LAUNCH_TESTED_DENIED
Event parameters	• GNRL_EA_PARAM_2 is the name of the session user. • GNRL_EA_PARAM_3 is the manually created category identifier. • GNRL_EA_PARAM_4 is the account security identifier (SID). • GNRL_EA_PARAM_5 is information about the digital signature of the application. • GNRL_EA_PARAM_6 is the name of the executable file of the application (for example, chrome.exe). • GNRL_EA_PARAM_7 is the path to the executable file. • GNRL_EA_PARAM_8 is the hash of the object (SHA256). • GNRL_EA_PARAM_9 is the version of the application that the user is trying to run.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Application startup allowed in test mode

Status	ⓘ
Component	Application Control
Windows event ID	704
Kaspersky Security Center event ID	GNRL_EV_APP_LAUNCH_TESTED_ALLOW
Event parameters	• GNRL_EA_PARAM_2 is the name of the session user. • GNRL_EA_PARAM_3 is the manually created category identifier. • GNRL_EA_PARAM_4 is the account security identifier (SID). • GNRL_EA_PARAM_5 is information about the digital signature of the application.
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

A page that is allowed was opened

Status	ⓘ
Component	Web Control
Windows event ID	751
Kaspersky Security Center event ID	000002f4
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Operation with the device allowed

Status	ⓘ
Component	Device Control
Windows event ID	801
Kaspersky Security Center event ID	00000321
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

File operation performed

Status	ⓘ
Component	Device Control
Windows event ID	808
Kaspersky Security Center event ID	GNRL_EV_USB_FILE_OPERATION
Event parameters	• GNRL_EA_PARAM_1 is the file operation (write or delete). • GNRL_EA_PARAM_2 is the path to the file. • GNRL_EA_PARAM_3 is the name of the device. • GNRL_EA_PARAM_4 is the name of the session user. • GNRL_EA_PARAM_5 is the Hardware ID (HWID).
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

No available updates

Status	ⓘ
Component	Update
Windows event ID	1020
Kaspersky Security Center event ID	000003fc
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Update distribution completed successfully

Status	ⓘ
Component	Update
Windows event ID	1022
Kaspersky Security Center event ID	000003fe

Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Downloading files

Status	ⓘ
Component	Update
Windows event ID	1003
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

File downloaded

Status	ⓘ
Component	Update
Windows event ID	1004
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

File installed

Status	ⓘ
Component	Update
Windows event ID	1005
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

File updated

Status	ⓘ
Component	Update
Windows event ID	1006
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

File rolled back due to update error

Status	ⓘ
Component	Update
Windows event ID	1007
Kaspersky Security Center event ID	–

Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Updating files

Status	ⓘ
Component	Update
Windows event ID	`1008`
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Distributing updates

Status	ⓘ
Component	Update
Windows event ID	`1009`
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Rolling back files

Status	ⓘ
Component	Update
Windows event ID	`1010`
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Creating the list of files to download

Status	ⓘ
Component	Update
Windows event ID	`1013`
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Downloading patches

Status	ⓘ
Component	Update
Windows event ID	`2150`
Kaspersky Security Center event ID	–

Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Installing patch

Status	ⓘ
Component	Update
Windows event ID	2151
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Patch installed

Status	ⓘ
Component	Update
Windows event ID	2152
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Rolling back patch

Status	ⓘ
Component	Update
Windows event ID	2154
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Patch rolled back

Status	ⓘ
Component	Update
Windows event ID	2155
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Started applying file encryption / decryption rules

Status	ⓘ
Component	Data Encryption
Windows event ID	901
Kaspersky Security Center event ID	00000385

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Finished applying file encryption / decryption rules

Status	ⓘ
Component	Data Encryption
Windows event ID	902
Kaspersky Security Center event ID	00000386
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Resumed applying file encryption / decryption rules

Status	ⓘ
Component	Data Encryption
Windows event ID	905
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

File encryption / decryption started

Status	ⓘ
Component	Data Encryption
Windows event ID	910
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

File encryption / decryption completed

Status	ⓘ
Component	Data Encryption
Windows event ID	911
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

File has not been encrypted because it is an exclusion

Status	ⓘ
Component	Data Encryption
Windows event ID	913
Kaspersky Security Center event ID	–

Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Portable mode enabled

Status	ⓘ
Component	Data Encryption
Windows event ID	950
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Portable mode disabled

Status	ⓘ
Component	Data Encryption
Windows event ID	952
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Device encryption / decryption started

Status	ⓘ
Component	Data Encryption
Windows event ID	1301
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Device encryption / decryption completed

Status	ⓘ
Component	Data Encryption
Windows event ID	1302
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Device encryption / decryption resumed

Status	ⓘ
Component	Data Encryption
Windows event ID	1304
Kaspersky Security Center event ID	–

Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Device is not encrypted

Status	ⓘ
Component	Data Encryption
Windows event ID	1307
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Device encryption / decryption process has been switched to active mode

Status	ⓘ
Component	Data Encryption
Windows event ID	1308
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Device encryption / decryption process has been switched to passive mode

Status	ⓘ
Component	Data Encryption
Windows event ID	1309
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Encryption module loaded

Status	ⓘ
Component	Data Encryption
Windows event ID	1310
Kaspersky Security Center event ID	0000051e
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

New Authentication Agent account created

Status	ⓘ
Component	Data Encryption
Windows event ID	1330
Kaspersky Security Center event ID	00000532

Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Authentication Agent account deleted

Status	ⓘ
Component	Data Encryption
Windows event ID	1331
Kaspersky Security Center event ID	00000533
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Authentication Agent account password changed

Status	ⓘ
Component	Data Encryption
Windows event ID	1332
Kaspersky Security Center event ID	00000534
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Successful Authentication Agent login

Status	ⓘ
Component	Data Encryption
Windows event ID	1333
Kaspersky Security Center event ID	00000535
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Failed Authentication Agent login attempt

Status	ⓘ
Component	Data Encryption
Windows event ID	1334
Kaspersky Security Center event ID	00000536
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Hard drive accessed using the procedure of requesting access to encrypted devices

Status	ⓘ
Component	Data Encryption
Windows event ID	1335
Kaspersky Security Center event ID	00000537

Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Failed attempt to access the hard drive using the procedure of requesting access to encrypted devices

Status	ⓘ
Component	Data Encryption
Windows event ID	`1336`
Kaspersky Security Center event ID	`00000538`
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Account was not added. This account already exists

Status	ⓘ
Component	Data Encryption
Windows event ID	`1337`
Kaspersky Security Center event ID	`00000539`
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Account was not modified. This account does not exist

Status	ⓘ
Component	Data Encryption
Windows event ID	`1338`
Kaspersky Security Center event ID	`0000053a`
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Account was not deleted. This account does not exist

Status	ⓘ
Component	Data Encryption
Windows event ID	`1339`
Kaspersky Security Center event ID	`0000053b`
Windows event log (default)	–
Kaspersky Security Center event log (default)	–

FDE upgrade successful

Status	ⓘ
Component	Data Encryption
Windows event ID	`1341`
Kaspersky Security Center event ID	`0000053d`

Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

FDE upgrade rollback successful

Status	ⓘ
Component	Data Encryption
Windows event ID	`1343`
Kaspersky Security Center event ID	`0000053f`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Failed to uninstall Kaspersky Disk Encryption drivers from the WinRE image

Status	ⓘ
Component	Data Encryption
Windows event ID	`1346`
Kaspersky Security Center event ID	`00000542`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

BitLocker recovery key was changed

Status	ⓘ
Component	Data Encryption
Windows event ID	`1370`
Kaspersky Security Center event ID	`0000055a`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

BitLocker password / PIN was changed

Status	ⓘ
Component	Data Encryption
Windows event ID	`1371`
Kaspersky Security Center event ID	`0000055b`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

BitLocker recovery key was saved to a removable drive

Status	ⓘ
Component	Data Encryption
Windows event ID	`1372`
Kaspersky Security Center event ID	`0000055c`

Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Processing of tasks from the Kaspersky Anti Targeted Attack Platform server is inactive

Status	ⓘ
Component	Endpoint Sensor
Windows event ID	`2103`
Kaspersky Security Center event ID	`00000837`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Endpoint Sensor connected to server

Status	ⓘ
Component	Endpoint Sensor
Windows event ID	`2101`
Kaspersky Security Center event ID	`00000835`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Connection to the Kaspersky Anti Targeted Attack Platform server restored

Status	ⓘ
Component	Endpoint Sensor
Windows event ID	`2102`
Kaspersky Security Center event ID	`00000836`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Tasks from the Kaspersky Anti Targeted Attack Platform server are being processed

Status	ⓘ
Component	Endpoint Sensor
Windows event ID	`2104`
Kaspersky Security Center event ID	`00000838`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Object deleted

Status	ⓘ
Component	Wipe Data
Windows event ID	`2251`
Kaspersky Security Center event ID	`000008cb`

Windows event log (default)	–
Kaspersky Security Center event log (default)	–

Wipe task statistics

Status	ⓘ
Component	Endpoint Detection and Response Expert (on-premises)
Windows event ID	`2853`
Kaspersky Security Center event ID	`00000b25`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Status	ⓘ
Component	Wipe Data
Windows event ID	`2253`
Kaspersky Security Center event ID	`000008cd`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Object quarantined (Sandbox)

Status	ⓘ
Component	Sandbox
Windows event ID	`2602`
Kaspersky Security Center event ID	`00000a2a`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object deleted (Sandbox)

Status	ⓘ
Component	Sandbox
Windows event ID	`2604`
Kaspersky Security Center event ID	`00000a2c`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

IOC Scan started

Status	ⓘ
Component	Endpoint Detection and Response
Windows event ID	`2652`
Kaspersky Security Center event ID	`00000a5c`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

IOC Scan completed

Status	ⓘ
Component	Endpoint Detection and Response
Windows event ID	2653
Kaspersky Security Center event ID	00000a5d
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object quarantined (Endpoint Detection and Response)

Status	ⓘ
Component	Endpoint Detection and Response
Windows event ID	2555
Kaspersky Security Center event ID	000009fb
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Object deleted (Endpoint Detection and Response)

Status	ⓘ
Component	Endpoint Detection and Response
Windows event ID	2557
Kaspersky Security Center event ID	000009fd
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Application components successfully changed

Status	ⓘ
Component	System Audit
Windows event ID	1402
Kaspersky Security Center event ID	0000057a
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Status	ⓘ
Component	Sandbox
Windows event ID	2606
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Status	ⓘ
Component	Sandbox
Windows event ID	2609
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Status	ⓘ
Component	Sandbox
Windows event ID	2610
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

Status	ⓘ
Component	Sandbox
Windows event ID	2616
Kaspersky Security Center event ID	–
Windows event log (default)	✓
Kaspersky Security Center event log (default)	–

The Administration Server that your device is connected to is set as trusted

Status	ⓘ
Component	Administration Server connection protection
Windows event ID	3300
Kaspersky Security Center event ID	00000ce4
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Your device is connected to a new trusted Administration Server

Status	ⓘ
Component	Administration Server connection protection
Windows event ID	3302
Kaspersky Security Center event ID	00000ce6
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

The Administration Server that your device is connected to is no longer set as trusted

Status	ⓘ
Component	Administration Server connection protection
Windows event ID	3303

Kaspersky Security Center event ID	`00000ce7`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Asynchronous Sandbox detection

Status	ⓘ
Component	Sandbox
Windows event ID	`2619`
Kaspersky Security Center event ID	`GNRL_EV_APP_INCIDENT_OCCURED`
Event parameters	• `GNRL_EA_PARAM_1` are the parameters of the Sandbox components. • `GNRL_EA_PARAM_2` is the path to the object. • `GNRL_EA_PARAM_3` is the incident ID. • `GNRL_EA_PARAM_4` is the hash of the object (SHA256).
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

The scan task has been successfully sent to Sandbox by a user

Status	ⓘ
Component	Sandbox
Windows event ID	`2622`
Kaspersky Security Center event ID	`00000a3e`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Device is connected

Status	ⓘ
Component	Device Control
Windows event ID	`805`
Kaspersky Security Center event ID	`GNRL_EV_DEVCTRL_DEV_PLUGGED`
Event parameters	• `GNRL_EA_PARAM_1` is the Hardware ID (HWID). • `GNRL_EA_PARAM_2` is the name of the session user.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Device is disconnected

Status	ⓘ
Component	Device Control
Windows event ID	`806`
Kaspersky Security Center event ID	`GNRL_EV_DEVCTRL_DEV_UNPLUGGED`
Event parameters	• `GNRL_EA_PARAM_1` is the Hardware ID (HWID). • `GNRL_EA_PARAM_2` is the name of the session user.
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Successful connection to the EDR Expert server

Status	ⓘ
Component	Endpoint Detection and Response Expert (on-premises)
Windows event ID	2853
Kaspersky Security Center event ID	00000b25
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Successful connection to the EDR Expert response server

Status	ⓘ
Component	Endpoint Detection and Response Expert (on-premises) Endpoint Detection and Response Expert (cloud)
Windows event ID	2853
Kaspersky Security Center event ID	00000b25
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Successful connection to the EDR Expert telemetry collection server

Status	ⓘ
Component	Endpoint Detection and Response Expert (on-premises) Endpoint Detection and Response Expert (cloud)
Windows event ID	2857
Kaspersky Security Center event ID	00000b26
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Successful connection to the NDR server

Status	ⓘ
Component	Network Detection and Response (KATA)
Windows event ID	3083
Kaspersky Security Center event ID	00000c0b
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

Starting the cloud service client application is allowed

Status	ⓘ
Component	Cloud Discovery
Windows event ID	2210
Kaspersky Security Center event ID	000008a2

Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Access to the cloud service is allowed

Status	ⓘ
Component	Cloud Discovery
Windows event ID	`2211`
Kaspersky Security Center event ID	`000008a3`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Access to the protected area

Status	ⓘ
Component	System Audit
Windows event ID	`2004`
Kaspersky Security Center event ID	`000007d4`
Windows event log (default)	✓
Kaspersky Security Center event log (default)	✓

File or folder change was detected

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	`2950`
Kaspersky Security Center event ID	`00000b86`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected.*

Object changes too often. Event aggregation started

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	`2955`
Kaspersky Security Center event ID	`00000b8b`
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Report on object modification for the aggregation period

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2956
Kaspersky Security Center event ID	00000b8c
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected.*

Registry change was detected

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2951
Kaspersky Security Center event ID	00000b87
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected.*

Device connection / disconnection is detected

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2952
Kaspersky Security Center event ID	00000b88
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected.*

Monitoring scope includes incorrect objects

Status	ⓘ / ⚠ / ⓘ
Component	System Integrity Monitoring
Windows event ID	2903
Kaspersky Security Center event ID	00000b89
Windows event log (default)	–

Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Baseline created

Status	ⓘ
Component	System Integrity Monitoring
Windows event ID	2957
Kaspersky Security Center event ID	00000b8d
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Baseline updated

Status	ⓘ
Component	System Integrity Monitoring
Windows event ID	2958
Kaspersky Security Center event ID	00000b8e
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

An operation is performed by the trusted user

Status	ⓘ
Component	System Integrity Monitoring
Windows event ID	2962
Kaspersky Security Center event ID	00000b92
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

To configure the retention period for this event, go to the **Event configuration** section of the policy and set the retention period for the general System Integrity Monitoring event – *File or folder change was detected*.

Connected to SVM

Status	ⓘ
Component	Light Agent
Windows event ID	3152
Kaspersky Security Center event ID	00000c50
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

A new temporary password was created

Status	ⓘ
Component	System Audit
Windows event ID	265
Kaspersky Security Center event ID	00000109
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Connected to the Integration Server

Status	ⓘ
Component	Light Agent
Windows event ID	3105
Kaspersky Security Center event ID	00000c21
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Restoring connection to the Integration Server

Status	ⓘ
Component	Light Agent
Windows event ID	3104
Kaspersky Security Center event ID	00000c20
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Successful connection to the KUMA server

Status	ⓘ
Component	KUMA Integration
Windows event ID	2857
Kaspersky Security Center event ID	00000b29
Windows event log (default)	–
Kaspersky Security Center event log (default)	✓

Appendix 7. Supported file extensions for Execution prevention

Kaspersky Endpoint Security supports preventing the opening of office format files in certain applications. The information about supported file extensions and applications is listed in the following table.

Supported file extensions for Execution prevention

Application name	Executable file	File extension
Microsoft Word	winword.exe	rtf doc dot docm docx dotx dotm docb
WordPad	wordpad.exe	docx rtf
Microsoft Excel	excel.exe	xls xlt xlm xlsx xlsm xltx xltm xlsb xla xlam xll xlw
Microsoft PowerPoint	powerpnt.exe	ppt pot pps pptx pptm potx potm ppam ppsx ppsm sldx sldm
Adobe Acrobat Foxit PDF Reader STDU Viewer Microsoft Edge Google Chrome Mozilla Firefox Yandex Browser Tor Browser	acrord32.exe FoxitReader.exe STDUViewerApp.exe MicrosoftEdge.exe chrome.exe firefox.exe browser.exe tor.exe	pdf

Appendix 8. Supported script interpreters for Execution prevention

Execution prevention supports the following script interpreters:

- AutoHotkey.exe
- AutoHotkeyA32.exe
- AutoHotkeyA64.exe
- AutoHotkeyU32.exe
- AutoHotkeyU64.exe
- InstallUtil.exe
- RegAsm.exe
- RegSvcs.exe
- autoit.exe
- cmd.exe
- control.exe
- cscript.exe
- hh.exe
- mmc.exe
- msbuild.exe
- mshta.exe
- msiexec.exe
- perl.exe
- powershell.exe
- python.exe
- reg.exe
- regedit.exe
- regedt32.exe

- regsvr32.exe
- ruby.exe
- rubyw.exe
- rundll32.exe
- runlegacycplelevated.exe
- wscript.exe
- wwahost.exe

Execution prevention supports working with Java applications in the Java runtime environment (java.exe and javaw.exe processes).

Appendix 9. IOC scan scope in the registry (RegistryItem)

When you add the **Windows registry - RegistryItem** data type to the IOC scan scope, Kaspersky Endpoint Security scans the following registry keys by default:

```
HKEY_CLASSES_ROOT\htafile

HKEY_CLASSES_ROOT\batfile

HKEY_CLASSES_ROOT\exefile

HKEY_CLASSES_ROOT\comfile

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Control\Lsa

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Control\Print\Monitors

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Control\NetworkProvider

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Control\Class

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Control\SecurityProviders

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Control\Terminal Server

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Control\Session Manager

HKEY_LOCAL_MACHINE\System\CurrentControlSet\Services

HKEY_LOCAL_MACHINE\Software\Classes\piffile

HKEY_LOCAL_MACHINE\Software\Classes\htafile

HKEY_LOCAL_MACHINE\Software\Classes\exefile
```

```
HKEY_LOCAL_MACHINE\Software\Classes\comfile

HKEY_LOCAL_MACHINE\Software\Classes\CLSID

HKEY_LOCAL_MACHINE\Software\Microsoft\Windows\CurrentVersion\Run

HKEY_LOCAL_MACHINE\Software\Microsoft\Windows\CurrentVersion\ShellServiceObjectDelayLoad

HKEY_LOCAL_MACHINE\Software\Microsoft\Windows\CurrentVersion\Policies\Explorer

HKEY_LOCAL_MACHINE\Software\Wow6432Node\Microsoft\Windows\CurrentVersion\Run

HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Active Setup\Installed Components

HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Windows

HKEY_LOCAL_MACHINE\Software\Microsoft\Windows NT\CurrentVersion\Image File Execution
Options

HKEY_LOCAL_MACHINE\Software\Microsoft\Windows NT\CurrentVersion\Aedebug

HKEY_LOCAL_MACHINE\SOFTWARE\Microsoft\Windows NT\CurrentVersion\Winlogon
```

Appendix 10. IOC file requirements

When creating IOC Scan tasks, consider the following IOC file requirements and limitations:

- The application supports IOC files with the IOC and XML extensions in the open standard OpenIOC versions 1.0 and 1.1 for describing indicators of compromise.
- After uploading IOC files, you can manually edit the files in the built-in editor directly in task properties. Kaspersky Endpoint Security supports editing IOC files that are compliant with the OpenIOC 1.1 standard. It is not possible to modify the content of IOC files compliant with OpenIOC version 1.0.
- If, when creating an *IOC Scan* task on the command line, you upload IOC files, some of which are not supported, when the task is run, the application uses only the supported IOC files. If, when creating an *IOC Scan* task on the command line, all of the IOC files that you upload turn out to be unsupported, the task can still be run, but it will not detect any indicators of compromise. It is not possible to upload unsupported IOC files using Web Console or Cloud Console.
- Semantic errors and unsupported IOC terms and tags in IOC files do not cause task execution to fail. In such sections of IOC files, the application detects no match.
- The identifiers of all IOC files used in a single IOC Scan task must be unique. If there are IOC files with the same identifier, it might affect the task execution results.
- A single IOC file must not exceed 2 MB in size. Using larger files will cause IOC Scan tasks to terminate with an error. The total size of all files added to the IOC collection should not exceed 10 MB. If the total size of all files exceeds 10 MB, you need to split the IOC collection and create several *IOC Scan* tasks.
- It is recommended to create one IOC file per threat. This makes it easier to analyze the results of the *IOC Scan* task.

The file that you can download by clicking the link below, contains a table with the full list of IOC terms of the OpenIOC standard.

DOWNLOAD THE IOC_TERMS.XLSX FILE

Features and limitations of the application's support for the OpenIOC standard are shown in the following table.

Features and limitations of support for OpenIOC version 1.0 and 1.1.

Supported conditions	OpenIOC 1.0:
	
	`is`
	`isnot` (as an exception from the set)
	`contains`
	`containsnot` (as an exception from the set)
	OpenIOC 1.1:
	
	`is`
	`contains`
	`starts-with`
	`ends-with`
	`matches`
	`greater-than`
	`less-than`
	
	For Email/* terms, only the `contains` and `is` conditions are supported. For Retrospective IOC Scan to work correctly, when using the `is` condition, email addresses in IOC files must be specified in the following format: `"name@example.org" <SMTP:name@example.org>`. When running the *IOC Scan* task normally, it is sufficient to specify the email address in the following format: `name@example.org`.

Supported condition attributes	OpenIOC 1.1:
	
	`preserve-case`
	`negate`

Supported operators	`AND` `OR`
Supported data types	`"date"`: date (applicable conditions: `is`, `greater-than`, `less-than`) `"int"`: integer (applicable conditions: `is`, `greater-than`, `less-than`) `"string"`: string (applicable conditions: `is`, `contains`, `matches`, `starts-with`, `ends-with`) `"duration"`: duration in seconds (applicable conditions: `is`, `greater-than`, `less-than`)

Features of data type interpretation	The `"boolean string"`, `"restricted string"`, `"md5"`, `"IP"`, `"sha256"` and `"base64Binary"` data types are interpreted as string.
	
	The application supports interpretation of the `Content` setting for the `int` and `date` data types when it is set in the form of intervals:
	
	OpenIOC 1.0:
	Using the `TO` operator in the `Content` field:
	`<Content type="int">49600 TO 50700</Content>`
	`<Content type="date">2009-04-28T10:00:00Z TO 2009-04-28T16:00:00Z</Content>`
	`<Content type="int">[154192 TO 154192]</Content>`
	OpenIOC 1.1:
	Using the `greater-than` and `less-than` conditions
	Using the `TO` operator in the `Content` field
	The application supports interpretation of the `date` and `duration` data types if the indicators are set in `ISO 8601, Zulu time zone, UTC` format.

Appendix 11. API for EDR Threat Response

Kaspersky Endpoint Security 12.9 for Windows introduces support for EDR Threat Response actions (EDR responses) using Kaspersky Security Center OpenAPI. That is, you can call OpenAPI methods to automate EDR threat response using Python. You can call these methods when integrated with SIEM solutions. *Kaspersky Unified Monitoring and Analysis Platform*, the Kaspersky SIEM solution, supports the EDR Threat Response OpenAPI starting with version 3.4.1. For example scripts, please refer to KUMA documentation.

To perform EDR Threat Response actions, you need to create a request and send it using KSC Open API (`AddIncident`). After the request is processed, a special task is created in the Kaspersky Security Center console.

> To create tasks when responding to EDR threats, you must establish a background connection between the Administration Server and Kaspersky Security Center Web Console. The background connection service is available in Kaspersky Security Center Windows 14.2 or later and in Kaspersky Security Center Linux 15.2 or later. Other consoles, including consoles of Kaspersky Detection and Response solutions, are not supported.

For EDR Threat Response, you need to specify basic request parameters, for example, in JSON format:

- `task` is the type of the task (see below).
- `targetHost` is the ID of the computer on which the script must be run. Required argument. The script gets this argument from the event.
- `responseEventIncidentArea` is the name of the application that ran the script (for example, `KUMA`). This parameter is added to the name of the created task.

To configure EDR Threat Response, you need to specify task settings in JSON format in the `"KLINCDT_BODY": json.dumps(data)` parameter. As a result, the application creates the `[Response][KUMA] <task type> - <Date> <Time> - <ID>` in the Kaspersky Security Center console.

Connecting to Kaspersky Security Center OpenAPI

As part of EDR Threat Response, the application creates special tasks in the Kaspersky Security Center console. Creating these tasks requires establishing a connection between the computer and Kaspersky Security Center. To achieve this, Kaspersky Security Center connection parameters must be specified in the request.

> In Kaspersky XDR version 2.1, the method for authorizing requests has changed. Kaspersky XDR uses PAT tokens instead of username and password authentication. Therefore, it is not possible to run scripts in Kaspersky XDR. For more information on request authorization, please refer to the Kaspersky XDR Help.

Kaspersky Security Center connection parameters

Parameter	Type	Description
`kscHost`	`string`	Kaspersky Security Center Administration Server Address. Required parameter.
`kscPort`	`int`	Administration Server connection port. Required parameter.

Parameter	Type	Description
kscCert	string	Path to a certificate file for connecting to the Kaspersky Security Center Administration Server. By default, the parameter is set to False.
kscUser	string	User account name. Required parameter.
kscPassword	string	User account password. Required parameter.

Example

```
# KSC connection info
# reads Environment variables by default, change with corresponding values
# KSC host, string, required
kscHost = "kscHost"
# KSC port, required, default is "13299"
kscPort = "13299"
# KSC certificate file path, default is False
kscCert = False
# KSC user, string, required
kscUser = "kscUser"
# KSC password, string, required
kscPassword = "kscPassword"

server_url = 'https://' + kscHost + ':' + str(kscPort)
    server = KlAkAdmServer.Create(
        server_url, kscUser, kscPassword, verify=kscCert)

    params = validate(args)

    data = {"targetHost": <MyHost>,
            "task": task,
            "params": params,
            "responseEventIncident": True,
            "responseEventIncidentArea":"Kuma"}

    oHostGroup = KlAkHostGroup(server)

    incdnt = oHostGroup.AddIncident({"KLINCDT_SEVERITY": 2,
                                     "KLINCDT_ADDED": paramDateTime(datetime.datetime.now()),
                                     "KLINCDT_BODY": json.dumps(data),
                                     "KLHST_WKS_HOSTNAME":  args.targetHost}).RetVal()

    oHostGroup.UpdateIncident(incdnt, {"KLINCDT_IS_HANDLED": False,
                                       "KLHST_WKS_HOSTNAME":  args.targetHost})
```

User account data is not protected, therefore you need to dedicate a separate user that will be used to perform only these actions.

Get file – getFile

Get file task settings

Parameter	Type	Description
md5hash	string	MD5 hash of the file that you want to get.
sha256hash	string	SHA256 hash of the file that you want to get.
path	string	Path to the file that you want to get.

Example

```
type getFile = {
  task: 'getFile';
  targetHost: string;
  params: {
    // an empty string or a valid md5 hash of the file
```

```
    md5hash: string;
    // an empty string or a valid sha256 hash of the file
    sha256hash: string;
    // the path to the file
    path: string;
  };
  responseEventIncidentArea: string;
};
```

Delete file – deleteFile

Delete file task settings

Parameter	Type	Description
`md5hash`	`string`	MD5 hash of the file that you want to delete.
`sha256hash`	`string`	SHA256 hash of the file that you want to delete.
`path`	`string`	Path to the file that you want to delete.
`searchInSubfolders?`	`boolean`	Search for the file that you want to delete in subfolders.

Example

```
type deleteFile = {
  task: 'deleteFile';
  targetHost: string;
  params: {
    // an empty string or a valid md5 hash of the file
    md5hash: string;
    // an empty string or a valid sha256 hash of the file
    sha256hash: string;
    // the path to the file
    path: string;
    // recursive search for a file (subfolder), optional
    searchInSubfolders?: boolean;
  };
  responseEventIncidentArea: string;
};
```

Move file to Quarantine – quarantineFile

Move file to Quarantine task settings

Parameter	Type	Description
`md5hash`	`string`	MD5 hash of the file that you want to quarantine.
`sha256hash`	`string`	SHA256 hash of the file that you want to quarantine.
`path`	`string`	Path to the file that you want to quarantine.

Example

```
type quarantineFile = {
  task: 'quarantineFile';
  targetHost: string;
  params: {
    // an empty string or a valid md5 hash of the file
    md5hash: string;
    // an empty string or a valid sha256 hash of the file
    sha256hash: string;
    // the path to the file
    path: string;
  };
```

```
  responseEventIncidentArea: string;
};
```

IOC Scan – iocScan

IOC Scan task settings

Parameter	Type	Description
`ioc`	`string`	Path to the ZIP archive with an IOC file that you want to use for scanning.
`isolateHost`	`boolean`	Isolate the computer from the network when an indicator of compromise is detected to prevent the threat from spreading.
`scanCriticalAreas`	`boolean`	Run the *Critical Areas Scan* task when an indicator of compromise is detected.
`quarantineObject`	`boolean`	Delete the malicious object when an indicator of compromise is detected. Before deleting the object, Kaspersky Endpoint Security creates a backup copy in case the object needs to be restored later. Kaspersky Endpoint Security moves the backup copy to Quarantine.

Example

```
type iocScan = {
  task: 'iocScan';
  targetHost: string;
  params: {
    // the path to the zip archive with ioc files in base64 encoding
    ioc: string;
    // isolation of the computer from the network
    isolateHost: boolean;
    // critical areas scan
    scanCriticalAreas: boolean;
    // quarantine the file
    quarantineObject: boolean;
  };
  responseEventIncidentArea: string;
};
```

Start process – startProcess

Start process task settings

Parameter	Type	Description
`executablePath`	`string`	Path to the executable file that is used to start the process.
`arguments?`	`string`	Additional command line arguments for starting the process.
`workingFolder?`	`string`	Path to the working folder of the process.

Example

```
type startProcess = {
  task: 'startProcess';
  targetHost: string;
  params: {
    // the path to the file
    executablePath: string;
    // command line arguments, optional
    arguments?: string;
    // a working folder, optional
    workingFolder?: string;
  };
  responseEventIncidentArea: string;
};
```

Terminate process – terminateProcess

Terminate process task settings

Parameter	Type	Description
`md5hash`	`string`	MD5 hash of the file whose process you want to terminate.
`sha256hash`	`string`	SHA256 hash of the file whose process you want to terminate.
`path`	`string`	Path to the file that you want to delete.
`caseSensitive`	`boolean`	Case sensitivity when searching for the file.

Example

```
type terminateProcess = {
  task: 'terminateProcess';
  targetHost: string;
  params: {
    // an empty string or a valid md5 hash of the file
    md5hash: string;
    // an empty string or a valid sha256 hash of the file
    sha256hash: string;
    // the path to the file
    path: string;
    // case sensitive of the file name
    caseSensitive: boolean;
  };
  responseEventIncidentArea: string;
};
```

Computer network isolation – isolateHost

Computer network isolation settings

Parameter	Type	Description
`action`	`string`	Operation mode of Network isolation.

Example

```
type isolateHost = {
  task: 'isolateHost';
  targetHost: string;
  params: {
    // 0 - turning off network isolation, 1 - turning on network isolation
    action: number;
  };
  responseEventIncidentArea: string;
};
```

Execution prevention – preventExecution

Execution prevention settings

Parameter	Type	Description
hash	string	MD5 hash of the file that you want to prevent from running.
path	string	Path to the file that you want to prevent from running.
caseSensitive	boolean	Case sensitivity when searching for the file.

Example

```
type preventExecution = {
  task: 'preventExecution';
  targetHost: string;
  params: {
    // a valid md5 hash of the file
    hash: string;
    // the path to the file
    path: string;
    // case sensitive of the file name
    caseSensitive: boolean;
  };
  responseEventIncidentArea: string;
};
```

Malware Scan – onDemandScan

Malware Scan task settings

Parameter	Type	Description
path	string	Space-delimited list of files and folders for Custom Scan.
recursive	boolean	Recursive scanning mode.
type	number	Scan scope.

```
ScanObjectType = Enum("ScanObjectType",
                      [
                          ("SystemMemory", 14),
                          ("StartupObjectsAndRunningProcesses", 15),
                          ("DiskBootSectors", 16),
                          ("SystemBackupStorage", 17),
                          ("Email", 18),
                          ("Folder", 22),
                          ("AllRemovableDrives", 23),
                          ("AllNetworkDrives", 24),
                          ("AllFixedDrives", 25)])
```

Example

```
type onDemandScan = {
  task: 'onDemandScan';
  targetHost: string;
  // please note, this is an array
  // array of scan object
  params: [{
    // enabling the scan object
    enabled: boolean;
    // an empty string or the path to the folder to scan
    path: string;
    // recursive scan mode
    recursive: boolean;
    // ID scan object
    type: number;
  }];
```

```
  responseEventIncidentArea: string;
};
```

Appendix 12. User accounts in application component rules

To configure some application components, you must add special rules. For example, for Web Control, you must add a rule with a list of web addresses that you want the application to block. In application component rules, you can also configure a schedule for the component or select users to which the application must apply the rule.

Rules must be added to configure the following application components:

- Application Control.
- Web Control.
- Device Control.
- Log Inspection.
- Adaptive Anomaly Control.
- System Integrity Monitoring.

Starting with Kaspersky Endpoint Security for Windows 12.5, you can select users not only from Active Directory, but also from the list of users in Kaspersky Security Center. You can also enter local user account data manually. This means you can add users in the following ways:

- Active Directory (recommended)
- List of users in Kaspersky Security Center
- Local user account

In order to correctly employ all user selection methods you need to update Kaspersky Endpoint Security application and management plug-in to version 12.5 or higher.

Kaspersky recommends using local user accounts only in special cases when it is not possible to use domain user accounts. For details about the security risks of using local accounts, see the Microsoft Knowledge Base. You bear full responsibility for the security of a computer if local user accounts are used; in particular this includes the responsibility for controlling and restricting access to Kaspersky Endpoint Security settings.

The application uses the SID (Security Identifier) of the user to identify users. When using user accounts from Active Directory or from the Kaspersky Security Center user list, the application determines the SID on the Administration Server. This means the application does not place extra load on the computer to identify a user. If you added more than 1000 local user accounts to an application rule, the applications contacts the domain controller to identify the user. This means the load on the computer is increased. To optimize the performance impact on the computer, we recommend using user accounts from Active Directory or the Kaspersky Security Center user list.

The application uses NetBIOS names for identification of manually added user accounts in the `<username>` and `<hostname>\<username>` formats. A NetBIOS name can be up to 16 bytes (15 characters) long. If the computer name is over 15 characters long, the application cannot identify the user. Then the application disables the rule and generates an error, for example, *Web Control: rule triggering disabled for user accounts without matching security identifier (SID)*. To make the rule work, you must manually shorten the computer name. You can add user accounts from Active Directory or Kaspersky Security Center. In this case, the application automatically shortens the computer name.

Kaspersky Endpoint Security also supports built-in users and groups (such as the "All" group) in rules. Because of how the SID of a user is determined, the application allows using only built-in user accounts added from Active Directory or the list of users in Kaspersky Security Center. Rules in which a built-in user account is added locally do not work.

Legal Information

Data provision

This section contains information about the data that the Kaspersky Endpoint Security application may store on the device and automatically transmit to Kaspersky during its operation.

Received information is protected by Kaspersky in accordance with the law and the requirements and applicable regulations of Kaspersky. Data is transmitted over encrypted communication channels.

Data provision under the End User License Agreement

If an activation code is applied to activate Kaspersky Endpoint Security, you agree to periodically send Kaspersky the following information automatically for the purposes of verifying correct use of the application:

- type, version, and localization of Kaspersky Endpoint Security;
- versions of installed updates for Kaspersky Endpoint Security;
- ID of the computer and ID of the specific Kaspersky Endpoint Security installation on the computer;
- serial number and active key identifier;
- type, version and bit rate of the operating system, and name of the virtual environment (if Kaspersky Endpoint Security is installed in a virtual environment);
- unique request ID to the Rightholder services;
- IDs of Kaspersky Endpoint Security components that are active when the information is transmitted.

Kaspersky may also use this information to generate statistics on the dissemination and use of Kaspersky software.

By using an activation code, you agree to automatically transmit the data listed above. If you do not agree to transmit this information to Kaspersky, you should use a key file to activate Kaspersky Endpoint Security.

By accepting the terms of the End User License Agreement, you agree to automatically transmit the following information:

- When upgrading Kaspersky Endpoint Security:
  - version of Kaspersky Endpoint Security;
  - ID of Kaspersky Endpoint Security;
  - active key;

- unique ID of the upgrade task start;
- unique ID of the Kaspersky Endpoint Security installation.

- When following links from the Kaspersky Endpoint Security interface:
  - version of Kaspersky Endpoint Security;
  - version of the operating system;
  - Kaspersky Endpoint Security activation date;
  - license expiration date;
  - key creation date;
  - Kaspersky Endpoint Security installation date;
  - ID of Kaspersky Endpoint Security;
  - ID of the detected vulnerability in the operating system;
  - ID of the last update installed for Kaspersky Endpoint Security;
  - hash of the detected file with a threat, and the name of this threat according to the Kaspersky classification;
  - Kaspersky Endpoint Security activation error category;
  - Kaspersky Endpoint Security activation error code;
  - number of days until key expiration;
  - number of days that have elapsed since the key was added;
  - number of days that have elapsed since the license expired;
  - number of computers on which the current license is applied;
  - active key;
  - Kaspersky Endpoint Security license term;
  - current status of the license;
  - type of current license;
  - application type;
  - unique ID of the upgrade task start;
  - unique ID of the Kaspersky Endpoint Security installation on the computer;
  - Kaspersky Endpoint Security interface language.

Received information is protected by Kaspersky in accordance with the law and the requirements and applicable regulations of Kaspersky. Data is transmitted over encrypted communication channels.

Read the End User License Agreement and visit the Kaspersky website to learn more about how we receive, process, store, and destroy information about application usage after you accept the End User License Agreement and consent to the Kaspersky Security Network Statement. The license.txt and ksn_<language ID>.txt files contain the text of the End User License Agreement and Kaspersky Security Network Statement and are included in the application distribution kit.

Data provision when using Kaspersky Security Network

The set of data that Kaspersky Endpoint Security sends to Kaspersky depends on the type of license and the Kaspersky Security Network usage settings.

Use of KSN under license on no more than 4 computers

By accepting the Kaspersky Security Network Statement, you agree to automatically transmit the following information:

- information about KSN configuration updates: identifier of the active configuration, identifier of the configuration received, error code of the configuration update;
- information about files and URL addresses to be scanned: checksums of the scanned file (MD5, SHA2-256, SHA1) and file patterns (MD5), the size of the pattern, type of the detected threat and its name according to Rightholder's classification, identifier for the anti-virus databases, URL address for which the reputation is being requested, as well as the referrer URL address, the connection's protocol identifier and the number of the port being used;
- ID of the scan task that detected the threat;
- information about digital certificates being used needed to verify their authenticity: the checksums (SHA256) of the certificate used to sign the scanned object and the certificate's public key;
- identifier of the Software component performing the scan;
- IDs of the anti-virus databases and of the records in these anti-virus databases;
- Information about activation of the Software on the Computer: signed header of the ticket from the activation service (identifier of the regional activation center, checksum of the activation code, checksum of the ticket, ticket creation date, unique identifier of the ticket, ticket version, license status, start/end date and time of ticket validity, unique identifier of the license, license version), identifier of the certificate used to sign the ticket header, checksum (MD5) of the key file;
- Information about the Rightholder's Software: full version, type, version of the protocol used to connect to Kaspersky services.

Use of KSN under license on 5 or more computers

By accepting the Kaspersky Security Network Statement, you agree to automatically transmit the following information:

If the **Kaspersky Security Network** check box is selected and the **Enable extended KSN mode** check box is cleared, the application sends the following information:

- information about KSN configuration updates: identifier of the active configuration, identifier of the configuration received, error code of the configuration update;
- information about files and URL addresses to be scanned: checksums of the scanned file (MD5, SHA2-256, SHA1) and file patterns (MD5), the size of the pattern, type of the detected threat and its name according to Rightholder's classification, identifier for the anti-virus databases, URL address for which the reputation is being requested, as well as the referrer URL address, the connection's protocol identifier and the number of the port being used;
- ID of the scan task that detected the threat;
- information about digital certificates being used needed to verify their authenticity: the checksums (SHA256) of the certificate used to sign the scanned object and the certificate's public key;
- identifier of the Software component performing the scan;
- IDs of the anti-virus databases and of the records in these anti-virus databases;
- Information about activation of the Software on the Computer: signed header of the ticket from the activation service (identifier of the regional activation center, checksum of the activation code, checksum of the ticket, ticket creation date, unique identifier of the ticket, ticket version, license status, start/end date and time of ticket validity, unique identifier of the license, license version), identifier of the certificate used to sign the ticket header, checksum (MD5) of the key file;
- Information about the Rightholder's Software: full version, type, version of the protocol used to connect to Kaspersky services.

If the **Enable extended KSN mode** check box is selected in addition to the **Kaspersky Security Network** check box, the application sends the following information in addition to the information listed above:

- information about the results of categorization of the requested web-resources, which contains the processed URL and IP address of the host, the version of the Software's component that performed the categorization, the method of categorization and set of the categories defined for the web-resource;
- information about the software installed on the Computer: names of the software applications and software vendors, registry keys and their values, information about files of the installed software components (checksums (MD5, SHA2-256, SHA1), name, path to the file on the Computer, size, version and the digital signature);
- information about the state of anti-virus protection of the Computer: the versions and the release timestamps of the anti-virus databases being used, the ID of the task and the ID of Software that performs scanning;

- information about files being downloaded by the End User: the URL and IP addresses of the download and the download pages, download protocol identifier and connection port number, the status of the URLs as malicious or not, file's attributes, size and checksums (MD5, SHA2-256, SHA1), information about the process that downloaded the file (checksums (MD5, SHA2-256, SHA1), creation/build date and time, autoplay status, attributes, names of packers, information about signatures, executable file flag, format identifier, and entropy), file name and its path on the Computer, the file's digital signature and timestamp of its generation, the URL address where detection occurred, the script's number on the page that appears to be suspicious or harmful, information about HTTP requests generated and the response to them;

- information about the running applications and their modules: data about processes running on the system (process ID (PID), process name, information about the account the process was started from, the application and command that started the process, the sign of trusted program or process, the full path to the process's files and their checksums (MD5, SHA2-256, SHA1), and the starting command line, level of the process's integrity, a description of the product that the process belongs to (the name of the product and information about the publisher), as well as digital certificates being used and information needed to verify their authenticity or information about the absence of a file's digital signature), and information about the modules loaded into the processes (their names, sizes, types, creation dates, attributes, checksums (MD5, SHA2-256, SHA1), the paths to them on the Computer), PE-file header information, names of packers (if the file was packed);

- information about all potentially malicious objects and activities: name of the detected object and full path to the object on the computer, checksums of processed files (MD5, SHA2-256, SHA1), detection date and time, names and sizes of infected files and paths to them, path template code, executable file flag, indicator of whether the object is a container, names of the packer (if the file was packed), file type code, file format ID, list of actions performed by malware and the decision made by the software and user in response to them, IDs of the anti-virus databases and of the records in these anti-virus databases that were used to make the decision, indicator of a potentially malicious object, the name of the detected threat according to the Rightholder's classification, the level of danger, the detection status and detection method, reason for inclusion into the analyzed context and sequence number of the file in the context, checksums (MD5, SHA2-256, SHA1), the name and attributes of the executable file of the application through which the infected message or link was transmitted, depersonalized IP addresses (IPv4 and IPv6) of the host of the blocked object, file entropy, file autorun indicator, time when the file was first detected in the system, the number of times the file has been run since the last statistics were sent, information about the name, checksums (MD5, SHA2-256, SHA1) and size of the mail client through which the malicious object was received, ID of the software task that performed the scan, indicator of whether the file reputation or signature was checked, file processing result, checksum (MD5) of the pattern collected for the object, the size of the pattern in bytes, and the technical specifications of the applied detection technologies;

- information about scanned objects: the assigned trust group to which and/or from which the file has been placed, the reason the file was placed in that category, category identifier, information about the source of the categories and the version of the category database, the file's trusted certificate flag, name of the file's vendor, file version, name and version of the software application which includes the file;

- information about vulnerabilities detected: the vulnerability ID in the database of vulnerabilities, the vulnerability danger class;

- information about emulation of the executable file: file size and its checksums (MD5, SHA2-256, SHA1), the version of the emulation component, emulation depth, an array of properties of logical blocks and functions within logical blocks obtained during the emulation, data from the executable file's PE headers;

- the IP addresses of the attacking computer (IPv4 and IPv6), the number of the port on the Computer that the network attack is directed at, identifier of the protocol of the IP packet containing the attack, the attack's target (organization name, website), flag for the reaction to the attack, the attack's weight, trust level;

- information about attacks associated with spoofed network resources, the DNS and IP addresses (IPv4 and IPv6) of visited websites;

- DNS and IP addresses (IPv4 or IPv6) of the requested web resource, information about the file and web client accessing the web resource, the name, size and checksums (MD5, SHA2-256, SHA1) of the file, full path to the file and path template code, the result of checking its digital signature, and its status in KSN;

- information about rollback of malware actions: data on the file whose activity was rolled back (name of the file, full path to the file, its size and checksums (MD5, SHA2-256, SHA1)), data on successful and unsuccessful actions to delete, rename and copy files and restore the values in the registry (names of registry keys and their values), and information about system files modified by malware, before and after rollback;

- Information about the exclusions set for the Adaptive Anomaly Control component: the ID and status of the rule that was triggered, the action performed by the Software when the rule was triggered, the type of user account under which the process or the thread performs suspicious activity, information about the process that performed or was subject to the suspicious activity (script ID or process file name, full path to the process file, path template code, checksums (MD5, SHA2-256, SHA1) of the process file); information about the object that performed the suspicious actions and about the object that was subject to the suspicious actions (registry key name or file name, full path to the file, path template code, and checksums (MD5, SHA2-256, SHA1) of the file).

- information about loaded software modules: name, size and checksums (MD5, SHA2-256, SHA1) of the module file, full path to it and the path template code, digital signature settings of the module file, data and time of signature creation, name of the subject and organization that signed the module file, ID of the process in which the module was loaded, name of the module supplier, and the sequence number of the module in the loading queue;

- information about the quality of Software interaction with the KSN services: start and end date and time of the period when the statistics were generated, information about the quality of requests and connection to each of the KSN services used (KSN service ID, number of successful requests, number of requests with responses from cache, number of unsuccessful requests (network problems, KSN being disabled in the Software settings, incorrect routing), time spread of the successful requests, time spread of the cancelled requests, time spread of the requests with exceeded time limit, number of connections to KSN taken from cache, number of successful connections to KSN, number of unsuccessful connections to KSN, number of successful transactions, number of unsuccessful transactions, time spread of the successful connections to KSN, time spread of the unsuccessful connections to KSN, time spread of the successful transactions, time spread of the unsuccessful transactions);

- if a potentially malicious object is detected, information is provided about data in the processes' memory: elements of the system object hierarchy (ObjectManager), data in UEFI BIOS memory, names of registry keys and their values;

- information about events in the systems logs: the event's timestamp, the name of the log in which the event was found, type and category of the event, name of the event's source and the event's description;

- information about network connections: version and checksums (MD5, SHA2-256, SHA1) of the file from which process was started that opened the port, the path to the process's file and its digital signature, local and remote IP addresses, numbers of local and remote connection ports, connection state, timestamp of the port's opening;

- information about the date of Software installation and activation on the Computer: the ID of the partner that sold the license, the serial number of the license, the signed header of the ticket from the activation service (the ID of a regional activation center, the checksum of the activation code, the checksum of the ticket, the ticket creation date, the unique ID of the ticket, the ticket version, the license status, the ticket start/end date and time, the unique ID of the license, the license version), the ID of the certificate used to sign the ticket header, the checksum (MD5) of the key file, the unique ID of Software installation on the Computer, the type and ID of the application that gets updated, the ID of the update task;

- information about the set of all installed updates, and the set of most recently installed/removed updates, the type of event that caused the update information to be sent, duration since the installation of last update, information about any currently installed anti-virus databases;

- information about software operation on the computer: data on CPU usage, data on memory usage (Private Bytes, Non-Paged Pool, Paged Pool), number of active threads in the software process and pending threads, and the duration of software operation prior to the error;

- number of software dumps and system dumps (BSOD) since the Software was installed and since the time of the last update, the identifier and version of the Software module that crashed, the memory stack in the Software's process, and information about the anti-virus databases at the time of the crash;

- data on the system dump (BSOD): a flag indicating the occurrence of the BSOD on the Computer, the name of the driver that caused the BSOD, the address and memory stack in the driver, a flag indicating the duration of the OS session before the BSOD occurred, memory stack of driver that crashed, type of stored memory dump, flag for the OS session before BSOD lasted more than 10 minutes, unique identifier of the dump, timestamp of the BSOD;

- information about errors or performance problems that occurred during operation of the Software components: the status ID of the Software, error type, code and cause as well of the time when the error occurred, the IDs of the component, module and process of the product in which the error occurred, the ID of the task or update category during which the error occurred, logs of drivers used by the Software (error code, module name, name of the source file and the line where the error occurred);

- information about updates of anti-virus databases and Software components: the name, date and time of index files downloaded during the last update and being downloaded during the current update;

- information about abnormal termination of the Software operation: the creation timestamp of the dump, its type, the type of event that caused the abnormal termination of the Software operation (unexpected power-off, third-party application crash), date and time of the unexpected power-off;

- information about the compatibility of Software drivers with hardware and Software: information about OS properties that restrict the functionality of Software components (Secure Boot, KPTI, WHQL Enforce, BitLocker, Case Sensitivity), type of download Software installed (UEFI, BIOS), Trusted Platform Module (TPM) identifier, TPM specification version, information about the CPU installed on the Computer, operating mode and parameters of Code Integrity and Device Guard, operating mode of drivers and reason for use of the current mode, version of Software drivers, software and hardware virtualization support status of the Computer;

- information about third-party applications that caused the error: their name, version and localization, the error code and information about the error from the system log of applications, the address of the error and memory stack of the third-party application, a flag indicating the occurrence of the error in the Software component, the length of time the third-party application was in operation before the error occurred, checksums (MD5, SHA2-256, SHA1) of the application process image, in which the error occurred, path to the application process image and template code of the path, information from the system log with a description of the error associated with the application, information about the application module, in which an error occurred (exception identifier, crash memory address as an offset in the application module, name and version of the module, identifier of the application crash in the Rightholder's plug-in and memory stack of the crash, duration of the application session before crash);

- version of the Software updater component, number of crashes of the updater component while running update tasks over the lifetime of the component, ID of the update task type, number of failed attempts of the updater component to complete update tasks;

- information about the operation of the Software system monitoring components: full versions of the components, date and time when the components were started, code of the event that overflowed the event queue and number of such events, the total number of queue overflow events, information about the file of the process of the initiator of the event (file name and its path on the Computer, template code of the file path, checksums (MD5, SHA2-256, SHA1) of the process associated with the file, file version), identifier of the event interception that occurred, the full version of the interception filter, identifier of the type of the intercepted event, size of the event queue and the number of events between the first event in the queue and the current event, number of overdue events in the queue, information about the file of the process of the initiator of the current event (file name and its path on the Computer, template code of the file path, checksums (MD5, SHA2-256, SHA1) of the process associated with the file), duration of the event processing, maximum duration of the event processing, probability of sending statistics, information about OS events for which the processing time limit was exceeded (date and time of the event, number of repeated initializations of anti-virus databases, date and time of the last repeated initialization of anti-virus databases after their update, event processing delay time for each system monitoring component, number of queued events, number of processed events, number of delayed events of the current type, total delay time for the events of the current type, total delay time for all events);

- information from the Windows event tracing tool (Event Tracing for Windows, ETW) in the event of Software performance problems, suppliers of SysConfig / SysConfigEx / WinSATAssessment events from Microsoft: information about the Computer (model, manufacturer, form factor of the housing, version), information about Windows performance metrics (WinSAT assessments, Windows performance index), domain name, information about physical and logical processors (number of physical and logical processors, manufacturer, model, stepping level, number of cores, clock frequency, CPUID, cache characteristics, logic processor characteristics, indicators of supported modes and instructions), information about RAM modules (type, form factor, manufacturer, model, capacity, granularity of memory allocation), information about network interfaces (IP and MAC addresses, name, description, configuration of network interfaces, breakdown of number and size of network packages by type, speed of network exchange, breakdown of number of network errors by type), configuration of IDE controller, IP addresses of DNS servers, information about the video card (model, description, manufacturer, compatibility, video memory capacity, screen permission, number of bits per pixel, BIOS version), information about plug-and-play devices (name, description, device identifier [PnP, ACPI], information about disks and storage devices (number of disks or flash drives, manufacturer, model, disk capacity, number of cylinders, number of tracks per cylinder, number of sectors per track, sector capacity, cache characteristics, sequential number, number of partitions, configuration of SCSI controller), information about logical disks (sequential number, partition capacity, volume capacity, volume letter, partition type, file system type, number of clusters, cluster size, number of sectors per cluster, number of empty and occupied clusters, letter of bootable volume, offset address of partition in relation to the start of the disk), information about BIOS motherboard (manufacturer, release date, version), information about motherboard (manufacturer, model, type), information about physical memory (shared and free capacity), information about operating system services (name, description, status, tag, information about processes [name and PID]), energy consumption parameters for the Computer, configuration of interrupt controller, path to Windows system folders (Windows and System32), information about the OS (version, build, release date, name, type, installation date), size of page file, information about monitors (number, manufacturer, screen permission, resolution capacity, type), information about video card driver (manufacturer, release date, version);

- information from ETW, suppliers of EventTrace / EventMetadata events from Microsoft: information on the sequence of system events (type, time, date, time zone), metadata about the file with tracing results (name, structure, tracing parameters, breakdown of number of trace operations by type), information about the OS (name, type, version, build, release date, start time);

- information from ETW, suppliers of Process / Microsoft Windows Kernel Process / Microsoft Windows Kernel Processor Power events from Microsoft: information about started and completed processes (name, PID, start parameters, command line, return code, power management parameters, start and completion time, access token type, SID, SessionID, number of descriptors installed), information about changes in thread priorities (TID, priority, time), information about disk operations of the process (type, time, capacity, number), history of changes to the structure and capacity of usable memory processes;

- information from ETW, suppliers of StackWalk / Perfinfo events from Microsoft: information about performance counters (performance of individual code sections, sequence of function calls, PID, TID, addresses and attributes of ISRs and DPCs);

- information from ETW, supplier of KernelTraceControl-ImageID events from Microsoft: information on executable files and dynamic libraries (name, image size, full path), information on PDB files (name, identifier), VERSIONINFO resource data for executable files (name, description, creator, localization, application version and identifier, file version and identifier);

- information from ETW, suppliers of FileIo / DiskIo / Image / Windows Kernel Disk events from Microsoft: information on file and disk operations (type, capacity, start time, completion time, duration, completion status, PID, TID, driver function call addresses, I/O Request Packet (IRP), Windows file object attributes), information about files involved in file and disk operations (name, version, size, full path, attributes, offset, image checksum, open and access options);

- information from ETW, supplier of PageFault events from Microsoft: information on memory page access errors (address, time, capacity, PID, TID, attributes of Windows file object, memory allocation parameters);

- information from ETW, supplier of Thread events from Microsoft: information on thread creation/completion, information on threads started (PID, TID, size of stack, priorities and allocation of CPU resources, I/O resources, memory pages between threads, stack address, address of init function, address of Thread Environment Block (TEB), Windows service tag);

- information from ETW, supplier of Microsoft Windows Kernel Memory events from Microsoft: information about memory management operations (completion status, time, quantity, PID), memory allocation structure (type, capacity, SessionID, PID);

- information about Software operation in the event of performance problems: Software installation identifier, type and value of drop in performance, information about the sequence of events within the Software (time, time zone, type, completion status, Software component identifier, Software operating scenario identifier, TID, PID, function call addresses), information about network connections to be checked (URL, direction of the connection, size of network package), information about PDB files (name, identifier, image size of executable file), information about files to be checked (name, full path, checksum), Software performance monitoring parameters;

- information about the last unsuccessful OS restart: the number of unsuccessful restarts since OS installation, data on the system dump (code and parameters of an error, name, version and checksum (CRC32) of the module that caused an error in the OS operation, error address as an offset in the module, checksums (MD5, SHA2-256, SHA1) of the system dump);

- information to verify authenticity of digital certificates being used to sign files: the certificate's fingerprint, the checksum algorithm, the certificate's public key and serial number, the name of the issuer of the certificate, the result of certificate validation and the certificate's database identifier;

- information about the process executing the attack on the Software's self-defense: the name and size of the process file, its checksums (MD5, SHA2-256, SHA1), the full path to the process file and the template code of the file path, the creation/build timestamps, executable file flag, attributes of the process file, information about the certificate used to sign the process file, code of the account used to launch the process, ID of operations performed to access the process, type of resource with which the operation is performed (process, file, registry object, FindWindow search function), name of resource with which the operation is performed, flag indicating success of the operation, the status of the file of the process and its signature according to the KSN;

- information about the Rightholder's Software: full version, type, localization and operation state of Software used, versions of the installed Software components and their operation state, information about the installed Software updates, the value of the TARGET filter, the version of the protocol used to connect to the Rightholder's services;

- information about hardware installed on the Computer: type, name, model name, firmware version, parameters of built-in and connected devices, the unique identifier of the Computer with the installed Software;
- information about the versions of the operating system and installed updates, the word size, edition and parameters of the OS run mode, version and checksums (MD5, SHA2-256, SHA1) of the OS kernel file, and OS startup date and time;
- executable and non-executable files, either entirely or partly;
- portions of the Computer's RAM;
- sectors involved in the process of booting the OS;
- network traffic data packets;
- web pages and emails containing suspicious and malicious objects;
- description of the classes and instances of classes of the WMI repository;
- application activity reports:
  - the name, size and version of the file being sent, its description and checksums (MD5, SHA2-256, SHA1), file format identifier, the name of the file's vendor, the name of the product to which the file belongs, full path to the file on the Computer, template code of the path, the creation and modification timestamps of the file;
  - start and end date/time of the validity period of the certificate (if the file has a digital signature), the date and the time of the signature, the name of the issuer of the certificate, information about the certificate holder, the fingerprint, the certificate's public key and appropriate algorithms, and the certificate's serial number;
  - the name of the account from which the process is running;
  - checksums (MD5, SHA2-256, SHA1) of the name of the Computer on which the process is running;
  - titles of the process windows;
  - Identifier for the anti-virus databases, name of the detected threat according to the Rightholder's classification;
  - data about the installed license, its identifier, type and expiration date;
  - local time of the Computer at the moment of the provision of information;
  - names and paths of the files that were accessed by the process;
  - names of registry keys and their values that were accessed by the process;
  - URL and IP addresses that were accessed by the process;
  - URL and IP addresses from which the running file was downloaded.

Data provision when using Detection and Response solutions

On computers with Kaspersky Endpoint Security installed, data prepared for automatic sending to Kaspersky Endpoint Detection and Response, Kaspersky Sandbox and Kaspersky Anti Targeted Attack Platform servers is stored. Files are stored on computers in plain, non-encrypted form.

The specific set of data depends on the solution within which Kaspersky Endpoint Security is used.

Kaspersky Endpoint Detection and Response

All data that the application stores locally on the computer, is deleted from the computer when Kaspersky Endpoint Security is uninstalled.

Data received as a result of IOC Scan task execution (standard task)

Kaspersky Endpoint Security automatically submits data on the *IOC Scan* task execution results to Kaspersky Security Center.

The data in the *IOC Scan* task execution results may contain the following information:

- IP address from the ARP table
- Physical address from the ARP table
- DNS record type and name
- IP address of the protected computer
- Physical address (MAC-address) of the protected computer
- Identifier in the event log entry
- Data source name in the log
- Log name
- Event time
- MD5 and SHA256 hashes of the file
- Full name of the file (including path)
- File size
- Remote IP address and port to which connection was established during scan
- Local adapter IP address

- Port open on the local adapter
- Protocol as a number (in accordance with the IANA standard)
- Process name
- Process arguments
- Path to the process file
- Windows identifier (PID) of the process
- Windows identifier (PID) of the parent process
- User account that started the process
- Date and time when the process was started
- Service name
- Service description
- Path and name of the DLL service (for svchost)
- Path and name of the service executable file
- Windows identifier (PID) of the service
- Service type (for example, a kernel driver or adapter)
- Service status
- Service launch mode
- User account name.
- Volume name
- Volume letter
- Volume type
- Windows registry value
- Registry hive value
- Registry key path (without hive and value name)
- Registry setting
- System (environment)
- Name and version of the operating system that is installed on the computer
- Network name of the protected computer

- Domain or group the protected computer belongs to
- Browser name
- Browser version
- Time when the web resource was last accessed
- URL from the HTTP request
- Name of the account used for the HTTP request
- File name of the process that made the HTTP request
- Full path to the file of the process that made the HTTP request
- Windows identifier (PID) of the process that made the HTTP request
- HTTP referer (HTTP request source URL)
- URI of the resource requested over HTTP
- Information about the HTTP user agent (the application that made the HTTP request)
- HTTP request execution time
- Unique identifier of the process that made the HTTP query

Data for creating a threat development chain

Data for creating a threat development chain is stored for seven days by default. The data is automatically sent to Kaspersky Security Center.

Data for creating a threat development chain may contain the following information:

- Incident date and time
- Detection name
- Scan mode
- Status of the last action related to the detection
- Reason why the detection processing failed
- Detected object type
- Detected object name
- Threat status after the object is processed
- Reason why execution of actions on the object failed

- Actions performed to roll back malicious actions
- Information about the processed object:
  - Unique identifier of the process
  - Unique identifier of the parent process
  - Unique identifier of the process file
  - Windows process identifier (PID)
  - Process command line
  - User account that started the process
  - Code of the logon session in which the process is running
  - Type of the session in which the process is running
  - Integrity level of the process being processed
  - Membership of the user account that started the process in the privileged local and domain groups
  - Identifier of the processed object
  - Full name of the processed object
  - Identifier of the protected device
  - Full name of the object (local file name or downloaded file web address)
  - MD5 or SHA256 hash of the processed object
  - Type of the processed object
  - Creation date of the processed object
  - Date when the processed object was last modified
  - Size of the processed object
  - Attributes of the processed object
  - Organization that signed the processed object
  - Result of the processed object digital certificate verification
  - Security identifier (SID) of the processed object
  - Time zone identifier of the processed object
  - Web address of the processed object download (only for files on disk)
  - Name of the application that downloaded the file

- MD5 and SHA256 hashes of the application that downloaded the file
- Name of the application that last modified the file
- MD5 and SHA256 hashes of the application that last modified the file
- Number of processed object starts
- Date and time when the processed object was first started
- Unique identifiers of the file
- Full name of the file (local file name or downloaded file web address)
- Path to the processed Windows registry variable
- Name of the processed Windows registry variable
- Value of the processed Windows registry variable
- Type of the processed Windows registry variable
- Indicator of the processed registry key membership in the autorun point
- Web address of the processed web request
- Link source of the processed web request
- User agent of the processed web request
- Type of the processed web request (`GET` or `POST`)
- Local IP port of the processed web request
- Remote IP port of the processed web request
- Connection direction (inbound or outbound) of the processed web request
- Identifier of the process into which the malicious code was embedded

Kaspersky Sandbox

All data that the application stores locally on the computer, is deleted from the computer when Kaspersky Endpoint Security is uninstalled.

Service data

Kaspersky Endpoint Security stores the following data processed during automatic response:

- Processed files and data entered by the user during configuration of the built-in agent of Kaspersky Endpoint Security:
  - Quarantined files
  - Public key of the certificate used for integration with Kaspersky Sandbox
- Cache of the built-in agent of Kaspersky Endpoint Security:
  - Time when scan results were written to the cache
  - MD5 hash of the scan task
  - Scan task identifier
  - Scan result for the object
- Queue of object scan requests:
  - ID of the object in the queue
  - Time when the object was placed in the queue
  - Processing status of the object in the queue
  - ID of the user session in the operating system where the object scan task was created
  - System identifier (SID) of the operating system user whose account was used to create the task
  - MD5 hash of the object scan task
- Information about the tasks for which the built-in agent of Kaspersky Endpoint Security is awaiting scan results from Kaspersky Sandbox:
  - Time when the object scan task was received
  - Object processing status
  - ID of the user session in the operating system where the object scan task was created
  - Identifier of the object scan task
  - MD5 hash of the object scan task
  - System identifier (SID) of the operating system user whose account was used to create the task
  - XML schema of the automatically created IOC
  - MD5 or SHA256 hash of the scanned object

- Processing errors
- Names of the objects for which the task was created
- Scan result for the object

Data in requests to Kaspersky Sandbox

The following data from requests from the built-in agent of Kaspersky Endpoint Security to Kaspersky Sandbox is stored locally on the computer:

- MD5 hash of the scan task
- Scan task identifier
- Scanned object and all related files

Data received as a result of IOC Scan task execution (stand-alone task)

Kaspersky Endpoint Security automatically submits data on the *IOC Scan* task execution results to Kaspersky Security Center.

The data in the *IOC Scan* task execution results may contain the following information:

- IP address from the ARP table
- Physical address from the ARP table
- DNS record type and name
- IP address of the protected computer
- Physical address (MAC-address) of the protected computer
- Identifier in the event log entry
- Data source name in the log
- Log name
- Event time
- MD5 and SHA256 hashes of the file
- Full name of the file (including path)
- File size
- Remote IP address and port to which connection was established during scan

- Local adapter IP address
- Port open on the local adapter
- Protocol as a number (in accordance with the IANA standard)
- Process name
- Process arguments
- Path to the process file
- Windows identifier (PID) of the process
- Windows identifier (PID) of the parent process
- User account that started the process
- Date and time when the process was started
- Service name
- Service description
- Path and name of the DLL service (for svchost)
- Path and name of the service executable file
- Windows identifier (PID) of the service
- Service type (for example, a kernel driver or adapter)
- Service status
- Service launch mode
- User account name.
- Volume name
- Volume letter
- Volume type
- Windows registry value
- Registry hive value
- Registry key path (without hive and value name)
- Registry setting
- System (environment)
- Name and version of the operating system that is installed on the computer

- Network name of the protected computer
- Domain or group the protected computer belongs to
- Browser name
- Browser version
- Time when the web resource was last accessed
- URL from the HTTP request
- Name of the account used for the HTTP request
- File name of the process that made the HTTP request
- Full path to the file of the process that made the HTTP request
- Windows identifier (PID) of the process that made the HTTP request
- HTTP referer (HTTP request source URL)
- URI of the resource requested over HTTP
- Information about the HTTP user agent (the application that made the HTTP request)
- HTTP request execution time
- Unique identifier of the process that made the HTTP query

Kaspersky Endpoint Detection and Response Expert (on-premises)

All data that the application stores locally on the computer, is deleted from the computer when Kaspersky Endpoint Security is uninstalled.

Service data

The built-in agent of Kaspersky Endpoint Security stores the following data locally:

- Data required for integration with the EDR Expert (on-premises) component:
  - Address and port for connecting to the KATA Central Node server
  - Address and port for connecting to the telemetry transmission server
  - Address and port for connecting to the response server
  - Information about certificates used for integration with KATA Central Node

    - Information about certificates used for integration with the telemetry transmission server
    - Information about certificates used for integration with the response server
- Quarantined files

Data from transmitted telemetry events

- **Telemetry data**
    - Data on files:
        - Unique identifiers of the file
        - File type
        - Full file path
        - File size
        - File attributes
        - Zone identifier
        - Date and time when the file was created
        - Date and time when the file was last modified
        - Original file name
        - Application name
        - Application version.
        - Application vendor
        - File description
        - File version.
        - MD5 and SHA256 hashes of the object
        - Result of file signature verification
        - Certificate issuer name
        - Certificate holder name
        - Certificate serial number

- Data about AMSI scan:
  - Unique identifier of the process that initiated the activity
  - Content type of the object passed to AMSI
  - Content of the object passed to AMSI
  - Object name
  - MD5 and SHA256 hashes of the object
- Data about application blocking:
  - Unique identifier of the process that initiated the application blocking
  - Unique identifier of the parent process
  - Unique system identifier of the process
  - Command used to start a process
  - Login session ID
  - Process integrity level
  - Process status
  - Unique identifier of the process file
  - Process command line
  - List of unique identifiers of interpreted files
- Data about blocked file openings:
  - Unique identifier of the process that initiated the file opening
  - Unique identifiers of the file
- Data about driver loading:
  - Unique identifier of the loaded driver
- Data about events:
  - Unique identifier of the event
  - Event date and time
- Data about file modification:
  - Unique identifier of the process that initiated the file modification
  - Unique identifiers of the file

    - Type of the modification operation
    - Flag indicating that the file will be deleted after the computer is restarted
    - Unique identifier of the modified file
    - Unique identifier of the file before modification
    - Set of bit flags that determine how the file was opened
    - Data about operations on the access control list
    - Data about changes to the ownership or parent group of the file
- Data about login session:
    - Login session ID
    - Name of the user who logged in
    - User account type
    - Session type
- Data about network connections:
    - Unique identifier of the process that initiated the connection
    - Local IP address used to initiate the connection
    - Remote IP address of the connection endpoint
    - Connection direction
    - Data transfer protocol
    - HTTP method
    - Path without the host name
    - Host name
    - Dynamic process state at the moment of the connection
    - Flag indicating that the connection is open at the raw socket level
    - TLS version used in the connection session
    - Name of the TLS server
    - MD5 and SHA1 hashes of the TLS server certificate
    - List of Subject Alternative Names (SAN) of the certificate
    - TLS certificate issuer name

    - Certificate serial number
    - Encryption algorithm used
    - Start and end dates of the certificate
    - JA3 fingerprint of the TLS client
    - JA3S fingerprint of the server
- Data captured while listening on a network port:
    - Unique identifier of the process that initiated the connection
- Command line input data:
    - Unique identifier of the process that initiated the console input
    - Console input type
    - Text entered by a user or a process
- Data about process creation:
    - Unique identifier of the process
    - Unique identifier of the parent process
    - Unique system identifier of the process
    - Command used to start a process
    - Login session ID
    - Process integrity level
    - Unique identifier of the process file
    - List of unique identifiers of interpreted files
    - Process type
- Data about the module loaded by the process:
    - Unique identifier of the process that initiated the download
    - Full path to the file that was uploaded to the process
    - Unique identifier of the module file
    - Full qualified name of the .NET assembly, if the loaded file is a .NET module
    - Flags of the .NET assembly defined in its manifest

- Data about process termination:
  - Unique identifier of the terminated process
- Data about registry modification:
  - Unique identifier of the process that initiated the registry modification
  - Type of registry operation
  - Full path to the registry key
  - Name of the value within a registry key
  - Type of data stored in the registry key value
  - Data specified in the registry key value
  - Name of the key before renaming
  - Information regarding a change in ownership of the key or primary key group
  - List of changes to the access control list (ACL) of the key
- Data about the detected threat and its processing:
  - Flag indicating that threat detection ran in background
  - Threat verdict
  - Verdict name
  - Unique identifier of the database record
  - Time when the threat record was saved in the database
  - Threat processing mode
  - Infected object type
  - Infected object name
  - MD5 and SHA256 hashes of the object
  - Unique identifier of infected object
  - Unique identifier of the process that downloaded the infected object from the internet
  - URL from which the infected object was downloaded
  - Sender email address that sent the infected object
  - Network protocol through which the infected object was received
  - Local address from which the infected object was received

    - External address from which the infected object was received
    - Object content type
    - Object content
- Data about access to processes:
    - Unique identifier of the process that attempted access
    - Unique identifier of the target process that was accessed
    - Set of rights requested from the target process
    - Operation type
    - Set of calls at the moment of accessing a process
    - Source process descriptor
    - Target process descriptor
- Data about DNS:
    - Unique identifier of the process that initiated the DNS query
    - DNS server IP address
    - Flags that manage the behavior of a DNS query
    - Request completion status
    - Fully qualified domain name specified in the DNS query
    - Data type in the DNS query
    - DNS server responses
- Data about code injection:
    - Unique identifier of the process that attempted to inject code
    - Used access method
    - Set of calls at the time the injected code was detected
    - Unique identifier of the target process to which the code was uploaded
    - Data about changes in the command sequence of the target process
    - Target process address
    - Name of the DLL library that was uploaded to the target process
    - Full path to the DDL file

- Data about operations with named channels:
  - Unique identifier of the process that created or connected to the channel
  - Full name of the named channel
  - Operation type (creation or connection)
- Data about WMI queries:
  - Unique identifier of the process that initiated the WMI operation
  - WMI operation type
  - Name of the target device for the WMI query
  - User account that initiated the WMI query
  - Text of the WMI query
  - Namespace in which the WMI query is performed
  - WMI filter name
  - Name of the consumer object
  - Text describing the action of the consumer object
- Data about LDAP queries:
  - Unique identifier of the process that made the LDAP query
  - Search scope of LDAP queries
  - LDAP filter
  - Parameter that specifies the Active Directory partition to which the query was directed
  - LDAP search attributes
- Data about connected USB devices:
  - USB device operation type
  - USB device type
  - Identifier of the USB device
  - USB device name
  - Path to the USB device
  - Flag indicating that the USB device is a system drive
- Data about creation, deletion, and modification of a scheduled task

- Data about creation, deletion, and modification of services
- Data about mounting/unmounting of the file system
- Data about the operation of the EDR Expert on-premise component:
  - Information about starting/stopping the agent
  - Information about installing/uninstalling the agent
  - Unique identifier for the agent start
  - System identifier of the agent process
  - Unique identifier of the agent process
  - Reason for the termination of the agent
  - Agent process termination code
- Event filtering settings:
  - Module names
  - Full paths to objects
  - MD5 and SHA256 hashes of the objects
  - Identifiers of the entries in Windows event log
  - Digital certificate settings
  - Traffic direction, IP addresses, ports, protocols, full paths to executable files
  - User names
  - User logon types
  - Types of telemetry events for which filters are applied

Data from requests of the EDR Expert component to the built-in agent of Kaspersky Endpoint Security

- General task settings:
  - Task type
  - Task schedule settings
  - Names and passwords of the accounts under which the tasks can be run
  - Versions of settings

    - Identifiers of quarantined objects
    - Paths to the objects
    - MD5 and SHA256 hashes of the objects
    - Command line to start the process with the arguments
    - Flags of the additional actions performed upon completion of tasks
    - IOC file identifiers to be retrieved from the server
    - IOC files
    - Service name
    - Service startup type
    - Folders for which the results of the *Get forensic* task must be received
    - Masks of the object names and extensions for the *Get forensic* task
- Network isolation settings:
    - Types of settings
    - Versions of settings
    - Lists of network isolation exclusions and exclusion settings: traffic direction, IP addresses, ports, protocols, and full paths to executable files
    - Flags of the additional actions
    - Time of automatic isolation disabling
- Execution prevention settings:
    - Types of settings
    - Versions of settings
    - Lists of execution prevention rules and rule settings: paths to objects, types of objects, MD5 and SHA256 hashes of objects
    - Flags of the additional actions

Data from requests sent by Kaspersky Endpoint Security to the EDR Expert component

When integrating with the EDR Expert (on-premises) solution, the following data is stored locally on the computers.

- In synchronization requests:
  - Unique ID
  - Basic part of the server web address
  - Computer name
  - Computer IP address
  - Computer MAC address
  - Local time on the computer
  - Self-defense status of Kaspersky Endpoint Security
  - Name and version of the operating system that is installed on the computer
  - Version of Kaspersky Endpoint Security
  - Versions of the application settings and task settings
  - Task statuses: identifiers of tasks, execution statuses, error codes
- In requests for obtaining files from the server:
  - Unique identifiers of files
  - Unique Kaspersky Endpoint Security identifier
  - Unique identifiers of certificates
  - Basic part of the web address of the server with the Central Node component installed
  - Host IP address
- In the reports on task execution results:
  - Host IP address
  - Information about the objects detected during an IOC scan or YARA scan
  - Flags of the additional actions performed upon completion of tasks
  - Task execution errors and return codes
  - Task completion statuses

    - Task completion time
    - Versions of the settings used for execution of the tasks
    - Information about the objects submitted to the server, quarantined objects, and objects restored from quarantine: paths to objects, MD5 and SHA256 hashes, identifiers of quarantined objects
    - Information about the processes started or stopped on a computer at the server's request: PID and UniquePID, error code, MD5 and SHA256 hashes of the objects
    - Information about the services started or stopped on a computer at the server's request: service name, startup type, error code, MD5 and SHA256 hashes of file images of the services
    - Information about the objects for which a memory dump was made for a YARA scan (paths, dump file identifier)
    - Files requested by the server
- Data on running processes:
    - Executable file name, including full path and extension
    - Process autorun parameters
    - Process ID
    - Login session ID
    - Login session name
    - Date and time when the process was started
    - MD5 and SHA256 hashes of the object
- Data on files:
    - File path
    - File name.
    - File size
    - File attributes
    - Date and time when the file was created
    - Date and time when the file was last modified
    - File description
    - Company name
    - MD5 and SHA256 hashes of the object
    - Registry key (for autorun points)

- Data in errors that occur when information about objects was retrieved:
  - Full name of the object that was processed when an error occurred
  - Error code
- Data in YARA scan results:

  The built-in agent of Kaspersky Endpoint Security automatically transfers YARA scan results to Kaspersky Anti Targeted Attack Platform to build a threat development chain.

  The data is temporarily stored locally in the queue for sending task execution results to the Kaspersky Anti Targeted Attack Platform server. The data is deleted from the temporary storage once it has been sent.

  - MD5 and SHA256 hashes of the file
  - Full name of the file
  - File path
  - File size
  - Process name
  - Process arguments
  - Path to the process file
  - Windows identifier (PID) of the process
  - Windows identifier (PID) of the parent process
  - User account that started the process
  - Date and time when the process was started
- Data in IOC scan results:
  - IP address from the ARP table
  - Physical address from the ARP table
  - DNS record name
  - DNS record type
  - Host name
  - IP address
  - Event ID in the log
  - Data source name in the log
  - Log name
  - User name

- Date and time the event was generated, in the ISO format
- MD5 and SHA256 hashes of the file
- Full name of the file
- File size
- Remote IP address and port to which connection was established during scan
- IP address and port of the local adapter
- Protocol
- Process name
- Process arguments
- Path to the process file
- Windows identifier (PID) of the process
- Windows identifier (PID) of the parent process
- User account that started the process
- Date and time when the process was started
- Path to the registry key
- Registry key name
- Text value of the registry key
- Service name
- Service description
- Path and name of the DLL service
- Path and name of the service executable file
- Windows identifier (PID) of the service
- Service type
- Service status
- Service launch mode
- Operating system name
- Operating system version
- Computer network name without domain

- Domain or workgroup
- User name
- Volume name
- Volume letter
- Volume type

Kaspersky Network Detection and Response (KATA)

All data that the application stores locally on the computer, is deleted from the computer when Kaspersky Endpoint Security is uninstalled.

Telemetry data

- **Data about files**
  - Unique identifiers of the file
  - File type
  - Full file path
  - File size
  - File attributes
  - Zone identifier
  - Date and time when the file was created
  - Date and time when the file was last modified
  - Original file name
  - Application name
  - Application version.
  - Application vendor
  - File description
  - File version.
  - MD5 and SHA256 hashes of the object

    - Result of file signature verification
    - Date and time when the file signature was created
    - Certificate chains used in the signature file
    - Certificate chain type
    - Certificates in the chain
    - Certificate issuer name
    - Certificate holder name
    - Certificate serial number
    - Certificate thumbprint algorithm
    - Certificate thumbprint
    - Certificate validity period
- **Data about login session**
    - Login session ID
    - Account name of the user who logged in
    - User account type
    - Session type
    - IP address of the machine from which the login attempt was made
    - IP address of the local machine for which the login attempt was made
    - Flag indicating that the session represented by this event has elevated privileges and administrative rights
    - Parameter indicating whether other sessions are linked to this login session
    - Protocol used for the terminal session
    - IPv4 protocol used for the terminal session
- **Data about network communication**
    - Start and end of the time interval over which the data was collected
    - List of connections
    - Local IP address of the computer
    - Local MAC address of the computer
    - Remote IP address of the computer

    - Remote MAC address of the computer
    - Gateway IP address
    - Number of transmitted data packets
    - Number of received data packets
    - Total number of bytes transferred
    - Data transfer protocol
    - Ethernet-frame EtherType field
    - Payload prefix of the first packet in the interval
    - IPv4 address of the network interface through which the communication was captured
- **Data about network connection**
    - Unique identifier of the process that initiated the connection
    - Data transfer protocol
    - Local IP address used to initiate the connection
    - Remote IP address of the connection endpoint
    - HTTP method
    - Path without the host name
    - Host name
    - Dynamic process state at the moment of the connection
    - Connection direction
    - Dynamic process state
    - Ethernet-frame EtherType field
- **Data captured while listening on a network port**
    - Unique identifier of the process that initiated the connection
    - Data transfer protocol
    - Local address
    - Dynamic process state at the moment of the connection

- **Result of connection verification**
  - Host network settings
  - Network interface description
  - DNS domain name
  - Local MAC address of the computer
  - IP connection metric number
  - List of IP addresses
  - IP address
  - Network mask
  - Gateway IP address
  - Gateway MAC address
  - List of installed patches
  - Patch number
  - Patch installation date
  - Device model
  - Device vendor
  - Host ID in Kaspersky Security Center
  - Description of installed Kaspersky antivirus
  - Component name of installed Kaspersky antivirus
  - Component version of installed Kaspersky antivirus
  - Database version of installed Kaspersky antivirus component
  - Date of last database update of installed Kaspersky antivirus component
  - Component status of installed Kaspersky antivirus
  - List of license keys
  - Key serial number
  - Key type
  - Key expiration date
  - Key status

- **Data about process creation on the host**
  - Unique identifier of the process
  - Unique identifier of the parent process
  - Unique system identifier of the process
  - Command used to start a process
  - Login session ID
  - Terminal session ID
  - Unique identifier of the process file
  - Process integrity level
  - List of process rights tokens
  - Attribute rights
  - List of unique identifiers of interpreted files
  - Process status
  - Command used to start a process
- **Data about process termination**
  - Unique identifier of the process
- **Data about detected threat**
  - Threat information
  - Threat verdict
  - AMR record number
  - Antivirus database version
  - Threat detection mode
  - Unique identifier of the threat
  - Protection technology
  - Information about infected object
  - Infected object type
  - Infected object name

- MD5 and SHA256 hashes of the object
- Unique identifier of infected process
- Unique identifier of infected object
- Unique identifier of the process that downloaded the infected object from the internet
- URL from which the infected object was downloaded
- Sender email address that sent the infected object
- Network protocol through which the infected object was received
- Local address from which the infected object was received
- External address from which the infected object was received
- Object content type
- Context of detected threat
- Object content
- Flag indicating that threat detection ran in background

- **Data about threat processing**
  - Threat information
  - Threat verdict
  - AMR record number
  - Antivirus database version
  - Threat detection mode
  - Infected object name
  - MD5 and SHA256 hashes of the object
  - Unique identifier of infected process
  - Unique identifier of infected object
  - Network protocol through which the infected object was received
  - Local address from which the infected object was received
  - External address from which the infected object was received
  - Threat processing status

- Reason why the threat could not be remediated
- Local physical address

- **Data about users**
  - User SID
  - User ID
  - User name
  - Full name of the user
  - User description
  - Whether the account is active or blocked
  - Whether the password has expired
  - Whether a password change is required
  - Whether password change is allowed
  - User account type
  - Whether automatic login is enabled for this account
  - List of groups the user belongs to

Integration with Kaspersky Unified Monitoring and Analysis Platform (KUMA)

All data that the application stores locally on the computer, is deleted from the computer when Kaspersky Endpoint Security is uninstalled.

When integrating with Kaspersky Unified Monitoring and Analysis Platform (KUMA), connection settings data is transferred, as well as all events registered in Windows Logs.

The main Windows Event Logs are System, Security, Application, ForwardedEvents, and HardwareEvents. Users can also create and work with custom logs to meet their specific requirements.

Compliance with European Union legislation (GDPR)

Kaspersky Endpoint Security may transmit data to Kaspersky under the following scenarios:

- Using Kaspersky Security Network.
- Activating the application with an activation code.

- Updating application modules and anti-virus databases.
- Following links in the application interface.

Irrespective of the data classification and territory from which the data is received, Kaspersky adheres to high standards for data security and employs various legal, organizational and technical measures to protect the data of users, to guarantee data security and confidentiality, and also to ensure the fulfillment of users' rights as guaranteed by applicable legislation. The text of the Privacy Policy is included in the application distribution kit and is available on the Kaspersky website.

Prior to using Kaspersky Endpoint Security, please carefully read the description of transmitted data in the End User License Agreement and Kaspersky Security Network Statement. If specific data transmitted from Kaspersky Endpoint Security under any of the described scenarios may be classified as personal data according to your local legislation or standard, you must ensure that such data is processed legally and obtain the consent of end users for the collection and transmission of such data.

Read the End User License Agreement and visit the Kaspersky website to learn more about how we receive, process, store, and destroy information about application usage after you accept the End User License Agreement and consent to the Kaspersky Security Network Statement. The license.txt and ksn_<language ID>.txt files contain the text of the End User License Agreement and Kaspersky Security Network Statement and are included in the application distribution kit.

If you do not want to transmit data to Kaspersky, you can disable data provision.

Using Kaspersky Security Network

By using Kaspersky Security Network, you agree to automatically provide the data listed in the Kaspersky Security Network Statement. If you do not agree to provide this data to Kaspersky, use Kaspersky Private Security Network (KPSN) or disable the use of KSN. For more details about KPSN, please refer to the documentation on Kaspersky Private Security Network.

Activating the application with an activation code

By using an activation code, you agree to automatically provide the data listed in the End User License Agreement. If you do not agree to provide this data to Kaspersky, use a key file to activate Kaspersky Endpoint Security.

Updating application modules and anti-virus databases

By using Kaspersky servers, you agree to automatically provide the data listed in the End User License Agreement. Kaspersky requires this information to verify that Kaspersky Endpoint Security is being legitimately used. If you do not agree to provide this information to Kaspersky, use Kaspersky Security Center for database updates or Kaspersky Update Utility.

Following links in the application interface

By using links in the application interface, you agree to automatically provide the data listed in the End User License Agreement. The precise list of data transmitted in each specific link depends on where the link is located in the application interface and which problem it aims to resolve. If you do not agree to provide this data to Kaspersky, use the simplified application interface or hide the application interface.

Dump writing

If you have enabled dump writing, Kaspersky Endpoint Security will create a dump file that will contain all memory data from application processes at the moment when this dump file was created.

Trademark notices

Registered trademarks and service marks are the property of their respective owners.

Adobe, Acrobat, Flash, Reader and Shockwave are either registered trademarks or trademarks of Adobe in the United States and/or other countries.

Amazon, Amazon Web Services, AWS are trademarks of Amazon.com, Inc. or its affiliates.

Apple, FireWire, iTunes, Mac and Safari are trademarks of Apple Inc.

Arm is a registered trademark of Arm Limited (or its subsidiaries) in the US and/or elsewhere.

AutoCAD is a trademark or registered trademark of Autodesk, Inc., and/or its subsidiaries and/or affiliates in the USA and/or other countries.

The Bluetooth word, mark and logos are owned by Bluetooth SIG, Inc.

Borland is trademark or registered trademark of Borland Software Corporation.

Cisco, Cisco AnyConnect, IOS are registered trademarks or trademarks of Cisco Systems, Inc. and/or its affiliates in the United States and certain other countries.

Citrix, Citrix Provisioning, Citrix Provisioning Services, Citrix Virtual Apps and Desktop, XenDesktop, and XenServer are either registered trademarks or trademarks of Cloud Software Group, Inc., and/or its subsidiaries in the United States and/or other countries.

Cloudflare, Cloudflare Workers, and the Cloudflare logo are trademarks and/or registered trademarks of Cloudflare, Inc. in the United States and other jurisdictions.

Core is the trademark of Intel Corporation or its subsidiaries.

dBase is a trademark of dataBased Intelligence, Inc.

Dell Technologies, Dell, EMC and other trademarks are trademarks of Dell Inc. or its subsidiaries.

Docker and the Docker logo are trademarks or registered trademarks of Docker, Inc. in the United States and/or other countries. Docker, Inc. and other parties may also have trademark rights in other terms used herein.

ESET is a trademark or registered trademark of ESET spol. s r.o. or respective ESET entity.

Foxit is a registered trademark of Foxit Corporation.

Radmin is a registered trademark of Famatech.

Google, Android, Google Public DNS, Google Chrome, Chrome are trademarks of Google LLC.

HUAWEI, FusionCompute and FusionSphere are trademarks of Huawei Technologies Co., Ltd.

ICQ is a Trademark and/or Service mark of ICQ LLC.

Intel is the trademark of Intel Corporation or its subsidiaries.

IBM is a trademark of International Business Machines Corporation, registered in many jurisdictions worldwide.

Lenovo and Lenovo ThinkPad are trademarks of Lenovo in the United States and/or elsewhere.

Linux is the registered trademark of Linus Torvalds in the U.S. and other countries.

Logitech is either a registered trademark or trademark of Logitech in the United States and/or other countries.

LogMeIn Pro and Remotely Anywhere are trademarks of LogMeIn, Inc.

Mail.ru is a Trademark of Mail.ru LLC.

McAfee is the trademark or registered trademark of McAfee LLC or its subsidiaries in the US and /or other countries.

Microsoft, Access, Active Directory, ActiveSync, Bing, BitLocker, Excel, Hyper-V, Internet Explorer, JScript, LifeCam Cinema, Microsoft Edge, MSDN, MS-DOS, MultiPoint, Office 365, Outlook, PowerPoint, PowerShell, Skype, SQL Server, Surface, Visual Basic, Visual FoxPro, Windows, Windows Live, Windows PowerShell, Windows Server and Windows Store are trademarks of the Microsoft group of companies.

Mozilla, Firefox and Thunderbird are trademarks of the Mozilla Foundation in the U.S. and other countries.

NetApp is a trademark or registered trademark of NetApp, Inc. in the United States and/or other countries.

OpenSSL is a trademark owned by the OpenSSL Software Foundation.

OpenStack is a registered trademark of the OpenStack Foundation in the United States and other countries.

Oracle, Java and JavaScript are registered trademarks of Oracle and/or its affiliates.

Python is a trademark or registered trademark of the Python Software Foundation.

Realtek is a trademark of Realtek Semiconductor Corporation.

SAMSUNG is a trademark of SAMSUNG in the United States or other countries.

Thawte is a trademark or registered trademark of Symantec Corporation or its affiliates in the U.S. and other countries.

Trend Micro is a trademark or registered trademark of Trend Micro Incorporated.

VERISIGN is a registered trademark in the United States and elsewhere or an unregistered trademark of VeriSign, Inc. and its subsidiaries.

VMware, VMware ESXi, VMware Horizon, VMware Workstation, VMware Tools, VMware vSphere are registered trademarks and/or trademarks of VMware, Inc. in the United States and other countries.

Information about third-party code

Information about third-party code is contained in the legal_notices.txt file, located in the application installation folder.